

Computer Algebra Independent Integration Tests

Summer 2023 edition with Rubi V 4.17.3

6-Hyperbolic-functions/6.1-Hyperbolic-sine/162-6.1.4-d+e-x-^m-
sinh-a+b-x+c-x²-ⁿ

Nasser M. Abbasi

December 9, 2023 Compiled on December 9, 2023 at 7:59am

Contents

1	Introduction	2
2	detailed summary tables of results	20
3	Listing of integrals	35
4	Appendix	222

CHAPTER 1

INTRODUCTION

1.1	Listing of CAS systems tested	3
1.2	Results	4
1.3	Time and leaf size Performance	7
1.4	Performance based on number of rules Rubi used	9
1.5	Performance based on number of steps Rubi used	10
1.6	Solved integrals histogram based on leaf size of result	11
1.7	Solved integrals histogram based on CPU time used	12
1.8	Leaf size vs. CPU time used	13
1.9	list of integrals with no known antiderivative	14
1.10	List of integrals solved by CAS but has no known antiderivative	14
1.11	list of integrals solved by CAS but failed verification	14
1.12	Timing	15
1.13	Verification	15
1.14	Important notes about some of the results	15
1.15	Design of the test system	19

This report gives the result of running the computer algebra independent integration test. The download section in on the main webpage contains links to download the problems in plain text format used for all CAS systems. The number of integrals in this report is [33]. This is test number [162].

1.1 Listing of CAS systems tested

The following are the CAS systems tested:

1. Mathematica 13.3.1 (August 16, 2023) on windows 10.
2. Rubi 4.17.3 (Sept 25, 2023) on Mathematica 13.3.1 on windows 10
3. Maple 2023.1 (July, 12, 2023) on windows 10.
4. Maxima 5.47 (June 1, 2023) using Lisp SBCL 2.3.0 on Linux via sagemath 10.1 (Aug 20, 2023).
5. FriCAS 1.3.9 (July 8, 2023) based on sbcl 2.3.0 on Linux via sagemath 10.1 (Aug 20, 2023).
6. Giac/Xcas 1.9.0-57 (June 26, 2023) on Linux via sagemath 10.1 (Aug 20, 2023).
7. Sympy 1.12 (May 10, 2023) Using Python 3.11.3 on Linux.
8. Mupad using Matlab 2021a with Symbolic Math Toolbox Version 8.7 on windows 10.

Maxima and Fricas and Giac are called using Sagemath. This was done using Sagemath `integrate` command by changing the name of the algorithm to use the different CAS systems.

Sympy was run directly in Python not via sagemath.

1.2 Results

Important note: A number of problems in this test suite have no antiderivative in closed form. This means the antiderivative of these integrals can not be expressed in terms of elementary, special functions or Hypergeometric2F1 functions. RootSum and RootOf are not allowed. If a CAS returns the above integral unevaluated within the time limit, then the result is counted as passed and assigned an A grade.

However, if CAS times out, then it is assigned an F grade even if the integral is not integrable, as this implies CAS could not determine that the integral is not integrable in the time limit.

If a CAS returns an antiderivative to such an integral, it is assigned an A grade automatically and this special result is listed in the introduction section of each individual test report to make it easy to identify as this can be important result to investigate.

The results given in in the table below reflects the above.

System	% solved	% Failed
Rubi	100.00 (33)	0.00 (0)
Mathematica	100.00 (33)	0.00 (0)
Fricas	100.00 (33)	0.00 (0)
Maple	93.94 (31)	6.06 (2)
Giac	93.94 (31)	6.06 (2)
Maxima	93.94 (31)	6.06 (2)
Mupad	27.27 (9)	72.73 (24)
Sympy	27.27 (9)	72.73 (24)

Table 1.1: Percentage solved for each CAS

The table below gives additional break down of the grading of quality of the antiderivatives generated by each CAS. The grading is given using the letters A,B,C and F with A being the best quality. The grading is accomplished by comparing the antiderivative generated with the optimal antiderivatives included in the test suite. The following table describes the meaning of these grades.

grade	description
A	Integral was solved and antiderivative is optimal in quality and leaf size.
B	Integral was solved and antiderivative is optimal in quality but leaf size is larger than twice the optimal antiderivatives leaf size.
C	Integral was solved and antiderivative is non-optimal in quality. This can be due to one or more of the following reasons <ol style="list-style-type: none"> 1. antiderivative contains a hypergeometric function and the optimal antiderivative does not. 2. antiderivative contains a special function and the optimal antiderivative does not. 3. antiderivative contains the imaginary unit and the optimal antiderivative does not.
F	Integral was not solved. Either the integral was returned unevaluated within the time limit, or it timed out, or CAS hanged or crashed or an exception was raised.


Table 1.2: Description of grading applied to integration result

Grading is implemented for all CAS systems. Based on the above, the following table summarizes the grading for this test suite.


System	% A grade	% B grade	% C grade	% F grade
Rubi	72.727	0.000	0.000	27.273
Mathematica	72.727	0.000	0.000	27.273
Giac	51.515	0.000	15.152	33.333
Maple	45.455	6.061	15.152	33.333
Fricas	18.182	54.545	0.000	27.273
Maxima	18.182	39.394	9.091	33.333
Mupad	0.000	0.000	0.000	100.000
Sympy	0.000	0.000	0.000	100.000

Table 1.3: Antiderivative Grade distribution of each CAS

The following is a Bar chart illustration of the data in the above table.

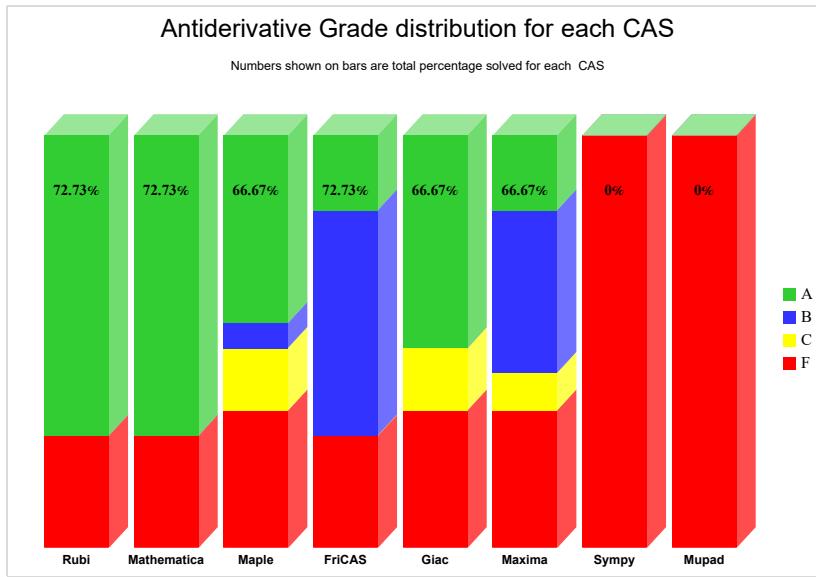

The figure below compares the grades of the CAS systems.

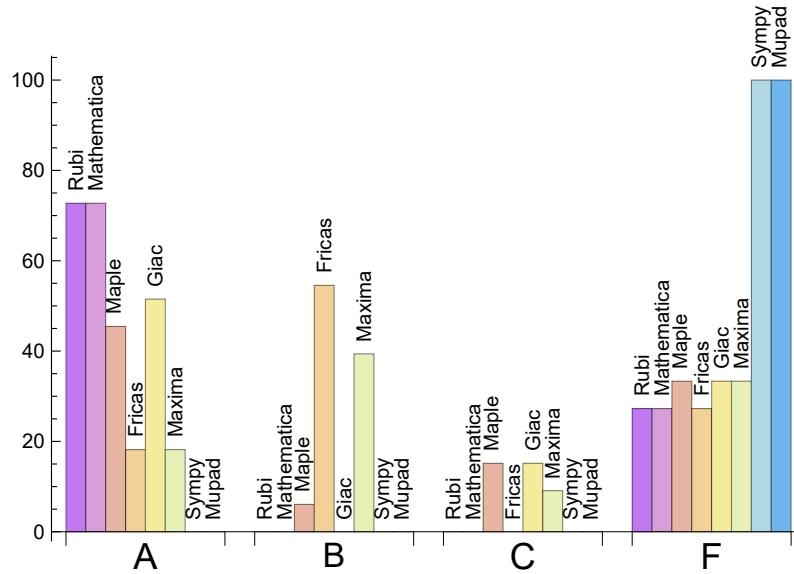

The following table shows the distribution of the different types of failures for each CAS. There are 3 types failures. The first is when CAS returns the input within the time limit, which means it could not solve it. This is the typical failure and given as **F**.

The second failure is due to time out. CAS could not solve the integral within the 3 minutes time limit which is assigned. This is assigned **F(-1)**.

The third is due to an exception generated, indicated as **F(-2)**. This most likely indicates an interface problem between sagemath and the CAS (applicable only to FriCAS, Maxima

and Giac) or it could be an indication of an internal error in the CAS itself. This type of error requires more investigation to determine the cause.

System	Number failed	Percentage normal failure	Percentage time-out failure	Percentage exception failure
Rubi	0	0.00	0.00	0.00
Mathematica	0	0.00	0.00	0.00
Fricas	0	0.00	0.00	0.00
Maple	2	100.00	0.00	0.00
Giac	2	100.00	0.00	0.00
Maxima	2	100.00	0.00	0.00
Mupad	24	0.00	100.00	0.00
Sympy	24	100.00	0.00	0.00

Table 1.4: Failure statistics for each CAS

1.3 Time and leaf size Performance

The table below summarizes the performance of each CAS system in terms of time used and leaf size of results.

Mean size is the average leaf size produced by the CAS (before any normalization). The Normalized mean is relative to the mean size of the optimal anti-derivative given in the input files.

For example, if CAS has **Normalized mean** of 3, then the mean size of its leaf size is 3 times as large as the mean size of the optimal leaf size.

Median size is value of leaf size where half the values are larger than this and half are smaller (before any normalization). i.e. The Middle value.

Similarly the **Normalized median** is relative to the median leaf size of the optimal.

For example, if a CAS has Normalized median of 1.2, then its median is 1.2 as large as the median leaf size of the optimal.

System	Mean time (sec)
Fricas	0.25
Giac	0.29
Rubi	0.35
Maxima	0.38
Maple	0.51
Mupad	1.10
Mathematica	2.52
Sympy	5.02

Table 1.5: Time performance for each CAS

System	Mean size	Normalized mean	Median size	Normalized median
Sympy	14.89	0.92	14.00	0.90
Mupad	17.67	1.08	18.00	1.11
Giac	91.00	0.93	79.00	0.93
Mathematica	100.91	1.07	109.00	1.13
Rubi	108.48	1.04	107.00	1.00
Maple	123.48	1.05	79.00	1.00
Maxima	249.87	2.37	123.00	1.93
Fricas	296.88	2.28	132.00	1.92

Table 1.6: Leaf size performance for each CAS

1.4 Performance based on number of rules Rubi used

This section shows how each CAS performed based on the number of rules Rubi needed to solve the same integral. One diagram is given for each CAS.

On the y axis is the percentage solved which Rubi itself needed the number of rules given the x axis. These plots show that as more rules are needed then most CAS system percentage of solving decreases which indicates the integral is becoming more complicated to solve.

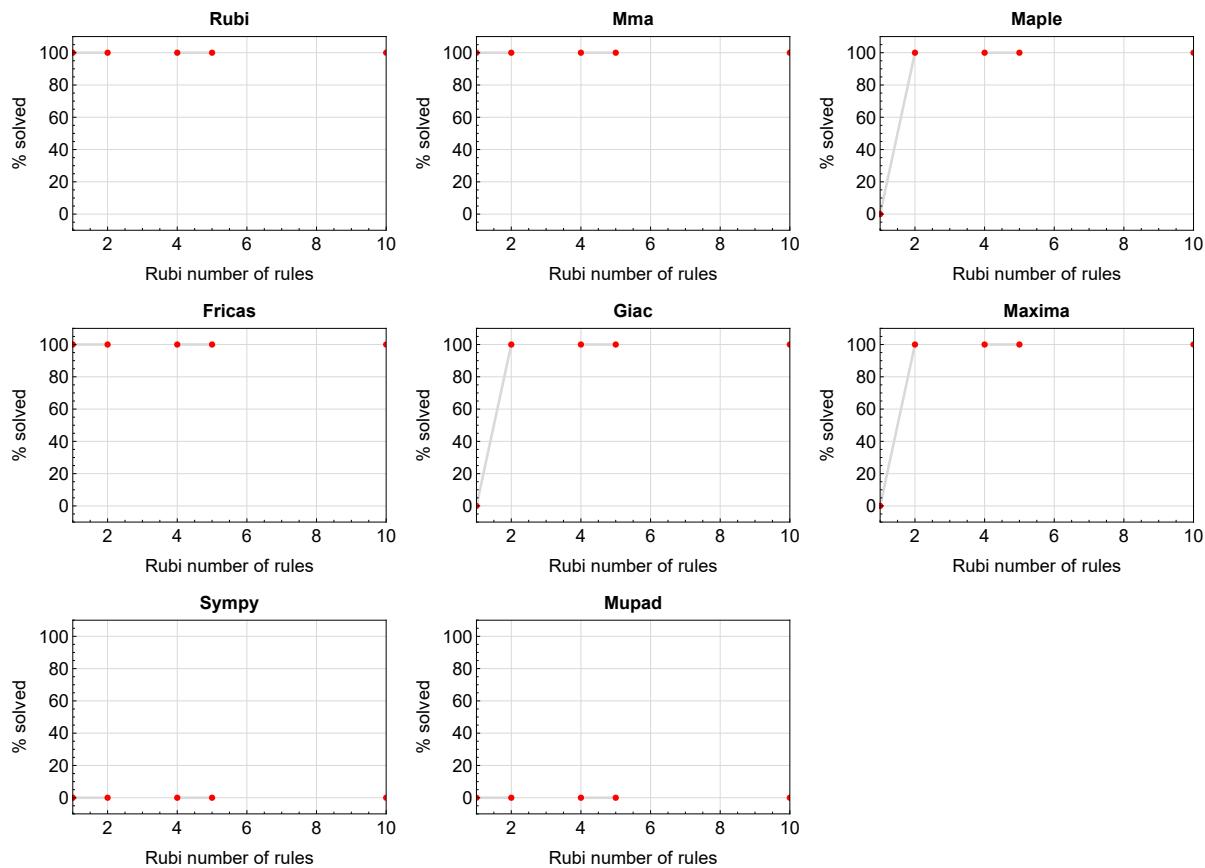


Figure 1.1: Solving statistics per number of Rubi rules used

1.5 Performance based on number of steps Rubi used

This section shows how each CAS performed based on the number of steps Rubi needed to solve the same integral. Note that the number of steps Rubi needed can be much higher than the number of rules, as the same rule could be used more than once.

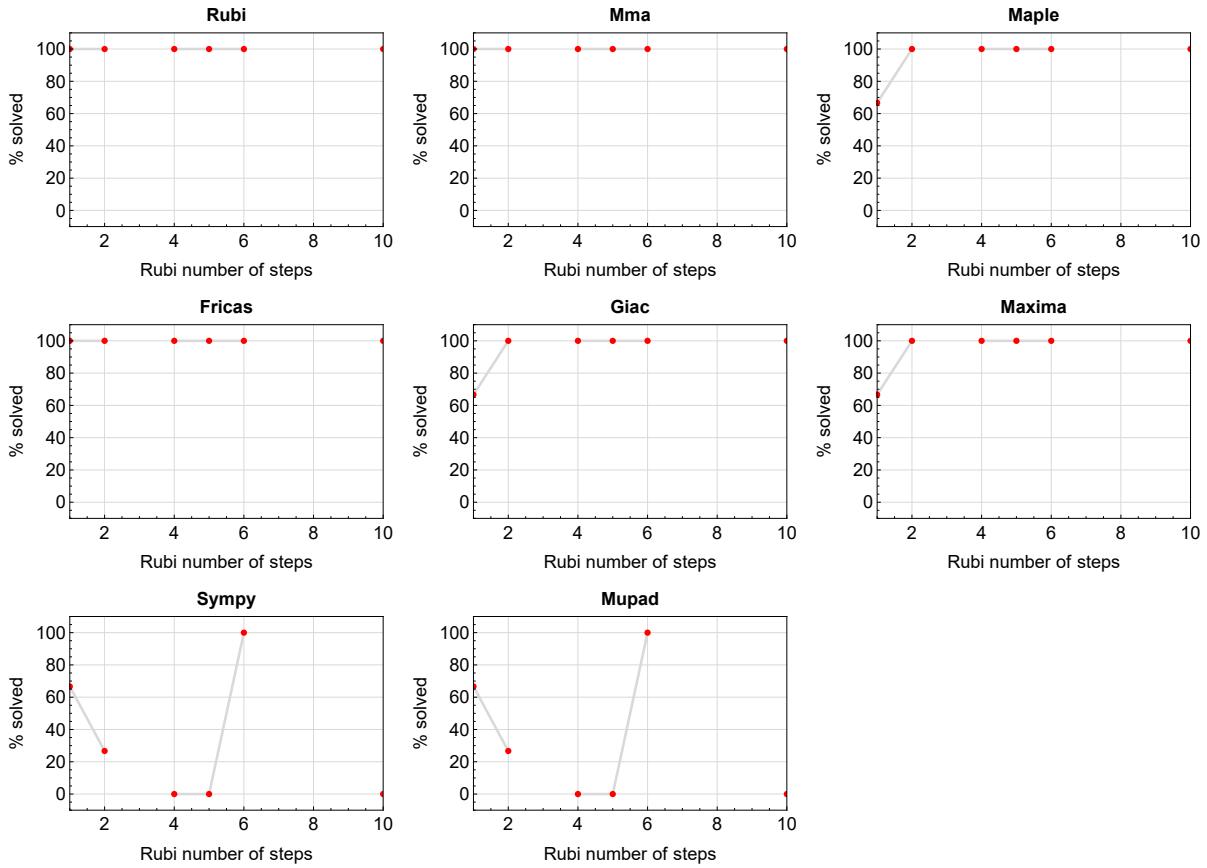


Figure 1.2: Solving statistics per number of Rubi steps used

The above diagram show that the precentage of solved intergals decreases for most CAS systems as the number of steps increases. As expected, for integrals that required less steps by Rubi, CAS systems had more success which indicates the integral was not as hard to solve. As Rubi needed more steps to solve the integral, the solved percentage decreased for most CAS systems which indicates the integral is becoming harder to solve.

1.6 Solved integrals histogram based on leaf size of result

The following shows the distribution of solved integrals for each CAS system based on leaf size of the antiderivatives produced by each CAS. It shows that most integrals solved produced leaf size less than about 100 to 150. The bin size used is 40.

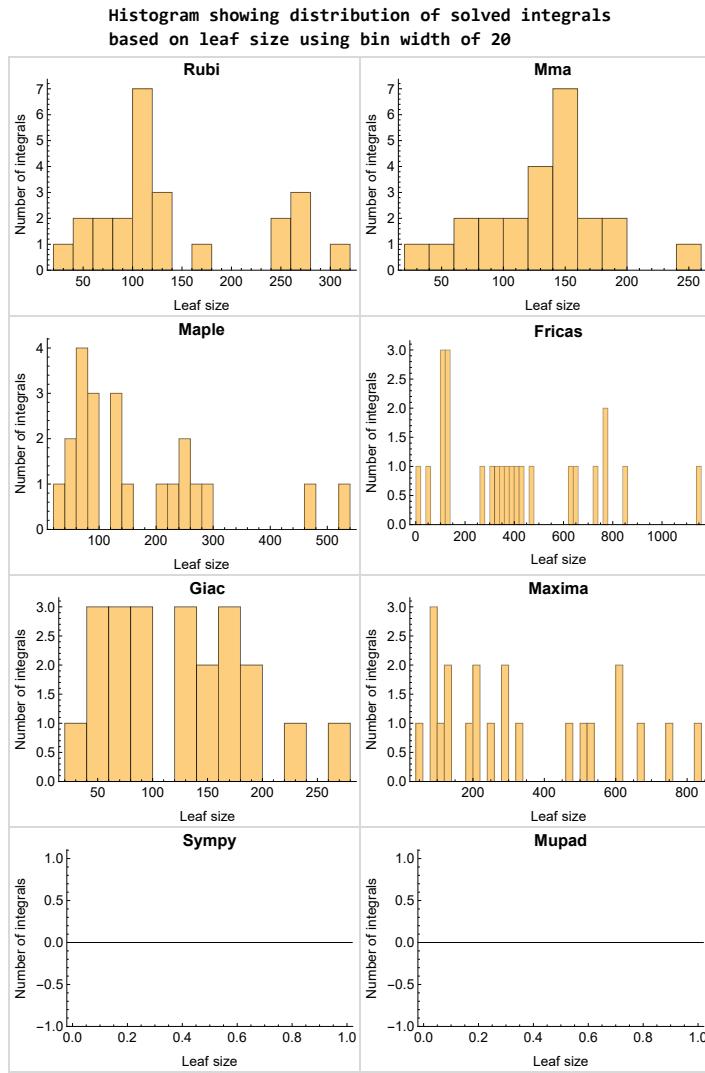


Figure 1.3: Solved integrals based on leaf size distribution

1.7 Solved integrals histogram based on CPU time used

The following shows the distribution of solved integrals for each CAS system based on CPU time used in seconds. The bin size used is 0.1 second.

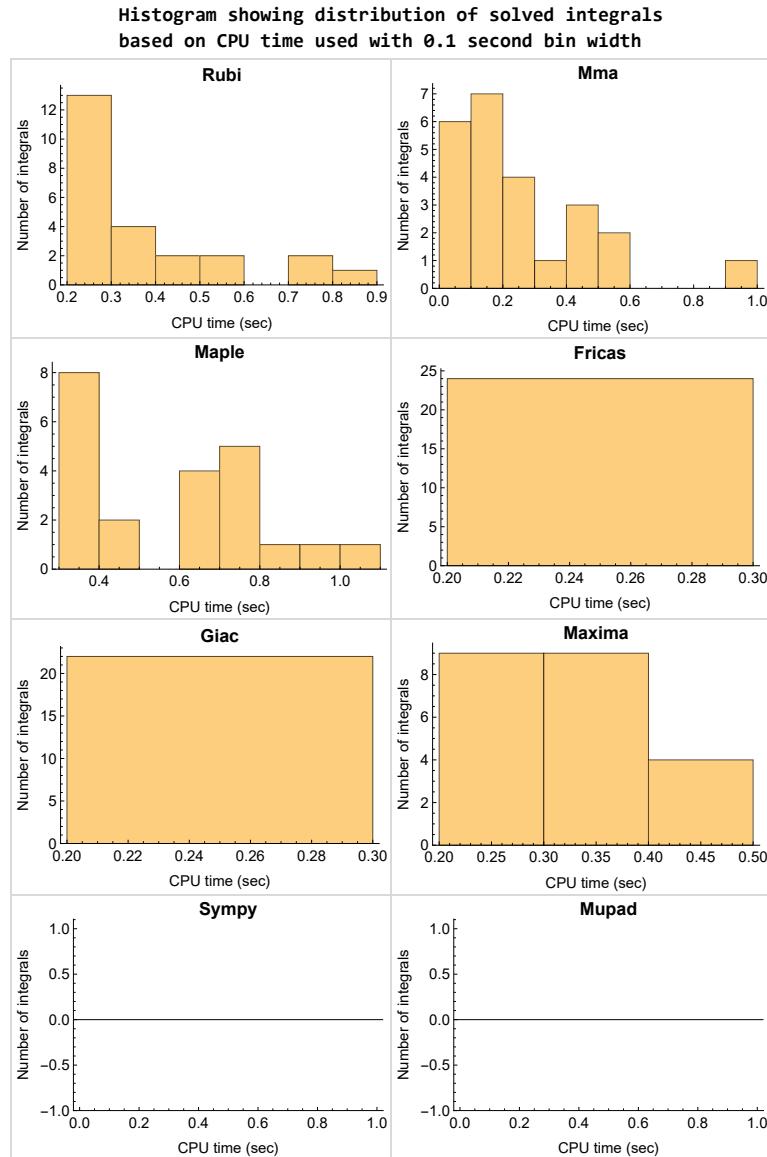


Figure 1.4: Solved integrals histogram based on CPU time used

1.8 Leaf size vs. CPU time used

The following gives the relation between the CPU time used to solve an integral and the leaf size of the antiderivative.

The result for Fricas, Maxima and Giac is shifted more to the right than the other CAS system due to the use of sagemath to call them, which causes an initial slight delay in the timing to start the integration due to overhead of starting a new process each time.

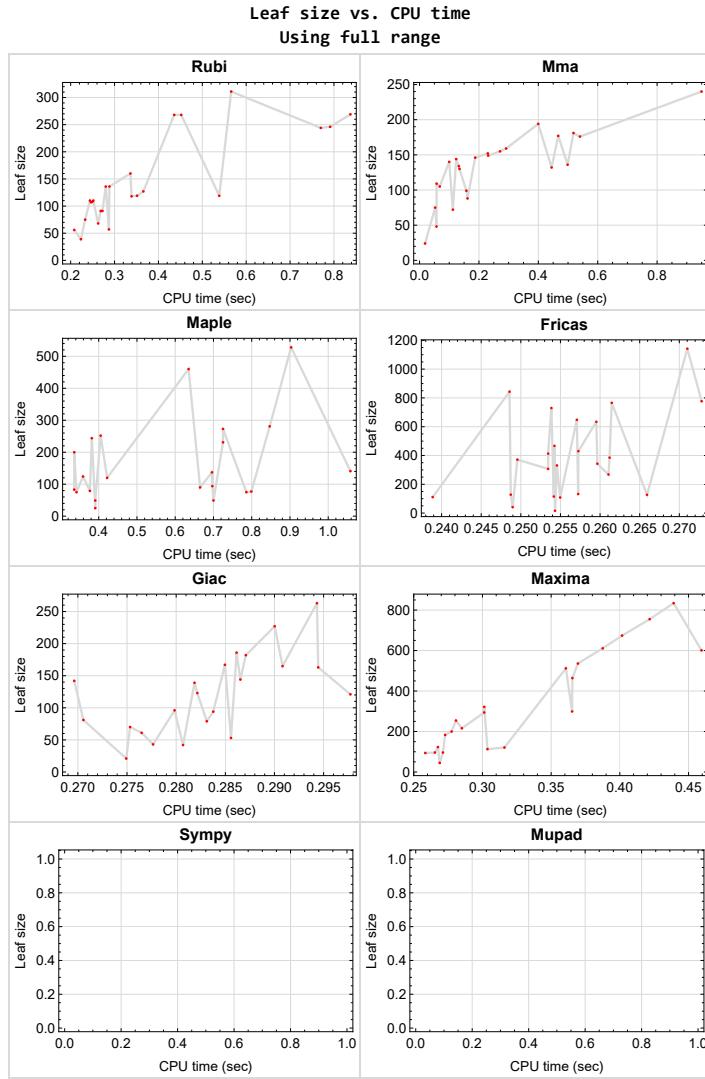


Figure 1.5: Leaf size vs. CPU time. Full range

1.9 list of integrals with no known antiderivative

{4, 9, 14, 15, 19, 23, 27, 30, 33}

1.10 List of integrals solved by CAS but has no known antiderivative

Rubi {}

Mathematica {}

Maple {}

Maxima {}

Fricas {}

Sympy {}

Giac {}

Mupad {}

1.11 list of integrals solved by CAS but failed verification

The following are integrals solved by CAS but the verification phase failed to verify the anti-derivative produced is correct. This does not necessarily mean that the anti-derivative is wrong as additional methods of verification might be needed, or more time is needed (3 minutes time limit was used). These integrals are listed here to make it possible to do further investigation to determine why the result could not be verified.

Rubi {}

Mathematica {}

Maple {}

Maxima Verification phase not currently implemented.

Fricas Verification phase not currently implemented.

Sympy Verification phase not currently implemented.

Giac Verification phase not currently implemented.

Mupad Verification phase not currently implemented.

1.12 Timing

The command `AbsoluteTiming[]` was used in Mathematica to obtain the elapsed time for each `integrate` call. In Maple, the command `Usage` was used as in the following example

```
cpu_time := Usage(assign ('result_of_int', int(expr, x)), output='realtime')
```

For all other CAS systems, the elapsed time to complete each integral was found by taking the difference between the time after the call completed from the time before the call was made. This was done using Python's `time.time()` call.

All elapsed times shown are in seconds. A time limit of 3 CPU minutes was used for each integral. If the `integrate` command did not complete within this time limit, the integral was aborted and considered to have failed and assigned an F grade. The time used by failed integrals due to time out was not counted in the final statistics.

1.13 Verification

A verification phase was applied on the result of integration for **Rubi** and **Mathematica**.

Future version of this report will implement verification for the other CAS systems. For the integrals whose result was not run through a verification phase, it is assumed that the antiderivative was correct.

Verification phase also had 3 minutes time out. An integral whose result was not verified could still be correct, but further investigation is needed on those integrals. These integrals were marked in the summary table below and also in each integral separate section so they are easy to identify and locate.

1.14 Important notes about some of the results

1.14.1 Important note about Maxima results

Since tests were run in a batch mode, and using an automated script, then any integral where Maxima needed an interactive response from the user to answer a question during the evaluation of the integral will fail.

The exception raised is `ValueError`. Therefore Maxima results is lower than what would result if Maxima was run directly and each question was answered correctly.

The percentage of such failures were not counted for each test file, but for an example, for the `Timofeev` test file, there were about 14 such integrals out of total 705, or about 2 percent. This percentage can be higher or lower depending on the specific input test file.

Such integrals can be identified by looking at the output of the integration in each section for Maxima. The exception message will indicate the cause of error.

Maxima `integrate` was run using SageMath with the following settings set by default

```
'besselexpand : true'
'display2d : false'
'domain : complex'
'keepfloat : true'
'load(to_poly_solve)'
'load(simplify_sum)'
'load(abs_integrate)' 'load(diag)'
```

SageMath automatic loading of Maxima `abs_integrate` was found to cause some problems. So the following code was added to disable this effect.

```
from sage.interfaces.maxima_lib import maxima_lib
maxima_lib.set('extra_definite_integration_methods', '[]')
maxima_lib.set('extra_integration_methods', '[]')
```

See <https://ask.sagemath.org/question/43088/integrate-results-that-are-different-from-using-maxima/> for reference.

1.14.2 Important note about FriCAS result

There were few integrals which failed due to SageMath interface and not because FriCAS system could not do the integration.

These will fail With error `Exception raised: NotImplementedError`.

The number of such cases seems to be very small. About 1 or 2 percent of all integrals. These can be identified by looking at the exception message given in the result.

1.14.3 Important note about finding leaf size of antiderivative

For Mathematica, Rubi, and Maple, the builtin system function `LeafSize` was used to find the leaf size of each antiderivative.

The other CAS systems (SageMath and Sympy) do not have special builtin function for this purpose at this time. Therefore the leaf size for Fricas and Sympy antiderivative was determined using the following function, thanks to user `slelievre` at https://ask.sagemath.org/question/57123/could-we-have-a-leaf_count-function-in-base-sagemath/

```
def tree_size(expr):
    """
    Return the tree size of this expression.
    """
    if expr not in SR:
        # deal with lists, tuples, vectors
        return 1 + sum(tree_size(a) for a in expr)
    expr = SR(expr)
    x, aa = expr.operator(), expr.operands()
    if x is None:
        return 1
    else:
        return 1 + sum(tree_size(a) for a in aa)
```

For Sympy, which was called directly from Python, the following code was used to obtain the leafsize of its result

```
try:
    # 1.7 is a fudge factor since it is low side from actual leaf count
    leafCount = round(1.7*count_ops(anti))

except Exception as ee:
    leafCount = 1
```

1.14.4 Important note about Mupad results

Matlab's symbolic toolbox does not have a leaf count function to measure the size of the antiderivative. Maple was used to determine the leaf size of Mupad output by post processing Mupad result.

Currently no grading of the antiderivative for Mupad is implemented. If it can integrate the problem, it was assigned a B grade automatically as a placeholder. In the future, when grading function is implemented for Mupad, the tests will be rerun again.

The following is an example of using Matlab's symbolic toolbox (Mupad) to solve an integral

```
integrand = evalin(symengine, 'cos(x)*sin(x)')
the_variable = evalin(symengine, 'x')
anti = int(integrand, the_variable)
```

Which gives $\sin(x)^2/2$

1.15 Design of the test system

The following diagram gives a high level view of the current test build system.



CHAPTER 2

DETAILED SUMMARY TABLES OF RESULTS

2.1	List of integrals sorted by grade for each CAS	21
2.2	Detailed conclusion table per each integral for all CAS systems	24
2.3	Detailed conclusion table specific for Rubi results	33

2.1 List of integrals sorted by grade for each CAS

2.1.1	Rubi	21
2.1.2	Mma	21
2.1.3	Maple	22
2.1.4	Fricas	22
2.1.5	Maxima	22
2.1.6	Giac	23
2.1.7	Mupad	23
2.1.8	Sympy	23

2.1.1 Rubi

A grade { 1, 2, 3, 5, 6, 7, 8, 10, 11, 12, 13, 16, 17, 18, 20, 21, 22, 24, 25, 26, 28, 29, 31, 32 }

B grade { }

C grade { }

F normal fail { }

F(-1) timeout fail { }

F(-2) exception fail { }

2.1.2 Mma

A grade { 1, 2, 3, 5, 6, 7, 8, 10, 11, 12, 13, 16, 17, 18, 20, 21, 22, 24, 25, 26, 28, 29, 31, 32 }

B grade { }

C grade { }

F normal fail { }

F(-1) timeout fail { }

F(-2) exception fail { }

2.1.3 Maple

A grade { 1, 2, 3, 6, 7, 8, 16, 17, 18, 20, 21, 22, 24, 29, 32 }

B grade { 28, 31 }

C grade { 11, 12, 13, 25, 26 }

F normal fail { 5, 10 }

F(-1) timeout fail { }

F(-2) exception fail { }

2.1.4 Fricas

A grade { 3, 8, 13, 18, 22, 26 }

B grade { 1, 2, 5, 6, 7, 10, 11, 12, 16, 17, 20, 21, 24, 25, 28, 29, 31, 32 }

C grade { }

F normal fail { }

F(-1) timeout fail { }

F(-2) exception fail { }

2.1.5 Maxima

A grade { 16, 17, 18, 20, 21, 22 }

B grade { 1, 2, 3, 6, 7, 8, 11, 12, 13, 28, 29, 31, 32 }

C grade { 24, 25, 26 }

F normal fail { 5, 10 }

F(-1) timeout fail { }

F(-2) exception fail { }

2.1.6 Giac

A grade { 1, 2, 3, 6, 7, 8, 16, 17, 18, 20, 21, 22, 24, 28, 29, 31, 32 }

B grade { }

C grade { 11, 12, 13, 25, 26 }

F normal fail { 5, 10 }

F(-1) timeout fail { }

F(-2) exception fail { }

2.1.7 Mupad

A grade { }

B grade { }

C grade { }

F normal fail { }

F(-1) timeout fail { 1, 2, 3, 5, 6, 7, 8, 10, 11, 12, 13, 16, 17, 18, 20, 21, 22, 24, 25, 26, 28, 29, 31, 32 }

F(-2) exception fail { }

2.1.8 Sympy

A grade { }

B grade { }

C grade { }

F normal fail { 1, 2, 3, 5, 6, 7, 8, 10, 11, 12, 13, 16, 17, 18, 20, 21, 22, 24, 25, 26, 28, 29, 31, 32 }

F(-1) timeout fail { }

F(-2) exception fail { }

2.2 Detailed conclusion table per each integral for all CAS systems

Detailed conclusion table per each integral is given by the table below. The elapsed time is in seconds. For failed result it is given as **F(-1)** if the failure was due to timeout. It is given as **F(-2)** if the failure was due to an exception being raised, which could indicate a bug in the system. If the failure was due to integral not being evaluated within the time limit, then it is given as **F**.

In this table, the column **N.S.** means **normalized size** and is defined as $\frac{\text{antiderivative leaf size}}{\text{optimal antiderivative leaf size}}$. To make the table fit the page, the name **Mathematica** was abbreviated to **MMA**.

Problem 1	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	B	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	225	244	149	252	755	430	0	163	0
N.S.	1	1.08	0.66	1.12	3.36	1.91	0.00	0.72	0.00
time (sec)	N/A	0.829	0.231	0.405	0.422	0.257	0.000	0.294	0.000

Problem 2	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	B	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	111	118	130	124	611	343	0	121	0
N.S.	1	1.06	1.17	1.12	5.50	3.09	0.00	1.09	0.00
time (sec)	N/A	0.362	0.135	0.359	0.388	0.260	0.000	0.298	0.000

Problem 3	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	B	A	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	91	91	105	83	464	111	0	79	0
N.S.	1	1.00	1.15	0.91	5.10	1.22	0.00	0.87	0.00
time (sec)	N/A	0.283	0.068	0.336	0.365	0.239	0.000	0.283	0.000

Problem 4	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	15	15	17	15	17	17	14	17	17
N.S.	1	1.00	1.13	1.00	1.13	1.13	0.93	1.13	1.13
time (sec)	N/A	0.175	5.777	0.259	0.736	0.234	0.592	0.293	1.078

Problem 5	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	F	F	B	F	F	F(-1)
verified	N/A	Yes	Yes	N/A	TBD	TBD	TBD	TBD	TBD
size	107	107	132	0	0	331	0	0	0
N.S.	1	1.00	1.23	0.00	0.00	3.09	0.00	0.00	0.00
time (sec)	N/A	0.264	0.445	0.000	0.000	0.255	0.000	0.000	0.000

Problem 6	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	B	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	227	246	152	244	834	467	0	167	0
N.S.	1	1.08	0.67	1.07	3.67	2.06	0.00	0.74	0.00
time (sec)	N/A	0.822	0.230	0.382	0.439	0.254	0.000	0.285	0.000

Problem 7	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	B	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	112	119	134	120	674	385	0	123	0
N.S.	1	1.06	1.20	1.07	6.02	3.44	0.00	1.10	0.00
time (sec)	N/A	0.363	0.132	0.422	0.402	0.261	0.000	0.282	0.000

Problem 8	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	B	A	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	91	91	109	79	512	115	0	81	0
N.S.	1	1.00	1.20	0.87	5.63	1.26	0.00	0.89	0.00
time (sec)	N/A	0.277	0.058	0.377	0.361	0.254	0.000	0.271	0.000

Problem 9	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	16	16	18	16	22	21	14	18	18
N.S.	1	1.00	1.12	1.00	1.38	1.31	0.88	1.12	1.12
time (sec)	N/A	0.176	6.641	0.287	0.717	0.249	0.603	0.280	1.117

Problem 10	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	F	F	B	F	F	F(-1)
verified	N/A	Yes	Yes	N/A	TBD	TBD	TBD	TBD	TBD
size	108	108	136	0	0	371	0	0	0
N.S.	1	1.00	1.26	0.00	0.00	3.44	0.00	0.00	0.00
time (sec)	N/A	0.260	0.499	0.000	0.000	0.250	0.000	0.000	0.000

Problem 11	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	C	B	B	F	C	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	66	119	72	75	183	127	0	53	0
N.S.	1	1.80	1.09	1.14	2.77	1.92	0.00	0.80	0.00
time (sec)	N/A	0.556	0.112	0.342	0.273	0.266	0.000	0.286	0.000

Problem 12	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	C	B	B	F	C	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	52	57	75	49	123	108	0	43	0
N.S.	1	1.10	1.44	0.94	2.37	2.08	0.00	0.83	0.00
time (sec)	N/A	0.291	0.053	0.391	0.268	0.255	0.000	0.278	0.000

Problem 13	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	C	B	A	F	C	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	39	39	24	25	94	16	0	21	0
N.S.	1	1.00	0.62	0.64	2.41	0.41	0.00	0.54	0.00
time (sec)	N/A	0.231	0.019	0.391	0.258	0.254	0.000	0.275	0.000

Problem 14	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	13	13	15	11	13	13	12	13	13
N.S.	1	1.00	1.15	0.85	1.00	1.00	0.92	1.00	1.00
time (sec)	N/A	0.165	6.331	0.243	0.648	0.239	0.585	0.268	1.086

Problem 15	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	13	13	15	11	13	13	14	13	13
N.S.	1	1.00	1.15	0.85	1.00	1.00	1.08	1.00	1.00
time (sec)	N/A	0.397	8.128	0.262	0.476	0.264	0.418	0.285	1.106

Problem 16	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	268	268	176	281	294	766	0	182	0
N.S.	1	1.00	0.66	1.05	1.10	2.86	0.00	0.68	0.00
time (sec)	N/A	0.468	0.540	0.847	0.301	0.261	0.000	0.287	0.000

Problem 17	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	136	136	155	141	200	648	0	142	0
N.S.	1	1.00	1.14	1.04	1.47	4.76	0.00	1.04	0.00
time (sec)	N/A	0.290	0.271	1.058	0.278	0.257	0.000	0.270	0.000

Problem 18	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	110	110	140	94	96	128	0	94	0
N.S.	1	1.00	1.27	0.85	0.87	1.16	0.00	0.85	0.00
time (sec)	N/A	0.249	0.100	0.697	0.265	0.249	0.000	0.284	0.000

Problem 19	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	17	17	19	17	51	19	15	19	19
N.S.	1	1.00	1.12	1.00	3.00	1.12	0.88	1.12	1.12
time (sec)	N/A	0.213	12.589	0.254	0.352	0.253	0.764	0.303	1.105

Problem 20	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	268	268	181	273	322	843	0	186	0
N.S.	1	1.00	0.68	1.02	1.20	3.15	0.00	0.69	0.00
time (sec)	N/A	0.455	0.518	0.725	0.301	0.249	0.000	0.286	0.000

Problem 21	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	136	136	159	137	216	730	0	144	0
N.S.	1	1.00	1.17	1.01	1.59	5.37	0.00	1.06	0.00
time (sec)	N/A	0.285	0.292	0.696	0.285	0.254	0.000	0.287	0.000

Problem 22	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	110	110	144	90	96	132	0	96	0
N.S.	1	1.00	1.31	0.82	0.87	1.20	0.00	0.87	0.00
time (sec)	N/A	0.260	0.123	0.665	0.271	0.257	0.000	0.280	0.000

Problem 23	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	18	18	20	18	51	22	15	20	20
N.S.	1	1.00	1.11	1.00	2.83	1.22	0.83	1.11	1.11
time (sec)	N/A	0.209	14.141	0.245	0.352	0.243	0.755	0.304	1.090

Problem 24	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	C	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	68	68	99	77	113	268	0	61	0
N.S.	1	1.00	1.46	1.13	1.66	3.94	0.00	0.90	0.00
time (sec)	N/A	0.268	0.158	0.799	0.304	0.261	0.000	0.276	0.000

Problem 25	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	C	C	B	F	C	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	75	75	88	75	121	307	0	70	0
N.S.	1	1.00	1.17	1.00	1.61	4.09	0.00	0.93	0.00
time (sec)	N/A	0.238	0.162	0.786	0.316	0.253	0.000	0.275	0.000

Problem 26	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	C	C	A	F	C	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	56	56	48	49	45	41	0	42	0
N.S.	1	1.00	0.86	0.88	0.80	0.73	0.00	0.75	0.00
time (sec)	N/A	0.214	0.057	0.700	0.269	0.249	0.000	0.281	0.000

Problem 27	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	15	15	17	13	43	15	14	15	15
N.S.	1	1.00	1.13	0.87	2.87	1.00	0.93	1.00	1.00
time (sec)	N/A	0.204	13.851	0.320	0.325	0.245	0.681	0.289	1.092

Problem 28	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	B	B	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	261	269	194	460	536	634	0	227	0
N.S.	1	1.03	0.74	1.76	2.05	2.43	0.00	0.87	0.00
time (sec)	N/A	0.862	0.400	0.635	0.369	0.260	0.000	0.290	0.000

Problem 29	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	B	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	128	127	146	200	254	413	0	139	0
N.S.	1	0.99	1.14	1.56	1.98	3.23	0.00	1.09	0.00
time (sec)	N/A	0.382	0.187	0.336	0.281	0.253	0.000	0.282	0.000

Problem 30	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	19	19	21	19	21	21	17	21	21
N.S.	1	1.00	1.11	1.00	1.11	1.11	0.89	1.11	1.11
time (sec)	N/A	0.180	3.104	0.418	0.670	0.237	0.509	0.288	1.138

Problem 31	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	B	B	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	311	311	240	528	601	1142	0	263	0
N.S.	1	1.00	0.77	1.70	1.93	3.67	0.00	0.85	0.00
time (sec)	N/A	0.588	0.949	0.903	0.459	0.271	0.000	0.294	0.000

Problem 32	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	B	B	F	A	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD
size	160	160	177	231	299	777	0	165	0
N.S.	1	1.00	1.11	1.44	1.87	4.86	0.00	1.03	0.00
time (sec)	N/A	0.346	0.467	0.725	0.365	0.273	0.000	0.291	0.000

Problem 33	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
verified	N/A	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD
size	21	21	23	21	72	23	19	23	23
N.S.	1	1.00	1.10	1.00	3.43	1.10	0.90	1.10	1.10
time (sec)	N/A	0.230	6.414	0.477	0.355	0.247	40.258	0.328	1.122

2.3 Detailed conclusion table specific for Rubi results

The following table is specific to Rubi only. It gives additional statistics for each integral. the column **steps** is the number of steps used by Rubi to obtain the antiderivative. The **rules** column is the number of unique rules used. The **integrand size** column is the leaf size of the integrand. Finally the ratio $\frac{\text{number of rules}}{\text{integrand size}}$ is also given. The larger this ratio is, the harder the integral is to solve. In this test file, problem number [11] had the largest ratio of [.76923099999999998]

Table 2.1: Rubi specific breakdown of results for each integral

#	grade	number of steps used	number of unique rules	normalized antiderivative leaf size	integrand leaf size	$\frac{\text{number of rules}}{\text{integrand leaf size}}$
1	A	10	10	1.08	15	0.667
2	A	5	5	1.06	13	0.385
3	A	4	4	1.00	11	0.364
4	N/A	1	0	1.00	15	0.000
5	A	1	1	1.00	33	0.030
6	A	10	10	1.08	16	0.625
7	A	5	5	1.06	14	0.357
8	A	4	4	1.00	12	0.333
9	N/A	1	0	1.00	16	0.000
10	A	1	1	1.00	35	0.029
11	A	10	10	1.80	13	0.769
12	A	5	5	1.10	11	0.455
13	A	4	4	1.00	9	0.444
14	N/A	1	0	1.00	13	0.000
15	N/A	6	0	1.00	13	0.000
16	A	2	2	1.00	17	0.118
17	A	2	2	1.00	15	0.133
18	A	2	2	1.00	13	0.154
19	N/A	2	0	1.00	17	0.000
20	A	2	2	1.00	18	0.111
21	A	2	2	1.00	16	0.125
22	A	2	2	1.00	14	0.143

Continued on next page

Table 2.1 – continued from previous page

#	grade	number of steps used	number of unique rules	normalized antiderivative leaf size	integrand leaf size	$\frac{\text{number of rules}}{\text{integrand leaf size}}$
23	N/A	2	0	1.00	18	0.000
24	A	2	2	1.00	15	0.133
25	A	2	2	1.00	13	0.154
26	A	2	2	1.00	11	0.182
27	N/A	2	0	1.00	15	0.000
28	A	10	10	1.03	19	0.526
29	A	5	5	0.99	17	0.294
30	N/A	1	0	1.00	19	0.000
31	A	2	2	1.00	21	0.095
32	A	2	2	1.00	19	0.105
33	N/A	2	0	1.00	21	0.000

CHAPTER 3

LISTING OF INTEGRALS

3.1	$\int x^2 \sinh(a + bx + cx^2) dx$	37
3.2	$\int x \sinh(a + bx + cx^2) dx$	45
3.3	$\int \sinh(a + bx + cx^2) dx$	52
3.4	$\int \frac{\sinh(a+bx+cx^2)}{x} dx$	58
3.5	$\int \left(-\frac{b \cosh(a+bx+cx^2)}{x} + \frac{\sinh(a+bx+cx^2)}{x^2} \right) dx$	62
3.6	$\int x^2 \sinh(a + bx - cx^2) dx$	67
3.7	$\int x \sinh(a + bx - cx^2) dx$	75
3.8	$\int \sinh(a + bx - cx^2) dx$	82
3.9	$\int \frac{\sinh(a+bx-cx^2)}{x} dx$	88
3.10	$\int \left(-\frac{b \cosh(a+bx-cx^2)}{x} + \frac{\sinh(a+bx-cx^2)}{x^2} \right) dx$	92
3.11	$\int x^2 \sinh(\frac{1}{4} + x + x^2) dx$	97
3.12	$\int x \sinh(\frac{1}{4} + x + x^2) dx$	104
3.13	$\int \sinh(\frac{1}{4} + x + x^2) dx$	110
3.14	$\int \frac{\sinh(\frac{1}{4}+x+x^2)}{x} dx$	115
3.15	$\int \frac{\sinh(\frac{1}{4}+x+x^2)}{x^2} dx$	119
3.16	$\int x^2 \sinh^2(a + bx + cx^2) dx$	124
3.17	$\int x \sinh^2(a + bx + cx^2) dx$	130
3.18	$\int \sinh^2(a + bx + cx^2) dx$	136
3.19	$\int \frac{\sinh^2(a+bx+cx^2)}{x} dx$	141
3.20	$\int x^2 \sinh^2(a + bx - cx^2) dx$	145
3.21	$\int x \sinh^2(a + bx - cx^2) dx$	151
3.22	$\int \sinh^2(a + bx - cx^2) dx$	157
3.23	$\int \frac{\sinh^2(a+bx-cx^2)}{x} dx$	162
3.24	$\int x^2 \sinh^2(\frac{1}{4} + x + x^2) dx$	166
3.25	$\int x \sinh^2(\frac{1}{4} + x + x^2) dx$	171
3.26	$\int \sinh^2(\frac{1}{4} + x + x^2) dx$	176
3.27	$\int \frac{\sinh^2(\frac{1}{4}+x+x^2)}{x} dx$	181

3.28	$\int (d + ex)^2 \sinh(a + bx + cx^2) dx$	185
3.29	$\int (d + ex) \sinh(a + bx + cx^2) dx$	195
3.30	$\int \frac{\sinh(a+bx+cx^2)}{d+ex} dx$	201
3.31	$\int (d + ex)^2 \sinh^2(a + bx + cx^2) dx$	205
3.32	$\int (d + ex) \sinh^2(a + bx + cx^2) dx$	212
3.33	$\int \frac{\sinh^2(a+bx+cx^2)}{d+ex} dx$	218

3.1 $\int x^2 \sinh(a + bx + cx^2) dx$

3.1.1	Optimal result	37
3.1.2	Mathematica [A] (verified)	37
3.1.3	Rubi [A] (verified)	38
3.1.4	Maple [A] (verified)	41
3.1.5	Fricas [B] (verification not implemented)	42
3.1.6	Sympy [F]	42
3.1.7	Maxima [B] (verification not implemented)	43
3.1.8	Giac [A] (verification not implemented)	44
3.1.9	Mupad [F(-1)]	44

3.1.1 Optimal result

Integrand size = 15, antiderivative size = 225

$$\begin{aligned} \int x^2 \sinh(a + bx + cx^2) dx = & -\frac{b \cosh(a + bx + cx^2)}{4c^2} + \frac{x \cosh(a + bx + cx^2)}{2c} \\ & - \frac{b^2 e^{-a+\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{16c^{5/2}} - \frac{e^{-a+\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \\ & + \frac{b^2 e^{a-\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{16c^{5/2}} - \frac{e^{a-\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \end{aligned}$$

```
output -1/4*b*cosh(c*x^2+b*x+a)/c^2+1/2*x*cosh(c*x^2+b*x+a)/c-1/16*b^2*exp(-a+1/4
*b^2/c)*erf(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(5/2)-1/8*exp(-a+1/4*b^2/c)*
erf(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)+1/16*b^2*exp(a-1/4*b^2/c)*erfi
(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(5/2)-1/8*exp(a-1/4*b^2/c)*erfi(1/2*(2*
c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)
```

3.1.2 Mathematica [A] (verified)

Time = 0.23 (sec), antiderivative size = 149, normalized size of antiderivative = 0.66

$$\begin{aligned} \int x^2 \sinh(a + bx + cx^2) dx \\ = \frac{4\sqrt{c}(-b + 2cx) \cosh(a + x(b + cx)) + (b^2 + 2c) \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right) \left(-\cosh\left(a - \frac{b^2}{4c}\right) + \sinh\left(a - \frac{b^2}{4c}\right)\right) + (b^2 - 2c) \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right) \left(\cosh\left(a - \frac{b^2}{4c}\right) - \sinh\left(a - \frac{b^2}{4c}\right)\right)}{16c^{5/2}} \end{aligned}$$

input `Integrate[x^2*Sinh[a + b*x + c*x^2], x]`

output
$$(4*\text{Sqrt}[c]*(-b + 2*c*x)*\text{Cosh}[a + x*(b + c*x)] + (b^2 + 2*c)*\text{Sqrt}[\text{Pi}]*\text{Erf}[(b + 2*c*x)/(2*\text{Sqrt}[c])]*(-\text{Cosh}[a - b^2/(4*c)] + \text{Sinh}[a - b^2/(4*c)]) + (b^2 - 2*c)*\text{Sqrt}[\text{Pi}]*\text{Erfi}[(b + 2*c*x)/(2*\text{Sqrt}[c])]*(\text{Cosh}[a - b^2/(4*c)] + \text{Sin}[a - b^2/(4*c)]))/((16*c^{(5/2)})$$

3.1.3 Rubi [A] (verified)

Time = 0.83 (sec), antiderivative size = 244, normalized size of antiderivative = 1.08, number of steps used = 10, number of rules used = 10, $\frac{\text{number of rules}}{\text{integrand size}} = 0.667$, Rules used = {5909, 5898, 2664, 2633, 2634, 5905, 5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int x^2 \sinh(a + bx + cx^2) dx \\
 & \downarrow \textcolor{blue}{5909} \\
 & - \frac{b \int x \sinh(cx^2 + bx + a) dx}{2c} - \frac{\int \cosh(cx^2 + bx + a) dx}{2c} + \frac{x \cosh(a + bx + cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{5898} \\
 & - \frac{\frac{1}{2} \int e^{-cx^2 - bx - a} dx + \frac{1}{2} \int e^{cx^2 + bx + a} dx}{2c} - \frac{b \int x \sinh(cx^2 + bx + a) dx}{2c} + \frac{x \cosh(a + bx + cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2664} \\
 & - \frac{\frac{1}{2} e^{\frac{b^2}{4c} - a} \int e^{-\frac{(b+2cx)^2}{4c}} dx + \frac{1}{2} e^{a - \frac{b^2}{4c}} \int e^{\frac{(b+2cx)^2}{4c}} dx}{2c} - \frac{b \int x \sinh(cx^2 + bx + a) dx}{2c} + \\
 & \quad \frac{x \cosh(a + bx + cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2633} \\
 & - \frac{\frac{1}{2} e^{\frac{b^2}{4c} - a} \int e^{-\frac{(b+2cx)^2}{4c}} dx + \frac{\sqrt{\pi} e^{a - \frac{b^2}{4c}} \text{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} - \frac{b \int x \sinh(cx^2 + bx + a) dx}{2c} + \frac{x \cosh(a + bx + cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2634} \\
 & - \frac{b \int x \sinh(cx^2 + bx + a) dx}{2c} - \frac{\frac{\sqrt{\pi} e^{\frac{b^2}{4c} - a} \text{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a - \frac{b^2}{4c}} \text{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} + \frac{x \cosh(a + bx + cx^2)}{2c}
 \end{aligned}$$

$$\begin{aligned}
& \downarrow \text{5905} \\
& - \frac{b \left(\frac{\cosh(a+bx+cx^2)}{2c} - \frac{b \int \sinh(cx^2+bx+a) dx}{2c} \right)}{2c} - \frac{\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} + \\
& \quad \frac{x \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{5897} \\
& - \frac{b \left(\frac{\cosh(a+bx+cx^2)}{2c} - \frac{b \left(\frac{1}{2} \int e^{cx^2+bx+a} dx - \frac{1}{2} \int e^{-cx^2-bx-a} dx \right)}{2c} \right)}{2c} - \\
& \quad \frac{\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} + \frac{x \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{2664} \\
& - \frac{b \left(\frac{\cosh(a+bx+cx^2)}{2c} - \frac{b \left(\frac{1}{2} e^{a-\frac{b^2}{4c}} \int e^{\frac{(b+2cx)^2}{4c}} dx - \frac{1}{2} e^{\frac{b^2}{4c}-a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \right)}{2c} \right)}{2c} - \\
& \quad \frac{\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} + \frac{x \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{2633} \\
& - \frac{b \left(\frac{\cosh(a+bx+cx^2)}{2c} - \frac{b \left(\frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{1}{2} e^{\frac{b^2}{4c}-a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \right)}{2c} \right)}{2c} - \\
& \quad \frac{\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} + \frac{x \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{2634}
\end{aligned}$$

$$\begin{aligned}
 & - \frac{b \left(\frac{\cosh(a+bx+cx^2)}{2c} - \frac{b \left(\frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} \right)}{2c} - \\
 & \quad \frac{\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} + \frac{x \cosh(a+bx+cx^2)}{2c}
 \end{aligned}$$

input `Int[x^2*Sinh[a + b*x + c*x^2], x]`

output `(x*Cosh[a + b*x + c*x^2])/(2*c) - ((E^(-a + b^2/(4*c))*Sqrt[Pi]*Erf[(b + 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c]) + (E^(a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b + 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c]))/(2*c) - (b*(Cosh[a + b*x + c*x^2]/(2*c) - (b*(-1/4*(E^(-a + b^2/(4*c))*Sqrt[Pi]*Erf[(b + 2*c*x)/(2*Sqrt[c])])/Sqrt[c] + (E^(a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b + 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c])))/(2*c)))/(2*c)`

3.1.3.1 Defintions of rubi rules used

rule 2633 `Int[(F_)^((a_.) + (b_.*((c_.) + (d_.*(x_)^2))), x_Symbol] :> Simp[F^a*Sqrt[Pi]*(Erfi[(c + d*x)*Rt[b*Log[F], 2]]/(2*d*Rt[b*Log[F], 2])), x] /; FreeQ[{F, a, b, c, d}, x] && PosQ[b]`

rule 2634 `Int[(F_)^((a_.) + (b_.*((c_.) + (d_.*(x_)^2))), x_Symbol] :> Simp[F^a*Sqrt[Pi]*(Erf[(c + d*x)*Rt[(-b)*Log[F], 2]]/(2*d*Rt[(-b)*Log[F], 2])), x] /; FreeQ[{F, a, b, c, d}, x] && NegQ[b]`

rule 2664 `Int[(F_)^((a_.) + (b_.*(x_) + (c_.*(x_)^2)), x_Symbol] :> Simp[F^(a - b^2/(4*c)) Int[F^((b + 2*c*x)^2/(4*c)), x], x] /; FreeQ[{F, a, b, c}, x]`

rule 5897 `Int[Sinh[(a_.) + (b_.*(x_) + (c_.*(x_)^2)), x_Symbol] :> Simp[1/2 Int[E^(a + b*x + c*x^2), x], x] - Simp[1/2 Int[E^(-a - b*x - c*x^2), x], x] /; FreeQ[{a, b, c}, x]`

rule 5898 $\text{Int}[\cosh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[e^{(a + b*x + c*x^2)}, x], x] + \text{Simp}[1/2 \text{Int}[e^{(-a - b*x - c*x^2)}, x], x]; \text{FreeQ}[\{a, b, c\}, x]$

rule 5905 $\text{Int}[((d_.) + (e_.)*(x_))*\sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(\cosh[a + b*x + c*x^2]/(2*c)), x] - \text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[\sinh[a + b*x + c*x^2], x], x]; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{NeQ}[b*e - 2*c*d, 0]$

rule 5909 $\text{Int}[((d_.) + (e_.)*(x_))^{(m_*)}\sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(d + e*x)^{(m - 1)}*\cosh[a + b*x + c*x^2]/(2*c), x] + (-\text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[(d + e*x)^{(m - 1)}*\sinh[a + b*x + c*x^2], x], x] - \text{Simp}[e^{2*((m - 1)/(2*c))} \text{Int}[(d + e*x)^{(m - 2)}*\cosh[a + b*x + c*x^2], x], x]); \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{GtQ}[m, 1] \&& \text{NeQ}[b*e - 2*c*d, 0]$

3.1.4 Maple [A] (verified)

Time = 0.40 (sec), antiderivative size = 252, normalized size of antiderivative = 1.12

method	result
risch	$\frac{x e^{-c x^2-b x-a}}{4 c}-\frac{b e^{-c x^2-b x-a}}{8 c^2}-\frac{b^2 \sqrt{\pi } e^{-\frac{4 a c-b^2}{4 c}} \operatorname{erf}\left(\sqrt{c} x+\frac{b}{2 \sqrt{c}}\right)}{16 c^{\frac{5}{2}}}-\frac{\sqrt{\pi } e^{-\frac{4 a c-b^2}{4 c}} \operatorname{erf}\left(\sqrt{c} x+\frac{b}{2 \sqrt{c}}\right)}{8 c^{\frac{3}{2}}}+\frac{x e^{c x^2+b x+a}}{4 c}-\frac{b e^{-c x^2-b x-a}}{8 c^2}$

input `int(x^2*sinh(c*x^2+b*x+a),x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & 1/4/c*x*exp(-c*x^2-b*x-a)-1/8*b/c^2*exp(-c*x^2-b*x-a)-1/16*b^2/c^(5/2)*Pi^(1/2)*exp(-1/4*(4*a*c-b^2)/c)*erf(c^(1/2)*x+1/2*b/c^(1/2))-1/8/c^(3/2)*Pi^(1/2)*exp(-1/4*(4*a*c-b^2)/c)*erf(c^(1/2)*x+1/2*b/c^(1/2))+1/4/c*x*exp(c*x^2+b*x+a)-1/8*b/c^2*exp(c*x^2+b*x+a)-1/16*b^2/c^2*Pi^(1/2)*exp(1/4*(4*a*c-b^2)/c)/(-c)^(1/2)*erf(-(-c)^(1/2)*x+1/2*b/(-c)^(1/2))+1/8/c*Pi^(1/2)*exp(1/4*(4*a*c-b^2)/c)/(-c)^(1/2)*erf(-(-c)^(1/2)*x+1/2*b/(-c)^(1/2)) \end{aligned}$$

3.1.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 430 vs. $2(169) = 338$.

Time = 0.26 (sec), antiderivative size = 430, normalized size of antiderivative = 1.91

$$\int x^2 \sinh(a + bx + cx^2) dx = \frac{4c^2x + 2(2c^2x - bc)\cosh(cx^2 + bx + a)^2 - \sqrt{\pi}((b^2 - 2c)\cosh(cx^2 + bx + a)\cosh\left(-\frac{b^2 - 4ac}{4c}\right) + (b^2 - 2c)\sinh(cx^2 + bx + a)\sinh\left(-\frac{b^2 - 4ac}{4c}\right))}{16}$$

input `integrate(x^2*sinh(c*x^2+b*x+a),x, algorithm="fricas")`

output `1/16*(4*c^2*x + 2*(2*c^2*x - b*c)*cosh(c*x^2 + b*x + a)^2 - sqrt(pi)*((b^2 - 2*c)*cosh(c*x^2 + b*x + a)*cosh(-1/4*(b^2 - 4*a*c)/c) + (b^2 - 2*c)*cosh(c*x^2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*c)/c) + ((b^2 - 2*c)*cosh(-1/4*(b^2 - 4*a*c)/c) + (b^2 - 2*c)*sinh(-1/4*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(-c)*erf(1/2*(2*c*x + b)*sqrt(-c)/c) - sqrt(pi)*((b^2 + 2*c)*cosh(c*x^2 + b*x + a)*cosh(-1/4*(b^2 - 4*a*c)/c) - (b^2 + 2*c)*cosh(c*x^2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*c)/c) + ((b^2 + 2*c)*cosh(-1/4*(b^2 - 4*a*c)/c) - (b^2 + 2*c)*sinh(-1/4*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(c)*erf(1/2*(2*c*x + b)/sqrt(c)) + 4*(2*c^2*x - b*c)*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a) + 2*(2*c^2*x - b*c)*sinh(c*x^2 + b*x + a)^2 - 2*b*c)/(c^3*cosh(c*x^2 + b*x + a) + c^3*sinh(c*x^2 + b*x + a))`

3.1.6 Sympy [F]

$$\int x^2 \sinh(a + bx + cx^2) dx = \int x^2 \sinh(a + bx + cx^2) dx$$

input `integrate(x**2*sinh(c*x**2+b*x+a),x)`

output `Integral(x**2*sinh(a + b*x + c*x**2), x)`

3.1.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 755 vs. $2(169) = 338$.

Time = 0.42 (sec), antiderivative size = 755, normalized size of antiderivative = 3.36

$$\int x^2 \sinh(a + bx + cx^2) dx = \text{Too large to display}$$

```
input integrate(x^2*sinh(c*x^2+b*x+a),x, algorithm="maxima")
```

```
output 1/3*x^3*sinh(c*x^2 + b*x + a) + 1/96*(sqrt(pi)*(2*c*x + b)*b^3*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(7/2)) - 6*b^2*e^(1/4*(2*c*x + b)^2/c)/c^(5/2) - 12*(2*c*x + b)^3*b*gamma(3/2, -1/4*(2*c*x + b)^2/c)/((-2*c*x + b)^2/c)^(3/2)*c^(7/2)) + 8*gamma(2, -1/4*(2*c*x + b)^2/c)/c^(3/2))*b*e^(a - 1/4*b^2/c)/sqrt(c) - 1/96*(sqrt(pi)*(2*c*x + b)*b^4*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(9/2)) - 8*b^3*e^(1/4*(2*c*x + b)^2/c)/c^(7/2) - 24*(2*c*x + b)^3*b^2*gamma(3/2, -1/4*(2*c*x + b)^2/c)/((-2*c*x + b)^2/c)^(3/2)*c^(9/2)) + 32*b*gamma(2, -1/4*(2*c*x + b)^2/c)/c^(5/2) - 16*(2*c*x + b)^5*gamma(5/2, -1/4*(2*c*x + b)^2/c)/((-2*c*x + b)^2/c)^(5/2)*c^(9/2))*sqrt(c)*e^(a - 1/4*b^2/c) + 1/96*(sqrt(pi)*(2*c*x + b)*b^3*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(7/2)) + 6*b^2*c*e^(-1/4*(2*c*x + b)^2/c)/(-c)^(7/2) - 12*(2*c*x + b)^3*b*gamma(3/2, 1/4*(2*c*x + b)^2/c)/(((2*c*x + b)^2/c)^(3/2)*(-c)^(7/2)) + 8*c^2*gamma(2, 1/4*(2*c*x + b)^2/c)/(-c)^(7/2))*b*e^(-a + 1/4*b^2/c)/sqrt(-c) + 1/96*(sqrt(pi)*(2*c*x + b)*b^4*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(9/2)) + 8*b^3*c*e^(-1/4*(2*c*x + b)^2/c)/(-c)^(9/2) - 24*(2*c*x + b)^3*b^2*gamma(3/2, 1/4*(2*c*x + b)^2/c)/(((2*c*x + b)^2/c)^(3/2)*(-c)^(9/2)) + 32*b*c^2*gamma(2, 1/4*(2*c*x + b)^2/c)/(-c)^(9/2) - 16*(2*c*x + b)^5*gamma(5/2, 1/4*(2*c*x + b)^2/c)/(((2*c*x + b)^2/c)^(5/2)*(-c)^(9/2)))*c*e^(-a + 1/4*b^2/c)/sqrt(-c)
```

3.1.8 Giac [A] (verification not implemented)

Time = 0.29 (sec) , antiderivative size = 163, normalized size of antiderivative = 0.72

$$\int x^2 \sinh(a + bx + cx^2) dx$$

$$= \frac{\sqrt{\pi}(b^2+2c) \operatorname{erf}\left(-\frac{1}{2}\sqrt{c}\left(2x+\frac{b}{c}\right)\right) e^{\left(\frac{b^2-4ac}{4c}\right)}}{16c^2} + 2\left(c\left(2x+\frac{b}{c}\right) - 2b\right) e^{(-cx^2-bx-a)}$$

$$- \frac{\sqrt{\pi}(b^2-2c) \operatorname{erf}\left(-\frac{1}{2}\sqrt{-c}\left(2x+\frac{b}{c}\right)\right) e^{\left(-\frac{b^2-4ac}{4c}\right)}}{16c^2} - 2\left(c\left(2x+\frac{b}{c}\right) - 2b\right) e^{(cx^2+bx+a)}$$

input `integrate(x^2*sinh(c*x^2+b*x+a),x, algorithm="giac")`

output `1/16*(sqrt(pi)*(b^2 + 2*c)*erf(-1/2*sqrt(c)*(2*x + b/c))*e^(1/4*(b^2 - 4*a*c)/c))/sqrt(c) + 2*(c*(2*x + b/c) - 2*b)*e^(-c*x^2 - b*x - a))/c^2 - 1/16*(sqrt(pi)*(b^2 - 2*c)*erf(-1/2*sqrt(-c)*(2*x + b/c))*e^(-1/4*(b^2 - 4*a*c)/c))/sqrt(-c) - 2*(c*(2*x + b/c) - 2*b)*e^(c*x^2 + b*x + a))/c^2`

3.1.9 Mupad [F(-1)]

Timed out.

$$\int x^2 \sinh(a + bx + cx^2) dx = \int x^2 \sinh(cx^2 + bx + a) dx$$

input `int(x^2*sinh(a + b*x + c*x^2),x)`

output `int(x^2*sinh(a + b*x + c*x^2), x)`

3.2 $\int x \sinh(a + bx + cx^2) dx$

3.2.1	Optimal result	45
3.2.2	Mathematica [A] (verified)	45
3.2.3	Rubi [A] (verified)	46
3.2.4	Maple [A] (verified)	47
3.2.5	Fricas [B] (verification not implemented)	48
3.2.6	Sympy [F]	48
3.2.7	Maxima [B] (verification not implemented)	49
3.2.8	Giac [A] (verification not implemented)	50
3.2.9	Mupad [F(-1)]	51

3.2.1 Optimal result

Integrand size = 13, antiderivative size = 111

$$\begin{aligned} \int x \sinh(a + bx + cx^2) dx &= \frac{\cosh(a + bx + cx^2)}{2c} + \frac{be^{-a+\frac{b^2}{4c}}\sqrt{\pi}\operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \\ &\quad - \frac{be^{a-\frac{b^2}{4c}}\sqrt{\pi}\operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \end{aligned}$$

output $1/2*\cosh(c*x^2+b*x+a)/c+1/8*b*\exp(-a+1/4*b^2/c)*\operatorname{erf}(1/2*(2*c*x+b)/c^(1/2))$
 $*Pi^(1/2)/c^(3/2)-1/8*b*\exp(a-1/4*b^2/c)*\operatorname{erfi}(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)$

3.2.2 Mathematica [A] (verified)

Time = 0.13 (sec), antiderivative size = 130, normalized size of antiderivative = 1.17

$$\begin{aligned} \int x \sinh(a + bx + cx^2) dx \\ = \frac{4\sqrt{c}\cosh(a + x(b + cx)) + b\sqrt{\pi}\operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)\left(\cosh\left(a - \frac{b^2}{4c}\right) - \sinh\left(a - \frac{b^2}{4c}\right)\right) - b\sqrt{\pi}\operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)\left(\cosh\left(a - \frac{b^2}{4c}\right) + \sinh\left(a - \frac{b^2}{4c}\right)\right)}{8c^{3/2}} \end{aligned}$$

input `Integrate[x*Sinh[a + b*x + c*x^2], x]`

```
output (4*.Sqrt[c]*Cosh[a + x*(b + c*x)] + b*.Sqrt[Pi]*Erf[(b + 2*c*x)/(2*.Sqrt[c])]* (Cosh[a - b^2/(4*c)] - Sinh[a - b^2/(4*c)]) - b*.Sqrt[Pi]*Erfi[(b + 2*c*x)/(2*.Sqrt[c])]*(Cosh[a - b^2/(4*c)] + Sinh[a - b^2/(4*c)]))/(8*c^(3/2))
```

3.2.3 Rubi [A] (verified)

Time = 0.36 (sec) , antiderivative size = 118, normalized size of antiderivative = 1.06, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.385, Rules used = {5905, 5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int x \sinh(a + bx + cx^2) dx \\
 & \downarrow \textcolor{blue}{5905} \\
 & \frac{\cosh(a + bx + cx^2)}{2c} - \frac{b \int \sinh(cx^2 + bx + a) dx}{2c} \\
 & \downarrow \textcolor{blue}{5897} \\
 & \frac{\cosh(a + bx + cx^2)}{2c} - \frac{b \left(\frac{1}{2} \int e^{cx^2 + bx + a} dx - \frac{1}{2} \int e^{-cx^2 - bx - a} dx \right)}{2c} \\
 & \downarrow \textcolor{blue}{2664} \\
 & \frac{\cosh(a + bx + cx^2)}{2c} - \frac{b \left(\frac{1}{2} e^{a - \frac{b^2}{4c}} \int e^{\frac{(b+2cx)^2}{4c}} dx - \frac{1}{2} e^{\frac{b^2}{4c} - a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \right)}{2c} \\
 & \downarrow \textcolor{blue}{2633} \\
 & \frac{\cosh(a + bx + cx^2)}{2c} - \frac{b \left(\frac{\sqrt{\pi} e^{a - \frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{1}{2} e^{\frac{b^2}{4c} - a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \right)}{2c} \\
 & \downarrow \textcolor{blue}{2634} \\
 & \frac{\cosh(a + bx + cx^2)}{2c} - \frac{b \left(\frac{\sqrt{\pi} e^{a - \frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi} e^{\frac{b^2}{4c} - a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c}
 \end{aligned}$$

```
input Int[x*Sinh[a + b*x + c*x^2],x]
```

3.2. $\int x \sinh(a + bx + cx^2) dx$

output $\text{Cosh}[a + b*x + c*x^2]/(2*c) - (b*(-1/4*(E^{-a + b^2/(4*c)})*\text{Sqrt}[\pi]*\text{Erf}[(b + 2*c*x)/(2*\text{Sqrt}[c])])/(\text{Sqrt}[c] + (E^{(a - b^2/(4*c)})*\text{Sqrt}[\pi]*\text{Erfi}[(b + 2*c*x)/(2*\text{Sqrt}[c])]))/(4*\text{Sqrt}[c]))/(2*c)$

3.2.3.1 Defintions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^{(a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2}, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^a*\text{Sqrt}[\pi]*(\text{Erfi}[(c + d*x)*\text{Rt}[b*\text{Log}[F], 2]]/(2*d*\text{Rt}[b*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^{(a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2}, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^a*\text{Sqrt}[\pi]*(\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^{(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2}, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c))}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \Rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5905 $\text{Int}[(d_{_}) + (e_{_})*(x_{_})*\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \Rightarrow \text{Simp}[e*(\text{Cosh}[a + b*x + c*x^2]/(2*c)), x] - \text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[\text{Sinh}[a + b*x + c*x^2], x], x] /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{NeQ}[b*e - 2*c*d, 0]$

3.2.4 Maple [A] (verified)

Time = 0.36 (sec), antiderivative size = 124, normalized size of antiderivative = 1.12

method	result	size
risch	$\frac{e^{-cx^2-bx-a}}{4c} + \frac{b\sqrt{\pi}e^{-\frac{4ac-b^2}{4c}}\text{erf}\left(\sqrt{c}x+\frac{b}{2\sqrt{c}}\right)}{8c^{\frac{3}{2}}} + \frac{e^{cx^2+bx+a}}{4c} + \frac{b\sqrt{\pi}e^{\frac{4ac-b^2}{4c}}\text{erf}\left(-\sqrt{c}x+\frac{b}{2\sqrt{-c}}\right)}{8c\sqrt{-c}}$	124

input `int(x*sinh(c*x^2+b*x+a), x, method=_RETURNVERBOSE)`

3.2. $\int x \sinh(a + bx + cx^2) dx$

```
output 1/4/c*exp(-c*x^2-b*x-a)+1/8*b/c^(3/2)*Pi^(1/2)*exp(-1/4*(4*a*c-b^2)/c)*erf
(c^(1/2)*x+1/2*b/c^(1/2))+1/4/c*exp(c*x^2+b*x+a)+1/8*b/c*Pi^(1/2)*exp(1/4*
(4*a*c-b^2)/c)/(-c)^(1/2)*erf(-(-c)^(1/2)*x+1/2*b/(-c)^(1/2))
```

3.2.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 343 vs. $2(83) = 166$.

Time = 0.26 (sec), antiderivative size = 343, normalized size of antiderivative = 3.09

$$\int x \sinh(a + bx + cx^2) dx = \frac{2 c \cosh(cx^2 + bx + a)^2 + \sqrt{\pi} \left(b \cosh(cx^2 + bx + a) \cosh\left(-\frac{b^2 - 4ac}{4c}\right) + b \cosh(cx^2 + bx + a) \sinh\left(-\frac{b^2 - 4ac}{4c}\right)\right)}{2}$$

```
input integrate(x*sinh(c*x^2+b*x+a),x, algorithm="fricas")
```

```
output 1/8*(2*c*cosh(c*x^2 + b*x + a)^2 + sqrt(pi)*(b*cosh(c*x^2 + b*x + a)*cosh(
-1/4*(b^2 - 4*a*c)/c) + b*cosh(c*x^2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*c)/c)
+ (b*cosh(-1/4*(b^2 - 4*a*c)/c) + b*sinh(-1/4*(b^2 - 4*a*c)/c))*sinh(c*x^
2 + b*x + a))*sqrt(-c)*erf(1/2*(2*c*x + b)*sqrt(-c)/c) + sqrt(pi)*(b*cosh(
c*x^2 + b*x + a)*cosh(-1/4*(b^2 - 4*a*c)/c) - b*cosh(c*x^2 + b*x + a)*sinh(
-1/4*(b^2 - 4*a*c)/c) + (b*cosh(-1/4*(b^2 - 4*a*c)/c) - b*sinh(-1/4*(b^2 -
4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(c)*erf(1/2*(2*c*x + b)/sqrt(c)) +
4*c*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a) + 2*c*sinh(c*x^2 + b*x +
a)^2 + 2*c)/(c^2*cosh(c*x^2 + b*x + a) + c^2*sinh(c*x^2 + b*x + a))
```

3.2.6 Sympy [F]

$$\int x \sinh(a + bx + cx^2) dx = \int x \sinh(a + bx + cx^2) dx$$

```
input integrate(x*sinh(c*x**2+b*x+a),x)
```

```
output Integral(x*sinh(a + b*x + c*x**2), x)
```

3.2.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 611 vs. $2(83) = 166$.

Time = 0.39 (sec), antiderivative size = 611, normalized size of antiderivative = 5.50

$$\begin{aligned}
 \int x \sinh(a + bx + cx^2) dx &= \frac{1}{2} x^2 \sinh(cx^2 + bx + a) \\
 &- \frac{\left(\frac{\sqrt{\pi}(2cx+b)b^2 \left(\operatorname{erf}\left(\frac{1}{2}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{5}{2}}} - \frac{4be^{\left(\frac{(2cx+b)^2}{4c}\right)}}{c^{\frac{3}{2}}} - \frac{4(2cx+b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{4c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} c^{\frac{5}{2}}} \right) be^{\left(a - \frac{b^2}{4c}\right)}}{32\sqrt{c}} \\
 &+ \frac{1}{32} \left(\frac{\sqrt{\pi}(2cx+b)b^3 \left(\operatorname{erf}\left(\frac{1}{2}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{7}{2}}} - \frac{6b^2 e^{\left(\frac{(2cx+b)^2}{4c}\right)}}{c^{\frac{5}{2}}} - \frac{12(2cx+b)^3 b \Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{4c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} c^{\frac{7}{2}}} \right. \\
 &\quad \left. + \frac{\left(\frac{\sqrt{\pi}(2cx+b)b^2 \left(\operatorname{erf}\left(\frac{1}{2}\sqrt{\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{\frac{(2cx+b)^2}{c}} (-c)^{\frac{5}{2}}} + \frac{4bce^{\left(-\frac{(2cx+b)^2}{4c}\right)}}{(-c)^{\frac{5}{2}}} - \frac{4(2cx+b)^3 \Gamma\left(\frac{3}{2}, \frac{(2cx+b)^2}{4c}\right)}{\left(\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} (-c)^{\frac{5}{2}}} \right) be^{\left(-a + \frac{b^2}{4c}\right)}}{32\sqrt{-c}} \right. \\
 &\quad \left. + \frac{\left(\frac{\sqrt{\pi}(2cx+b)b^3 \left(\operatorname{erf}\left(\frac{1}{2}\sqrt{\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{\frac{(2cx+b)^2}{c}} (-c)^{\frac{7}{2}}} + \frac{6b^2 ce^{\left(-\frac{(2cx+b)^2}{4c}\right)}}{(-c)^{\frac{7}{2}}} - \frac{12(2cx+b)^3 b \Gamma\left(\frac{3}{2}, \frac{(2cx+b)^2}{4c}\right)}{\left(\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} (-c)^{\frac{7}{2}}} + \frac{8c^2 \Gamma\left(2, \frac{(2cx+b)^2}{4c}\right)}{(-c)^{\frac{7}{2}}} \right) ce^{\left(-a + \frac{b^2}{4c}\right)}}{32\sqrt{-c}} \right)
 \end{aligned}$$

```
input integrate(x*sinh(c*x^2+b*x+a),x, algorithm="maxima")
```

```
output 1/2*x^2*sinh(c*x^2 + b*x + a) - 1/32*(sqrt(pi)*(2*c*x + b)*b^2*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(5/2)) - 4*b*e^(1/4*(2*c*x + b)^2/c)/c^(3/2) - 4*(2*c*x + b)^3*gamma(3/2, -1/4*(2*c*x + b)^2/c)/((-(2*c*x + b)^2/c)^(3/2)*c^(5/2)))*b*e^(a - 1/4*b^2/c)/sqrt(c) + 1/32*(sqrt(pi)*(2*c*x + b)*b^3*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(7/2)) - 6*b^2*e^(1/4*(2*c*x + b)^2/c)/c^(5/2) - 12*(2*c*x + b)^3*b*gamma(3/2, -1/4*(2*c*x + b)^2/c)/((-(2*c*x + b)^2/c)^(3/2)*c^(7/2)) + 8*gamma(2, -1/4*(2*c*x + b)^2/c)/c^(3/2))*sqrt(c)*e^(a - 1/4*b^2/c) + 1/32*(sqrt(pi)*(2*c*x + b)*b^2*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(5/2)) + 4*b*c*e^(-1/4*(2*c*x + b)^2/c)/(-c)^(5/2) - 4*(2*c*x + b)^3*gamma(3/2, 1/4*(2*c*x + b)^2/c)/(((2*c*x + b)^2/c)^(3/2)*(-c)^(5/2)))*b*e^(-a + 1/4*b^2/c)/sqrt(-c) + 1/32*(sqrt(pi)*(2*c*x + b)*b^3*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(7/2)) + 6*b^2*c*e^(-1/4*(2*c*x + b)^2/c)/(-c)^(7/2) - 12*(2*c*x + b)^3*b*gamma(3/2, 1/4*(2*c*x + b)^2/c)/(((2*c*x + b)^2/c)^(3/2)*(-c)^(7/2)) + 8*c^2*gamma(2, 1/4*(2*c*x + b)^2/c)/(-c)^(7/2))*c*e^(-a + 1/4*b^2/c)/sqrt(-c)
```

3.2.8 Giac [A] (verification not implemented)

Time = 0.30 (sec) , antiderivative size = 121, normalized size of antiderivative = 1.09

$$\int x \sinh(a + bx + cx^2) dx = -\frac{\sqrt{\pi}b \operatorname{erf}\left(-\frac{1}{2}\sqrt{c}\left(2x + \frac{b}{c}\right)\right)e^{\left(\frac{b^2 - 4ac}{4c}\right)}}{8c} - 2e^{(-cx^2 - bx - a)} \\ + \frac{\sqrt{\pi}b \operatorname{erf}\left(-\frac{1}{2}\sqrt{-c}\left(2x + \frac{b}{c}\right)\right)e^{\left(-\frac{b^2 - 4ac}{4c}\right)}}{8c} + 2e^{(cx^2 + bx + a)}$$

```
input integrate(x*sinh(c*x^2+b*x+a),x, algorithm="giac")
```

```
output -1/8*(sqrt(pi)*b*erf(-1/2*sqrt(c)*(2*x + b/c))*e^(1/4*(b^2 - 4*a*c)/c)/sqrt(c) - 2*e^(-c*x^2 - b*x - a))/c + 1/8*(sqrt(pi)*b*erf(-1/2*sqrt(-c)*(2*x + b/c))*e^(-1/4*(b^2 - 4*a*c)/c)/sqrt(-c) + 2*e^(c*x^2 + b*x + a))/c
```

3.2.9 Mupad [F(-1)]

Timed out.

$$\int x \sinh(a + bx + cx^2) dx = \int x \sinh(cx^2 + bx + a) dx$$

input `int(x*sinh(a + b*x + c*x^2),x)`

output `int(x*sinh(a + b*x + c*x^2), x)`

3.3 $\int \sinh(a + bx + cx^2) dx$

3.3.1	Optimal result	52
3.3.2	Mathematica [A] (verified)	52
3.3.3	Rubi [A] (verified)	53
3.3.4	Maple [A] (verified)	54
3.3.5	Fricas [A] (verification not implemented)	55
3.3.6	Sympy [F]	55
3.3.7	Maxima [B] (verification not implemented)	56
3.3.8	Giac [A] (verification not implemented)	57
3.3.9	Mupad [F(-1)]	57

3.3.1 Optimal result

Integrand size = 11, antiderivative size = 91

$$\int \sinh(a + bx + cx^2) dx = -\frac{e^{-a+\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{e^{a-\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}$$

output
$$-\frac{1}{4} \exp(-a + \frac{1}{4} b^2/c) \operatorname{erf}\left(\frac{1}{2} \sqrt{\frac{b+2cx}{c}}\right) \operatorname{Pi}(1/2) + \frac{1}{4} \exp(a - \frac{1}{4} b^2/c) \operatorname{erfi}\left(\frac{1}{2} \sqrt{\frac{b+2cx}{c}}\right) \operatorname{Pi}(1/2)$$

3.3.2 Mathematica [A] (verified)

Time = 0.07 (sec), antiderivative size = 105, normalized size of antiderivative = 1.15

$$\begin{aligned} & \int \sinh(a + bx + cx^2) dx \\ &= \frac{\sqrt{\pi} \left(\operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right) \left(-\cosh\left(a - \frac{b^2}{4c}\right) + \sinh\left(a - \frac{b^2}{4c}\right) \right) + \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right) \left(\cosh\left(a - \frac{b^2}{4c}\right) + \sinh\left(a - \frac{b^2}{4c}\right) \right) \right)}{4\sqrt{c}} \end{aligned}$$

input `Integrate[Sinh[a + b*x + c*x^2], x]`

output
$$\frac{(\operatorname{Sqrt}[\operatorname{Pi}]*(\operatorname{Erf}[(b + 2*c*x)/(2*\operatorname{Sqrt}[c])]*(-\operatorname{Cosh}[a - b^2/(4*c)] + \operatorname{Sinh}[a - b^2/(4*c)]) + \operatorname{Erfi}[(b + 2*c*x)/(2*\operatorname{Sqrt}[c])]*(\operatorname{Cosh}[a - b^2/(4*c)] + \operatorname{Sinh}[a - b^2/(4*c)])))/(4*\operatorname{Sqrt}[c])}{4}$$

3.3.3 Rubi [A] (verified)

Time = 0.28 (sec), antiderivative size = 91, normalized size of antiderivative = 1.00, number of steps used = 4, number of rules used = 4, $\frac{\text{number of rules}}{\text{integrand size}} = 0.364$, Rules used = {5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \sinh(a + bx + cx^2) dx \\
 & \downarrow \textcolor{blue}{5897} \\
 & \frac{1}{2} \int e^{cx^2+bx+a} dx - \frac{1}{2} \int e^{-cx^2-bx-a} dx \\
 & \downarrow \textcolor{blue}{2664} \\
 & \frac{1}{2} e^{a-\frac{b^2}{4c}} \int e^{\frac{(b+2cx)^2}{4c}} dx - \frac{1}{2} e^{\frac{b^2}{4c}-a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \\
 & \downarrow \textcolor{blue}{2633} \\
 & \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{1}{2} e^{\frac{b^2}{4c}-a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \\
 & \downarrow \textcolor{blue}{2634} \\
 & \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}
 \end{aligned}$$

input `Int[Sinh[a + b*x + c*x^2], x]`

output `-1/4*(E^(-a + b^2/(4*c))*Sqrt[Pi]*Erf[(b + 2*c*x)/(2*Sqrt[c])])/Sqrt[c] + (E^(a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b + 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c])`

3.3.3.1 Defintions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erfi}[(c + d*x)*\text{Rt}[b*\text{Log}[F], 2]]/(2*d*\text{Rt}[b*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2), x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c))}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \Rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

3.3.4 Maple [A] (verified)

Time = 0.34 (sec) , antiderivative size = 83, normalized size of antiderivative = 0.91

method	result	size
risch	$-\frac{\sqrt{\pi} e^{-\frac{4ac-b^2}{4c}} \text{erf}\left(\sqrt{c}x + \frac{b}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi} e^{\frac{4ac-b^2}{4c}} \text{erf}\left(-\sqrt{-c}x + \frac{b}{2\sqrt{-c}}\right)}{4\sqrt{-c}}$	83

input `int(sinh(c*x^2+b*x+a),x,method=_RETURNVERBOSE)`

output $-1/4*\text{Pi}^{(1/2)}*\text{exp}(-1/4*(4*a*c-b^2)/c)/c^{(1/2)}*\text{erf}(c^{(1/2)}*x+1/2*b/c^{(1/2)}) - 1/4*\text{Pi}^{(1/2)}*\text{exp}(1/4*(4*a*c-b^2)/c)/(-c)^{(1/2)}*\text{erf}(-(-c)^{(1/2)}*x+1/2*b/(-c)^{(1/2)})$

3.3.5 Fricas [A] (verification not implemented)

Time = 0.24 (sec) , antiderivative size = 111, normalized size of antiderivative = 1.22

$$\int \sinh(a + bx + cx^2) dx = -\frac{\sqrt{\pi}\sqrt{-c} \left(\cosh\left(-\frac{b^2-4ac}{4c}\right) + \sinh\left(-\frac{b^2-4ac}{4c}\right) \right) \operatorname{erf}\left(\frac{(2cx+b)\sqrt{-c}}{2c}\right) + \sqrt{\pi}\sqrt{c} \left(\cosh\left(-\frac{b^2-4ac}{4c}\right) - \sinh\left(-\frac{b^2-4ac}{4c}\right) \right)}{4c}$$

input `integrate(sinh(c*x^2+b*x+a),x, algorithm="fricas")`

output `-1/4*(sqrt(pi)*sqrt(-c)*(cosh(-1/4*(b^2 - 4*a*c)/c) + sinh(-1/4*(b^2 - 4*a*c)/c))*erf(1/2*(2*c*x + b)*sqrt(-c)/c) + sqrt(pi)*sqrt(c)*(cosh(-1/4*(b^2 - 4*a*c)/c) - sinh(-1/4*(b^2 - 4*a*c)/c))*erf(1/2*(2*c*x + b)/sqrt(c)))/c`

3.3.6 Sympy [F]

$$\int \sinh(a + bx + cx^2) dx = \int \sinh(a + bx + cx^2) dx$$

input `integrate(sinh(c*x**2+b*x+a),x)`

output `Integral(sinh(a + b*x + c*x**2), x)`

3.3.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 464 vs. $2(65) = 130$.

Time = 0.37 (sec), antiderivative size = 464, normalized size of antiderivative = 5.10

$$\int \sinh(a + bx + cx^2) dx = \frac{\left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\frac{1}{2} \sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1\right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{2e^{\left(\frac{(2cx+b)^2}{4c}\right)}}{\sqrt{c}} \right) be^{(a - \frac{b^2}{4c})}}{8\sqrt{c}}$$

$$- \frac{1}{8} \left(\frac{\sqrt{\pi}(2cx+b)b^2 \left(\operatorname{erf}\left(\frac{1}{2} \sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1\right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{5}{2}}} - \frac{4be^{\left(\frac{(2cx+b)^2}{4c}\right)}}{c^{\frac{3}{2}}} - \frac{4(2cx+b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{4c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} c^{\frac{5}{2}}} \right) \sqrt{c} e^{(a - \frac{b^2}{4c})}$$

$$+ \frac{\left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\frac{1}{2} \sqrt{\frac{(2cx+b)^2}{c}}\right) - 1\right)}{\sqrt{\frac{(2cx+b)^2}{c}} (-c)^{\frac{3}{2}}} + \frac{2ce^{\left(-\frac{(2cx+b)^2}{4c}\right)}}{(-c)^{\frac{3}{2}}} \right) be^{(-a + \frac{b^2}{4c})}}{8\sqrt{-c}}$$

$$+ \frac{\left(\frac{\sqrt{\pi}(2cx+b)b^2 \left(\operatorname{erf}\left(\frac{1}{2} \sqrt{\frac{(2cx+b)^2}{c}}\right) - 1\right)}{\sqrt{\frac{(2cx+b)^2}{c}} (-c)^{\frac{5}{2}}} + \frac{4bce^{\left(-\frac{(2cx+b)^2}{4c}\right)}}{(-c)^{\frac{5}{2}}} - \frac{4(2cx+b)^3 \Gamma\left(\frac{3}{2}, \frac{(2cx+b)^2}{4c}\right)}{\left(\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} (-c)^{\frac{5}{2}}} \right) ce^{(-a + \frac{b^2}{4c})}}{8\sqrt{-c}}$$

$$+ x \sinh(cx^2 + bx + a)$$

```
input integrate(sinh(c*x^2+b*x+a),x, algorithm="maxima")
```

```
output 1/8*(sqrt(pi)*(2*c*x + b)*b*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(3/2)) - 2*e^(1/4*(2*c*x + b)^2/c)/sqrt(c))*b*e^(a - 1/4*b^2/c)/sqrt(c) - 1/8*(sqrt(pi)*(2*c*x + b)*b^2*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(5/2)) - 4*b*e^(1/4*(2*c*x + b)^2/c)/c^(3/2) - 4*(2*c*x + b)^3*gamma(3/2, -1/4*(2*c*x + b)^2/c)/((-2*c*x + b)^2/c)^(3/2)*c^(5/2))*sqrt(c)*e^(a - 1/4*b^2/c) + 1/8*(sqrt(pi)*(2*c*x + b)*b*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(3/2)) + 2*c*e^(-1/4*(2*c*x + b)^2/c)/(-c)^(3/2))*b*e^(-a + 1/4*b^2/c)/sqrt(-c) + 1/8*(sqrt(pi)*(2*c*x + b)*b^2*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(5/2)) + 4*b*c*e^(-1/4*(2*c*x + b)^2/c)/(-c)^(5/2) - 4*(2*c*x + b)^3*gamma(3/2, 1/4*(2*c*x + b)^2/c)/(((2*c*x + b)^2/c)^(3/2)*(-c)^(5/2))*c*e^(-a + 1/4*b^2/c)/sqrt(-c) + x*sinh(c*x^2 + b*x + a))
```

3.3.8 Giac [A] (verification not implemented)

Time = 0.28 (sec) , antiderivative size = 79, normalized size of antiderivative = 0.87

$$\int \sinh(a + bx + cx^2) dx = \frac{\sqrt{\pi} \operatorname{erf}\left(-\frac{1}{2} \sqrt{c}(2x + \frac{b}{c})\right) e^{\left(\frac{b^2 - 4ac}{4c}\right)}}{4\sqrt{c}} - \frac{\sqrt{\pi} \operatorname{erf}\left(-\frac{1}{2} \sqrt{-c}(2x + \frac{b}{c})\right) e^{\left(-\frac{b^2 - 4ac}{4c}\right)}}{4\sqrt{-c}}$$

input `integrate(sinh(c*x^2+b*x+a),x, algorithm="giac")`

output `1/4*sqrt(pi)*erf(-1/2*sqrt(c)*(2*x + b/c))*e^(1/4*(b^2 - 4*a*c)/c)/sqrt(c) - 1/4*sqrt(pi)*erf(-1/2*sqrt(-c)*(2*x + b/c))*e^(-1/4*(b^2 - 4*a*c)/c)/sqrt(-c)`

3.3.9 Mupad [F(-1)]

Timed out.

$$\int \sinh(a + bx + cx^2) dx = \int \sinh(cx^2 + bx + a) dx$$

input `int(sinh(a + b*x + c*x^2),x)`

output `int(sinh(a + b*x + c*x^2), x)`

3.4 $\int \frac{\sinh(a+bx+cx^2)}{x} dx$

3.4.1	Optimal result	58
3.4.2	Mathematica [N/A]	58
3.4.3	Rubi [N/A]	59
3.4.4	Maple [N/A] (verified)	59
3.4.5	Fricas [N/A]	60
3.4.6	Sympy [N/A]	60
3.4.7	Maxima [N/A]	60
3.4.8	Giac [N/A]	61
3.4.9	Mupad [N/A]	61

3.4.1 Optimal result

Integrand size = 15, antiderivative size = 15

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx = \text{Int}\left(\frac{\sinh(a + bx + cx^2)}{x}, x\right)$$

output `Unintegrable(sinh(c*x^2+b*x+a)/x,x)`

3.4.2 Mathematica [N/A]

Not integrable

Time = 5.78 (sec) , antiderivative size = 17, normalized size of antiderivative = 1.13

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx = \int \frac{\sinh(a + bx + cx^2)}{x} dx$$

input `Integrate[Sinh[a + b*x + c*x^2]/x,x]`

output `Integrate[Sinh[a + b*x + c*x^2]/x, x]`

3.4.3 Rubi [N/A]

Not integrable

Time = 0.18 (sec) , antiderivative size = 15, normalized size of antiderivative = 1.00, number of steps used = 1, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {5915}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx$$

↓ 5915

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx$$

input `Int[Sinh[a + b*x + c*x^2]/x, x]`

output `$Aborted`

3.4.3.1 Defintions of rubi rules used

rule 5915 `Int[((d_.) + (e_ .)*(x_))^(m_ .)*Sinh[(a_ .) + (b_ .)*(x_) + (c_ .)*(x_)^2], x_Symbol] :> Unintegrable[(d + e*x)^m*Sinh[a + b*x + c*x^2], x] /; FreeQ[{a, b, c, d, e, m}, x]`

3.4.4 Maple [N/A] (verified)

Not integrable

Time = 0.26 (sec) , antiderivative size = 15, normalized size of antiderivative = 1.00

$$\int \frac{\sinh(cx^2 + bx + a)}{x} dx$$

input `int(sinh(c*x^2+b*x+a)/x, x)`

output `int(sinh(c*x^2+b*x+a)/x, x)`

3.4.5 Fricas [N/A]

Not integrable

Time = 0.23 (sec) , antiderivative size = 17, normalized size of antiderivative = 1.13

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx = \int \frac{\sinh(cx^2 + bx + a)}{x} dx$$

input `integrate(sinh(c*x^2+b*x+a)/x,x, algorithm="fricas")`

output `integral(sinh(c*x^2 + b*x + a)/x, x)`

3.4.6 Sympy [N/A]

Not integrable

Time = 0.59 (sec) , antiderivative size = 14, normalized size of antiderivative = 0.93

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx = \int \frac{\sinh(a + bx + cx^2)}{x} dx$$

input `integrate(sinh(c*x**2+b*x+a)/x,x)`

output `Integral(sinh(a + b*x + c*x**2)/x, x)`

3.4.7 Maxima [N/A]

Not integrable

Time = 0.74 (sec) , antiderivative size = 17, normalized size of antiderivative = 1.13

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx = \int \frac{\sinh(cx^2 + bx + a)}{x} dx$$

input `integrate(sinh(c*x^2+b*x+a)/x,x, algorithm="maxima")`

output `integrate(sinh(c*x^2 + b*x + a)/x, x)`

3.4.8 Giac [N/A]

Not integrable

Time = 0.29 (sec) , antiderivative size = 17, normalized size of antiderivative = 1.13

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx = \int \frac{\sinh(cx^2 + bx + a)}{x} dx$$

input `integrate(sinh(c*x^2+b*x+a)/x,x, algorithm="giac")`

output `integrate(sinh(c*x^2 + b*x + a)/x, x)`

3.4.9 Mupad [N/A]

Not integrable

Time = 1.08 (sec) , antiderivative size = 17, normalized size of antiderivative = 1.13

$$\int \frac{\sinh(a + bx + cx^2)}{x} dx = \int \frac{\sinh(cx^2 + bx + a)}{x} dx$$

input `int(sinh(a + b*x + c*x^2)/x,x)`

output `int(sinh(a + b*x + c*x^2)/x, x)`

$$3.5 \quad \int \left(-\frac{b \cosh(a+bx+cx^2)}{x} + \frac{\sinh(a+bx+cx^2)}{x^2} \right) dx$$

3.5.1	Optimal result	62
3.5.2	Mathematica [A] (verified)	62
3.5.3	Rubi [A] (verified)	63
3.5.4	Maple [F]	64
3.5.5	Fricas [B] (verification not implemented)	64
3.5.6	Sympy [F]	65
3.5.7	Maxima [F]	65
3.5.8	Giac [F]	65
3.5.9	Mupad [F(-1)]	66

3.5.1 Optimal result

Integrand size = 33, antiderivative size = 107

$$\begin{aligned} & \int \left(-\frac{b \cosh(a+bx+cx^2)}{x} + \frac{\sinh(a+bx+cx^2)}{x^2} \right) dx \\ &= \frac{1}{2} \sqrt{c} e^{-a+\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right) + \frac{1}{2} \sqrt{c} e^{a-\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right) - \frac{\sinh(a+bx+cx^2)}{x} \end{aligned}$$

output $-\sinh(c*x^2+b*x+a)/x+1/2*\exp(-a+1/4*b^2/c)*\operatorname{erf}(1/2*(2*c*x+b)/c^{(1/2)})*c^{(1/2)}*\operatorname{Pi}^{(1/2)}+1/2*\exp(a-1/4*b^2/c)*\operatorname{erfi}(1/2*(2*c*x+b)/c^{(1/2)})*c^{(1/2)}*\operatorname{Pi}^{(1/2)}$

3.5.2 Mathematica [A] (verified)

Time = 0.44 (sec), antiderivative size = 132, normalized size of antiderivative = 1.23

$$\begin{aligned} & \int \left(-\frac{b \cosh(a+bx+cx^2)}{x} + \frac{\sinh(a+bx+cx^2)}{x^2} \right) dx \\ &= \frac{\sqrt{c} \sqrt{\pi} x \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right) \left(\cosh\left(a-\frac{b^2}{4c}\right) - \sinh\left(a-\frac{b^2}{4c}\right)\right) + \sqrt{c} \sqrt{\pi} x \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right) \left(\cosh\left(a-\frac{b^2}{4c}\right) + \sinh\left(a-\frac{b^2}{4c}\right)\right)}{2x} \end{aligned}$$

input `Integrate[-((b*Cosh[a + b*x + c*x^2])/x) + Sinh[a + b*x + c*x^2]/x^2, x]`

$$3.5. \quad \int \left(-\frac{b \cosh(a+bx+cx^2)}{x} + \frac{\sinh(a+bx+cx^2)}{x^2} \right) dx$$

output $(\text{Sqrt}[c]*\text{Sqrt}[\text{Pi}]*x*\text{Erf}[(b + 2*c*x)/(2*\text{Sqrt}[c])]*(\text{Cosh}[a - b^2/(4*c)] - \text{Sinh}[a - b^2/(4*c)]) + \text{Sqrt}[c]*\text{Sqrt}[\text{Pi}]*x*\text{Erfi}[(b + 2*c*x)/(2*\text{Sqrt}[c])]*(\text{Cos}[a - b^2/(4*c)] + \text{Sinh}[a - b^2/(4*c)]) - 2*\text{Sinh}[a + x*(b + c*x)])/(2*x)$

3.5.3 Rubi [A] (verified)

Time = 0.26 (sec) , antiderivative size = 107, normalized size of antiderivative = 1.00, number of steps used = 1, number of rules used = 1, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.030, Rules used = {2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \left(\frac{\sinh(a + bx + cx^2)}{x^2} - \frac{b \cosh(a + bx + cx^2)}{x} \right) dx$$

\downarrow 2009

$$\frac{1}{2}\sqrt{\pi}\sqrt{c}e^{\frac{b^2}{4c}-a}\text{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right) + \frac{1}{2}\sqrt{\pi}\sqrt{c}e^{a-\frac{b^2}{4c}}\text{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right) - \frac{\sinh(a + bx + cx^2)}{x}$$

input $\text{Int}[-((b*\text{Cosh}[a + b*x + c*x^2])/x) + \text{Sinh}[a + b*x + c*x^2]/x^2, x]$

output $(\text{Sqrt}[c]*\text{E}^{-(-a + b^2/(4*c))}*\text{Sqrt}[\text{Pi}]*\text{Erf}[(b + 2*c*x)/(2*\text{Sqrt}[c])])/2 + (\text{Sqrt}[c]*\text{E}^{(a - b^2/(4*c))}*\text{Sqrt}[\text{Pi}]*\text{Erfi}[(b + 2*c*x)/(2*\text{Sqrt}[c])])/2 - \text{Sinh}[a + b*x + c*x^2]/x$

3.5. $\int \left(-\frac{b \cosh(a + bx + cx^2)}{x} + \frac{\sinh(a + bx + cx^2)}{x^2} \right) dx$

3.5.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

3.5.4 Maple [F]

$$\int \left(-\frac{b \cosh(cx^2 + bx + a)}{x} + \frac{\sinh(cx^2 + bx + a)}{x^2} \right) dx$$

input `int(-b*cosh(c*x^2+b*x+a)/x+sinh(c*x^2+b*x+a)/x^2,x)`

output `int(-b*cosh(c*x^2+b*x+a)/x+sinh(c*x^2+b*x+a)/x^2,x)`

3.5.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 331 vs. $2(81) = 162$.

Time = 0.25 (sec), antiderivative size = 331, normalized size of antiderivative = 3.09

$$\int \left(-\frac{b \cosh(a + bx + cx^2)}{x} + \frac{\sinh(a + bx + cx^2)}{x^2} \right) dx = \\ -\frac{\sqrt{\pi} \left(x \cosh(cx^2 + bx + a) \cosh\left(-\frac{b^2 - 4ac}{4c}\right) + x \cosh(cx^2 + bx + a) \sinh\left(-\frac{b^2 - 4ac}{4c}\right) + \left(x \cosh\left(-\frac{b^2 - 4ac}{4c}\right)\right. \right.}{$$

input `integrate(-b*cosh(c*x^2+b*x+a)/x+sinh(c*x^2+b*x+a)/x^2,x, algorithm="fricas")`

output `-1/2*(sqrt(pi)*(x*cosh(c*x^2 + b*x + a)*cosh(-1/4*(b^2 - 4*a*c)/c) + x*cosh(c*x^2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*c)/c) + (x*cosh(-1/4*(b^2 - 4*a*c)/c) + x*sinh(-1/4*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(-c)*erf(1/2*(2*c*x + b)*sqrt(-c)/c) - sqrt(pi)*(x*cosh(c*x^2 + b*x + a)*cosh(-1/4*(b^2 - 4*a*c)/c) - x*cosh(c*x^2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*c)/c) + (x*cosh(-1/4*(b^2 - 4*a*c)/c) - x*sinh(-1/4*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(c)*erf(1/2*(2*c*x + b)/sqrt(c)) + cosh(c*x^2 + b*x + a)^2 + 2*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a) + sinh(c*x^2 + b*x + a)^2 - 1)/(x*cosh(c*x^2 + b*x + a) + x*sinh(c*x^2 + b*x + a))`

3.5. $\int \left(-\frac{b \cosh(a + bx + cx^2)}{x} + \frac{\sinh(a + bx + cx^2)}{x^2} \right) dx$

3.5.6 Sympy [F]

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx + cx^2)}{x} + \frac{\sinh(a + bx + cx^2)}{x^2} \right) dx \\ &= - \int \left(-\frac{\sinh(a + bx + cx^2)}{x^2} \right) dx - \int \frac{b \cosh(a + bx + cx^2)}{x} dx \end{aligned}$$

input `integrate(-b*cosh(c*x**2+b*x+a)/x+sinh(c*x**2+b*x+a)/x**2,x)`

output `-Integral(-sinh(a + b*x + c*x**2)/x**2, x) - Integral(b*cosh(a + b*x + c*x**2)/x, x)`

3.5.7 Maxima [F]

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx + cx^2)}{x} + \frac{\sinh(a + bx + cx^2)}{x^2} \right) dx \\ &= \int -\frac{b \cosh(cx^2 + bx + a)}{x} + \frac{\sinh(cx^2 + bx + a)}{x^2} dx \end{aligned}$$

input `integrate(-b*cosh(c*x^2+b*x+a)/x+sinh(c*x^2+b*x+a)/x^2,x, algorithm="maxima")`

output `integrate(-b*cosh(c*x^2 + b*x + a)/x + sinh(c*x^2 + b*x + a)/x^2, x)`

3.5.8 Giac [F]

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx + cx^2)}{x} + \frac{\sinh(a + bx + cx^2)}{x^2} \right) dx \\ &= \int -\frac{b \cosh(cx^2 + bx + a)}{x} + \frac{\sinh(cx^2 + bx + a)}{x^2} dx \end{aligned}$$

input `integrate(-b*cosh(c*x^2+b*x+a)/x+sinh(c*x^2+b*x+a)/x^2,x, algorithm="giac")`

output `integrate(-b*cosh(c*x^2 + b*x + a)/x + sinh(c*x^2 + b*x + a)/x^2, x)`

3.5. $\int \left(-\frac{b \cosh(a + bx + cx^2)}{x} + \frac{\sinh(a + bx + cx^2)}{x^2} \right) dx$

3.5.9 Mupad [F(-1)]

Timed out.

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx + cx^2)}{x} + \frac{\sinh(a + bx + cx^2)}{x^2} \right) dx \\ &= \int \frac{\sinh(cx^2 + bx + a)}{x^2} - \frac{b \cosh(cx^2 + bx + a)}{x} dx \end{aligned}$$

input `int(sinh(a + b*x + c*x^2)/x^2 - (b*cosh(a + b*x + c*x^2))/x, x)`

output `int(sinh(a + b*x + c*x^2)/x^2 - (b*cosh(a + b*x + c*x^2))/x, x)`

3.5. $\int \left(-\frac{b \cosh(a+bx+cx^2)}{x} + \frac{\sinh(a+bx+cx^2)}{x^2} \right) dx$

3.6 $\int x^2 \sinh(a + bx - cx^2) dx$

3.6.1	Optimal result	67
3.6.2	Mathematica [A] (verified)	67
3.6.3	Rubi [A] (verified)	68
3.6.4	Maple [A] (verified)	71
3.6.5	Fricas [B] (verification not implemented)	72
3.6.6	Sympy [F]	72
3.6.7	Maxima [B] (verification not implemented)	73
3.6.8	Giac [A] (verification not implemented)	74
3.6.9	Mupad [F(-1)]	74

3.6.1 Optimal result

Integrand size = 16, antiderivative size = 227

$$\begin{aligned} \int x^2 \sinh(a + bx - cx^2) dx = & -\frac{b \cosh(a + bx - cx^2)}{4c^2} - \frac{x \cosh(a + bx - cx^2)}{2c} \\ & - \frac{b^2 e^{a+\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{16c^{5/2}} - \frac{e^{a+\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \\ & + \frac{b^2 e^{-a-\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{16c^{5/2}} - \frac{e^{-a-\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \end{aligned}$$

```
output -1/4*b*cosh(-c*x^2+b*x+a)/c^2-1/2*x*cosh(-c*x^2+b*x+a)/c-1/16*b^2*exp(a+1/
4*b^2/c)*erf(1/2*(-2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(5/2)-1/8*exp(a+1/4*b^2/c)
*erf(1/2*(-2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)+1/16*b^2*exp(-a-1/4*b^2/c)*e
rfi(1/2*(-2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(5/2)-1/8*exp(-a-1/4*b^2/c)*erfi(1/
2*(-2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)
```

3.6.2 Mathematica [A] (verified)

Time = 0.23 (sec), antiderivative size = 152, normalized size of antiderivative = 0.67

$$\begin{aligned} \int x^2 \sinh(a + bx - cx^2) dx \\ = \frac{-4\sqrt{c}(b + 2cx) \cosh(a + x(b - cx)) + (b^2 - 2c) \sqrt{\pi} \operatorname{erfi}\left(\frac{-b+2cx}{2\sqrt{c}}\right) \left(-\cosh\left(a + \frac{b^2}{4c}\right) + \sinh\left(a + \frac{b^2}{4c}\right)\right) + (b^2 - 2c) \sqrt{\pi} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{16c^{5/2}} \end{aligned}$$

input `Integrate[x^2*Sinh[a + b*x - c*x^2], x]`

output
$$\begin{aligned} & (-4\sqrt{c}*(b + 2*c*x)*Cosh[a + x*(b - c*x)] + (b^2 - 2*c)*Sqrt[\pi]*Erfi[(-b + 2*c*x)/(2*\sqrt{c})]*(-Cosh[a + b^2/(4*c)] + Sinh[a + b^2/(4*c)]) + (b^2 + 2*c)*Sqrt[\pi]*Erf[(-b + 2*c*x)/(2*\sqrt{c})]*(Cosh[a + b^2/(4*c)] + Sinh[a + b^2/(4*c)]))/((16*c^{(5/2)}) \end{aligned}$$

3.6.3 Rubi [A] (verified)

Time = 0.82 (sec) , antiderivative size = 246, normalized size of antiderivative = 1.08, number of steps used = 10, number of rules used = 10, $\frac{\text{number of rules}}{\text{integrand size}} = 0.625$, Rules used = {5909, 5898, 2664, 2633, 2634, 5905, 5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int x^2 \sinh(a + bx - cx^2) dx \\ & \downarrow 5909 \\ & \frac{b \int x \sinh(-cx^2 + bx + a) dx}{2c} + \frac{\int \cosh(-cx^2 + bx + a) dx}{2c} - \frac{x \cosh(a + bx - cx^2)}{2c} \\ & \downarrow 5898 \\ & \frac{\frac{1}{2} \int e^{-cx^2 + bx + a} dx + \frac{1}{2} \int e^{cx^2 - bx - a} dx}{2c} + \frac{b \int x \sinh(-cx^2 + bx + a) dx}{2c} - \frac{x \cosh(a + bx - cx^2)}{2c} \\ & \downarrow 2664 \\ & \frac{\frac{1}{2} e^{a+\frac{b^2}{4c}} \int e^{-\frac{(b-2cx)^2}{4c}} dx + \frac{1}{2} e^{-a-\frac{b^2}{4c}} \int e^{\frac{(b-2cx)^2}{4c}} dx}{2c} + \frac{b \int x \sinh(-cx^2 + bx + a) dx}{2c} - \\ & \quad \frac{x \cosh(a + bx - cx^2)}{2c} \\ & \downarrow 2633 \\ & \frac{\frac{1}{2} e^{a+\frac{b^2}{4c}} \int e^{-\frac{(b-2cx)^2}{4c}} dx - \frac{\sqrt{\pi} e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} + \frac{b \int x \sinh(-cx^2 + bx + a) dx}{2c} - \\ & \quad \frac{x \cosh(a + bx - cx^2)}{2c} \\ & \downarrow 2634 \end{aligned}$$

$$\begin{aligned}
& \frac{b \int x \sinh(-cx^2 + bx + a) dx}{2c} + \frac{-\frac{\sqrt{\pi}e^{a+\frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi}e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} - \frac{x \cosh(a + bx - cx^2)}{2c} \\
& \quad \downarrow \textcolor{blue}{5905} \\
& \frac{b \left(\frac{b \int \sinh(-cx^2 + bx + a) dx}{2c} - \frac{\cosh(a + bx - cx^2)}{2c} \right)}{2c} + \frac{-\frac{\sqrt{\pi}e^{a+\frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi}e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} - \\
& \quad \frac{x \cosh(a + bx - cx^2)}{2c} \\
& \quad \downarrow \textcolor{blue}{5897} \\
& \frac{b \left(\frac{b \left(\frac{1}{2} \int e^{-cx^2 + bx + a} dx - \frac{1}{2} \int e^{cx^2 - bx - a} dx \right)}{2c} - \frac{\cosh(a + bx - cx^2)}{2c} \right)}{2c} + \\
& \quad \frac{-\frac{\sqrt{\pi}e^{a+\frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi}e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} - \frac{x \cosh(a + bx - cx^2)}{2c} \\
& \quad \downarrow \textcolor{blue}{2664} \\
& \frac{b \left(\frac{b \left(\frac{1}{2} e^{a+\frac{b^2}{4c}} \int e^{-\frac{(b-2cx)^2}{4c}} dx - \frac{1}{2} e^{-a-\frac{b^2}{4c}} \int e^{\frac{(b-2cx)^2}{4c}} dx \right)}{2c} - \frac{\cosh(a + bx - cx^2)}{2c} \right)}{2c} + \\
& \quad \frac{-\frac{\sqrt{\pi}e^{a+\frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi}e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} - \frac{x \cosh(a + bx - cx^2)}{2c} \\
& \quad \downarrow \textcolor{blue}{2633} \\
& \frac{b \left(\frac{b \left(\frac{1}{2} e^{a+\frac{b^2}{4c}} \int e^{-\frac{(b-2cx)^2}{4c}} dx + \frac{\sqrt{\pi}e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} - \frac{\cosh(a + bx - cx^2)}{2c} \right)}{2c} + \\
& \quad \frac{-\frac{\sqrt{\pi}e^{a+\frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi}e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} - \frac{x \cosh(a + bx - cx^2)}{2c} \\
& \quad \downarrow \textcolor{blue}{2634}
\end{aligned}$$

$$\begin{aligned}
 & b \left(\frac{b \left(\frac{\sqrt{\pi} e^{-a - \frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right) - \sqrt{\pi} e^{a + \frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} - \frac{\cosh(a+bx-cx^2)}{2c} \right) \\
 & + \frac{\frac{2c}{\sqrt{\pi} e^{a + \frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)} - \frac{\sqrt{\pi} e^{-a - \frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{x \cosh(a+bx-cx^2)}{2c}}{2c}
 \end{aligned}$$

input `Int[x^2*Sinh[a + b*x - c*x^2], x]`

output `-1/2*(x*Cosh[a + b*x - c*x^2])/c + (-1/4*(E^(a + b^2/(4*c))*Sqrt[Pi]*Erf[(b - 2*c*x)/(2*Sqrt[c])])/Sqrt[c] - (E^(-a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b - 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c]))/(2*c) + (b*(-1/2*Cosh[a + b*x - c*x^2]/c + (b*(-1/4*(E^(a + b^2/(4*c))*Sqrt[Pi]*Erf[(b - 2*c*x)/(2*Sqrt[c])])/Sqrt[c] + (E^(-a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b - 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c]))/(2*c))))/(2*c))`

3.6.3.1 Defintions of rubi rules used

rule 2633 `Int[(F_)^((a_.) + (b_.*((c_.) + (d_.*(x_)^2))), x_Symbol] :> Simp[F^a*Sqrt[Pi]*(Erfi[(c + d*x)*Rt[b*Log[F], 2]]/(2*d*Rt[b*Log[F], 2])), x] /; FreeQ[{F, a, b, c, d}, x] && PosQ[b]`

rule 2634 `Int[(F_)^((a_.) + (b_.*((c_.) + (d_.*(x_)^2))), x_Symbol] :> Simp[F^a*Sqrt[Pi]*(Erf[(c + d*x)*Rt[(-b)*Log[F], 2]]/(2*d*Rt[(-b)*Log[F], 2])), x] /; FreeQ[{F, a, b, c, d}, x] && NegQ[b]`

rule 2664 `Int[(F_)^((a_.) + (b_.*(x_) + (c_.*(x_)^2)), x_Symbol] :> Simp[F^(a - b^2/(4*c)) Int[F^((b + 2*c*x)^2/(4*c)), x], x] /; FreeQ[{F, a, b, c}, x]`

rule 5897 `Int[Sinh[(a_.) + (b_.*(x_) + (c_.*(x_)^2)), x_Symbol] :> Simp[1/2 Int[E^(a + b*x + c*x^2), x], x] - Simp[1/2 Int[E^(-a - b*x - c*x^2), x], x] /; FreeQ[{a, b, c}, x]`

rule 5898 $\text{Int}[\cosh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[e^{(a + b*x + c*x^2)}, x], x] + \text{Simp}[1/2 \text{Int}[e^{(-a - b*x - c*x^2)}, x], x];$
 $\text{FreeQ}[\{a, b, c\}, x]$

rule 5905 $\text{Int}[(d_.) + (e_.)*(x_))*\sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(\cosh[a + b*x + c*x^2]/(2*c)), x] - \text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[\sinh[a + b*x + c*x^2], x], x];$
 $\text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{NeQ}[b*e - 2*c*d, 0]$

rule 5909 $\text{Int}[(d_.) + (e_.)*(x_)]^m * \sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(d + e*x)^{m-1} * (\cosh[a + b*x + c*x^2]/(2*c)), x] + (-\text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[(d + e*x)^{m-1} * \sinh[a + b*x + c*x^2], x], x] - \text{Simp}[e^{2*((m-1)/(2*c))} \text{Int}[(d + e*x)^{m-2} * \cosh[a + b*x + c*x^2], x], x]);$
 $\text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{GtQ}[m, 1] \&& \text{NeQ}[b*e - 2*c*d, 0]$

3.6.4 Maple [A] (verified)

Time = 0.38 (sec), antiderivative size = 244, normalized size of antiderivative = 1.07

method	result
risch	$\frac{x e^{cx^2-bx-a}}{4c} - \frac{b e^{cx^2-bx-a}}{8c^2} - \frac{b^2 \sqrt{\pi} e^{-\frac{4ac+b^2}{4c}} \operatorname{erf}\left(\sqrt{-c}x + \frac{b}{2\sqrt{-c}}\right)}{16c^2\sqrt{-c}} + \frac{\sqrt{\pi} e^{-\frac{4ac+b^2}{4c}} \operatorname{erf}\left(\sqrt{-c}x + \frac{b}{2\sqrt{-c}}\right)}{8c\sqrt{-c}} - \frac{x e^{-cx^2+bx+a}}{4c}$

input `int(x^2*sinh(-c*x^2+b*x+a), x, method=_RETURNVERBOSE)`

output
$$\begin{aligned} & -1/4/c*x*\exp(c*x^2-b*x-a)-1/8*b/c^2*\exp(c*x^2-b*x-a)-1/16*b^2/c^2*\text{Pi}^{(1/2)} \\ & *\exp(-1/4*(4*a*c+b^2)/c)/(-c)^{(1/2)}*\operatorname{erf}((-c)^{(1/2)}*x+1/2*b/(-c)^{(1/2)})+1/8 \\ & /c*\text{Pi}^{(1/2)}*\exp(-1/4*(4*a*c+b^2)/c)/(-c)^{(1/2)}*\operatorname{erf}((-c)^{(1/2)}*x+1/2*b/(-c)^{(1/2)})-1/4/c*x*\exp(-c*x^2+b*x+a)-1/8*b/c^2*\exp(-c*x^2+b*x+a)-1/16*b^2/c^{(5/2)}*\text{Pi}^{(1/2)}*\exp(1/4*(4*a*c+b^2)/c)*\operatorname{erf}(-c^{(1/2)}*x+1/2*b/c^{(1/2)})-1/8/c^{(3/2)}*\text{Pi}^{(1/2)}*\exp(1/4*(4*a*c+b^2)/c)*\operatorname{erf}(-c^{(1/2)}*x+1/2*b/c^{(1/2)}) \end{aligned}$$

3.6.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 467 vs. $2(179) = 358$.

Time = 0.25 (sec), antiderivative size = 467, normalized size of antiderivative = 2.06

$$\int x^2 \sinh(a + bx - cx^2) dx =$$

$$\frac{4c^2x + 2(2c^2x + bc)\cosh(cx^2 - bx - a)^2 - \sqrt{\pi}((b^2 - 2c)\cosh(cx^2 - bx - a)\cosh\left(\frac{b^2 + 4ac}{4c}\right) - (b^2 - 2c)\sinh(cx^2 - bx - a)\sinh\left(\frac{b^2 + 4ac}{4c}\right))}{-}$$

input `integrate(x^2*sinh(-c*x^2+b*x+a),x, algorithm="fricas")`

output
$$\begin{aligned} & -1/16*(4*c^2*x + 2*(2*c^2*x + b*c)*cosh(c*x^2 - b*x - a)^2 - sqrt(pi)*((b^2 - 2*c)*cosh(c*x^2 - b*x - a)*cosh(1/4*(b^2 + 4*a*c)/c) - (b^2 - 2*c)*cosh(c*x^2 - b*x - a)*sinh(1/4*(b^2 + 4*a*c)/c) + ((b^2 - 2*c)*cosh(1/4*(b^2 + 4*a*c)/c) - (b^2 - 2*c)*sinh(1/4*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a)*sqrt(-c)*erf(1/2*(2*c*x - b)*sqrt(-c)/c) - sqrt(pi)*((b^2 + 2*c)*cosh(c*x^2 - b*x - a)*cosh(1/4*(b^2 + 4*a*c)/c) + (b^2 + 2*c)*cosh(c*x^2 - b*x - a)*sinh(1/4*(b^2 + 4*a*c)/c) + ((b^2 + 2*c)*cosh(1/4*(b^2 + 4*a*c)/c) + (b^2 + 2*c)*sinh(1/4*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a)*sqrt(c)*erf(1/2*(2*c*x - b)/sqrt(c)) + 4*(2*c^2*x + b*c)*cosh(c*x^2 - b*x - a)*sinh(c*x^2 - b*x - a) + 2*(2*c^2*x + b*c)*sinh(c*x^2 - b*x - a)^2 + 2*b*c)/(c^3*cosh(c*x^2 - b*x - a) + c^3*sinh(c*x^2 - b*x - a))) \end{aligned}$$

3.6.6 Sympy [F]

$$\int x^2 \sinh(a + bx - cx^2) dx = \int x^2 \sinh(a + bx - cx^2) dx$$

input `integrate(x**2*sinh(-c*x**2+b*x+a),x)`

output `Integral(x**2*sinh(a + b*x - c*x**2), x)`

3.6.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 834 vs. $2(179) = 358$.

Time = 0.44 (sec), antiderivative size = 834, normalized size of antiderivative = 3.67

$$\int x^2 \sinh(a + bx - cx^2) dx = \text{Too large to display}$$

```
input integrate(x^2*sinh(-c*x^2+b*x+a),x, algorithm="maxima")
```

```
output -1/3*x^3*sinh(c*x^2 - b*x - a) - 1/96*(sqrt(pi)*(2*c*x - b)*b^3*(erf(1/2*sqrt((2*c*x - b)^2/c)) - 1)/(sqrt((2*c*x - b)^2/c)*(-c)^(7/2)) - 6*b^2*c*e^(-1/4*(2*c*x - b)^2/c)/(-c)^(7/2) - 12*(2*c*x - b)^3*b*gamma(3/2, 1/4*(2*c*x - b)^2/c)/(((2*c*x - b)^2/c)^(3/2)*(-c)^(7/2)) - 8*c^2*gamma(2, 1/4*(2*c*x - b)^2/c)/(-c)^(7/2))*b*e^(a + 1/4*b^2/c)/sqrt(-c) - 1/96*(sqrt(pi)*(2*c*x - b)*b^4*(erf(1/2*sqrt((2*c*x - b)^2/c)) - 1)/(sqrt((2*c*x - b)^2/c)*(-c)^(9/2)) - 8*b^3*c*e^(-1/4*(2*c*x - b)^2/c)/(-c)^(9/2) - 24*(2*c*x - b)^3*b^2*gamma(3/2, 1/4*(2*c*x - b)^2/c)/(((2*c*x - b)^2/c)^(3/2)*(-c)^(9/2)) - 32*b*c^2*gamma(2, 1/4*(2*c*x - b)^2/c)/(-c)^(9/2) - 16*(2*c*x - b)^5*gamma(5/2, 1/4*(2*c*x - b)^2/c)/(((2*c*x - b)^2/c)^(5/2)*(-c)^(9/2)))*c*e^(a + 1/4*b^2/c)/sqrt(-c) - 1/96*(sqrt(pi)*(2*c*x - b)*b^3*(erf(1/2*sqrt(-(2*c*x - b)^2/c)) - 1)/(sqrt(-(2*c*x - b)^2/c)*c^(7/2)) + 6*b^2*c*e^(1/4*(2*c*x - b)^2/c)/c^(5/2) - 12*(2*c*x - b)^3*b*gamma(3/2, -1/4*(2*c*x - b)^2/c)/((-2*c*x - b)^2/c)^(3/2)*c^(7/2)) - 8*gamma(2, -1/4*(2*c*x - b)^2/c)/c^(3/2)*b*c*e^(-a - 1/4*b^2/c)/sqrt(c) + 1/96*(sqrt(pi)*(2*c*x - b)*b^4*(erf(1/2*sqrt(-(2*c*x - b)^2/c)) - 1)/(sqrt(-(2*c*x - b)^2/c)*c^(9/2)) + 8*b^3*c*e^(1/4*(2*c*x - b)^2/c)/c^(7/2) - 24*(2*c*x - b)^3*b^2*gamma(3/2, -1/4*(2*c*x - b)^2/c)/((-2*c*x - b)^2/c)^(3/2)*c^(9/2)) - 32*b*gamma(2, -1/4*(2*c*x - b)^2/c)/c^(5/2) - 16*(2*c*x - b)^5*gamma(5/2, -1/4*(2*c*x - b)^2/c)/((-2*c*x - b)^2/c)^(5/2)*c^(9/2)))*sqrt(c)*e^(-a - 1/4*b^2/c)
```

3.6.8 Giac [A] (verification not implemented)

Time = 0.28 (sec) , antiderivative size = 167, normalized size of antiderivative = 0.74

$$\int x^2 \sinh(a + bx - cx^2) dx$$

$$= -\frac{\sqrt{\pi}(b^2+2c) \operatorname{erf}\left(-\frac{1}{2}\sqrt{c}\left(2x-\frac{b}{c}\right)\right)e^{\left(\frac{b^2+4ac}{4c}\right)}}{16c^2} + 2\left(c\left(2x-\frac{b}{c}\right) + 2b\right)e^{(-cx^2+bx+a)}$$

$$+ \frac{\sqrt{\pi}(b^2-2c) \operatorname{erf}\left(-\frac{1}{2}\sqrt{-c}\left(2x-\frac{b}{c}\right)\right)e^{\left(-\frac{b^2+4ac}{4c}\right)}}{16c^2} - 2\left(c\left(2x-\frac{b}{c}\right) + 2b\right)e^{(cx^2-bx-a)}$$

input `integrate(x^2*sinh(-c*x^2+b*x+a),x, algorithm="giac")`

output `-1/16*(sqrt(pi)*(b^2 + 2*c)*erf(-1/2*sqrt(c)*(2*x - b/c))*e^(1/4*(b^2 + 4*a*c)/c))/sqrt(c) + 2*(c*(2*x - b/c) + 2*b)*e^(-c*x^2 + b*x + a))/c^2 + 1/16*(sqrt(pi)*(b^2 - 2*c)*erf(-1/2*sqrt(-c)*(2*x - b/c))*e^(-1/4*(b^2 + 4*a*c)/c))/sqrt(-c) - 2*(c*(2*x - b/c) + 2*b)*e^(c*x^2 - b*x - a))/c^2`

3.6.9 Mupad [F(-1)]

Timed out.

$$\int x^2 \sinh(a + bx - cx^2) dx = \int x^2 \sinh(-cx^2 + bx + a) dx$$

input `int(x^2*sinh(a + b*x - c*x^2),x)`

output `int(x^2*sinh(a + b*x - c*x^2), x)`

3.7 $\int x \sinh(a + bx - cx^2) dx$

3.7.1	Optimal result	75
3.7.2	Mathematica [A] (verified)	75
3.7.3	Rubi [A] (verified)	76
3.7.4	Maple [A] (verified)	77
3.7.5	Fricas [B] (verification not implemented)	78
3.7.6	Sympy [F]	78
3.7.7	Maxima [B] (verification not implemented)	79
3.7.8	Giac [A] (verification not implemented)	80
3.7.9	Mupad [F(-1)]	81

3.7.1 Optimal result

Integrand size = 14, antiderivative size = 112

$$\begin{aligned} \int x \sinh(a + bx - cx^2) dx = & -\frac{\cosh(a + bx - cx^2)}{2c} - \frac{be^{a+\frac{b^2}{4c}}\sqrt{\pi}\operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \\ & + \frac{be^{-a-\frac{b^2}{4c}}\sqrt{\pi}\operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \end{aligned}$$

output
$$\begin{aligned} -1/2*\cosh(-c*x^2+b*x+a)/c-1/8*b*\exp(a+1/4*b^2/c)*\operatorname{erf}(1/2*(-2*c*x+b)/c^{1/2}) \\)*\operatorname{Pi}^{1/2}/c^{3/2}+1/8*b*\exp(-a-1/4*b^2/c)*\operatorname{erfi}(1/2*(-2*c*x+b)/c^{1/2})*\operatorname{i}^{1/2}/c^{3/2} \end{aligned}$$

3.7.2 Mathematica [A] (verified)

Time = 0.13 (sec), antiderivative size = 134, normalized size of antiderivative = 1.20

$$\begin{aligned} \int x \sinh(a + bx - cx^2) dx \\ = \frac{-4\sqrt{c}\cosh(a + x(b - cx)) + b\sqrt{\pi}\operatorname{erfi}\left(\frac{-b+2cx}{2\sqrt{c}}\right)\left(-\cosh\left(a + \frac{b^2}{4c}\right) + \sinh\left(a + \frac{b^2}{4c}\right)\right) + b\sqrt{\pi}\operatorname{erf}\left(\frac{-b+2cx}{2\sqrt{c}}\right)\left(c\cosh(a + x(b - cx)) - b\sqrt{\pi}\operatorname{erfi}\left(\frac{-b+2cx}{2\sqrt{c}}\right)\right)}{8c^{3/2}} \end{aligned}$$

input `Integrate[x*Sinh[a + b*x - c*x^2], x]`

```
output (-4*.Sqrt[c]*Cosh[a + x*(b - c*x)] + b*.Sqrt[Pi]*Erfi[(-b + 2*c*x)/(2*.Sqrt[c])]*(-Cosh[a + b^2/(4*c)] + Sinh[a + b^2/(4*c)]) + b*.Sqrt[Pi]*Erf[(-b + 2*c*x)/(2*.Sqrt[c])]*(Cosh[a + b^2/(4*c)] + Sinh[a + b^2/(4*c)]))/(8*c^(3/2))
```

3.7.3 Rubi [A] (verified)

Time = 0.36 (sec) , antiderivative size = 119, normalized size of antiderivative = 1.06, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.357, Rules used = {5905, 5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int x \sinh(a + bx - cx^2) dx \\
 & \downarrow \textcolor{blue}{5905} \\
 & \frac{b \int \sinh(-cx^2 + bx + a) dx}{2c} - \frac{\cosh(a + bx - cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{5897} \\
 & \frac{b \left(\frac{1}{2} \int e^{-cx^2 + bx + a} dx - \frac{1}{2} \int e^{cx^2 - bx - a} dx \right)}{2c} - \frac{\cosh(a + bx - cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2664} \\
 & \frac{b \left(\frac{1}{2} e^{a+\frac{b^2}{4c}} \int e^{-\frac{(b-2cx)^2}{4c}} dx - \frac{1}{2} e^{-a-\frac{b^2}{4c}} \int e^{\frac{(b-2cx)^2}{4c}} dx \right)}{2c} - \frac{\cosh(a + bx - cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2633} \\
 & \frac{b \left(\frac{1}{2} e^{a+\frac{b^2}{4c}} \int e^{-\frac{(b-2cx)^2}{4c}} dx + \frac{\sqrt{\pi} e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} - \frac{\cosh(a + bx - cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2634} \\
 & \frac{b \left(\frac{\sqrt{\pi} e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi} e^{a+\frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} - \frac{\cosh(a + bx - cx^2)}{2c}
 \end{aligned}$$

```
input Int[x*Sinh[a + b*x - c*x^2],x]
```

3.7. $\int x \sinh(a + bx - cx^2) dx$

```
output -1/2*Cosh[a + b*x - c*x^2]/c + (b*(-1/4*(E^(a + b^2/(4*c))*Sqrt[Pi]*Erf[(b - 2*c*x)/(2*Sqrt[c])]))/Sqrt[c] + (E^(-a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b - 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c])))/(2*c)
```

3.7.3.1 Defintions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^{(a_{_}) + (b_{_}) * ((c_{_}) + (d_{_}) * (x_{_})^2)}, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^a * \text{Sqrt}[Pi] * (\text{Erfi}[(c + d*x) * \text{Rt}[b * \text{Log}[F], 2]] / (2 * d * \text{Rt}[b * \text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^{(a_{_}) + (b_{_}) * ((c_{_}) + (d_{_}) * (x_{_})^2)}, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^a * \text{Sqrt}[Pi] * (\text{Erf}[(c + d*x) * \text{Rt}[(-b) * \text{Log}[F], 2]] / (2 * d * \text{Rt}[(-b) * \text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^{(a_{_}) + (b_{_}) * (x_{_}) + (c_{_}) * (x_{_})^2}, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c))}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\text{Sinh}[(a_{_}) + (b_{_}) * (x_{_}) + (c_{_}) * (x_{_})^2], x_{\text{Symbol}}] \Rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5905 $\text{Int}[(d_{_}) + (e_{_}) * (x_{_})] * \text{Sinh}[(a_{_}) + (b_{_}) * (x_{_}) + (c_{_}) * (x_{_})^2], x_{\text{Symbol}}] \Rightarrow \text{Simp}[e * (\text{Cosh}[a + b*x + c*x^2] / (2*c)), x] - \text{Simp}[(b*e - 2*c*d) / (2*c) \text{Int}[\text{Sinh}[a + b*x + c*x^2], x], x] /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{NeQ}[b*e - 2*c*d, 0]$

3.7.4 Maple [A] (verified)

Time = 0.42 (sec), antiderivative size = 120, normalized size of antiderivative = 1.07

method	result	size
risch	$-\frac{e^{cx^2-bx-a}}{4c}-\frac{b\sqrt{\pi}e^{-\frac{4ac+b^2}{4c}}\text{erf}\left(\sqrt{-c}x+\frac{b}{2\sqrt{-c}}\right)}{8c\sqrt{-c}}-\frac{e^{-cx^2+bx+a}}{4c}-\frac{b\sqrt{\pi}e^{\frac{4ac+b^2}{4c}}\text{erf}\left(-\sqrt{c}x+\frac{b}{2\sqrt{c}}\right)}{8c^{\frac{3}{2}}}$	120

input `int(x*sinh(-c*x^2+b*x+a),x,method=_RETURNVERBOSE)`

3.7. $\int x \sinh(a + bx - cx^2) dx$

```
output -1/4/c*exp(c*x^2-b*x-a)-1/8*b/c*Pi^(1/2)*exp(-1/4*(4*a*c+b^2)/c)/(-c)^(1/2)
)*erf((-c)^(1/2)*x+1/2*b/(-c)^(1/2))-1/4/c*exp(-c*x^2+b*x+a)-1/8*b/c^(3/2)
*Pi^(1/2)*exp(1/4*(4*a*c+b^2)/c)*erf(-c^(1/2)*x+1/2*b/c^(1/2))
```

3.7.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 385 vs. $2(88) = 176$.

Time = 0.26 (sec), antiderivative size = 385, normalized size of antiderivative = 3.44

$$\int x \sinh(a + bx - cx^2) dx =$$

$$\frac{2c \cosh(cx^2 - bx - a)^2 - \sqrt{\pi} \left(b \cosh(cx^2 - bx - a) \cosh\left(\frac{b^2 + 4ac}{4c}\right) - b \cosh(cx^2 - bx - a) \sinh\left(\frac{b^2 + 4ac}{4c}\right) \right)}{2}$$

```
input integrate(x*sinh(-c*x^2+b*x+a),x, algorithm="fricas")
```

```
output -1/8*(2*c*cosh(c*x^2 - b*x - a)^2 - sqrt(pi)*(b*cosh(c*x^2 - b*x - a)*cosh(1/4*(b^2 + 4*a*c)/c) - b*cosh(c*x^2 - b*x - a)*sinh(1/4*(b^2 + 4*a*c)/c) + (b*cosh(1/4*(b^2 + 4*a*c)/c) - b*sinh(1/4*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a))*sqrt(-c)*erf(1/2*(2*c*x - b)*sqrt(-c)/c) - sqrt(pi)*(b*cosh(c*x^2 - b*x - a)*cosh(1/4*(b^2 + 4*a*c)/c) + b*cosh(c*x^2 - b*x - a)*sinh(1/4*(b^2 + 4*a*c)/c) + (b*cosh(1/4*(b^2 + 4*a*c)/c) + b*sinh(1/4*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a))*sqrt(c)*erf(1/2*(2*c*x - b)/sqrt(c)) + 4*c*cosh(c*x^2 - b*x - a)*sinh(c*x^2 - b*x - a) + 2*c*sinh(c*x^2 - b*x - a)^2 + 2*c)/(c^2*cosh(c*x^2 - b*x - a) + c^2*sinh(c*x^2 - b*x - a))
```

3.7.6 Sympy [F]

$$\int x \sinh(a + bx - cx^2) dx = \int x \sinh(a + bx - cx^2) dx$$

```
input integrate(x*sinh(-c*x**2+b*x+a),x)
```

```
output Integral(x*sinh(a + b*x - c*x**2), x)
```

3.7.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 674 vs. $2(88) = 176$.

Time = 0.40 (sec), antiderivative size = 674, normalized size of antiderivative = 6.02

$$\begin{aligned} \int x \sinh(a + bx - cx^2) dx &= -\frac{1}{2} x^2 \sinh(cx^2 - bx - a) \\ &+ \frac{\left(\frac{\sqrt{\pi}(2cx-b)b^2 \left(\operatorname{erf}\left(\frac{1}{2}\sqrt{\frac{(2cx-b)^2}{c}}\right) - 1 \right)}{\sqrt{\frac{(2cx-b)^2}{c}}(-c)^{\frac{5}{2}}} - \frac{4bce^{\left(-\frac{(2cx-b)^2}{4c}\right)}}{(-c)^{\frac{5}{2}}} - \frac{4(2cx-b)^3 \Gamma\left(\frac{3}{2}, \frac{(2cx-b)^2}{4c}\right)}{\left(\frac{(2cx-b)^2}{c}\right)^{\frac{3}{2}}(-c)^{\frac{5}{2}}} \right) be^{(a+\frac{b^2}{4c})}}{32\sqrt{-c}} \\ &+ \frac{\left(\frac{\sqrt{\pi}(2cx-b)b^3 \left(\operatorname{erf}\left(\frac{1}{2}\sqrt{\frac{(2cx-b)^2}{c}}\right) - 1 \right)}{\sqrt{\frac{(2cx-b)^2}{c}}(-c)^{\frac{7}{2}}} - \frac{6b^2ce^{\left(-\frac{(2cx-b)^2}{4c}\right)}}{(-c)^{\frac{7}{2}}} - \frac{12(2cx-b)^3 b \Gamma\left(\frac{3}{2}, \frac{(2cx-b)^2}{4c}\right)}{\left(\frac{(2cx-b)^2}{c}\right)^{\frac{3}{2}}(-c)^{\frac{7}{2}}} - \frac{8c^2 \Gamma\left(2, \frac{(2cx-b)^2}{4c}\right)}{(-c)^{\frac{7}{2}}} \right) ce^{(a+\frac{b^2}{4c})}}{32\sqrt{-c}} \\ &- \frac{\left(\frac{\sqrt{\pi}(2cx-b)b^2 \left(\operatorname{erf}\left(\frac{1}{2}\sqrt{-\frac{(2cx-b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx-b)^2}{c}}c^{\frac{5}{2}}} + \frac{4be^{\left(\frac{(2cx-b)^2}{4c}\right)}}{c^{\frac{3}{2}}} - \frac{4(2cx-b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx-b)^2}{4c}\right)}{\left(-\frac{(2cx-b)^2}{c}\right)^{\frac{3}{2}}c^{\frac{5}{2}}} \right) be^{(-a-\frac{b^2}{4c})}}{32\sqrt{c}} \\ &+ \frac{1}{32} \left(\frac{\sqrt{\pi}(2cx-b)b^3 \left(\operatorname{erf}\left(\frac{1}{2}\sqrt{-\frac{(2cx-b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx-b)^2}{c}}c^{\frac{7}{2}}} + \frac{6b^2e^{\left(\frac{(2cx-b)^2}{4c}\right)}}{c^{\frac{5}{2}}} - \frac{12(2cx-b)^3 b \Gamma\left(\frac{3}{2}, -\frac{(2cx-b)^2}{4c}\right)}{\left(-\frac{(2cx-b)^2}{c}\right)^{\frac{3}{2}}c^{\frac{7}{2}}} \right) \end{aligned}$$

```
input integrate(x*sinh(-c*x^2+b*x+a),x, algorithm="maxima")
```

```
output -1/2*x^2*sinh(c*x^2 - b*x - a) + 1/32*(sqrt(pi)*(2*c*x - b)*b^2*(erf(1/2*s
qrt((2*c*x - b)^2/c)) - 1)/(sqrt((2*c*x - b)^2/c)*(-c)^(5/2)) - 4*b*c*e^(-
1/4*(2*c*x - b)^2/c)/(-c)^(5/2) - 4*(2*c*x - b)^3*gamma(3/2, 1/4*(2*c*x -
b)^2/c)/(((2*c*x - b)^2/c)^(3/2)*(-c)^(5/2)))*b*e^(a + 1/4*b^2/c)/sqrt(-c)
+ 1/32*(sqrt(pi)*(2*c*x - b)*b^3*(erf(1/2*sqrt((2*c*x - b)^2/c)) - 1)/(sq
rt((2*c*x - b)^2/c)*(-c)^(7/2)) - 6*b^2*c*e^(-1/4*(2*c*x - b)^2/c)/(-c)^(7
/2) - 12*(2*c*x - b)^3*b*gamma(3/2, 1/4*(2*c*x - b)^2/c)/(((2*c*x - b)^2/c
)^3/2)*(-c)^(7/2)) - 8*c^2*gamma(2, 1/4*(2*c*x - b)^2/c)/(-c)^(7/2))*c*e^(
a + 1/4*b^2/c)/sqrt(-c) - 1/32*(sqrt(pi)*(2*c*x - b)*b^2*(erf(1/2*sqrt(-(2*c*x
- b)^2/c)) - 1)/(sqrt(-(2*c*x - b)^2/c)*c^(5/2)) + 4*b*e^(1/4*(2*c*x
- b)^2/c)/c^(3/2) - 4*(2*c*x - b)^3*gamma(3/2, -1/4*(2*c*x - b)^2/c)/((-(2*c*x
- b)^2/c)^(3/2)*c^(5/2)))*b*e^(-a - 1/4*b^2/c)/sqrt(c) + 1/32*(sqrt(pi)*(2*c*x
- b)*b^3*(erf(1/2*sqrt(-(2*c*x - b)^2/c)) - 1)/(sqrt(-(2*c*x - b)^2/c)*c^(7/2))
+ 6*b^2*e^(1/4*(2*c*x - b)^2/c)/c^(5/2) - 12*(2*c*x - b)^3*b*gamma(3/2, -1/4*(2*c*x
- b)^2/c)/((-(2*c*x - b)^2/c)^(3/2)*c^(7/2)) - 8*gamma(2, -1/4*(2*c*x - b)^2/c)/c^(3/2))*sqrt(c)*e^(-a - 1/4*b^2/c)
```

3.7.8 Giac [A] (verification not implemented)

Time = 0.28 (sec) , antiderivative size = 123, normalized size of antiderivative = 1.10

$$\int x \sinh(a + bx - cx^2) dx = -\frac{\sqrt{\pi}b \operatorname{erf}\left(-\frac{1}{2}\sqrt{c}\left(2x - \frac{b}{c}\right)\right)e^{\left(\frac{b^2+4ac}{4c}\right)}}{8c} + 2e^{(-cx^2+bx+a)} \\ + \frac{\sqrt{\pi}b \operatorname{erf}\left(-\frac{1}{2}\sqrt{-c}\left(2x - \frac{b}{c}\right)\right)e^{\left(-\frac{b^2+4ac}{4c}\right)}}{8c} - 2e^{(cx^2-bx-a)}$$

```
input integrate(x*sinh(-c*x^2+b*x+a),x, algorithm="giac")
```

```
output -1/8*(sqrt(pi)*b*erf(-1/2*sqrt(c)*(2*x - b/c))*e^(1/4*(b^2 + 4*a*c)/c)/sqr
t(c) + 2*e^(-c*x^2 + b*x + a))/c + 1/8*(sqrt(pi)*b*erf(-1/2*sqrt(-c)*(2*x -
b/c))*e^(-1/4*(b^2 + 4*a*c)/c)/sqrt(-c) - 2*e^(c*x^2 - b*x - a))/c
```

3.7.9 Mupad [F(-1)]

Timed out.

$$\int x \sinh(a + bx - cx^2) dx = \int x \sinh(-cx^2 + bx + a) dx$$

input `int(x*sinh(a + b*x - c*x^2),x)`

output `int(x*sinh(a + b*x - c*x^2), x)`

3.8 $\int \sinh(a + bx - cx^2) dx$

3.8.1	Optimal result	82
3.8.2	Mathematica [A] (verified)	82
3.8.3	Rubi [A] (verified)	83
3.8.4	Maple [A] (verified)	84
3.8.5	Fricas [A] (verification not implemented)	85
3.8.6	Sympy [F]	85
3.8.7	Maxima [B] (verification not implemented)	86
3.8.8	Giac [A] (verification not implemented)	87
3.8.9	Mupad [F(-1)]	87

3.8.1 Optimal result

Integrand size = 12, antiderivative size = 91

$$\int \sinh(a + bx - cx^2) dx = -\frac{e^{a+\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{e^{-a-\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}$$

output
$$-1/4*\exp(a+1/4*b^2/c)*\operatorname{erf}(1/2*(-2*c*x+b)/c^(1/2))*\operatorname{Pi}^(1/2)/c^(1/2)+1/4*\exp(-a-1/4*b^2/c)*\operatorname{erfi}(1/2*(-2*c*x+b)/c^(1/2))*\operatorname{Pi}^(1/2)/c^(1/2)$$

3.8.2 Mathematica [A] (verified)

Time = 0.06 (sec), antiderivative size = 109, normalized size of antiderivative = 1.20

$$\begin{aligned} & \int \sinh(a + bx - cx^2) dx \\ &= \frac{\sqrt{\pi} \left(\operatorname{erfi}\left(\frac{-b+2cx}{2\sqrt{c}}\right) \left(-\cosh\left(a + \frac{b^2}{4c}\right) + \sinh\left(a + \frac{b^2}{4c}\right) \right) + \operatorname{erf}\left(\frac{-b+2cx}{2\sqrt{c}}\right) \left(\cosh\left(a + \frac{b^2}{4c}\right) + \sinh\left(a + \frac{b^2}{4c}\right) \right) \right)}{4\sqrt{c}} \end{aligned}$$

input `Integrate[Sinh[a + b*x - c*x^2], x]`

output
$$(\operatorname{Sqrt}[\operatorname{Pi}]*(\operatorname{Erfi}[-b+2*c*x]/(2*\operatorname{Sqrt}[c]))*(-\operatorname{Cosh}[a+b^2/(4*c)]+\operatorname{Sinh}[a+b^2/(4*c)])+\operatorname{Erf}[-b+2*c*x]/(2*\operatorname{Sqrt}[c])*(\operatorname{Cosh}[a+b^2/(4*c)]+\operatorname{Sinh}[a+b^2/(4*c)]))/ (4*\operatorname{Sqrt}[c])$$

3.8.3 Rubi [A] (verified)

Time = 0.28 (sec), antiderivative size = 91, normalized size of antiderivative = 1.00, number of steps used = 4, number of rules used = 4, $\frac{\text{number of rules}}{\text{integrand size}} = 0.333$, Rules used = {5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \sinh(a + bx - cx^2) dx \\
 & \downarrow 5897 \\
 & \frac{1}{2} \int e^{-cx^2+bx+a} dx - \frac{1}{2} \int e^{cx^2-bx-a} dx \\
 & \downarrow 2664 \\
 & \frac{1}{2} e^{a+\frac{b^2}{4c}} \int e^{-\frac{(b-2cx)^2}{4c}} dx - \frac{1}{2} e^{-a-\frac{b^2}{4c}} \int e^{\frac{(b-2cx)^2}{4c}} dx \\
 & \downarrow 2633 \\
 & \frac{1}{2} e^{a+\frac{b^2}{4c}} \int e^{-\frac{(b-2cx)^2}{4c}} dx + \frac{\sqrt{\pi} e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \\
 & \downarrow 2634 \\
 & \frac{\sqrt{\pi} e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi} e^{a+\frac{b^2}{4c}} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}
 \end{aligned}$$

input `Int[Sinh[a + b*x - c*x^2], x]`

output `-1/4*(E^(a + b^2/(4*c))*Sqrt[Pi]*Erf[(b - 2*c*x)/(2*Sqrt[c])])/Sqrt[c] + (E^(-a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b - 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c])`

3.8.3.1 Defintions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_}))^2, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erfi}[(c + d*x)*\text{Rt}[b*\text{Log}[F], 2]]/(2*d*\text{Rt}[b*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_}))^2, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2, x_{\text{Symbol}}] \Rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c)), x}], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \Rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

3.8.4 Maple [A] (verified)

Time = 0.38 (sec) , antiderivative size = 79, normalized size of antiderivative = 0.87

method	result	size
risch	$-\frac{\sqrt{\pi} e^{-\frac{4ac+b^2}{4c}} \text{erf}\left(\sqrt{-c}x + \frac{b}{2\sqrt{-c}}\right)}{4\sqrt{-c}} - \frac{\sqrt{\pi} e^{\frac{4ac+b^2}{4c}} \text{erf}\left(-\sqrt{c}x + \frac{b}{2\sqrt{c}}\right)}{4\sqrt{c}}$	79

input `int(sinh(-c*x^2+b*x+a),x,method=_RETURNVERBOSE)`

output $-1/4*\text{Pi}^{(1/2)}*\text{exp}(-1/4*(4*a*c+b^2)/c)/(-c)^{(1/2)}*\text{erf}((-c)^{(1/2)}*x+1/2*b/(-c)^{(1/2)}) - 1/4*\text{Pi}^{(1/2)}*\text{exp}(1/4*(4*a*c+b^2)/c)/c^{(1/2)}*\text{erf}(-c^{(1/2)}*x+1/2*b/c^{(1/2)})$

3.8.5 Fricas [A] (verification not implemented)

Time = 0.25 (sec) , antiderivative size = 115, normalized size of antiderivative = 1.26

$$\int \sinh(a + bx - cx^2) dx \\ = \frac{\sqrt{\pi} \sqrt{-c} \left(\cosh\left(\frac{b^2+4ac}{4c}\right) - \sinh\left(\frac{b^2+4ac}{4c}\right) \right) \operatorname{erf}\left(\frac{(2cx-b)\sqrt{-c}}{2c}\right) + \sqrt{\pi} \sqrt{c} \left(\cosh\left(\frac{b^2+4ac}{4c}\right) + \sinh\left(\frac{b^2+4ac}{4c}\right) \right) \operatorname{erf}\left(\frac{(2cx+b)\sqrt{c}}{2c}\right)}{4c}$$

input `integrate(sinh(-c*x^2+b*x+a),x, algorithm="fricas")`

output `1/4*(sqrt(pi)*sqrt(-c)*(cosh(1/4*(b^2 + 4*a*c)/c) - sinh(1/4*(b^2 + 4*a*c)/c))*erf(1/2*(2*c*x - b)*sqrt(-c)/c) + sqrt(pi)*sqrt(c)*(cosh(1/4*(b^2 + 4*a*c)/c) + sinh(1/4*(b^2 + 4*a*c)/c))*erf(1/2*(2*c*x - b)/sqrt(c)))/c`

3.8.6 Sympy [F]

$$\int \sinh(a + bx - cx^2) dx = \int \sinh(a + bx - cx^2) dx$$

input `integrate(sinh(-c*x**2+b*x+a),x)`

output `Integral(sinh(a + b*x - c*x**2), x)`

3.8.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 512 vs. $2(69) = 138$.

Time = 0.36 (sec), antiderivative size = 512, normalized size of antiderivative = 5.63

$$\int \sinh(a + bx - cx^2) dx = -\frac{\left(\frac{\sqrt{\pi}(2cx-b)b \left(\operatorname{erf}\left(\frac{1}{2} \sqrt{\frac{(2cx-b)^2}{c}}\right) - 1 \right)}{\sqrt{\frac{(2cx-b)^2}{c}}(-c)^{\frac{3}{2}}} - \frac{2ce^{\left(-\frac{(2cx-b)^2}{4c}\right)}}{(-c)^{\frac{3}{2}}} \right) be^{(a+\frac{b^2}{4c})}}{8\sqrt{-c}}$$

$$-\frac{\left(\frac{\sqrt{\pi}(2cx-b)b^2 \left(\operatorname{erf}\left(\frac{1}{2} \sqrt{\frac{(2cx-b)^2}{c}}\right) - 1 \right)}{\sqrt{\frac{(2cx-b)^2}{c}}(-c)^{\frac{5}{2}}} - \frac{4bce^{\left(-\frac{(2cx-b)^2}{4c}\right)}}{(-c)^{\frac{5}{2}}} - \frac{4(2cx-b)^3 \Gamma\left(\frac{3}{2}, \frac{(2cx-b)^2}{4c}\right)}{\left(\frac{(2cx-b)^2}{c}\right)^{\frac{3}{2}}(-c)^{\frac{5}{2}}} \right) ce^{(a+\frac{b^2}{4c})}}{8\sqrt{-c}}$$

$$-\frac{\left(\frac{\sqrt{\pi}(2cx-b)b \left(\operatorname{erf}\left(\frac{1}{2} \sqrt{-\frac{(2cx-b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx-b)^2}{c}}c^{\frac{3}{2}}} + \frac{2e^{\left(\frac{(2cx-b)^2}{4c}\right)}}{\sqrt{c}} \right) be^{(-a-\frac{b^2}{4c})}}{8\sqrt{c}}$$

$$+\frac{1}{8} \left(\frac{\sqrt{\pi}(2cx-b)b^2 \left(\operatorname{erf}\left(\frac{1}{2} \sqrt{-\frac{(2cx-b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx-b)^2}{c}}c^{\frac{5}{2}}} + \frac{4be^{\left(\frac{(2cx-b)^2}{4c}\right)}}{c^{\frac{3}{2}}} - \frac{4(2cx-b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx-b)^2}{4c}\right)}{\left(-\frac{(2cx-b)^2}{c}\right)^{\frac{3}{2}}c^{\frac{5}{2}}} \right) \sqrt{ce^{(a+\frac{b^2}{4c})}}$$

$$- x \sinh(cx^2 - bx - a)$$

input `integrate(sinh(-c*x^2+b*x+a),x, algorithm="maxima")`

output

```
-1/8*(sqrt(pi)*(2*c*x - b)*b*(erf(1/2*sqrt((2*c*x - b)^2/c)) - 1)/(sqrt((2*c*x - b)^2/c)*(-c)^(3/2)) - 2*c*e^(-1/4*(2*c*x - b)^2/c)/(-c)^(3/2))*b*e^(a + 1/4*b^2/c)/sqrt(-c) - 1/8*(sqrt(pi)*(2*c*x - b)*b*b^2*(erf(1/2*sqrt((2*c*x - b)^2/c)) - 1)/(sqrt((2*c*x - b)^2/c)*(-c)^(5/2)) - 4*b*c*e^(-1/4*(2*c*x - b)^2/c)/(-c)^(5/2) - 4*(2*c*x - b)^3*gamma(3/2, 1/4*(2*c*x - b)^2/c)/(((2*c*x - b)^2/c)^(3/2)*(-c)^(5/2)))*c*e^(a + 1/4*b^2/c)/sqrt(-c) - 1/8*(sqrt(pi)*(2*c*x - b)*b*(erf(1/2*sqrt(-(2*c*x - b)^2/c)) - 1)/(sqrt(-(2*c*x - b)^2/c)*c^(3/2)) + 2*e^(1/4*(2*c*x - b)^2/c)/sqrt(c))*b*e^(-a - 1/4*b^2/c)/sqrt(c) + 1/8*(sqrt(pi)*(2*c*x - b)*b*b^2*(erf(1/2*sqrt(-(2*c*x - b)^2/c)) - 1)/(sqrt(-(2*c*x - b)^2/c)*c^(5/2)) + 4*b*e^(1/4*(2*c*x - b)^2/c)/c^(3/2) - 4*(2*c*x - b)^3*gamma(3/2, -1/4*(2*c*x - b)^2/c)/((-(2*c*x - b)^2/c)^(3/2)*c^(5/2)))*sqrt(c)*e^(-a - 1/4*b^2/c) - x*sinh(c*x^2 - b*x - a)
```

3.8.8 Giac [A] (verification not implemented)

Time = 0.27 (sec) , antiderivative size = 81, normalized size of antiderivative = 0.89

$$\int \sinh(a + bx - cx^2) dx = -\frac{\sqrt{\pi} \operatorname{erf}\left(-\frac{1}{2} \sqrt{c}(2x - \frac{b}{c})\right) e^{\left(\frac{b^2+4ac}{4c}\right)}}{4\sqrt{c}} \\ + \frac{\sqrt{\pi} \operatorname{erf}\left(-\frac{1}{2} \sqrt{-c}(2x - \frac{b}{c})\right) e^{\left(-\frac{b^2+4ac}{4c}\right)}}{4\sqrt{-c}}$$

input `integrate(sinh(-c*x^2+b*x+a),x, algorithm="giac")`

output `-1/4*sqrt(pi)*erf(-1/2*sqrt(c)*(2*x - b/c))*e^(1/4*(b^2 + 4*a*c)/c)/sqrt(c) + 1/4*sqrt(pi)*erf(-1/2*sqrt(-c)*(2*x - b/c))*e^(-1/4*(b^2 + 4*a*c)/c)/sqrt(-c)`

3.8.9 Mupad [F(-1)]

Timed out.

$$\int \sinh(a + bx - cx^2) dx = \int \sinh(-cx^2 + bx + a) dx$$

input `int(sinh(a + b*x - c*x^2),x)`

output `int(sinh(a + b*x - c*x^2), x)`

3.9 $\int \frac{\sinh(a+bx-cx^2)}{x} dx$

3.9.1	Optimal result	88
3.9.2	Mathematica [N/A]	88
3.9.3	Rubi [N/A]	89
3.9.4	Maple [N/A] (verified)	89
3.9.5	Fricas [N/A]	90
3.9.6	Sympy [N/A]	90
3.9.7	Maxima [N/A]	90
3.9.8	Giac [N/A]	91
3.9.9	Mupad [N/A]	91

3.9.1 Optimal result

Integrand size = 16, antiderivative size = 16

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx = \text{Int}\left(\frac{\sinh(a + bx - cx^2)}{x}, x\right)$$

output `Unintegrable(sinh(-c*x^2+b*x+a)/x,x)`

3.9.2 Mathematica [N/A]

Not integrable

Time = 6.64 (sec) , antiderivative size = 18, normalized size of antiderivative = 1.12

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx = \int \frac{\sinh(a + bx - cx^2)}{x} dx$$

input `Integrate[Sinh[a + b*x - c*x^2]/x,x]`

output `Integrate[Sinh[a + b*x - c*x^2]/x, x]`

3.9.3 Rubi [N/A]

Not integrable

Time = 0.18 (sec) , antiderivative size = 16, normalized size of antiderivative = 1.00, number of steps used = 1, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {5915}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx$$

↓ 5915

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx$$

input `Int[Sinh[a + b*x - c*x^2]/x, x]`

output `$Aborted`

3.9.3.1 Defintions of rubi rules used

rule 5915 `Int[((d_.) + (e_.)*(x_))^m_*Sinh[(a_.) + (b_.)*(x_) + (c_._)*(x_)^2], x_Symbol] :> Unintegrable[(d + e*x)^m*Sinh[a + b*x + c*x^2], x] /; FreeQ[{a, b, c, d, e, m}, x]`

3.9.4 Maple [N/A] (verified)

Not integrable

Time = 0.29 (sec) , antiderivative size = 16, normalized size of antiderivative = 1.00

$$\int \frac{\sinh(-cx^2 + bx + a)}{x} dx$$

input `int(sinh(-c*x^2+b*x+a)/x,x)`

output `int(sinh(-c*x^2+b*x+a)/x,x)`

3.9.5 Fricas [N/A]

Not integrable

Time = 0.25 (sec) , antiderivative size = 21, normalized size of antiderivative = 1.31

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx = \int \frac{\sinh(-cx^2 + bx + a)}{x} dx$$

input `integrate(sinh(-c*x^2+b*x+a)/x,x, algorithm="fricas")`

output `integral(-sinh(c*x^2 - b*x - a)/x, x)`

3.9.6 Sympy [N/A]

Not integrable

Time = 0.60 (sec) , antiderivative size = 14, normalized size of antiderivative = 0.88

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx = \int \frac{\sinh(a + bx - cx^2)}{x} dx$$

input `integrate(sinh(-c*x**2+b*x+a)/x,x)`

output `Integral(sinh(a + b*x - c*x**2)/x, x)`

3.9.7 Maxima [N/A]

Not integrable

Time = 0.72 (sec) , antiderivative size = 22, normalized size of antiderivative = 1.38

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx = \int \frac{\sinh(-cx^2 + bx + a)}{x} dx$$

input `integrate(sinh(-c*x^2+b*x+a)/x,x, algorithm="maxima")`

output `-integrate(sinh(c*x^2 - b*x - a)/x, x)`

3.9.8 Giac [N/A]

Not integrable

Time = 0.28 (sec) , antiderivative size = 18, normalized size of antiderivative = 1.12

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx = \int \frac{\sinh(-cx^2 + bx + a)}{x} dx$$

input `integrate(sinh(-c*x^2+b*x+a)/x,x, algorithm="giac")`

output `integrate(sinh(-c*x^2 + b*x + a)/x, x)`

3.9.9 Mupad [N/A]

Not integrable

Time = 1.12 (sec) , antiderivative size = 18, normalized size of antiderivative = 1.12

$$\int \frac{\sinh(a + bx - cx^2)}{x} dx = \int \frac{\sinh(-cx^2 + bx + a)}{x} dx$$

input `int(sinh(a + b*x - c*x^2)/x,x)`

output `int(sinh(a + b*x - c*x^2)/x, x)`

3.10 $\int \left(-\frac{b \cosh(a+bx-cx^2)}{x} + \frac{\sinh(a+bx-cx^2)}{x^2} \right) dx$

3.10.1 Optimal result	92
3.10.2 Mathematica [A] (verified)	92
3.10.3 Rubi [A] (verified)	93
3.10.4 Maple [F]	94
3.10.5 Fricas [B] (verification not implemented)	94
3.10.6 Sympy [F]	95
3.10.7 Maxima [F]	95
3.10.8 Giac [F]	95
3.10.9 Mupad [F(-1)]	96

3.10.1 Optimal result

Integrand size = 35, antiderivative size = 108

$$\begin{aligned} & \int \left(-\frac{b \cosh(a+bx-cx^2)}{x} + \frac{\sinh(a+bx-cx^2)}{x^2} \right) dx \\ &= \frac{1}{2} \sqrt{c} e^{a+\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b-2cx}{2\sqrt{c}}\right) + \frac{1}{2} \sqrt{c} e^{-a-\frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b-2cx}{2\sqrt{c}}\right) - \frac{\sinh(a+bx-cx^2)}{x} \end{aligned}$$

output $-\sinh(-c*x^2+b*x+a)/x+1/2*\exp(a+1/4*b^2/c)*\operatorname{erf}(1/2*(-2*c*x+b)/c^{(1/2)})*c^{(1/2)}*\operatorname{Pi}^{(1/2)}+1/2*\exp(-a-1/4*b^2/c)*\operatorname{erfi}(1/2*(-2*c*x+b)/c^{(1/2)})*c^{(1/2)}*\operatorname{Pi}^{(1/2)}$

3.10.2 Mathematica [A] (verified)

Time = 0.50 (sec), antiderivative size = 136, normalized size of antiderivative = 1.26

$$\begin{aligned} & \int \left(-\frac{b \cosh(a+bx-cx^2)}{x} + \frac{\sinh(a+bx-cx^2)}{x^2} \right) dx \\ &= \frac{1}{2} \left(\sqrt{c} \sqrt{\pi} \operatorname{erfi}\left(\frac{-b+2cx}{2\sqrt{c}}\right) \left(-\cosh\left(a+\frac{b^2}{4c}\right) + \sinh\left(a+\frac{b^2}{4c}\right) \right) \right. \\ & \quad \left. - \sqrt{c} \sqrt{\pi} \operatorname{erf}\left(\frac{-b+2cx}{2\sqrt{c}}\right) \left(\cosh\left(a+\frac{b^2}{4c}\right) + \sinh\left(a+\frac{b^2}{4c}\right) \right) - \frac{2 \sinh(a+x(b-cx))}{x} \right) \end{aligned}$$

input `Integrate[-((b*Cosh[a + b*x - c*x^2])/x) + Sinh[a + b*x - c*x^2]/x^2, x]`

3.10. $\int \left(-\frac{b \cosh(a+bx-cx^2)}{x} + \frac{\sinh(a+bx-cx^2)}{x^2} \right) dx$

output $(\text{Sqrt}[c]*\text{Sqrt}[\text{Pi}]*\text{Erfi}[(\text{-}b + 2*c*x)/(2*\text{Sqrt}[c])]*(-\text{Cosh}[\text{a} + \text{b}^2/(4*c)] + \text{Sinh}[\text{a} + \text{b}^2/(4*c)]) - \text{Sqrt}[c]*\text{Sqrt}[\text{Pi}]*\text{Erf}[(\text{-}b + 2*c*x)/(2*\text{Sqrt}[c])]*(\text{Cosh}[\text{a} + \text{b}^2/(4*c)] + \text{Sinh}[\text{a} + \text{b}^2/(4*c)]) - (2*\text{Sinh}[\text{a} + x*(\text{b} - c*x)])/\text{x})/2$

3.10.3 Rubi [A] (verified)

Time = 0.26 (sec) , antiderivative size = 108, normalized size of antiderivative = 1.00, number of steps used = 1, number of rules used = 1, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.029, Rules used = {2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int \left(\frac{\sinh(a + bx - cx^2)}{x^2} - \frac{b \cosh(a + bx - cx^2)}{x} \right) dx \\ & \downarrow \text{2009} \\ & \frac{1}{2} \sqrt{\pi} \sqrt{c} e^{a+\frac{b^2}{4c}} \operatorname{erf}\left(\frac{b - 2cx}{2\sqrt{c}}\right) + \frac{1}{2} \sqrt{\pi} \sqrt{c} e^{-a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b - 2cx}{2\sqrt{c}}\right) - \frac{\sinh(a + bx - cx^2)}{x} \end{aligned}$$

input $\text{Int}[-((\text{b}*\text{Cosh}[\text{a} + \text{b}*\text{x} - \text{c}*\text{x}^2])/\text{x}) + \text{Sinh}[\text{a} + \text{b}*\text{x} - \text{c}*\text{x}^2]/\text{x}^2, \text{x}]$

output $(\text{Sqrt}[c]*\text{E}^{(\text{a} + \text{b}^2/(4*c))}*\text{Sqrt}[\text{Pi}]*\text{Erf}[(\text{b} - 2*c*x)/(2*\text{Sqrt}[c])])/2 + (\text{Sqrt}[c]*\text{E}^{(-\text{a} - \text{b}^2/(4*c))}*\text{Sqrt}[\text{Pi}]*\text{Erfi}[(\text{b} - 2*c*x)/(2*\text{Sqrt}[c])])/2 - \text{Sinh}[\text{a} + \text{b}*\text{x} - \text{c}*\text{x}^2]/\text{x}$

3.10.3.1 Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

3.10.4 Maple [F]

$$\int \left(-\frac{b \cosh(-cx^2 + bx + a)}{x} + \frac{\sinh(-cx^2 + bx + a)}{x^2} \right) dx$$

input `int(-b*cosh(-c*x^2+b*x+a)/x+sinh(-c*x^2+b*x+a)/x^2,x)`

output `int(-b*cosh(-c*x^2+b*x+a)/x+sinh(-c*x^2+b*x+a)/x^2,x)`

3.10.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 371 vs. 2(86) = 172.

Time = 0.25 (sec), antiderivative size = 371, normalized size of antiderivative = 3.44

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx - cx^2)}{x} + \frac{\sinh(a + bx - cx^2)}{x^2} \right) dx \\ &= \sqrt{\pi} \left(x \cosh(cx^2 - bx - a) \cosh\left(\frac{b^2+4ac}{4c}\right) - x \cosh(cx^2 - bx - a) \sinh\left(\frac{b^2+4ac}{4c}\right) + \left(x \cosh\left(\frac{b^2+4ac}{4c}\right) - x \sinh\left(\frac{b^2+4ac}{4c}\right)\right) \right) \end{aligned}$$

input `integrate(-b*cosh(-c*x^2+b*x+a)/x+sinh(-c*x^2+b*x+a)/x^2,x, algorithm="fricas")`

output `1/2*(sqrt(pi)*(x*cosh(c*x^2 - b*x - a)*cosh(1/4*(b^2 + 4*a*c)/c) - x*cosh(c*x^2 - b*x - a)*sinh(1/4*(b^2 + 4*a*c)/c) + (x*cosh(1/4*(b^2 + 4*a*c)/c) - x*sinh(1/4*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a))*sqrt(-c)*erf(1/2*(2*c*x - b)*sqrt(-c)/c) - sqrt(pi)*(x*cosh(c*x^2 - b*x - a)*cosh(1/4*(b^2 + 4*a*c)/c) + x*cosh(c*x^2 - b*x - a)*sinh(1/4*(b^2 + 4*a*c)/c) + (x*cosh(1/4*(b^2 + 4*a*c)/c) + x*sinh(1/4*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a))*sqrt(c)*erf(1/2*(2*c*x - b)/sqrt(c)) + cosh(c*x^2 - b*x - a)^2 + 2*cosh(c*x^2 - b*x - a)*sinh(c*x^2 - b*x - a) + sinh(c*x^2 - b*x - a)^2 - 1)/(x*cosh(c*x^2 - b*x - a) + x*sinh(c*x^2 - b*x - a))`

3.10. $\int \left(-\frac{b \cosh(a + bx - cx^2)}{x} + \frac{\sinh(a + bx - cx^2)}{x^2} \right) dx$

3.10.6 Sympy [F]

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx - cx^2)}{x} + \frac{\sinh(a + bx - cx^2)}{x^2} \right) dx \\ &= - \int \left(-\frac{\sinh(a + bx - cx^2)}{x^2} \right) dx - \int \frac{b \cosh(a + bx - cx^2)}{x} dx \end{aligned}$$

input `integrate(-b*cosh(-c*x**2+b*x+a)/x+sinh(-c*x**2+b*x+a)/x**2,x)`

output `-Integral(-sinh(a + b*x - c*x**2)/x**2, x) - Integral(b*cosh(a + b*x - c*x**2)/x, x)`

3.10.7 Maxima [F]

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx - cx^2)}{x} + \frac{\sinh(a + bx - cx^2)}{x^2} \right) dx \\ &= \int -\frac{b \cosh(-cx^2 + bx + a)}{x} + \frac{\sinh(-cx^2 + bx + a)}{x^2} dx \end{aligned}$$

input `integrate(-b*cosh(-c*x^2+b*x+a)/x+sinh(-c*x^2+b*x+a)/x^2,x, algorithm="maxima")`

output `integrate(-b*cosh(c*x^2 - b*x - a)/x - sinh(c*x^2 - b*x - a)/x^2, x)`

3.10.8 Giac [F]

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx - cx^2)}{x} + \frac{\sinh(a + bx - cx^2)}{x^2} \right) dx \\ &= \int -\frac{b \cosh(-cx^2 + bx + a)}{x} + \frac{\sinh(-cx^2 + bx + a)}{x^2} dx \end{aligned}$$

input `integrate(-b*cosh(-c*x^2+b*x+a)/x+sinh(-c*x^2+b*x+a)/x^2,x, algorithm="giac")`

output `integrate(-b*cosh(-c*x^2 + b*x + a)/x + sinh(-c*x^2 + b*x + a)/x^2, x)`

3.10.9 Mupad [F(-1)]

Timed out.

$$\begin{aligned} & \int \left(-\frac{b \cosh(a + bx - cx^2)}{x} + \frac{\sinh(a + bx - cx^2)}{x^2} \right) dx \\ &= \int \frac{\sinh(-cx^2 + bx + a)}{x^2} - \frac{b \cosh(-cx^2 + bx + a)}{x} dx \end{aligned}$$

input `int(sinh(a + b*x - c*x^2)/x^2 - (b*cosh(a + b*x - c*x^2))/x, x)`

output `int(sinh(a + b*x - c*x^2)/x^2 - (b*cosh(a + b*x - c*x^2))/x, x)`

3.11 $\int x^2 \sinh\left(\frac{1}{4} + x + x^2\right) dx$

3.11.1 Optimal result	97
3.11.2 Mathematica [A] (verified)	97
3.11.3 Rubi [A] (verified)	98
3.11.4 Maple [C] (verified)	101
3.11.5 Fricas [B] (verification not implemented)	101
3.11.6 Sympy [F]	102
3.11.7 Maxima [B] (verification not implemented)	102
3.11.8 Giac [C] (verification not implemented)	103
3.11.9 Mupad [F(-1)]	103

3.11.1 Optimal result

Integrand size = 13, antiderivative size = 66

$$\begin{aligned}\int x^2 \sinh\left(\frac{1}{4} + x + x^2\right) dx &= -\frac{1}{4} \cosh\left(\frac{1}{4} + x + x^2\right) + \frac{1}{2}x \cosh\left(\frac{1}{4} + x + x^2\right) \\ &\quad + \frac{3}{16}\sqrt{\pi}\text{erf}\left(\frac{1}{2}(-1 - 2x)\right) - \frac{1}{16}\sqrt{\pi}\text{erfi}\left(\frac{1}{2}(1 + 2x)\right)\end{aligned}$$

output `-1/4*cosh(1/4+x+x^2)+1/2*x*cosh(1/4+x+x^2)-3/16*erf(1/2+x)*Pi^(1/2)-1/16*erfi(1/2+x)*Pi^(1/2)`

3.11.2 Mathematica [A] (verified)

Time = 0.11 (sec), antiderivative size = 72, normalized size of antiderivative = 1.09

$$\begin{aligned}\int x^2 \sinh\left(\frac{1}{4} + x + x^2\right) dx &= \frac{1}{16} \left(-3\sqrt{\pi}\text{erf}\left(\frac{1}{2} + x\right) - \sqrt{\pi}\text{erfi}\left(\frac{1}{2} + x\right) \right. \\ &\quad \left. + \frac{2(-1 + 2x)((1 + \sqrt{e}) \cosh(x(1 + x)) + (-1 + \sqrt{e}) \sinh(x(1 + x)))}{\sqrt[4]{e}} \right)\end{aligned}$$

input `Integrate[x^2*Sinh[1/4 + x + x^2], x]`

3.11. $\int x^2 \sinh\left(\frac{1}{4} + x + x^2\right) dx$

```
output (-3*Sqrt[Pi]*Erf[1/2 + x] - Sqrt[Pi]*Erfi[1/2 + x] + (2*(-1 + 2*x)*((1 + Sqrt[E])*Cosh[x*(1 + x)] + (-1 + Sqrt[E])*Sinh[x*(1 + x)]))/E^(1/4))/16
```

3.11.3 Rubi [A] (verified)

Time = 0.56 (sec) , antiderivative size = 119, normalized size of antiderivative = 1.80, number of steps used = 10, number of rules used = 10, $\frac{\text{number of rules}}{\text{integrand size}} = 0.769$, Rules used = {5909, 5898, 2664, 2633, 2634, 5905, 5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int x^2 \sinh \left(x^2 + x + \frac{1}{4} \right) dx \\
 & \quad \downarrow \textcolor{blue}{5909} \\
 & -\frac{1}{2} \int x \sinh \left(x^2 + x + \frac{1}{4} \right) dx - \frac{1}{2} \int \cosh \left(x^2 + x + \frac{1}{4} \right) dx + \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
 & \quad \downarrow \textcolor{blue}{5898} \\
 & \frac{1}{2} \left(-\frac{1}{2} \int e^{-x^2-x-\frac{1}{4}} dx - \frac{1}{2} \int e^{x^2+x+\frac{1}{4}} dx \right) - \frac{1}{2} \int x \sinh \left(x^2 + x + \frac{1}{4} \right) dx + \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
 & \quad \downarrow \textcolor{blue}{2664} \\
 & -\frac{1}{2} \int x \sinh \left(x^2 + x + \frac{1}{4} \right) dx + \frac{1}{2} \left(-\frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx - \frac{1}{2} \int e^{\frac{1}{4}(2x+1)^2} dx \right) + \\
 & \quad \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
 & \quad \downarrow \textcolor{blue}{2633} \\
 & \frac{1}{2} \left(-\frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) - \frac{1}{2} \int x \sinh \left(x^2 + x + \frac{1}{4} \right) dx + \\
 & \quad \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
 & \quad \downarrow \textcolor{blue}{2634} \\
 & -\frac{1}{2} \int x \sinh \left(x^2 + x + \frac{1}{4} \right) dx + \frac{1}{2} \left(-\frac{1}{4} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) + \\
 & \quad \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
 & \quad \downarrow \textcolor{blue}{5905}
 \end{aligned}$$

$$\begin{aligned}
& \frac{1}{2} \left(\frac{1}{2} \int \sinh \left(x^2 + x + \frac{1}{4} \right) dx - \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \right) + \\
& \frac{1}{2} \left(-\frac{1}{4} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) + \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
& \quad \downarrow \textcolor{blue}{5897} \\
& \frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{2} \int e^{x^2+x+\frac{1}{4}} dx - \frac{1}{2} \int e^{-x^2-x-\frac{1}{4}} dx \right) - \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \right) + \\
& \frac{1}{2} \left(-\frac{1}{4} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) + \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
& \quad \downarrow \textcolor{blue}{2664} \\
& \frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{2} \int e^{\frac{1}{4}(2x+1)^2} dx - \frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx \right) - \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \right) + \\
& \frac{1}{2} \left(-\frac{1}{4} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) + \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
& \quad \downarrow \textcolor{blue}{2633} \\
& \frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx \right) - \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \right) + \\
& \frac{1}{2} \left(-\frac{1}{4} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) + \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right) \\
& \quad \downarrow \textcolor{blue}{2634} \\
& \frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{4} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2}(2x+1) \right) \right) - \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \right) + \\
& \frac{1}{2} \left(-\frac{1}{4} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) + \frac{1}{2} x \cosh \left(x^2 + x + \frac{1}{4} \right)
\end{aligned}$$

input `Int[x^2*Sinh[1/4 + x + x^2],x]`

output `(x*Cosh[1/4 + x + x^2])/2 + (-1/4*(Sqrt[Pi]*Erf[(1 + 2*x)/2]) - (Sqrt[Pi]*Erfi[(1 + 2*x)/2])/4)/2 + (-1/2*Cosh[1/4 + x + x^2] + (-1/4*(Sqrt[Pi]*Erf[(1 + 2*x)/2]) + (Sqrt[Pi]*Erfi[(1 + 2*x)/2])/4)/2)/2`

3.11.3.1 Definitions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erfi}[(c + d*x)*\text{Rt}[b*\text{Log}[F], 2]]/(2*d*\text{Rt}[b*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c))}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5898 $\text{Int}[\text{Cosh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] + \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5905 $\text{Int}[(d_{_}) + (e_{_})*(x_{_})]*\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(\text{Cosh}[a + b*x + c*x^2]/(2*c)), x] - \text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[\text{Sinh}[a + b*x + c*x^2], x], x] /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{NeQ}[b*e - 2*c*d, 0]$

rule 5909 $\text{Int}[(d_{_}) + (e_{_})*(x_{_})]^{(m)} * \text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(d + e*x)^{(m - 1)} * (\text{Cosh}[a + b*x + c*x^2]/(2*c)), x] + (-\text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[(d + e*x)^{(m - 1)} * \text{Sinh}[a + b*x + c*x^2], x], x] - \text{Simp}[e^{2*((m - 1)/(2*c))} \text{Int}[(d + e*x)^{(m - 2)} * \text{Cosh}[a + b*x + c*x^2], x], x]) /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{GtQ}[m, 1] \&& \text{NeQ}[b*e - 2*c*d, 0]$

3.11.4 Maple [C] (verified)

Result contains complex when optimal does not.

Time = 0.34 (sec) , antiderivative size = 75, normalized size of antiderivative = 1.14

method	result	size
risch	$\frac{x e^{-\frac{(1+2x)^2}{4}}}{4} - \frac{e^{-\frac{(1+2x)^2}{4}}}{8} - \frac{3 \operatorname{erf}\left(\frac{1}{2}+x\right) \sqrt{\pi}}{16} + \frac{x e^{\frac{(1+2x)^2}{4}}}{4} - \frac{e^{\frac{(1+2x)^2}{4}}}{8} + \frac{i \sqrt{\pi} \operatorname{erf}\left(i x+\frac{1}{2} i\right)}{16}$	75

input `int(x^2*sinh(1/4+x+x^2),x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & 1/4*x*exp(-1/4*(1+2*x)^2)-1/8*exp(-1/4*(1+2*x)^2)-3/16*erf(1/2+x)*Pi^(1/2) \\ & +1/4*x*exp(1/4*(1+2*x)^2)-1/8*exp(1/4*(1+2*x)^2)+1/16*I*Pi^(1/2)*erf(I*x+1/2*I) \end{aligned}$$

3.11.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 127 vs. $2(38) = 76$.

Time = 0.27 (sec) , antiderivative size = 127, normalized size of antiderivative = 1.92

$$\begin{aligned} & \int x^2 \sinh \left(\frac{1}{4} + x + x^2 \right) dx \\ & = \frac{2 (2 x - 1) \cosh \left(x^2 + x + \frac{1}{4} \right)^2 + 4 (2 x - 1) \cosh \left(x^2 + x + \frac{1}{4} \right) \sinh \left(x^2 + x + \frac{1}{4} \right) + 2 (2 x - 1) \sinh \left(x^2 + x + \frac{1}{4} \right)^2}{16} \end{aligned}$$

input `integrate(x^2*sinh(1/4+x+x^2),x, algorithm="fricas")`

output
$$\begin{aligned} & 1/16*(2*(2*x - 1)*cosh(x^2 + x + 1/4)^2 + 4*(2*x - 1)*cosh(x^2 + x + 1/4)* \\ & sinh(x^2 + x + 1/4) + 2*(2*x - 1)*sinh(x^2 + x + 1/4)^2 - sqrt(pi)*(3*cosh(x^2 + x + 1/4)*erf(x + 1/2) + cosh(x^2 + x + 1/4)*erfi(x + 1/2) + (3*erf(x + 1/2) + erfi(x + 1/2))*sinh(x^2 + x + 1/4)) + 4*x - 2)/(cosh(x^2 + x + 1/4) + sinh(x^2 + x + 1/4)) \end{aligned}$$

3.11.6 Sympy [F]

$$\int x^2 \sinh\left(\frac{1}{4} + x + x^2\right) dx = \int x^2 \sinh\left(x^2 + x + \frac{1}{4}\right) dx$$

input `integrate(x**2*sinh(1/4+x+x**2),x)`

output `Integral(x**2*sinh(x**2 + x + 1/4), x)`

3.11.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 183 vs. $2(38) = 76$.

Time = 0.27 (sec) , antiderivative size = 183, normalized size of antiderivative = 2.77

$$\begin{aligned} \int x^2 \sinh\left(\frac{1}{4} + x + x^2\right) dx &= \frac{1}{3} x^3 \sinh\left(x^2 + x + \frac{1}{4}\right) + \frac{(2x+1)^5 \Gamma(\frac{5}{2}, \frac{1}{4}(2x+1)^2)}{6((2x+1)^2)^{\frac{5}{2}}} \\ &\quad + \frac{(2x+1)^5 \Gamma(\frac{5}{2}, -\frac{1}{4}(2x+1)^2)}{6(-(2x+1)^2)^{\frac{5}{2}}} \\ &\quad + \frac{(2x+1)^3 \Gamma(\frac{3}{2}, \frac{1}{4}(2x+1)^2)}{8((2x+1)^2)^{\frac{3}{2}}} \\ &\quad + \frac{(2x+1)^3 \Gamma(\frac{3}{2}, -\frac{1}{4}(2x+1)^2)}{8(-(2x+1)^2)^{\frac{3}{2}}} \\ &\quad + \frac{1}{48} e^{(\frac{1}{4}(2x+1)^2)} - \frac{1}{48} e^{(-\frac{1}{4}(2x+1)^2)} \\ &\quad - \frac{1}{4} \Gamma\left(2, \frac{1}{4}(2x+1)^2\right) - \frac{1}{4} \Gamma\left(2, -\frac{1}{4}(2x+1)^2\right) \end{aligned}$$

input `integrate(x^2*sinh(1/4+x+x^2),x, algorithm="maxima")`

output `1/3*x^3*sinh(x^2 + x + 1/4) + 1/6*(2*x + 1)^5*gamma(5/2, 1/4*(2*x + 1)^2)/((2*x + 1)^2)^(5/2) + 1/6*(2*x + 1)^5*gamma(5/2, -1/4*(2*x + 1)^2)/(-(2*x + 1)^2)^(5/2) + 1/8*(2*x + 1)^3*gamma(3/2, 1/4*(2*x + 1)^2)/((2*x + 1)^2)^(3/2) + 1/8*(2*x + 1)^3*gamma(3/2, -1/4*(2*x + 1)^2)/(-(2*x + 1)^2)^(3/2) + 1/48*e^(1/4*(2*x + 1)^2) - 1/48*e^(-1/4*(2*x + 1)^2) - 1/4*gamma(2, 1/4*(2*x + 1)^2) - 1/4*gamma(2, -1/4*(2*x + 1)^2)`

3.11.8 Giac [C] (verification not implemented)

Result contains complex when optimal does not.

Time = 0.29 (sec) , antiderivative size = 53, normalized size of antiderivative = 0.80

$$\int x^2 \sinh\left(\frac{1}{4} + x + x^2\right) dx = \frac{1}{8} (2x - 1)e^{(x^2+x+\frac{1}{4})} + \frac{1}{8} (2x - 1)e^{(-x^2-x-\frac{1}{4})} \\ - \frac{3}{16} \sqrt{\pi} \operatorname{erf}\left(x + \frac{1}{2}\right) - \frac{1}{16} i \sqrt{\pi} \operatorname{erf}\left(-ix - \frac{1}{2}i\right)$$

input `integrate(x^2*sinh(1/4+x+x^2),x, algorithm="giac")`

output `1/8*(2*x - 1)*e^(x^2 + x + 1/4) + 1/8*(2*x - 1)*e^(-x^2 - x - 1/4) - 3/16*sqrt(pi)*erf(x + 1/2) - 1/16*I*sqrt(pi)*erf(-I*x - 1/2*I)`

3.11.9 Mupad [F(-1)]

Timed out.

$$\int x^2 \sinh\left(\frac{1}{4} + x + x^2\right) dx = \int x^2 \sinh\left(x^2 + x + \frac{1}{4}\right) dx$$

input `int(x^2*sinh(x + x^2 + 1/4),x)`

output `int(x^2*sinh(x + x^2 + 1/4), x)`

3.12 $\int x \sinh\left(\frac{1}{4} + x + x^2\right) dx$

3.12.1 Optimal result	104
3.12.2 Mathematica [A] (verified)	104
3.12.3 Rubi [A] (verified)	105
3.12.4 Maple [C] (verified)	106
3.12.5 Fricas [B] (verification not implemented)	107
3.12.6 Sympy [F]	107
3.12.7 Maxima [B] (verification not implemented)	107
3.12.8 Giac [C] (verification not implemented)	108
3.12.9 Mupad [F(-1)]	109

3.12.1 Optimal result

Integrand size = 11, antiderivative size = 52

$$\int x \sinh\left(\frac{1}{4} + x + x^2\right) dx = \frac{1}{2} \cosh\left(\frac{1}{4} + x + x^2\right) - \frac{1}{8} \sqrt{\pi} \operatorname{erf}\left(\frac{1}{2}(-1 - 2x)\right) - \frac{1}{8} \sqrt{\pi} \operatorname{erfi}\left(\frac{1}{2}(1 + 2x)\right)$$

output `1/2*cosh(1/4+x+x^2)+1/8*erf(1/2+x)*Pi^(1/2)-1/8*erfi(1/2+x)*Pi^(1/2)`

3.12.2 Mathematica [A] (verified)

Time = 0.05 (sec) , antiderivative size = 75, normalized size of antiderivative = 1.44

$$\int x \sinh\left(\frac{1}{4} + x + x^2\right) dx = \frac{2(1 + \sqrt{e}) \cosh(x(1 + x)) + \sqrt[4]{e} \sqrt{\pi} \operatorname{erf}\left(\frac{1}{2} + x\right) - \sqrt[4]{e} \sqrt{\pi} \operatorname{erfi}\left(\frac{1}{2} + x\right) + 2(-1 + \sqrt{e}) \sinh(x(1 + x))}{8\sqrt[4]{e}}$$

input `Integrate[x*Sinh[1/4 + x + x^2], x]`

output `(2*(1 + Sqrt[E])*Cosh[x*(1 + x)] + E^(1/4)*Sqrt[Pi]*Erf[1/2 + x] - E^(1/4)*Sqrt[Pi]*Erfi[1/2 + x] + 2*(-1 + Sqrt[E])*Sinh[x*(1 + x)])/(8*E^(1/4))`

3.12.3 Rubi [A] (verified)

Time = 0.29 (sec), antiderivative size = 57, normalized size of antiderivative = 1.10, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.455$, Rules used = {5905, 5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int x \sinh \left(x^2 + x + \frac{1}{4} \right) dx \\
 & \quad \downarrow \textcolor{blue}{5905} \\
 & \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) - \frac{1}{2} \int \sinh \left(x^2 + x + \frac{1}{4} \right) dx \\
 & \quad \downarrow \textcolor{blue}{5897} \\
 & \frac{1}{2} \left(\frac{1}{2} \int e^{-x^2-x-\frac{1}{4}} dx - \frac{1}{2} \int e^{x^2+x+\frac{1}{4}} dx \right) + \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \\
 & \quad \downarrow \textcolor{blue}{2664} \\
 & \frac{1}{2} \left(\frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx - \frac{1}{2} \int e^{\frac{1}{4}(2x+1)^2} dx \right) + \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \\
 & \quad \downarrow \textcolor{blue}{2633} \\
 & \frac{1}{2} \left(\frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) + \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \\
 & \quad \downarrow \textcolor{blue}{2634} \\
 & \frac{1}{2} \left(\frac{1}{4} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2}(2x+1) \right) - \frac{1}{4} \sqrt{\pi} \operatorname{erfi} \left(\frac{1}{2}(2x+1) \right) \right) + \frac{1}{2} \cosh \left(x^2 + x + \frac{1}{4} \right)
 \end{aligned}$$

input `Int[x*Sinh[1/4 + x + x^2],x]`

output `Cosh[1/4 + x + x^2]/2 + ((Sqrt[Pi]*Erf[(1 + 2*x)/2])/4 - (Sqrt[Pi]*Erfi[(1 + 2*x)/2])/4)/2`

3.12.3.1 Definitions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erfi}[(c + d*x)*\text{Rt}[b*\text{Log}[F], 2]]/(2*d*\text{Rt}[b*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c))}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5905 $\text{Int}[(d_{_}) + (e_{_})*(x_{_})*\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(\text{Cosh}[a + b*x + c*x^2]/(2*c)), x] - \text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[\text{Sinh}[a + b*x + c*x^2], x], x] /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{NeQ}[b*e - 2*c*d, 0]$

3.12.4 Maple [C] (verified)

Result contains complex when optimal does not.

Time = 0.39 (sec), antiderivative size = 49, normalized size of antiderivative = 0.94

method	result	size
risch	$\frac{e^{-\frac{(1+2x)^2}{4}}}{4} + \frac{\text{erf}(\frac{1}{2}+x)\sqrt{\pi}}{8} + \frac{e^{\frac{(1+2x)^2}{4}}}{4} + \frac{i\sqrt{\pi} \text{erf}(ix+\frac{1}{2}i)}{8}$	49

input `int(x*sinh(1/4+x+x^2), x, method=_RETURNVERBOSE)`

output $1/4*\text{exp}(-1/4*(1+2*x)^2)+1/8*\text{erf}(1/2+x)*\text{Pi}^{(1/2)}+1/4*\text{exp}(1/4*(1+2*x)^2)+1/8*I*\text{Pi}^{(1/2)}*\text{erf}(I*x+1/2*I)$

3.12.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 108 vs. $2(28) = 56$.

Time = 0.25 (sec), antiderivative size = 108, normalized size of antiderivative = 2.08

$$\int x \sinh \left(\frac{1}{4} + x + x^2 \right) dx \\ = \frac{2 \cosh(x^2 + x + \frac{1}{4})^2 + 4 \cosh(x^2 + x + \frac{1}{4}) \sinh(x^2 + x + \frac{1}{4}) + 2 \sinh(x^2 + x + \frac{1}{4})^2 + \sqrt{\pi}(\cosh(x^2 + x + \frac{1}{4}) - \sinh(x^2 + x + \frac{1}{4}))}{8(\cosh(x^2 + x + \frac{1}{4}) + \sinh(x^2 + x + \frac{1}{4}))}$$

input `integrate(x*sinh(1/4+x+x^2),x, algorithm="fricas")`

output `1/8*(2*cosh(x^2 + x + 1/4)^2 + 4*cosh(x^2 + x + 1/4)*sinh(x^2 + x + 1/4) + 2*sinh(x^2 + x + 1/4)^2 + sqrt(pi)*(cosh(x^2 + x + 1/4)*erf(x + 1/2) - cosh(x^2 + x + 1/4)*erfi(x + 1/2) + (erf(x + 1/2) - erfi(x + 1/2))*sinh(x^2 + x + 1/4)) + 2)/(cosh(x^2 + x + 1/4) + sinh(x^2 + x + 1/4))`

3.12.6 Sympy [F]

$$\int x \sinh \left(\frac{1}{4} + x + x^2 \right) dx = \int x \sinh \left(x^2 + x + \frac{1}{4} \right) dx$$

input `integrate(x*sinh(1/4+x+x**2),x)`

output `Integral(x*sinh(x**2 + x + 1/4), x)`

3.12.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 123 vs. $2(28) = 56$.

Time = 0.27 (sec) , antiderivative size = 123, normalized size of antiderivative = 2.37

$$\begin{aligned} \int x \sinh\left(\frac{1}{4} + x + x^2\right) dx &= \frac{1}{2} x^2 \sinh\left(x^2 + x + \frac{1}{4}\right) - \frac{(2x+1)^3 \Gamma\left(\frac{3}{2}, \frac{1}{4}(2x+1)^2\right)}{4((2x+1)^2)^{\frac{3}{2}}} \\ &\quad - \frac{(2x+1)^3 \Gamma\left(\frac{3}{2}, -\frac{1}{4}(2x+1)^2\right)}{4(-(2x+1)^2)^{\frac{3}{2}}} \\ &\quad - \frac{1}{16} e^{\left(\frac{1}{4}(2x+1)^2\right)} + \frac{1}{16} e^{\left(-\frac{1}{4}(2x+1)^2\right)} \\ &\quad + \frac{1}{4} \Gamma\left(2, \frac{1}{4}(2x+1)^2\right) + \frac{1}{4} \Gamma\left(2, -\frac{1}{4}(2x+1)^2\right) \end{aligned}$$

```
input integrate(x*sinh(1/4+x+x^2),x, algorithm="maxima")
```

```
output 1/2*x^2*sinh(x^2 + x + 1/4) - 1/4*(2*x + 1)^3*gamma(3/2, 1/4*(2*x + 1)^2)/
((2*x + 1)^2)^(3/2) - 1/4*(2*x + 1)^3*gamma(3/2, -1/4*(2*x + 1)^2)/(-(2*x
+ 1)^2)^(3/2) - 1/16*e^(1/4*(2*x + 1)^2) + 1/16*e^(-1/4*(2*x + 1)^2) + 1/4
*gamma(2, 1/4*(2*x + 1)^2) + 1/4*gamma(2, -1/4*(2*x + 1)^2)
```

3.12.8 Giac [C] (verification not implemented)

Result contains complex when optimal does not.

Time = 0.28 (sec) , antiderivative size = 43, normalized size of antiderivative = 0.83

$$\begin{aligned} \int x \sinh\left(\frac{1}{4} + x + x^2\right) dx &= \frac{1}{8} \sqrt{\pi} \operatorname{erf}\left(x + \frac{1}{2}\right) - \frac{1}{8} i \sqrt{\pi} \operatorname{erf}\left(-ix - \frac{1}{2}i\right) \\ &\quad + \frac{1}{4} e^{(x^2+x+\frac{1}{4})} + \frac{1}{4} e^{(-x^2-x-\frac{1}{4})} \end{aligned}$$

```
input integrate(x*sinh(1/4+x+x^2),x, algorithm="giac")
```

```
output 1/8*sqrt(pi)*erf(x + 1/2) - 1/8*I*sqrt(pi)*erf(-Ix - 1/2*I) + 1/4*e^(x^2
+ x + 1/4) + 1/4*e^(-x^2 - x - 1/4)
```

3.12.9 Mupad [F(-1)]

Timed out.

$$\int x \sinh\left(\frac{1}{4} + x + x^2\right) dx = \int x \sinh\left(x^2 + x + \frac{1}{4}\right) dx$$

input `int(x*sinh(x + x^2 + 1/4),x)`

output `int(x*sinh(x + x^2 + 1/4), x)`

3.13 $\int \sinh\left(\frac{1}{4} + x + x^2\right) dx$

3.13.1	Optimal result	110
3.13.2	Mathematica [A] (verified)	110
3.13.3	Rubi [A] (verified)	111
3.13.4	Maple [C] (verified)	112
3.13.5	Fricas [A] (verification not implemented)	112
3.13.6	Sympy [F]	113
3.13.7	Maxima [B] (verification not implemented)	113
3.13.8	Giac [C] (verification not implemented)	113
3.13.9	Mupad [F(-1)]	114

3.13.1 Optimal result

Integrand size = 9, antiderivative size = 39

$$\int \sinh\left(\frac{1}{4} + x + x^2\right) dx = \frac{1}{4}\sqrt{\pi}\text{erf}\left(\frac{1}{2}(-1 - 2x)\right) + \frac{1}{4}\sqrt{\pi}\text{erfi}\left(\frac{1}{2}(1 + 2x)\right)$$

output `-1/4*erf(1/2+x)*Pi^(1/2)+1/4*erfi(1/2+x)*Pi^(1/2)`

3.13.2 Mathematica [A] (verified)

Time = 0.02 (sec), antiderivative size = 24, normalized size of antiderivative = 0.62

$$\int \sinh\left(\frac{1}{4} + x + x^2\right) dx = \frac{1}{4}\sqrt{\pi}\left(-\text{erf}\left(\frac{1}{2} + x\right) + \text{erfi}\left(\frac{1}{2} + x\right)\right)$$

input `Integrate[Sinh[1/4 + x + x^2], x]`

output `(Sqrt[Pi]*(-Erf[1/2 + x] + Erfi[1/2 + x]))/4`

3.13.3 Rubi [A] (verified)

Time = 0.23 (sec), antiderivative size = 39, normalized size of antiderivative = 1.00, number of steps used = 4, number of rules used = 4, $\frac{\text{number of rules}}{\text{integrand size}} = 0.444$, Rules used = {5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \sinh\left(x^2 + x + \frac{1}{4}\right) dx \\
 & \downarrow \textcolor{blue}{5897} \\
 & \frac{1}{2} \int e^{x^2+x+\frac{1}{4}} dx - \frac{1}{2} \int e^{-x^2-x-\frac{1}{4}} dx \\
 & \downarrow \textcolor{blue}{2664} \\
 & \frac{1}{2} \int e^{\frac{1}{4}(2x+1)^2} dx - \frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx \\
 & \downarrow \textcolor{blue}{2633} \\
 & \frac{1}{4}\sqrt{\pi}\operatorname{erfi}\left(\frac{1}{2}(2x+1)\right) - \frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx \\
 & \downarrow \textcolor{blue}{2634} \\
 & \frac{1}{4}\sqrt{\pi}\operatorname{erfi}\left(\frac{1}{2}(2x+1)\right) - \frac{1}{4}\sqrt{\pi}\operatorname{erf}\left(\frac{1}{2}(2x+1)\right)
 \end{aligned}$$

input `Int[Sinh[1/4 + x + x^2], x]`

output `-1/4*(Sqrt[Pi]*Erf[(1 + 2*x)/2]) + (Sqrt[Pi]*Erfi[(1 + 2*x)/2])/4`

3.13.3.1 Definitions of rubi rules used

rule 2633 `Int[(F_)^((a_.) + (b_.)*((c_.) + (d_.)*(x_)^2), x_Symbol] :> Simp[F^a*Sqrt[Pi]*(Erfi[(c + d*x)*Rt[b*Log[F], 2]]/(2*d*Rt[b*Log[F], 2])), x] /; FreeQ[{F, a, b, c, d}, x] && PosQ[b]`

rule 2634 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*((c_{_}) + (d_{_})*(x_{_}))^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \sqrt{\pi} * (\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*x_{_} + (c_{_})*x_{_}^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c))}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\sinh((a_{_}) + (b_{_})*x_{_} + (c_{_})*x_{_}^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[e^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[e^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

3.13.4 Maple [C] (verified)

Result contains complex when optimal does not.

Time = 0.39 (sec) , antiderivative size = 25, normalized size of antiderivative = 0.64

method	result	size
risch	$-\frac{\text{erf}(\frac{1}{2}+x)\sqrt{\pi}}{4} - \frac{i\sqrt{\pi} \text{erf}(ix+\frac{1}{2}i)}{4}$	25

input `int(sinh(1/4+x+x^2),x,method=_RETURNVERBOSE)`

output `-1/4*erf(1/2+x)*Pi^(1/2)-1/4*I*Pi^(1/2)*erf(I*x+1/2*I)`

3.13.5 Fricas [A] (verification not implemented)

Time = 0.25 (sec) , antiderivative size = 16, normalized size of antiderivative = 0.41

$$\int \sinh\left(\frac{1}{4} + x + x^2\right) dx = -\frac{1}{4} \sqrt{\pi} \left(\text{erf}\left(x + \frac{1}{2}\right) - \text{erfi}\left(x + \frac{1}{2}\right) \right)$$

input `integrate(sinh(1/4+x+x^2),x, algorithm="fricas")`

output `-1/4*sqrt(pi)*(erf(x + 1/2) - erfi(x + 1/2))`

3.13.6 Sympy [F]

$$\int \sinh\left(\frac{1}{4} + x + x^2\right) dx = \int \sinh\left(x^2 + x + \frac{1}{4}\right) dx$$

input `integrate(sinh(1/4+x+x**2),x)`

output `Integral(sinh(x**2 + x + 1/4), x)`

3.13.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 94 vs. $2(19) = 38$.

Time = 0.26 (sec) , antiderivative size = 94, normalized size of antiderivative = 2.41

$$\begin{aligned} \int \sinh\left(\frac{1}{4} + x + x^2\right) dx &= \frac{(2x+1)^3 \Gamma(\frac{3}{2}, \frac{1}{4}(2x+1)^2)}{2((2x+1)^2)^{\frac{3}{2}}} + \frac{(2x+1)^3 \Gamma(\frac{3}{2}, -\frac{1}{4}(2x+1)^2)}{2(-(2x+1)^2)^{\frac{3}{2}}} \\ &\quad + x \sinh\left(x^2 + x + \frac{1}{4}\right) + \frac{1}{4} e^{(\frac{1}{4}(2x+1)^2)} - \frac{1}{4} e^{(-\frac{1}{4}(2x+1)^2)} \end{aligned}$$

input `integrate(sinh(1/4+x+x^2),x, algorithm="maxima")`

output `1/2*(2*x + 1)^3*gamma(3/2, 1/4*(2*x + 1)^2)/((2*x + 1)^2)^(3/2) + 1/2*(2*x + 1)^3*gamma(3/2, -1/4*(2*x + 1)^2)/(-(2*x + 1)^2)^(3/2) + x*sinh(x^2 + x + 1/4) + 1/4*e^(1/4*(2*x + 1)^2) - 1/4*e^(-1/4*(2*x + 1)^2)`

3.13.8 Giac [C] (verification not implemented)

Result contains complex when optimal does not.

Time = 0.27 (sec) , antiderivative size = 21, normalized size of antiderivative = 0.54

$$\int \sinh\left(\frac{1}{4} + x + x^2\right) dx = -\frac{1}{4} \sqrt{\pi} \operatorname{erf}\left(x + \frac{1}{2}\right) + \frac{1}{4} i \sqrt{\pi} \operatorname{erf}\left(-ix - \frac{1}{2}i\right)$$

input `integrate(sinh(1/4+x+x^2),x, algorithm="giac")`

output `-1/4*sqrt(pi)*erf(x + 1/2) + 1/4*I*sqrt(pi)*erf(-I*x - 1/2*I)`

3.13.9 Mupad [F(-1)]

Timed out.

$$\int \sinh\left(\frac{1}{4} + x + x^2\right) dx = \int \sinh\left(x^2 + x + \frac{1}{4}\right) dx$$

input `int(sinh(x + x^2 + 1/4),x)`

output `int(sinh(x + x^2 + 1/4), x)`

3.14 $\int \frac{\sinh\left(\frac{1}{4}+x+x^2\right)}{x} dx$

3.14.1	Optimal result	115
3.14.2	Mathematica [N/A]	115
3.14.3	Rubi [N/A]	116
3.14.4	Maple [N/A] (verified)	116
3.14.5	Fricas [N/A]	117
3.14.6	Sympy [N/A]	117
3.14.7	Maxima [N/A]	117
3.14.8	Giac [N/A]	118
3.14.9	Mupad [N/A]	118

3.14.1 Optimal result

Integrand size = 13, antiderivative size = 13

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} dx = \text{Int}\left(\frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x}, x\right)$$

output `Unintegrable(sinh(1/4+x+x^2)/x,x)`

3.14.2 Mathematica [N/A]

Not integrable

Time = 6.33 (sec) , antiderivative size = 15, normalized size of antiderivative = 1.15

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} dx$$

input `Integrate[Sinh[1/4 + x + x^2]/x,x]`

output `Integrate[Sinh[1/4 + x + x^2]/x, x]`

3.14.3 Rubi [N/A]

Not integrable

Time = 0.16 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00, number of steps used = 1, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {5915}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{\sinh(x^2 + x + \frac{1}{4})}{x} dx$$

↓ 5915

$$\int \frac{\sinh(x^2 + x + \frac{1}{4})}{x} dx$$

input `Int[Sinh[1/4 + x + x^2]/x, x]`

output `$Aborted`

3.14.3.1 Definitions of rubi rules used

rule 5915 `Int[((d_.) + (e_ .)*(x_))^(m_ .)*Sinh[(a_ .) + (b_ .)*(x_) + (c_ .)*(x_)^2], x_Symbol] :> Unintegrable[(d + e*x)^m*Sinh[a + b*x + c*x^2], x] /; FreeQ[{a, b, c, d, e, m}, x]`

3.14.4 Maple [N/A] (verified)

Not integrable

Time = 0.24 (sec) , antiderivative size = 11, normalized size of antiderivative = 0.85

$$\int \frac{\sinh(\frac{1}{4} + x + x^2)}{x} dx$$

input `int(sinh(1/4+x+x^2)/x, x)`

output `int(sinh(1/4+x+x^2)/x, x)`

3.14.5 Fricas [N/A]

Not integrable

Time = 0.24 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x} dx$$

input `integrate(sinh(1/4+x+x^2)/x,x, algorithm="fricas")`

output `integral(sinh(x^2 + x + 1/4)/x, x)`

3.14.6 Sympy [N/A]

Not integrable

Time = 0.59 (sec) , antiderivative size = 12, normalized size of antiderivative = 0.92

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x} dx$$

input `integrate(sinh(1/4+x+x**2)/x,x)`

output `Integral(sinh(x**2 + x + 1/4)/x, x)`

3.14.7 Maxima [N/A]

Not integrable

Time = 0.65 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x} dx$$

input `integrate(sinh(1/4+x+x^2)/x,x, algorithm="maxima")`

output `integrate(sinh(x^2 + x + 1/4)/x, x)`

3.14.8 Giac [N/A]

Not integrable

Time = 0.27 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x} dx$$

input `integrate(sinh(1/4+x+x^2)/x,x, algorithm="giac")`

output `integrate(sinh(x^2 + x + 1/4)/x, x)`

3.14.9 Mupad [N/A]

Not integrable

Time = 1.09 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x} dx$$

input `int(sinh(x + x^2 + 1/4)/x,x)`

output `int(sinh(x + x^2 + 1/4)/x, x)`

3.15 $\int \frac{\sinh\left(\frac{1}{4}+x+x^2\right)}{x^2} dx$

3.15.1	Optimal result	119
3.15.2	Mathematica [N/A]	119
3.15.3	Rubi [N/A]	120
3.15.4	Maple [N/A] (verified)	121
3.15.5	Fricas [N/A]	122
3.15.6	Sympy [N/A]	122
3.15.7	Maxima [N/A]	122
3.15.8	Giac [N/A]	123
3.15.9	Mupad [N/A]	123

3.15.1 Optimal result

Integrand size = 13, antiderivative size = 13

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x^2} dx = -\frac{1}{2}\sqrt{\pi}\operatorname{erf}\left(\frac{1}{2}(-1 - 2x)\right) + \frac{1}{2}\sqrt{\pi}\operatorname{erfi}\left(\frac{1}{2}(1 + 2x)\right) - \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x} + \operatorname{Int}\left(\frac{\cosh\left(\frac{1}{4} + x + x^2\right)}{x}, x\right)$$

output `-sinh(1/4+x+x^2)/x+1/2*erf(1/2+x)*Pi^(1/2)+1/2*erfi(1/2+x)*Pi^(1/2)+Unintegrable(cosh(1/4+x+x^2)/x,x)`

3.15.2 Mathematica [N/A]

Not integrable

Time = 8.13 (sec) , antiderivative size = 15, normalized size of antiderivative = 1.15

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x^2} dx = \int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x^2} dx$$

input `Integrate[Sinh[1/4 + x + x^2]/x^2, x]`

output `Integrate[Sinh[1/4 + x + x^2]/x^2, x]`

3.15. $\int \frac{\sinh\left(\frac{1}{4}+x+x^2\right)}{x^2} dx$

3.15.3 Rubi [N/A]

Not integrable

Time = 0.40 (sec), antiderivative size = 13, normalized size of antiderivative = 1.00, number of steps used = 6, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {5913, 5898, 2664, 2633, 2634, 5916}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{\sinh(x^2 + x + \frac{1}{4})}{x^2} dx \\
 & \quad \downarrow \textcolor{blue}{5913} \\
 & 2 \int \cosh\left(x^2 + x + \frac{1}{4}\right) dx + \int \frac{\cosh(x^2 + x + \frac{1}{4})}{x} dx - \frac{\sinh(x^2 + x + \frac{1}{4})}{x} \\
 & \quad \downarrow \textcolor{blue}{5898} \\
 & 2\left(\frac{1}{2} \int e^{-x^2-x-\frac{1}{4}} dx + \frac{1}{2} \int e^{x^2+x+\frac{1}{4}} dx\right) + \int \frac{\cosh(x^2 + x + \frac{1}{4})}{x} dx - \frac{\sinh(x^2 + x + \frac{1}{4})}{x} \\
 & \quad \downarrow \textcolor{blue}{2664} \\
 & \int \frac{\cosh(x^2 + x + \frac{1}{4})}{x} dx + 2\left(\frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx + \frac{1}{2} \int e^{\frac{1}{4}(2x+1)^2} dx\right) - \frac{\sinh(x^2 + x + \frac{1}{4})}{x} \\
 & \quad \downarrow \textcolor{blue}{2633} \\
 & 2\left(\frac{1}{2} \int e^{-\frac{1}{4}(2x+1)^2} dx + \frac{1}{4}\sqrt{\pi} \operatorname{erfi}\left(\frac{1}{2}(2x+1)\right)\right) + \int \frac{\cosh(x^2 + x + \frac{1}{4})}{x} dx - \frac{\sinh(x^2 + x + \frac{1}{4})}{x} \\
 & \quad \downarrow \textcolor{blue}{2634} \\
 & \int \frac{\cosh(x^2 + x + \frac{1}{4})}{x} dx + 2\left(\frac{1}{4}\sqrt{\pi} \operatorname{erf}\left(\frac{1}{2}(2x+1)\right) + \frac{1}{4}\sqrt{\pi} \operatorname{erfi}\left(\frac{1}{2}(2x+1)\right)\right) - \frac{\sinh(x^2 + x + \frac{1}{4})}{x} \\
 & \quad \downarrow \textcolor{blue}{5916} \\
 & \int \frac{\cosh(x^2 + x + \frac{1}{4})}{x} dx + 2\left(\frac{1}{4}\sqrt{\pi} \operatorname{erf}\left(\frac{1}{2}(2x+1)\right) + \frac{1}{4}\sqrt{\pi} \operatorname{erfi}\left(\frac{1}{2}(2x+1)\right)\right) - \frac{\sinh(x^2 + x + \frac{1}{4})}{x}
 \end{aligned}$$

input `Int[Sinh[1/4 + x + x^2]/x^2, x]`

output `$Aborted`

3.15.3.1 Definitions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erfi}[(c + d*x)*\text{Rt}[b*\text{Log}[F], 2]]/(2*d*\text{Rt}[b*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c))}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5898 $\text{Int}[\text{Cosh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] + \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5913 $\text{Int}[((d_{_}) + (e_{_})*(x_{_}))^{(m_{_})} * \text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[(d + e*x)^{(m + 1)} * (\text{Sinh}[a + b*x + c*x^2]/(e*(m + 1))), x] + (-\text{Simp}[(b*e - 2*c*d)/(e^2*(m + 1)) \text{Int}[(d + e*x)^{(m + 1)} * \text{Cosh}[a + b*x + c*x^2], x], x] - \text{Simp}[2*(c/(e^2*(m + 1))) \text{Int}[(d + e*x)^{(m + 2)} * \text{Cosh}[a + b*x + c*x^2], x], x]) /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{LtQ}[m, -1] \&& \text{NeQ}[b*e - 2*c*d, 0]$

rule 5916 $\text{Int}[\text{Cosh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2] * ((d_{_}) + (e_{_})*(x_{_}))^{(m_{_})}, x_{\text{Symbol}}] \rightarrow \text{Unintegrable}[(d + e*x)^m * \text{Cosh}[a + b*x + c*x^2], x] /; \text{FreeQ}[\{a, b, c, d, e, m\}, x]$

3.15.4 Maple [N/A] (verified)

Not integrable

Time = 0.26 (sec) , antiderivative size = 11, normalized size of antiderivative = 0.85

$$\int \frac{\sinh(\frac{1}{4} + x + x^2)}{x^2} dx$$

input `int(sinh(1/4+x+x^2)/x^2,x)`

3.15. $\int \frac{\sinh(\frac{1}{4} + x + x^2)}{x^2} dx$

output `int(sinh(1/4+x+x^2)/x^2,x)`

3.15.5 Fricas [N/A]

Not integrable

Time = 0.26 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x^2} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x^2} dx$$

input `integrate(sinh(1/4+x+x^2)/x^2,x, algorithm="fricas")`

output `integral(sinh(x^2 + x + 1/4)/x^2, x)`

3.15.6 Sympy [N/A]

Not integrable

Time = 0.42 (sec) , antiderivative size = 14, normalized size of antiderivative = 1.08

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x^2} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x^2} dx$$

input `integrate(sinh(1/4+x+x**2)/x**2,x)`

output `Integral(sinh(x**2 + x + 1/4)/x**2, x)`

3.15.7 Maxima [N/A]

Not integrable

Time = 0.48 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x^2} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x^2} dx$$

input `integrate(sinh(1/4+x+x^2)/x^2,x, algorithm="maxima")`

output `integrate(sinh(x^2 + x + 1/4)/x^2, x)`

3.15. $\int \frac{\sinh(\frac{1}{4}+x+x^2)}{x^2} dx$

3.15.8 Giac [N/A]

Not integrable

Time = 0.29 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x^2} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x^2} dx$$

input `integrate(sinh(1/4+x+x^2)/x^2,x, algorithm="giac")`

output `integrate(sinh(x^2 + x + 1/4)/x^2, x)`

3.15.9 Mupad [N/A]

Not integrable

Time = 1.11 (sec) , antiderivative size = 13, normalized size of antiderivative = 1.00

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)}{x^2} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)}{x^2} dx$$

input `int(sinh(x + x^2 + 1/4)/x^2,x)`

output `int(sinh(x + x^2 + 1/4)/x^2, x)`

3.16 $\int x^2 \sinh^2(a + bx + cx^2) dx$

3.16.1 Optimal result	124
3.16.2 Mathematica [A] (verified)	125
3.16.3 Rubi [A] (verified)	125
3.16.4 Maple [A] (verified)	126
3.16.5 Fricas [B] (verification not implemented)	127
3.16.6 Sympy [F]	128
3.16.7 Maxima [A] (verification not implemented)	128
3.16.8 Giac [A] (verification not implemented)	129
3.16.9 Mupad [F(-1)]	129

3.16.1 Optimal result

Integrand size = 17, antiderivative size = 268

$$\begin{aligned} \int x^2 \sinh^2(a + bx + cx^2) dx = & -\frac{x^3}{6} + \frac{b^2 e^{-2a+\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} + \frac{e^{-2a+\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} \\ & + \frac{b^2 e^{2a-\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} - \frac{e^{2a-\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} \\ & - \frac{b \sinh(2a + 2bx + 2cx^2)}{16c^2} + \frac{x \sinh(2a + 2bx + 2cx^2)}{8c} \end{aligned}$$

```
output -1/6*x^3-1/16*b*sinh(2*c*x^2+2*b*x+2*a)/c^2+1/8*x*sinh(2*c*x^2+2*b*x+2*a)/
c+1/64*b^2*exp(-2*a+1/2*b^2/c)*erf(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*
Pi^(1/2)/c^(5/2)+1/64*exp(-2*a+1/2*b^2/c)*erf(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))
)*2^(1/2)*Pi^(1/2)/c^(3/2)+1/64*b^2*exp(2*a-1/2*b^2/c)*erfi(1/2*(2*c*x+b)
*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(5/2)-1/64*exp(2*a-1/2*b^2/c)*erfi(1/
2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)
```

3.16.2 Mathematica [A] (verified)

Time = 0.54 (sec) , antiderivative size = 176, normalized size of antiderivative = 0.66

$$\int x^2 \sinh^2(a + bx + cx^2) dx \\ = \frac{3(b^2 + c) \sqrt{2\pi} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right) \left(\cosh\left(2a - \frac{b^2}{2c}\right) - \sinh\left(2a - \frac{b^2}{2c}\right)\right) + 3(b^2 - c) \sqrt{2\pi} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right) \left(\cosh\left(2a - \frac{b^2}{2c}\right) + \sinh\left(2a - \frac{b^2}{2c}\right)\right)}{192c^{5/2}}$$

input `Integrate[x^2*Sinh[a + b*x + c*x^2]^2, x]`

output `(3*(b^2 + c)*Sqrt[2*Pi]*Erf[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])]*(Cosh[2*a - b^2/(2*c)] - Sinh[2*a - b^2/(2*c)]) + 3*(b^2 - c)*Sqrt[2*Pi]*Erfi[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])]*(Cosh[2*a - b^2/(2*c)] + Sinh[2*a - b^2/(2*c)]) - 4*Sqrt[c]*(8*c^2*x^3 + 3*(b - 2*c*x)*Sinh[2*(a + x*(b + c*x))]))/(192*c^(5/2))`

3.16.3 Rubi [A] (verified)

Time = 0.47 (sec) , antiderivative size = 268, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.118$, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int x^2 \sinh^2(a + bx + cx^2) dx \\ & \downarrow 5917 \\ & \int \left(\frac{1}{2}x^2 \cosh(2a + 2bx + 2cx^2) - \frac{x^2}{2} \right) dx \\ & \downarrow 2009 \\ & \frac{\sqrt{\frac{\pi}{2}} e^{\frac{b^2}{2c}-2a} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} + \frac{\sqrt{\frac{\pi}{2}} b^2 e^{\frac{b^2}{2c}-2a} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} - \frac{\sqrt{\frac{\pi}{2}} e^{2a-\frac{b^2}{2c}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} + \\ & \frac{\sqrt{\frac{\pi}{2}} b^2 e^{2a-\frac{b^2}{2c}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} - \frac{b \sinh(2a + 2bx + 2cx^2)}{16c^2} + \frac{x \sinh(2a + 2bx + 2cx^2)}{8c} - \frac{x^3}{6} \end{aligned}$$

input `Int[x^2*Sinh[a + b*x + c*x^2]^2, x]`

3.16. $\int x^2 \sinh^2(a + bx + cx^2) dx$

```
output -1/6*x^3 + (b^2*E^(-2*a + b^2/(2*c))*Sqrt[Pi/2]*Erf[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(32*c^(5/2)) + (E^(-2*a + b^2/(2*c))*Sqrt[Pi/2]*Erf[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(32*c^(3/2)) + (b^2*E^(2*a - b^2/(2*c))*Sqrt[Pi/2]*Erfi[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(32*c^(5/2)) - (E^(2*a - b^2/(2*c))*Sqrt[Pi/2]*Erfi[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(32*c^(3/2)) - (b*Sinh[2*a + 2*b*x + 2*c*x^2])/(16*c^2) + (x*Sinh[2*a + 2*b*x + 2*c*x^2])/(8*c)
```

3.16.3.1 Defintions of rubi rules used

```
rule 2009 Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]
```

```
rule 5917 Int[((d_.) + (e_)*(x_))^(m_)*Sinh[(a_.) + (b_)*(x_) + (c_)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]
```

3.16.4 Maple [A] (verified)

Time = 0.85 (sec), antiderivative size = 281, normalized size of antiderivative = 1.05

method	result
risch	$-\frac{x^3}{6} - \frac{x e^{-2c x^2-2bx-2a}}{16c} + \frac{b e^{-2c x^2-2bx-2a}}{32c^2} + \frac{b^2 \sqrt{\pi} e^{-\frac{4ac-b^2}{2c}} \sqrt{2} \operatorname{erf}\left(\sqrt{2} \sqrt{c} x + \frac{b \sqrt{2}}{2 \sqrt{c}}\right)}{64c^{\frac{5}{2}}} + \frac{\sqrt{\pi} e^{-\frac{4ac-b^2}{2c}} \sqrt{2} \operatorname{erf}\left(\sqrt{2} \sqrt{c} x + \frac{b \sqrt{2}}{2 \sqrt{c}}\right)}{64c^{\frac{3}{2}}}$

```
input int(x^2*sinh(c*x^2+b*x+a)^2,x,method=_RETURNVERBOSE)
```

```
output -1/6*x^3-1/16*c*x*exp(-2*c*x^2-2*b*x-2*a)+1/32*b/c^2*exp(-2*c*x^2-2*b*x-2*a)+1/64*b^2/c^(5/2)*Pi^(1/2)*exp(-1/2*(4*a*c-b^2)/c)*2^(1/2)*erf(2^(1/2)*c^(1/2)*x+1/2*b*2^(1/2)/c^(1/2))+1/64/c^(3/2)*Pi^(1/2)*exp(-1/2*(4*a*c-b^2)/c)*2^(1/2)*erf(2^(1/2)*c^(1/2)*x+1/2*b*2^(1/2)/c^(1/2))+1/16/c*x*exp(2*c*x^2+2*b*x+2*a)-1/32*b/c^2*exp(2*c*x^2+2*b*x+2*a)-1/32*b^2/c^2*Pi^(1/2)*exp(1/2*(4*a*c-b^2)/c)/(-2*c)^(1/2)*erf(-(-2*c)^(1/2)*x+b/(-2*c)^(1/2))+1/32*c*Pi^(1/2)*exp(1/2*(4*a*c-b^2)/c)/(-2*c)^(1/2)*erf(-(-2*c)^(1/2)*x+b/(-2*c)^(1/2))
```

3.16.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 766 vs. $2(210) = 420$.

Time = 0.26 (sec), antiderivative size = 766, normalized size of antiderivative = 2.86

$$\int x^2 \sinh^2(a + bx + cx^2) dx =$$

$$\frac{32 c^3 x^3 \cosh(cx^2 + bx + a)^2 - 6(2c^2x - bc) \cosh(cx^2 + bx + a)^4 - 24(2c^2x - bc) \cosh(cx^2 + bx + a)}{32 c^3 x^3 \cosh(cx^2 + bx + a)^2 - 6(2c^2x - bc) \cosh(cx^2 + bx + a)^4 - 24(2c^2x - bc) \cosh(cx^2 + bx + a)}$$

input `integrate(x^2*sinh(c*x^2+b*x+a)^2,x, algorithm="fricas")`

output

$$\begin{aligned} & -1/192*(32*c^3*x^3*cosh(c*x^2 + b*x + a)^2 - 6*(2*c^2*x - b*c)*cosh(c*x^2 + b*x + a)^4 - 24*(2*c^2*x - b*c)*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a)^3 - 6*(2*c^2*x - b*c)*sinh(c*x^2 + b*x + a)^4 + 3*sqrt(2)*sqrt(pi)*((b^2 - c)*cosh(c*x^2 + b*x + a)^2*cosh(-1/2*(b^2 - 4*a*c)/c) + (b^2 - c)*cosh(c*x^2 + b*x + a)^2*sinh(-1/2*(b^2 - 4*a*c)/c) + ((b^2 - c)*cosh(-1/2*(b^2 - 4*a*c)/c) + (b^2 - c)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)^2 + 2*((b^2 - c)*cosh(c*x^2 + b*x + a)*cosh(-1/2*(b^2 - 4*a*c)/c) + (b^2 - c)*cosh(c*x^2 + b*x + a)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)*sqrt(-c)*erf(1/2*sqrt(2)*(2*c*x + b)*sqrt(-c)/c) - 3*sqrt(2)*sqrt(pi)*((b^2 + c)*cosh(c*x^2 + b*x + a)^2*cosh(-1/2*(b^2 - 4*a*c)/c) - (b^2 + c)*cosh(c*x^2 + b*x + a)^2*sinh(-1/2*(b^2 - 4*a*c)/c) + ((b^2 + c)*cosh(-1/2*(b^2 - 4*a*c)/c) - (b^2 + c)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)^2 + 2*((b^2 + c)*cosh(c*x^2 + b*x + a)*cosh(-1/2*(b^2 - 4*a*c)/c) - (b^2 + c)*cosh(c*x^2 + b*x + a)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)*sqrt(c)*erf(1/2*sqrt(2)*(2*c*x + b)/sqrt(c)) + 12*c^2*x + 4*(8*c^3*x^3 - 9*(2*c^2*x - b*c)*cosh(c*x^2 + b*x + a)^2)*sinh(c*x^2 + b*x + a)^2 - 6*b*c + 8*(8*c^3*x^3*cosh(c*x^2 + b*x + a) - 3*(2*c^2*x - b*c)*cosh(c*x^2 + b*x + a)^3)*sinh(c*x^2 + b*x + a))/(c^3*cosh(c*x^2 + b*x + a)^2 + 2*c^3*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a) + c^3*sinh(c*x^2 + b*x + a)^2) \end{aligned}$$

3.16.6 Sympy [F]

$$\int x^2 \sinh^2(a + bx + cx^2) dx = \int x^2 \sinh^2(a + bx + cx^2) dx$$

input `integrate(x**2*sinh(c*x**2+b*x+a)**2,x)`

output `Integral(x**2*sinh(a + b*x + c*x**2)**2, x)`

3.16.7 Maxima [A] (verification not implemented)

Time = 0.30 (sec), antiderivative size = 294, normalized size of antiderivative = 1.10

$$\begin{aligned} \int x^2 \sinh^2(a + bx + cx^2) dx &= -\frac{1}{6} x^3 \\ &+ \frac{\sqrt{2} \left(\frac{\sqrt{\pi} (2cx+b)b^2 \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{-\frac{(2cx+b)^2}{c}} \right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{5}{2}}} - \frac{2\sqrt{2}be^{\left(\frac{(2cx+b)^2}{2c}\right)}}{c^{\frac{3}{2}}} - \frac{2(2cx+b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{2c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} c^{\frac{5}{2}}} \right) e^{\left(2a - \frac{b^2}{2c}\right)}}{64\sqrt{c}} \\ &- \frac{\sqrt{2} \left(\frac{\sqrt{\pi} (2cx+b)b^2 \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{\frac{(2cx+b)^2}{c}} \right) - 1 \right)}{\sqrt{\frac{(2cx+b)^2}{c}} (-c)^{\frac{5}{2}}} + \frac{2\sqrt{2}bce^{\left(-\frac{(2cx+b)^2}{2c}\right)}}{(-c)^{\frac{5}{2}}} - \frac{2(2cx+b)^3 \Gamma\left(\frac{3}{2}, \frac{(2cx+b)^2}{2c}\right)}{\left(\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} (-c)^{\frac{5}{2}}} \right) e^{\left(-2a + \frac{b^2}{2c}\right)}}{64\sqrt{-c}} \end{aligned}$$

input `integrate(x^2*sinh(c*x^2+b*x+a)^2,x, algorithm="maxima")`

output `-1/6*x^3 + 1/64*sqrt(2)*(sqrt(pi)*(2*c*x + b)*b^2*(erf(sqrt(1/2)*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(5/2)) - 2*sqrt(2)*b*e^(1/2*(2*c*x + b)^2/c)/c^(3/2) - 2*(2*c*x + b)^3*gamma(3/2, -1/2*(2*c*x + b)^2/c)/((-(2*c*x + b)^2/c)^(3/2)*c^(5/2))*e^(2*a - 1/2*b^2/c)/sqrt(c) - 1/64*sqrt(2)*(sqrt(pi)*(2*c*x + b)*b^2*(erf(sqrt(1/2)*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(5/2)) + 2*sqrt(2)*b*c*e^(-1/2*(2*c*x + b)^2/c)/(-c)^(5/2) - 2*(2*c*x + b)^3*gamma(3/2, 1/2*(2*c*x + b)^2/c)/(((2*c*x + b)^2/c)^(3/2)*(-c)^(5/2))*e^(-2*a + 1/2*b^2/c)/sqrt(-c))`

3.16.8 Giac [A] (verification not implemented)

Time = 0.29 (sec) , antiderivative size = 182, normalized size of antiderivative = 0.68

$$\int x^2 \sinh^2(a + bx + cx^2) dx$$

$$= -\frac{1}{6}x^3 - \frac{\frac{\sqrt{2}\sqrt{\pi}(b^2+c)\operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{c}\left(2x+\frac{b}{c}\right)\right)e^{\left(\frac{b^2-4ac}{2c}\right)}}{\sqrt{c}} + 2(c(2x+\frac{b}{c})-2b)e^{(-2cx^2-2bx-2a)}}{64c^2}$$

$$- \frac{\frac{\sqrt{2}\sqrt{\pi}(b^2-c)\operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{-c}\left(2x+\frac{b}{c}\right)\right)e^{\left(-\frac{b^2-4ac}{2c}\right)}}{\sqrt{-c}} - 2(c(2x+\frac{b}{c})-2b)e^{(2cx^2+2bx+2a)}}{64c^2}$$

input `integrate(x^2*sinh(c*x^2+b*x+a)^2,x, algorithm="giac")`

output `-1/6*x^3 - 1/64*(sqrt(2)*sqrt(pi)*(b^2 + c)*erf(-1/2*sqrt(2)*sqrt(c)*(2*x + b/c))*e^(1/2*(b^2 - 4*a*c)/c)/sqrt(c) + 2*(c*(2*x + b/c) - 2*b)*e^(-2*c*x^2 - 2*b*x - 2*a))/c^2 - 1/64*(sqrt(2)*sqrt(pi)*(b^2 - c)*erf(-1/2*sqrt(2)*sqrt(-c)*(2*x + b/c))*e^(-1/2*(b^2 - 4*a*c)/c)/sqrt(-c) - 2*(c*(2*x + b/c) - 2*b)*e^(2*c*x^2 + 2*b*x + 2*a))/c^2`

3.16.9 Mupad [F(-1)]

Timed out.

$$\int x^2 \sinh^2(a + bx + cx^2) dx = \int x^2 \sinh(cx^2 + bx + a)^2 dx$$

input `int(x^2*sinh(a + b*x + c*x^2)^2,x)`

output `int(x^2*sinh(a + b*x + c*x^2)^2, x)`

3.17 $\int x \sinh^2(a + bx + cx^2) dx$

3.17.1 Optimal result	130
3.17.2 Mathematica [A] (verified)	130
3.17.3 Rubi [A] (verified)	131
3.17.4 Maple [A] (verified)	132
3.17.5 Fricas [B] (verification not implemented)	132
3.17.6 Sympy [F]	133
3.17.7 Maxima [A] (verification not implemented)	134
3.17.8 Giac [A] (verification not implemented)	134
3.17.9 Mupad [F(-1)]	135

3.17.1 Optimal result

Integrand size = 15, antiderivative size = 136

$$\begin{aligned} \int x \sinh^2(a + bx + cx^2) dx = & -\frac{x^2}{4} - \frac{be^{-2a+\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} \\ & - \frac{be^{2a-\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} + \frac{\sinh(2a + 2bx + 2cx^2)}{8c} \end{aligned}$$

output
$$-1/4*x^2+1/8*sinh(2*c*x^2+2*b*x+2*a)/c-1/32*b*exp(-2*a+1/2*b^2/c)*erf(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)-1/32*b*exp(2*a-1/2*b^2/c)*erfi(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)$$

3.17.2 Mathematica [A] (verified)

Time = 0.27 (sec), antiderivative size = 155, normalized size of antiderivative = 1.14

$$\begin{aligned} & \int x \sinh^2(a + bx + cx^2) dx \\ &= \frac{b\sqrt{2\pi}\operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)\left(-\cosh\left(2a - \frac{b^2}{2c}\right) + \sinh\left(2a - \frac{b^2}{2c}\right)\right) - b\sqrt{2\pi}\operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)\left(\cosh\left(2a - \frac{b^2}{2c}\right) + \sinh\left(2a - \frac{b^2}{2c}\right)\right)}{32c^{3/2}} \end{aligned}$$

input `Integrate[x*Sinh[a + b*x + c*x^2]^2, x]`

```
output (b*.Sqrt[2*Pi]*Erf[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])]*(-Cosh[2*a - b^2/(2*c)] +
Sinh[2*a - b^2/(2*c)]) - b*.Sqrt[2*Pi]*Erfi[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])]*
(Cosh[2*a - b^2/(2*c)] + Sinh[2*a - b^2/(2*c)]) + 4*Sqrt[c]*(-2*c*x^2 + S
inh[2*(a + x*(b + c*x))]))/(32*c^(3/2))
```

3.17.3 Rubi [A] (verified)

Time = 0.29 (sec) , antiderivative size = 136, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.133$, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int x \sinh^2(a + bx + cx^2) dx \\ & \downarrow \textcolor{blue}{5917} \\ & \int \left(\frac{1}{2}x \cosh(2a + 2bx + 2cx^2) - \frac{x}{2} \right) dx \\ & \downarrow \textcolor{blue}{2009} \\ & -\frac{\sqrt{\frac{\pi}{2}} b e^{\frac{b^2}{2c}-2a} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} - \frac{\sqrt{\frac{\pi}{2}} b e^{2a-\frac{b^2}{2c}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} + \frac{\sinh(2a + 2bx + 2cx^2)}{8c} - \frac{x^2}{4} \end{aligned}$$

```
input Int[x*Sinh[a + b*x + c*x^2]^2, x]
```

```
output -1/4*x^2 - (b*E^(-2*a + b^2/(2*c))*Sqrt[Pi/2]*Erf[(b + 2*c*x)/(Sqrt[2]*Sqr
t[c])])/(16*c^(3/2)) - (b*E^(2*a - b^2/(2*c))*Sqrt[Pi/2]*Erfi[(b + 2*c*x)/
(Sqrt[2]*Sqrt[c])])/(16*c^(3/2)) + Sinh[2*a + 2*b*x + 2*c*x^2]/(8*c)
```

3.17.3.1 Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_) + (e_)*(x_))^(m_)*Sinh[(a_) + (b_)*(x_) + (c_)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.17.4 Maple [A] (verified)

Time = 1.06 (sec), antiderivative size = 141, normalized size of antiderivative = 1.04

method	result
risch	$-\frac{x^2}{4} - \frac{e^{-2cx^2-2bx-2a}}{16c} - \frac{b\sqrt{\pi}e^{-\frac{4ac-b^2}{2c}}\sqrt{2}\operatorname{erf}\left(\sqrt{2}\sqrt{c}x+\frac{b\sqrt{2}}{2\sqrt{c}}\right)}{32c^{\frac{3}{2}}} + \frac{e^{2cx^2+2bx+2a}}{16c} + \frac{b\sqrt{\pi}e^{\frac{4ac-b^2}{2c}}\operatorname{erf}\left(-\sqrt{-2c}x+\frac{b}{\sqrt{-2c}}\right)}{16c\sqrt{-2c}}$

input `int(x*sinh(c*x^2+b*x+a)^2,x,method=_RETURNVERBOSE)`

output `-1/4*x^2-1/16/c*exp(-2*c*x^2-2*b*x-2*a)-1/32*b/c^(3/2)*Pi^(1/2)*exp(-1/2*(4*a*c-b^2)/c)*2^(1/2)*erf(2^(1/2)*c^(1/2)*x+1/2*b*2^(1/2)/c^(1/2))+1/16/c*exp(2*c*x^2+2*b*x+2*a)+1/16*b/c*Pi^(1/2)*exp(1/2*(4*a*c-b^2)/c)/(-2*c)^(1/2)*erf((-2*c)^(1/2)*x+b/(-2*c)^(1/2))`

3.17.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 648 vs. 2(106) = 212.

Time = 0.26 (sec), antiderivative size = 648, normalized size of antiderivative = 4.76

$$\int x \sinh^2(a + bx + cx^2) dx = \frac{8c^2x^2 \cosh(cx^2 + bx + a)^2 - 2c \cosh(cx^2 + bx + a)^4 - 8c \cosh(cx^2 + bx + a) \sinh(cx^2 + bx + a)^3 - 2c \cosh(cx^2 + bx + a) \sinh(cx^2 + bx + a)^5}{-}$$

input `integrate(x*sinh(c*x^2+b*x+a)^2,x, algorithm="fricas")`

```
output -1/32*(8*c^2*x^2*cosh(c*x^2 + b*x + a)^2 - 2*c*cosh(c*x^2 + b*x + a)^4 - 8
*c*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a)^3 - 2*c*sinh(c*x^2 + b*x +
a)^4 - sqrt(2)*sqrt(pi)*(b*cosh(c*x^2 + b*x + a)^2*cosh(-1/2*(b^2 - 4*a*c)
/c) + b*cosh(c*x^2 + b*x + a)^2*sinh(-1/2*(b^2 - 4*a*c)/c) + (b*cosh(-1/2*
(b^2 - 4*a*c)/c) + b*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)^2 +
2*(b*cosh(c*x^2 + b*x + a)*cosh(-1/2*(b^2 - 4*a*c)/c) + b*cosh(c*x^2 + b*
x + a)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)))*sqrt(-c)*erf(1/2
*sqrt(2)*(2*c*x + b)*sqrt(-c)/c) + sqrt(2)*sqrt(pi)*(b*cosh(c*x^2 + b*x +
a)^2*cosh(-1/2*(b^2 - 4*a*c)/c) - b*cosh(c*x^2 + b*x + a)^2*sinh(-1/2*(b^2 -
4*a*c)/c) + (b*cosh(-1/2*(b^2 - 4*a*c)/c) - b*sinh(-1/2*(b^2 - 4*a*c)/c
))*sinh(c*x^2 + b*x + a)^2 + 2*(b*cosh(c*x^2 + b*x + a)*cosh(-1/2*(b^2 - 4
*a*c)/c) - b*cosh(c*x^2 + b*x + a)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2
+ b*x + a))*sqrt(c)*erf(1/2*sqrt(2)*(2*c*x + b)/sqrt(c)) + 4*(2*c^2*x^2 -
3*c*cosh(c*x^2 + b*x + a)^2)*sinh(c*x^2 + b*x + a)^2 + 8*(2*c^2*x^2*cosh(c
*x^2 + b*x + a) - c*cosh(c*x^2 + b*x + a)^3)*sinh(c*x^2 + b*x + a) + 2*c)/
(c^2*cosh(c*x^2 + b*x + a)^2 + 2*c^2*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*
x + a) + c^2*sinh(c*x^2 + b*x + a)^2)
```

3.17.6 Sympy [F]

$$\int x \sinh^2(a + bx + cx^2) dx = \int x \sinh^2(a + bx + cx^2) dx$$

```
input integrate(x*sinh(c*x**2+b*x+a)**2,x)
```

```
output Integral(x*sinh(a + b*x + c*x**2)**2, x)
```

3.17.7 Maxima [A] (verification not implemented)

Time = 0.28 (sec) , antiderivative size = 200, normalized size of antiderivative = 1.47

$$\int x \sinh^2(a + bx + cx^2) dx$$

$$= -\frac{1}{4}x^2 - \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{-\frac{(2cx+b)^2}{c}} \right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}e^{\left(\frac{(2cx+b)^2}{2c} \right)}}{\sqrt{c}} \right) e^{\left(2a - \frac{b^2}{2c} \right)}}{32\sqrt{c}}$$

$$- \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{\frac{(2cx+b)^2}{c}} \right) - 1 \right)}{\sqrt{\frac{(2cx+b)^2}{c}} (-c)^{\frac{3}{2}}} + \frac{\sqrt{2}ce^{\left(-\frac{(2cx+b)^2}{2c} \right)}}{(-c)^{\frac{3}{2}}} \right) e^{\left(-2a + \frac{b^2}{2c} \right)}}{32\sqrt{-c}}$$

```
input integrate(x*sinh(c*x^2+b*x+a)^2,x, algorithm="maxima")
```

```
output -1/4*x^2 - 1/32*sqrt(2)*(sqrt(pi)*(2*c*x + b)*b*(erf(sqrt(1/2)*sqrt(-2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(3/2)) - sqrt(2)*e^(1/2*(2*c*x + b)^2/c)/sqrt(c)*e^(2*a - 1/2*b^2/c)/sqrt(c) - 1/32*sqrt(2)*(sqrt(pi)*(2*c*x + b)*b*(erf(sqrt(1/2)*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(3/2)) + sqrt(2)*c*e^(-1/2*(2*c*x + b)^2/c)/(-c)^(3/2))*e^(-2*a + 1/2*b^2/c)/sqrt(-c)
```

3.17.8 Giac [A] (verification not implemented)

Time = 0.27 (sec) , antiderivative size = 142, normalized size of antiderivative = 1.04

$$\int x \sinh^2(a + bx + cx^2) dx = -\frac{1}{4}x^2 + \frac{\frac{\sqrt{2}\sqrt{\pi}b \operatorname{erf} \left(-\frac{1}{2}\sqrt{2}\sqrt{c} \left(2x + \frac{b}{c} \right) \right) e^{\left(\frac{b^2 - 4ac}{2c} \right)}}{\sqrt{c}} - 2e^{(-2cx^2 - 2bx - 2a)}}{32c}$$

$$+ \frac{\frac{\sqrt{2}\sqrt{\pi}b \operatorname{erf} \left(-\frac{1}{2}\sqrt{2}\sqrt{-c} \left(2x + \frac{b}{c} \right) \right) e^{\left(-\frac{b^2 - 4ac}{2c} \right)}}{\sqrt{-c}} + 2e^{(2cx^2 + 2bx + 2a)}}{32c}$$

```
input integrate(x*sinh(c*x^2+b*x+a)^2,x, algorithm="giac")
```

```
output -1/4*x^2 + 1/32*(sqrt(2)*sqrt(pi)*b*erf(-1/2*sqrt(2)*sqrt(c)*(2*x + b/c))*e^(1/2*(b^2 - 4*a*c)/c)/sqrt(c) - 2*e^(-2*c*x^2 - 2*b*x - 2*a))/c + 1/32*(sqrt(2)*sqrt(pi)*b*erf(-1/2*sqrt(2)*sqrt(-c)*(2*x + b/c))*e^(-1/2*(b^2 - 4*a*c)/c)/sqrt(-c) + 2*e^(2*c*x^2 + 2*b*x + 2*a))/c
```

3.17.9 Mupad [F(-1)]

Timed out.

$$\int x \sinh^2(a + bx + cx^2) dx = \int x \sinh(cx^2 + bx + a)^2 dx$$

```
input int(x*sinh(a + b*x + c*x^2)^2,x)
```

```
output int(x*sinh(a + b*x + c*x^2)^2, x)
```

3.18 $\int \sinh^2(a + bx + cx^2) dx$

3.18.1 Optimal result	136
3.18.2 Mathematica [A] (verified)	136
3.18.3 Rubi [A] (verified)	137
3.18.4 Maple [A] (verified)	138
3.18.5 Fricas [A] (verification not implemented)	138
3.18.6 Sympy [F]	139
3.18.7 Maxima [A] (verification not implemented)	139
3.18.8 Giac [A] (verification not implemented)	139
3.18.9 Mupad [F(-1)]	140

3.18.1 Optimal result

Integrand size = 13, antiderivative size = 110

$$\int \sinh^2(a + bx + cx^2) dx = -\frac{x}{2} + \frac{e^{-2a+\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{8\sqrt{c}} + \frac{e^{2a-\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{8\sqrt{c}}$$

output
$$-\frac{1}{2}x + \frac{1}{16}\exp(-2a + 1/2b^2/c)\operatorname{erf}(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(1/2) + \frac{1}{16}\exp(2*a - 1/2*b^2/c)\operatorname{erfi}(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(1/2)$$

3.18.2 Mathematica [A] (verified)

Time = 0.10 (sec), antiderivative size = 140, normalized size of antiderivative = 1.27

$$\begin{aligned} & \int \sinh^2(a + bx + cx^2) dx \\ &= \frac{-4\sqrt{2}\sqrt{c}x + \sqrt{\pi}\operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)\left(\cosh\left(2a - \frac{b^2}{2c}\right) - \sinh\left(2a - \frac{b^2}{2c}\right)\right) + \sqrt{\pi}\operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)\left(\cosh\left(2a - \frac{b^2}{2c}\right) + \sinh\left(2a - \frac{b^2}{2c}\right)\right)}{8\sqrt{2}\sqrt{c}} \end{aligned}$$

input `Integrate[Sinh[a + b*x + c*x^2]^2, x]`

output
$$(-4*\sqrt{2}*\sqrt{c}*x + \sqrt{\pi}*\operatorname{Erf}[(b + 2*c*x)/(\sqrt{2}*\sqrt{c})]*(\cosh[2*a - b^2/(2*c)] - \sinh[2*a - b^2/(2*c)]) + \sqrt{\pi}*\operatorname{Erfi}[(b + 2*c*x)/(\sqrt{2}*\sqrt{c})]*(\cosh[2*a - b^2/(2*c)] + \sinh[2*a - b^2/(2*c)]))/(8*\sqrt{2}*\sqrt{c})$$

3.18.3 Rubi [A] (verified)

Time = 0.25 (sec) , antiderivative size = 110, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.154, Rules used = {5899, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \sinh^2(a + bx + cx^2) dx \\
 & \downarrow \textcolor{blue}{5899} \\
 & \int \left(\frac{1}{2} \cosh(2a + 2bx + 2cx^2) - \frac{1}{2} \right) dx \\
 & \downarrow \textcolor{blue}{2009} \\
 & \frac{\sqrt{\frac{\pi}{2}} e^{\frac{b^2}{2c}-2a} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{8\sqrt{c}} + \frac{\sqrt{\frac{\pi}{2}} e^{2a-\frac{b^2}{2c}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{8\sqrt{c}} - \frac{x}{2}
 \end{aligned}$$

input `Int[Sinh[a + b*x + c*x^2]^2, x]`

output `-1/2*x + (E^(-2*a + b^2/(2*c))*Sqrt[Pi/2]*Erf[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(8*Sqrt[c]) + (E^(2*a - b^2/(2*c))*Sqrt[Pi/2]*Erfi[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(8*Sqrt[c])`

3.18.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5899 `Int[Sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c}, x] && IGtQ[n, 1]`

3.18.4 Maple [A] (verified)

Time = 0.70 (sec) , antiderivative size = 94, normalized size of antiderivative = 0.85

method	result	size
risch	$-\frac{x}{2} + \frac{\sqrt{\pi} e^{-\frac{4ac-b^2}{2c}} \sqrt{2} \operatorname{erf}\left(\sqrt{2}\sqrt{c}x + \frac{b\sqrt{2}}{2\sqrt{c}}\right)}{16\sqrt{c}} - \frac{\sqrt{\pi} e^{\frac{4ac-b^2}{2c}} \operatorname{erf}\left(-\sqrt{-2c}x + \frac{b}{\sqrt{-2c}}\right)}{8\sqrt{-2c}}$	94

input `int(sinh(c*x^2+b*x+a)^2,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & -\frac{1}{2}x + \frac{1}{16}\pi^{1/2}e^{-1/2*(4*a*c-b^2)/c}2^{1/2}/c^{1/2}\operatorname{erf}(2^{1/2}/c^{1/2}x+1/2*2^{1/2}/c^{1/2}) \\ & -\frac{1}{8}\pi^{1/2}e^{1/2*(4*a*c-b^2)/c}/(-2*c)^{1/2}\operatorname{erf}(-(-2*c)^{1/2}*x+b/(-2*c)^{1/2}) \end{aligned}$$

3.18.5 Fricas [A] (verification not implemented)

Time = 0.25 (sec) , antiderivative size = 128, normalized size of antiderivative = 1.16

$$\int \sinh^2(a + bx + cx^2) dx = \frac{-\sqrt{2}\sqrt{\pi}\sqrt{-c}\left(\cosh\left(-\frac{b^2-4ac}{2c}\right) + \sinh\left(-\frac{b^2-4ac}{2c}\right)\right)\operatorname{erf}\left(\frac{\sqrt{2}(2cx+b)\sqrt{-c}}{2c}\right) - \sqrt{2}\sqrt{\pi}\sqrt{c}\left(\cosh\left(-\frac{b^2-4ac}{2c}\right) - \sinh\left(-\frac{b^2-4ac}{2c}\right)\right)\operatorname{erf}\left(\frac{(2cx+b)\sqrt{-c}}{2c}\right)}{16c}$$

input `integrate(sinh(c*x^2+b*x+a)^2,x, algorithm="fricas")`

output
$$\begin{aligned} & -\frac{1}{16}(\sqrt{2}\sqrt{\pi}\sqrt{-c}(\cosh(-1/2*(b^2-4*a*c)/c) + \sinh(-1/2*(b^2-4*a*c)/c))\operatorname{erf}(1/2*\sqrt{2}*(2*c*x+b)/\sqrt{-c}) - \sqrt{2}\sqrt{\pi}\sqrt{c}(\cosh(-1/2*(b^2-4*a*c)/c) - \sinh(-1/2*(b^2-4*a*c)/c))\operatorname{erf}(1/2*\sqrt{2}*(2*c*x+b)/\sqrt{c})) + 8*c*x)/c \end{aligned}$$

3.18.6 Sympy [F]

$$\int \sinh^2(a + bx + cx^2) dx = \int \sinh^2(a + bx + cx^2) dx$$

input `integrate(sinh(c*x**2+b*x+a)**2,x)`

output `Integral(sinh(a + b*x + c*x**2)**2, x)`

3.18.7 Maxima [A] (verification not implemented)

Time = 0.27 (sec), antiderivative size = 96, normalized size of antiderivative = 0.87

$$\begin{aligned} \int \sinh^2(a + bx + cx^2) dx &= \frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(\sqrt{2}\sqrt{-c}x - \frac{\sqrt{2}b}{2\sqrt{-c}}\right) e^{\left(2a - \frac{b^2}{2c}\right)}}{16\sqrt{-c}} \\ &+ \frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(\sqrt{2}\sqrt{c}x + \frac{\sqrt{2}b}{2\sqrt{c}}\right) e^{\left(-2a + \frac{b^2}{2c}\right)}}{16\sqrt{c}} - \frac{1}{2}x \end{aligned}$$

input `integrate(sinh(c*x^2+b*x+a)^2,x, algorithm="maxima")`

output `1/16*sqrt(2)*sqrt(pi)*erf(sqrt(2)*sqrt(-c)*x) - 1/2*sqrt(2)*b/sqrt(-c))*e^(2*a - 1/2*b^2/c)/sqrt(-c) + 1/16*sqrt(2)*sqrt(pi)*erf(sqrt(2)*sqrt(c)*x) + 1/2*sqrt(2)*b/sqrt(c))*e^(-2*a + 1/2*b^2/c)/sqrt(c) - 1/2*x`

3.18.8 Giac [A] (verification not implemented)

Time = 0.28 (sec), antiderivative size = 94, normalized size of antiderivative = 0.85

$$\begin{aligned} \int \sinh^2(a + bx + cx^2) dx &= -\frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{c}(2x + \frac{b}{c})\right) e^{\left(\frac{b^2-4ac}{2c}\right)}}{16\sqrt{c}} \\ &- \frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{-c}(2x + \frac{b}{c})\right) e^{\left(-\frac{b^2-4ac}{2c}\right)}}{16\sqrt{-c}} - \frac{1}{2}x \end{aligned}$$

input `integrate(sinh(c*x^2+b*x+a)^2,x, algorithm="giac")`

output
$$\begin{aligned} & -\frac{1}{16}\sqrt{2}\sqrt{\pi}\operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{c}(2x + \frac{b}{c})\right)e^{\left(\frac{1}{2}(b^2 - 4ac)/c\right)} \\ & -\frac{1}{16}\sqrt{2}\sqrt{\pi}\operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{-c}(2x + \frac{b}{c})\right)e^{\left(-\frac{1}{2}(b^2 - 4ac)/c\right)} - \frac{1}{2}x \end{aligned}$$

3.18.9 Mupad [F(-1)]

Timed out.

$$\int \sinh^2(a + bx + cx^2) dx = \int \sinh(cx^2 + bx + a)^2 dx$$

input `int(sinh(a + b*x + c*x^2)^2,x)`

output `int(sinh(a + b*x + c*x^2)^2, x)`

3.19 $\int \frac{\sinh^2(a+bx+cx^2)}{x} dx$

3.19.1	Optimal result	141
3.19.2	Mathematica [N/A]	141
3.19.3	Rubi [N/A]	142
3.19.4	Maple [N/A] (verified)	143
3.19.5	Fricas [N/A]	143
3.19.6	Sympy [N/A]	143
3.19.7	Maxima [N/A]	144
3.19.8	Giac [N/A]	144
3.19.9	Mupad [N/A]	144

3.19.1 Optimal result

Integrand size = 17, antiderivative size = 17

$$\int \frac{\sinh^2(a + bx + cx^2)}{x} dx = -\frac{\log(x)}{2} + \frac{1}{2} \text{Int}\left(\frac{\cosh(2a + 2bx + 2cx^2)}{x}, x\right)$$

output `-1/2*ln(x)+1/2*Unintegrable(cosh(2*c*x^2+2*b*x+2*a)/x,x)`

3.19.2 Mathematica [N/A]

Not integrable

Time = 12.59 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.12

$$\int \frac{\sinh^2(a + bx + cx^2)}{x} dx = \int \frac{\sinh^2(a + bx + cx^2)}{x} dx$$

input `Integrate[Sinh[a + b*x + c*x^2]^2/x, x]`

output `Integrate[Sinh[a + b*x + c*x^2]^2/x, x]`

3.19.3 Rubi [N/A]

Not integrable

Time = 0.21 (sec), antiderivative size = 17, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int \frac{\sinh^2(a + bx + cx^2)}{x} dx \\ & \quad \downarrow \textcolor{blue}{5917} \\ & \int \left(\frac{\cosh(2a + 2bx + 2cx^2)}{2x} - \frac{1}{2x} \right) dx \\ & \quad \downarrow \textcolor{blue}{2009} \\ & \frac{1}{2} \int \frac{\cosh(2cx^2 + 2bx + 2a)}{x} dx - \frac{\log(x)}{2} \end{aligned}$$

input `Int[Sinh[a + b*x + c*x^2]^2/x, x]`

output `$Aborted`

3.19.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simplify[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_.) + (e_)*(x_))^(m_.)*Sinh[(a_.) + (b_)*(x_) + (c_)*(x_)^2]^(n_), x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.19.4 Maple [N/A] (verified)

Not integrable

Time = 0.25 (sec) , antiderivative size = 17, normalized size of antiderivative = 1.00

$$\int \frac{\sinh(cx^2 + bx + a)^2}{x} dx$$

input `int(sinh(c*x^2+b*x+a)^2/x,x)`

output `int(sinh(c*x^2+b*x+a)^2/x,x)`

3.19.5 Fricas [N/A]

Not integrable

Time = 0.25 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.12

$$\int \frac{\sinh^2(a + bx + cx^2)}{x} dx = \int \frac{\sinh(cx^2 + bx + a)^2}{x} dx$$

input `integrate(sinh(c*x^2+b*x+a)^2/x,x, algorithm="fricas")`

output `integral(sinh(c*x^2 + b*x + a)^2/x, x)`

3.19.6 Sympy [N/A]

Not integrable

Time = 0.76 (sec) , antiderivative size = 15, normalized size of antiderivative = 0.88

$$\int \frac{\sinh^2(a + bx + cx^2)}{x} dx = \int \frac{\sinh^2(a + bx + cx^2)}{x} dx$$

input `integrate(sinh(c*x**2+b*x+a)**2/x,x)`

output `Integral(sinh(a + b*x + c*x**2)**2/x, x)`

3.19.7 Maxima [N/A]

Not integrable

Time = 0.35 (sec) , antiderivative size = 51, normalized size of antiderivative = 3.00

$$\int \frac{\sinh^2(a + bx + cx^2)}{x} dx = \int \frac{\sinh(cx^2 + bx + a)^2}{x} dx$$

input `integrate(sinh(c*x^2+b*x+a)^2/x,x, algorithm="maxima")`

output `1/4*integrate(e^(2*c*x^2 + 2*b*x + 2*a)/x, x) + 1/4*integrate(e^(-2*c*x^2 - 2*b*x - 2*a)/x, x) - 1/2*log(x)`

3.19.8 Giac [N/A]

Not integrable

Time = 0.30 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.12

$$\int \frac{\sinh^2(a + bx + cx^2)}{x} dx = \int \frac{\sinh(cx^2 + bx + a)^2}{x} dx$$

input `integrate(sinh(c*x^2+b*x+a)^2/x,x, algorithm="giac")`

output `integrate(sinh(c*x^2 + b*x + a)^2/x, x)`

3.19.9 Mupad [N/A]

Not integrable

Time = 1.11 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.12

$$\int \frac{\sinh^2(a + bx + cx^2)}{x} dx = \int \frac{\sinh(cx^2 + bx + a)^2}{x} dx$$

input `int(sinh(a + b*x + c*x^2)^2/x,x)`

output `int(sinh(a + b*x + c*x^2)^2/x, x)`

3.20 $\int x^2 \sinh^2(a + bx - cx^2) dx$

3.20.1 Optimal result	145
3.20.2 Mathematica [A] (verified)	146
3.20.3 Rubi [A] (verified)	146
3.20.4 Maple [A] (verified)	147
3.20.5 Fricas [B] (verification not implemented)	148
3.20.6 Sympy [F]	149
3.20.7 Maxima [A] (verification not implemented)	149
3.20.8 Giac [A] (verification not implemented)	150
3.20.9 Mupad [F(-1)]	150

3.20.1 Optimal result

Integrand size = 18, antiderivative size = 268

$$\begin{aligned} \int x^2 \sinh^2(a + bx - cx^2) dx = & -\frac{x^3}{6} - \frac{b^2 e^{2a+\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} - \frac{e^{2a+\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} \\ & - \frac{b^2 e^{-2a-\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} + \frac{e^{-2a-\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} \\ & - \frac{b \sinh(2a + 2bx - 2cx^2)}{16c^2} - \frac{x \sinh(2a + 2bx - 2cx^2)}{8c} \end{aligned}$$

```
output -1/6*x^3-1/16*b*sinh(-2*c*x^2+2*b*x+2*a)/c^2-1/8*x*sinh(-2*c*x^2+2*b*x+2*a)
/c-1/64*b^2*exp(2*a+1/2*b^2/c)*erf(1/2*(-2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)
)*Pi^(1/2)/c^(5/2)-1/64*exp(2*a+1/2*b^2/c)*erf(1/2*(-2*c*x+b)*2^(1/2)/c^(1
/2))*2^(1/2)*Pi^(1/2)/c^(3/2)-1/64*b^2*exp(-2*a-1/2*b^2/c)*erfi(1/2*(-2*c*
x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(5/2)+1/64*exp(-2*a-1/2*b^2/c)*er
fi(1/2*(-2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)
```

3.20.2 Mathematica [A] (verified)

Time = 0.52 (sec) , antiderivative size = 181, normalized size of antiderivative = 0.68

$$\int x^2 \sinh^2(a + bx - cx^2) dx \\ = \frac{3(b^2 - c) \sqrt{2\pi} \operatorname{erfi}\left(\frac{-b+2cx}{\sqrt{2c}}\right) \left(\cosh\left(2a + \frac{b^2}{2c}\right) - \sinh\left(2a + \frac{b^2}{2c}\right)\right) + 3(b^2 + c) \sqrt{2\pi} \operatorname{erf}\left(\frac{-b+2cx}{\sqrt{2c}}\right) \left(\cosh\left(2a + \frac{b^2}{2c}\right) + \sinh\left(2a + \frac{b^2}{2c}\right)\right)}{192c^{5/2}}$$

input `Integrate[x^2*Sinh[a + b*x - c*x^2]^2, x]`

output $(3*(b^2 - c)*\operatorname{Sqrt}[2*\pi]*\operatorname{Erfi}[(-b + 2*c*x)/(\operatorname{Sqrt}[2]*\operatorname{Sqrt}[c])]*(\operatorname{Cosh}[2*a + b^2/(2*c)] - \operatorname{Sinh}[2*a + b^2/(2*c)]) + 3*(b^2 + c)*\operatorname{Sqrt}[2*\pi]*\operatorname{Erf}[(-b + 2*c*x)/(\operatorname{Sqrt}[2]*\operatorname{Sqrt}[c])]*(\operatorname{Cosh}[2*a + b^2/(2*c)] + \operatorname{Sinh}[2*a + b^2/(2*c)]) - 4*\operatorname{Sqrt}[c]*(8*c^2*x^3 + 3*(b + 2*c*x)*\operatorname{Sinh}[2*(a + x*(b - c*x))]))/(192*c^{(5/2)})$

3.20.3 Rubi [A] (verified)

Time = 0.45 (sec) , antiderivative size = 268, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.111$, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int x^2 \sinh^2(a + bx - cx^2) dx \\ \downarrow 5917 \\ \int \left(\frac{1}{2}x^2 \cosh(2a + 2bx - 2cx^2) - \frac{x^2}{2}\right) dx \\ \downarrow 2009 \\ -\frac{\sqrt{\frac{\pi}{2}}e^{2a+\frac{b^2}{2c}}\operatorname{erf}\left(\frac{b-2cx}{\sqrt{2c}}\right)}{32c^{3/2}} - \frac{\sqrt{\frac{\pi}{2}}b^2e^{2a+\frac{b^2}{2c}}\operatorname{erf}\left(\frac{b-2cx}{\sqrt{2c}}\right)}{32c^{5/2}} + \frac{\sqrt{\frac{\pi}{2}}e^{-2a-\frac{b^2}{2c}}\operatorname{erfi}\left(\frac{b-2cx}{\sqrt{2c}}\right)}{32c^{3/2}} - \frac{\sqrt{\frac{\pi}{2}}b^2e^{-2a-\frac{b^2}{2c}}\operatorname{erfi}\left(\frac{b-2cx}{\sqrt{2c}}\right)}{32c^{5/2}} - \frac{b \sinh(2a + 2bx - 2cx^2)}{16c^2} - \frac{x \sinh(2a + 2bx - 2cx^2)}{8c} - \frac{x^3}{6}$$

input `Int[x^2*Sinh[a + b*x - c*x^2]^2, x]`

output
$$\begin{aligned} -\frac{1}{6}x^3 - (b^2 E^{(2*a + b^2/(2*c))} \operatorname{Sqrt}[\text{Pi}/2] \operatorname{Erf}[(b - 2*c*x)/(\sqrt[2]{2} \operatorname{Sqr}t[c])])/(32*c^{(5/2)}) - (E^{(2*a + b^2/(2*c))} \operatorname{Sqrt}[\text{Pi}/2] \operatorname{Erf}[(b - 2*c*x)/(\sqrt[2]{2} \operatorname{Sqr}t[c])])/(32*c^{(3/2)}) - (b^2 E^{(-2*a - b^2/(2*c))} \operatorname{Sqrt}[\text{Pi}/2] \operatorname{Erfi}[(b - 2*c*x)/(\sqrt[2]{2} \operatorname{Sqr}t[c])])/(32*c^{(5/2)}) + (E^{(-2*a - b^2/(2*c))} \operatorname{Sqrt}[\text{Pi}/2] \operatorname{Erfi}[(b - 2*c*x)/(\sqrt[2]{2} \operatorname{Sqr}t[c])])/(32*c^{(3/2)}) - (b \operatorname{Sinh}[2*a + 2*b*x - 2*c*x^2])/(16*c^2) - (x \operatorname{Sinh}[2*a + 2*b*x - 2*c*x^2])/(8*c) \end{aligned}$$

3.20.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_) + (e_)*(x_))^(m_)*Sinh[(a_) + (b_)*(x_) + (c_)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.20.4 Maple [A] (verified)

Time = 0.72 (sec), antiderivative size = 273, normalized size of antiderivative = 1.02

method	result
risch	$-\frac{x^3}{6} + \frac{x e^{2c x^2 - 2bx - 2a}}{16c} + \frac{b e^{2c x^2 - 2bx - 2a}}{32c^2} + \frac{b^2 \sqrt{\pi} e^{-\frac{4ac+b^2}{2c}} \operatorname{erf}\left(\sqrt{-2c}x + \frac{b}{\sqrt{-2c}}\right)}{32c^2 \sqrt{-2c}} - \frac{\sqrt{\pi} e^{-\frac{4ac+b^2}{2c}} \operatorname{erf}\left(\sqrt{-2c}x + \frac{b}{\sqrt{-2c}}\right)}{32c \sqrt{-2c}}$

input `int(x^2*sinh(-c*x^2+b*x+a)^2,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} -\frac{1}{6}x^3 + \frac{1}{16}c*x*\exp(2*c*x^2 - 2*b*x - 2*a) + \frac{1}{32}b/c^2*\exp(2*c*x^2 - 2*b*x - 2*a) \\ + \frac{1}{32}b^2/c^2*\text{Pi}^{(1/2)}*\exp(-1/2*(4*a*c + b^2)/c)/(-2*c)^{(1/2)}*\operatorname{erf}((-2*c)^{(1/2)}*x + b/(-2*c)^{(1/2)}) - \frac{1}{32}c*\text{Pi}^{(1/2)}*\exp(-1/2*(4*a*c + b^2)/c)/(-2*c)^{(1/2)}*\operatorname{erf}((-2*c)^{(1/2)}*x + b/(-2*c)^{(1/2)}) - \frac{1}{16}c*x*\exp(-2*c*x^2 + 2*b*x + 2*a) - \frac{1}{32}b/c^2*\exp(-2*c*x^2 + 2*b*x + 2*a) - \frac{1}{64}b^2/c^2*\text{Pi}^{(1/2)}*\exp(1/2*(4*a*c + b^2)/c)*2^{(1/2)}*\operatorname{erf}(-2^{(1/2)}*c^{(1/2)}*x + 1/2*b*2^{(1/2)}/c^{(1/2)}) - \frac{1}{64}c^{(3/2)}*\text{Pi}^{(1/2)}*\exp(1/2*(4*a*c + b^2)/c)*2^{(1/2)}*\operatorname{erf}(-2^{(1/2)}*c^{(1/2)}*x + 1/2*b*2^{(1/2)}/c^{(1/2)}) \end{aligned}$$

3.20.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 843 vs. $2(218) = 436$.

Time = 0.25 (sec), antiderivative size = 843, normalized size of antiderivative = 3.15

$$\int x^2 \sinh^2(a + bx - cx^2) dx =$$

$$\frac{32 c^3 x^3 \cosh(cx^2 - bx - a)^2 - 6(2c^2x + bc)\cosh(cx^2 - bx - a)^4 - 24(2c^2x + bc)\cosh(cx^2 - bx - a)^2}{-}$$

input `integrate(x^2*sinh(-c*x^2+b*x+a)^2,x, algorithm="fricas")`

output

$$\begin{aligned} & -1/192*(32*c^3*x^3*cosh(c*x^2 - b*x - a)^2 - 6*(2*c^2*x + b*c)*cosh(c*x^2 - b*x - a)^4 - 24*(2*c^2*x + b*c)*cosh(c*x^2 - b*x - a)*sinh(c*x^2 - b*x - a)^3 - 6*(2*c^2*x + b*c)*sinh(c*x^2 - b*x - a)^4 + 3*sqrt(2)*sqrt(pi)*((b^2 - c)*cosh(c*x^2 - b*x - a)^2*cosh(1/2*(b^2 + 4*a*c)/c) - (b^2 - c)*cosh(c*x^2 - b*x - a)^2*sinh(1/2*(b^2 + 4*a*c)/c) + ((b^2 - c)*cosh(1/2*(b^2 + 4*a*c)/c) - (b^2 - c)*sinh(1/2*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a)^2 + 2*((b^2 - c)*cosh(c*x^2 - b*x - a)*cosh(1/2*(b^2 + 4*a*c)/c) - (b^2 - c)*cosh(c*x^2 - b*x - a)*sinh(1/2*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a)*sqrt(-c)*erf(1/2*sqrt(2)*(2*c*x - b)*sqrt(-c)/c) - 3*sqrt(2)*sqrt(pi)*((b^2 + c)*cosh(c*x^2 - b*x - a)^2*cosh(1/2*(b^2 + 4*a*c)/c) + (b^2 + c)*cosh(c*x^2 - b*x - a)^2*sinh(1/2*(b^2 + 4*a*c)/c) + ((b^2 + c)*cosh(1/2*(b^2 + 4*a*c)/c) + (b^2 + c)*sinh(1/2*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a)^2 + 2*((b^2 + c)*cosh(c*x^2 - b*x - a)*cosh(1/2*(b^2 + 4*a*c)/c) + (b^2 + c)*cosh(c*x^2 - b*x - a)*sinh(1/2*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a)*sqrt(c)*erf(1/2*sqrt(2)*(2*c*x - b)/sqrt(c)) + 12*c^2*x + 4*(8*c^3*x^3 - 9*(2*c^2*x + b*c)*cosh(c*x^2 - b*x - a)^2)*sinh(c*x^2 - b*x - a)^2 + 6*b*c + 8*(8*c^3*x^3*cosh(c*x^2 - b*x - a) - 3*(2*c^2*x + b*c)*cosh(c*x^2 - b*x - a)^3)*sinh(c*x^2 - b*x - a))/(c^3*cosh(c*x^2 - b*x - a)^2 + 2*c^3*cosh(c*x^2 - b*x - a)*sinh(c*x^2 - b*x - a) + c^3*sinh(c*x^2 - b*x - a)^2) \end{aligned}$$

3.20.6 Sympy [F]

$$\int x^2 \sinh^2(a + bx - cx^2) dx = \int x^2 \sinh^2(a + bx - cx^2) dx$$

input `integrate(x**2*sinh(-c*x**2+b*x+a)**2,x)`

output `Integral(x**2*sinh(a + b*x - c*x**2)**2, x)`

3.20.7 Maxima [A] (verification not implemented)

Time = 0.30 (sec), antiderivative size = 322, normalized size of antiderivative = 1.20

$$\begin{aligned} \int x^2 \sinh^2(a + bx - cx^2) dx &= -\frac{1}{6} x^3 \\ &- \frac{\sqrt{2} \left(\frac{\sqrt{\pi(2cx-b)b^2} \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{\frac{(2cx-b)^2}{c}} \right) - 1 \right)}{\sqrt{\frac{(2cx-b)^2}{c}} (-c)^{\frac{5}{2}}} - \frac{2\sqrt{2}bce^{\left(-\frac{(2cx-b)^2}{2c} \right)}}{(-c)^{\frac{5}{2}}} - \frac{2(2cx-b)^3 \Gamma \left(\frac{3}{2}, \frac{(2cx-b)^2}{2c} \right)}{\left(\frac{(2cx-b)^2}{c} \right)^{\frac{3}{2}} (-c)^{\frac{5}{2}}} \right) e^{\left(2a + \frac{b^2}{2c} \right)}}{64\sqrt{-c}} \\ &+ \frac{\sqrt{2} \left(\frac{\sqrt{\pi(2cx-b)b^2} \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{-\frac{(2cx-b)^2}{c}} \right) - 1 \right)}{\sqrt{-\frac{(2cx-b)^2}{c}} c^{\frac{5}{2}}} + \frac{2\sqrt{2}be^{\left(\frac{(2cx-b)^2}{2c} \right)}}{c^{\frac{3}{2}}} - \frac{2(2cx-b)^3 \Gamma \left(\frac{3}{2}, -\frac{(2cx-b)^2}{2c} \right)}{\left(-\frac{(2cx-b)^2}{c} \right)^{\frac{3}{2}} c^{\frac{5}{2}}} \right) e^{\left(-2a - \frac{b^2}{2c} \right)}}{64\sqrt{c}} \end{aligned}$$

input `integrate(x^2*sinh(-c*x^2+b*x+a)^2,x, algorithm="maxima")`

output `-1/6*x^3 - 1/64*sqrt(2)*(sqrt(pi)*(2*c*x - b)*b^2*(erf(sqrt(1/2)*sqrt((2*c*x - b)^2/c)) - 1)/(sqrt((2*c*x - b)^2/c)*(-c)^(5/2)) - 2*sqrt(2)*b*c*e^(-1/2*(2*c*x - b)^2/c)/(-c)^(5/2) - 2*(2*c*x - b)^3*gamma(3/2, 1/2*(2*c*x - b)^2/c)/((2*c*x - b)^2/c)^(3/2)*(-c)^(5/2))*e^(2*a + 1/2*b^2/c)/sqrt(-c) + 1/64*sqrt(2)*(sqrt(pi)*(2*c*x - b)*b^2*(erf(sqrt(1/2)*sqrt(-(2*c*x - b)^2/c)) - 1)/(sqrt(-(2*c*x - b)^2/c)*c^(5/2)) + 2*sqrt(2)*b*c*e^(1/2*(2*c*x - b)^2/c)/c^(3/2) - 2*(2*c*x - b)^3*gamma(3/2, -1/2*(2*c*x - b)^2/c)/((-2*c*x - b)^2/c)^(3/2)*c^(5/2))*e^(-2*a - 1/2*b^2/c)/sqrt(c)`

3.20.8 Giac [A] (verification not implemented)

Time = 0.29 (sec) , antiderivative size = 186, normalized size of antiderivative = 0.69

$$\int x^2 \sinh^2(a + bx - cx^2) dx$$

$$= -\frac{1}{6}x^3 - \frac{\frac{\sqrt{2}\sqrt{\pi}(b^2+c)\operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{c}\left(2x-\frac{b}{c}\right)\right)e^{\left(\frac{b^2+4ac}{2c}\right)}}{\sqrt{c}} + 2\left(c\left(2x-\frac{b}{c}\right) + 2b\right)e^{(-2cx^2+2bx+2a)}}{64c^2}$$

$$- \frac{\frac{\sqrt{2}\sqrt{\pi}(b^2-c)\operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{-c}\left(2x-\frac{b}{c}\right)\right)e^{\left(-\frac{b^2+4ac}{2c}\right)}}{\sqrt{-c}} - 2\left(c\left(2x-\frac{b}{c}\right) + 2b\right)e^{(2cx^2-2bx-2a)}}{64c^2}$$

input `integrate(x^2*sinh(-c*x^2+b*x+a)^2,x, algorithm="giac")`

output `-1/6*x^3 - 1/64*(sqrt(2)*sqrt(pi)*(b^2 + c)*erf(-1/2*sqrt(2)*sqrt(c)*(2*x - b/c))*e^(1/2*(b^2 + 4*a*c)/c)/sqrt(c) + 2*(c*(2*x - b/c) + 2*b)*e^(-2*c*x^2 + 2*b*x + 2*a))/c^2 - 1/64*(sqrt(2)*sqrt(pi)*(b^2 - c)*erf(-1/2*sqrt(2)*sqrt(-c)*(2*x - b/c))*e^(-1/2*(b^2 + 4*a*c)/c)/sqrt(-c) - 2*(c*(2*x - b/c) + 2*b)*e^(2*c*x^2 - 2*b*x - 2*a))/c^2`

3.20.9 Mupad [F(-1)]

Timed out.

$$\int x^2 \sinh^2(a + bx - cx^2) dx = \int x^2 \sinh(-cx^2 + bx + a)^2 dx$$

input `int(x^2*sinh(a + b*x - c*x^2)^2,x)`

output `int(x^2*sinh(a + b*x - c*x^2)^2, x)`

3.21 $\int x \sinh^2(a + bx - cx^2) dx$

3.21.1	Optimal result	151
3.21.2	Mathematica [A] (verified)	151
3.21.3	Rubi [A] (verified)	152
3.21.4	Maple [A] (verified)	153
3.21.5	Fricas [B] (verification not implemented)	153
3.21.6	Sympy [F]	154
3.21.7	Maxima [A] (verification not implemented)	155
3.21.8	Giac [A] (verification not implemented)	155
3.21.9	Mupad [F(-1)]	156

3.21.1 Optimal result

Integrand size = 16, antiderivative size = 136

$$\begin{aligned} \int x \sinh^2(a + bx - cx^2) dx = & -\frac{x^2}{4} - \frac{be^{2a+\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} \\ & - \frac{be^{-2a-\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} - \frac{\sinh(2a + 2bx - 2cx^2)}{8c} \end{aligned}$$

output
$$-1/4*x^2-1/8*sinh(-2*c*x^2+2*b*x+2*a)/c-1/32*b*exp(2*a+1/2*b^2/c)*erf(1/2*(-2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)-1/32*b*exp(-2*a-1/2*b^2/c)*erfi(1/2*(-2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)$$

3.21.2 Mathematica [A] (verified)

Time = 0.29 (sec), antiderivative size = 159, normalized size of antiderivative = 1.17

$$\begin{aligned} \int x \sinh^2(a + bx - cx^2) dx \\ = \frac{b\sqrt{2\pi}\operatorname{erfi}\left(\frac{-b+2cx}{\sqrt{2}\sqrt{c}}\right)\left(\cosh\left(2a + \frac{b^2}{2c}\right) - \sinh\left(2a + \frac{b^2}{2c}\right)\right) + b\sqrt{2\pi}\operatorname{erf}\left(\frac{-b+2cx}{\sqrt{2}\sqrt{c}}\right)\left(\cosh\left(2a + \frac{b^2}{2c}\right) + \sinh\left(2a + \frac{b^2}{2c}\right)\right)}{32c^{3/2}} \end{aligned}$$

input `Integrate[x*Sinh[a + b*x - c*x^2]^2, x]`

```
output (b*.Sqrt[2*Pi]*Erfi[(-b + 2*c*x)/(Sqrt[2]*Sqrt[c])]*(Cosh[2*a + b^2/(2*c)] - Sinh[2*a + b^2/(2*c)]) + b*.Sqrt[2*Pi]*Erf[(-b + 2*c*x)/(Sqrt[2]*Sqrt[c])]*(Cosh[2*a + b^2/(2*c)] + Sinh[2*a + b^2/(2*c)]) - 4*Sqrt[c]*(2*c*x^2 + Sinh[2*(a + x*(b - c*x))]))/(32*c^(3/2))
```

3.21.3 Rubi [A] (verified)

Time = 0.29 (sec) , antiderivative size = 136, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.125$, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int x \sinh^2(a + bx - cx^2) dx \\ & \quad \downarrow \textcolor{blue}{5917} \\ & \int \left(\frac{1}{2}x \cosh(2a + 2bx - 2cx^2) - \frac{x}{2} \right) dx \\ & \quad \downarrow \textcolor{blue}{2009} \\ & -\frac{\sqrt{\frac{\pi}{2}}be^{2a+\frac{b^2}{2c}}\operatorname{erf}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} - \frac{\sqrt{\frac{\pi}{2}}be^{-2a-\frac{b^2}{2c}}\operatorname{erfi}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} - \frac{\sinh(2a + 2bx - 2cx^2)}{8c} - \frac{x^2}{4} \end{aligned}$$

```
input Int[x*Sinh[a + b*x - c*x^2]^2, x]
```

```
output -1/4*x^2 - (b*E^(2*a + b^2/(2*c))*Sqrt[Pi/2]*Erf[(b - 2*c*x)/(Sqrt[2]*Sqrt[c])])/(16*c^(3/2)) - (b*E^(-2*a - b^2/(2*c))*Sqrt[Pi/2]*Erfi[(b - 2*c*x)/(Sqrt[2]*Sqrt[c])])/(16*c^(3/2)) - Sinh[2*a + 2*b*x - 2*c*x^2]/(8*c)
```

3.21.3.1 Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_.) + (e_.)*(x_))^m_.*Sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.21.4 Maple [A] (verified)

Time = 0.70 (sec), antiderivative size = 137, normalized size of antiderivative = 1.01

method	result
risch	$-\frac{x^2}{4} + \frac{e^{2cx^2-2bx-2a}}{16c} + \frac{b\sqrt{\pi}e^{-\frac{4ac+b^2}{2c}}\operatorname{erf}\left(\sqrt{-2c}x+\frac{b}{\sqrt{-2c}}\right)}{16c\sqrt{-2c}} - \frac{e^{-2cx^2+2bx+2a}}{16c} - \frac{b\sqrt{\pi}e^{\frac{4ac+b^2}{2c}}\sqrt{2}\operatorname{erf}\left(-\sqrt{2}\sqrt{c}x+\frac{b\sqrt{2}}{2\sqrt{c}}\right)}{32c^{\frac{3}{2}}}$

input `int(x*sinh(-c*x^2+b*x+a)^2, x, method=_RETURNVERBOSE)`

output `-1/4*x^2+1/16/c*exp(2*c*x^2-2*b*x-2*a)+1/16*b/c*Pi^(1/2)*exp(-1/2*(4*a*c+b^2)/c)/(-2*c)^(1/2)*erf((-2*c)^(1/2)*x+b/(-2*c)^(1/2))-1/16/c*exp(-2*c*x^2+2*b*x+2*a)-1/32*b/c^(3/2)*Pi^(1/2)*exp(1/2*(4*a*c+b^2)/c)*2^(1/2)*erf(-2^(1/2)*c^(1/2)*x+1/2*b*2^(1/2)/c^(1/2))`

3.21.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 730 vs. $2(110) = 220$.

Time = 0.25 (sec), antiderivative size = 730, normalized size of antiderivative = 5.37

$$\int x \sinh^2(a + bx - cx^2) dx = \frac{8c^2x^2 \cosh(cx^2 - bx - a)^2 - 2c \cosh(cx^2 - bx - a)^4 - 8c \cosh(cx^2 - bx - a) \sinh(cx^2 - bx - a)^3 - 2c \cosh(cx^2 - bx - a)^5}{-}$$

input `integrate(x*sinh(-c*x^2+b*x+a)^2, x, algorithm="fricas")`

3.21. $\int x \sinh^2(a + bx - cx^2) dx$

```
output -1/32*(8*c^2*x^2*cosh(c*x^2 - b*x - a)^2 - 2*c*cosh(c*x^2 - b*x - a)^4 - 8
*c*cosh(c*x^2 - b*x - a)*sinh(c*x^2 - b*x - a)^3 - 2*c*sinh(c*x^2 - b*x -
a)^4 + sqrt(2)*sqrt(pi)*(b*cosh(c*x^2 - b*x - a)^2*cosh(1/2*(b^2 + 4*a*c)/
c) - b*cosh(c*x^2 - b*x - a)^2*sinh(1/2*(b^2 + 4*a*c)/c) + (b*cosh(1/2*(b^
2 + 4*a*c)/c) - b*sinh(1/2*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a)^2 + 2*(b*
cosh(c*x^2 - b*x - a)*cosh(1/2*(b^2 + 4*a*c)/c) - b*cosh(c*x^2 - b*x - a)
)*sinh(1/2*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a))*sqrt(-c)*erf(1/2*sqrt(
2)*(2*c*x - b)*sqrt(-c)/c) - sqrt(2)*sqrt(pi)*(b*cosh(c*x^2 - b*x - a)^2*c
osh(1/2*(b^2 + 4*a*c)/c) + b*cosh(c*x^2 - b*x - a)^2*sinh(1/2*(b^2 + 4*a*c)/c)
+ (b*cosh(1/2*(b^2 + 4*a*c)/c) + b*sinh(1/2*(b^2 + 4*a*c)/c))*sinh(c*
x^2 - b*x - a)^2 + 2*(b*cosh(c*x^2 - b*x - a)*cosh(1/2*(b^2 + 4*a*c)/c) +
b*cosh(c*x^2 - b*x - a)*sinh(1/2*(b^2 + 4*a*c)/c))*sinh(c*x^2 - b*x - a))*
sqrt(c)*erf(1/2*sqrt(2)*(2*c*x - b)/sqrt(c)) + 4*(2*c^2*x^2 - 3*c*cosh(c*x^
2 - b*x - a)^2)*sinh(c*x^2 - b*x - a)^2 + 8*(2*c^2*x^2*cosh(c*x^2 - b*x -
a) - c*cosh(c*x^2 - b*x - a)^3)*sinh(c*x^2 - b*x - a) + 2*c)/(c^2*cosh(c*x^
2 - b*x - a)^2 + 2*c^2*cosh(c*x^2 - b*x - a)*sinh(c*x^2 - b*x - a) + c^2
*sinh(c*x^2 - b*x - a)^2)
```

3.21.6 Sympy [F]

$$\int x \sinh^2(a + bx - cx^2) dx = \int x \sinh^2(a + bx - cx^2) dx$$

```
input integrate(x*sinh(-c*x**2+b*x+a)**2,x)
```

```
output Integral(x*sinh(a + b*x - c*x**2)**2, x)
```

3.21.7 Maxima [A] (verification not implemented)

Time = 0.29 (sec) , antiderivative size = 216, normalized size of antiderivative = 1.59

$$\int x \sinh^2(a + bx - cx^2) dx$$

$$= -\frac{1}{4}x^2 + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx-b)b \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{\frac{(2cx-b)^2}{c}} \right) - 1 \right)}{\sqrt{\frac{(2cx-b)^2}{c}} (-c)^{\frac{3}{2}}} - \frac{\sqrt{2}ce^{\left(-\frac{(2cx-b)^2}{2c} \right)}}{(-c)^{\frac{3}{2}}} \right) e^{\left(2a + \frac{b^2}{2c} \right)}}{32\sqrt{-c}}$$

$$+ \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx-b)b \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{\frac{(2cx-b)^2}{c}} \right) - 1 \right)}{\sqrt{-\frac{(2cx-b)^2}{c}} c^{\frac{3}{2}}} + \frac{\sqrt{2}e^{\left(\frac{(2cx-b)^2}{2c} \right)}}{\sqrt{c}} \right) e^{\left(-2a - \frac{b^2}{2c} \right)}}{32\sqrt{c}}$$

```
input integrate(x*sinh(-c*x^2+b*x+a)^2,x, algorithm="maxima")
```

```
output -1/4*x^2 + 1/32*sqrt(2)*(sqrt(pi)*(2*c*x - b)*b*(erf(sqrt(1/2)*sqrt((2*c*x - b)^2/c)) - 1)/(sqrt((2*c*x - b)^2/c)*(-c)^(3/2)) - sqrt(2)*c*e^(-1/2*(2*c*x - b)^2/c)/(-c)^(3/2))*e^(2*a + 1/2*b^2/c)/sqrt(-c) + 1/32*sqrt(2)*(sqrt(pi)*(2*c*x - b)*b*(erf(sqrt(1/2)*sqrt(-(2*c*x - b)^2/c)) - 1)/(sqrt(-(2*c*x - b)^2/c)*c^(3/2)) + sqrt(2)*e^(1/2*(2*c*x - b)^2/c)/sqrt(c))*e^(-2*a - 1/2*b^2/c)/sqrt(c)
```

3.21.8 Giac [A] (verification not implemented)

Time = 0.29 (sec) , antiderivative size = 144, normalized size of antiderivative = 1.06

$$\int x \sinh^2(a + bx - cx^2) dx = -\frac{1}{4}x^2 - \frac{\frac{\sqrt{2}\sqrt{\pi}b \operatorname{erf} \left(-\frac{1}{2}\sqrt{2}\sqrt{c} \left(2x - \frac{b}{c} \right) \right) e^{\left(\frac{b^2+4ac}{2c} \right)}}{\sqrt{c}} + 2e^{(-2cx^2+2bx+2a)}}{32c}$$

$$- \frac{\frac{\sqrt{2}\sqrt{\pi}b \operatorname{erf} \left(-\frac{1}{2}\sqrt{2}\sqrt{-c} \left(2x - \frac{b}{c} \right) \right) e^{\left(-\frac{b^2+4ac}{2c} \right)}}{\sqrt{-c}} - 2e^{(2cx^2-2bx-2a)}}{32c}$$

```
input integrate(x*sinh(-c*x^2+b*x+a)^2,x, algorithm="giac")
```

```
output -1/4*x^2 - 1/32*(sqrt(2)*sqrt(pi)*b*erf(-1/2*sqrt(2)*sqrt(c)*(2*x - b/c))*e^(1/2*(b^2 + 4*a*c)/c)/sqrt(c) + 2*e^(-2*c*x^2 + 2*b*x + 2*a))/c - 1/32*(sqrt(2)*sqrt(pi)*b*erf(-1/2*sqrt(2)*sqrt(-c)*(2*x - b/c))*e^(-1/2*(b^2 + 4*a*c)/c)/sqrt(-c) - 2*e^(2*c*x^2 - 2*b*x - 2*a))/c
```

3.21.9 Mupad [F(-1)]

Timed out.

$$\int x \sinh^2(a + bx - cx^2) dx = \int x \sinh(-cx^2 + bx + a)^2 dx$$

```
input int(x*sinh(a + b*x - c*x^2)^2,x)
```

```
output int(x*sinh(a + b*x - c*x^2)^2, x)
```

3.22 $\int \sinh^2(a + bx - cx^2) dx$

3.22.1	Optimal result	157
3.22.2	Mathematica [A] (verified)	157
3.22.3	Rubi [A] (verified)	158
3.22.4	Maple [A] (verified)	159
3.22.5	Fricas [A] (verification not implemented)	159
3.22.6	Sympy [F]	160
3.22.7	Maxima [A] (verification not implemented)	160
3.22.8	Giac [A] (verification not implemented)	160
3.22.9	Mupad [F(-1)]	161

3.22.1 Optimal result

Integrand size = 14, antiderivative size = 110

$$\int \sinh^2(a + bx - cx^2) dx = -\frac{x}{2} - \frac{e^{2a+\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{8\sqrt{c}} - \frac{e^{-2a-\frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{8\sqrt{c}}$$

output
$$-1/2*x - 1/16*exp(2*a+1/2*b^2/c)*erf(1/2*(-2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(1/2) - 1/16*exp(-2*a-1/2*b^2/c)*erfi(1/2*(-2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(1/2)$$

3.22.2 Mathematica [A] (verified)

Time = 0.12 (sec), antiderivative size = 144, normalized size of antiderivative = 1.31

$$\begin{aligned} & \int \sinh^2(a + bx - cx^2) dx \\ &= \frac{-4\sqrt{2}\sqrt{c}x + \sqrt{\pi}\operatorname{erfi}\left(\frac{-b+2cx}{\sqrt{2}\sqrt{c}}\right)\left(\cosh\left(2a + \frac{b^2}{2c}\right) - \sinh\left(2a + \frac{b^2}{2c}\right)\right) + \sqrt{\pi}\operatorname{erf}\left(\frac{-b+2cx}{\sqrt{2}\sqrt{c}}\right)\left(\cosh\left(2a + \frac{b^2}{2c}\right) + \sinh\left(2a + \frac{b^2}{2c}\right)\right)}{8\sqrt{2}\sqrt{c}} \end{aligned}$$

input `Integrate[Sinh[a + b*x - c*x^2]^2, x]`

output
$$(-4*\text{Sqrt}[2]*\text{Sqrt}[c]*x + \text{Sqrt}[\pi]*\text{Erfi}[(-b + 2*c*x)/(\text{Sqrt}[2]*\text{Sqrt}[c])]*(\text{Cosh}[2*a + b^2/(2*c)] - \text{Sinh}[2*a + b^2/(2*c)]) + \text{Sqrt}[\pi]*\text{Erf}[(-b + 2*c*x)/(\text{Sqrt}[2]*\text{Sqrt}[c])]*(\text{Cosh}[2*a + b^2/(2*c)] + \text{Sinh}[2*a + b^2/(2*c)]))/(8*\text{Sqrt}[2]*\text{Sqrt}[c])$$

3.22.3 Rubi [A] (verified)

Time = 0.26 (sec) , antiderivative size = 110, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.143, Rules used = {5899, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \sinh^2(a + bx - cx^2) dx \\
 & \downarrow \textcolor{blue}{5899} \\
 & \int \left(\frac{1}{2} \cosh(2a + 2bx - 2cx^2) - \frac{1}{2} \right) dx \\
 & \downarrow \textcolor{blue}{2009} \\
 & -\frac{\sqrt{\frac{\pi}{2}} e^{2a + \frac{b^2}{2c}} \operatorname{erf}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{8\sqrt{c}} - \frac{\sqrt{\frac{\pi}{2}} e^{-2a - \frac{b^2}{2c}} \operatorname{erfi}\left(\frac{b-2cx}{\sqrt{2}\sqrt{c}}\right)}{8\sqrt{c}} - \frac{x}{2}
 \end{aligned}$$

input `Int[Sinh[a + b*x - c*x^2]^2, x]`

output `-1/2*x - (E^(2*a + b^2/(2*c))*Sqrt[Pi/2]*Erf[(b - 2*c*x)/(Sqrt[2]*Sqrt[c])]/(8*Sqrt[c]) - (E^(-2*a - b^2/(2*c))*Sqrt[Pi/2]*Erfi[(b - 2*c*x)/(Sqrt[2]*Sqrt[c])])/(8*Sqrt[c])]`

3.22.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5899 `Int[Sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c}, x] && IGtQ[n, 1]`

3.22.4 Maple [A] (verified)

Time = 0.66 (sec) , antiderivative size = 90, normalized size of antiderivative = 0.82

method	result	size
risch	$-\frac{x}{2} + \frac{\sqrt{\pi} e^{-\frac{4ac+b^2}{2c}} \operatorname{erf}\left(\sqrt{-2c}x + \frac{b}{\sqrt{-2c}}\right)}{8\sqrt{-2c}} - \frac{\sqrt{\pi} e^{\frac{4ac+b^2}{2c}} \sqrt{2} \operatorname{erf}\left(-\sqrt{2}\sqrt{c}x + \frac{b\sqrt{2}}{2\sqrt{c}}\right)}{16\sqrt{c}}$	90

input `int(sinh(-c*x^2+b*x+a)^2,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & -\frac{1}{2}x + \frac{1}{8}\pi^{1/2}e^{-1/2*(4*a*c+b^2)/c}/(-2*c)^{1/2}*\operatorname{erf}((-2*c)^{1/2}x+b/(-2*c)^{1/2}) \\ & -\frac{1}{16}\pi^{1/2}e^{1/2*(4*a*c+b^2)/c}*2^{1/2}/c^{1/2}*\operatorname{erf}((-2^{1/2}c^{1/2}x+1/2*b*2^{1/2})/c^{1/2}) \end{aligned}$$

3.22.5 Fricas [A] (verification not implemented)

Time = 0.26 (sec) , antiderivative size = 132, normalized size of antiderivative = 1.20

$$\int \sinh^2(a + bx - cx^2) dx = \frac{-\sqrt{2}\sqrt{\pi}\sqrt{-c}\left(\cosh\left(\frac{b^2+4ac}{2c}\right) - \sinh\left(\frac{b^2+4ac}{2c}\right)\right)\operatorname{erf}\left(\frac{\sqrt{2}(2cx-b)\sqrt{-c}}{2c}\right) - \sqrt{2}\sqrt{\pi}\sqrt{c}\left(\cosh\left(\frac{b^2+4ac}{2c}\right) + \sinh\left(\frac{b^2+4ac}{2c}\right)\right)\operatorname{erf}\left(\frac{\sqrt{2}(2cx+b)\sqrt{-c}}{2c}\right)}{16c}$$

input `integrate(sinh(-c*x^2+b*x+a)^2,x, algorithm="fricas")`

output
$$\begin{aligned} & -\frac{1}{16}(\sqrt{2}\sqrt{\pi}\sqrt{-c}(\cosh(1/2*(b^2+4*a*c)/c) - \sinh(1/2*(b^2+4*a*c)/c))\operatorname{erf}(1/2*\sqrt{2}*(2*c*x-b)*\sqrt{-c}/c) - \sqrt{2}\sqrt{\pi}\sqrt{c}(\cosh(1/2*(b^2+4*a*c)/c) + \sinh(1/2*(b^2+4*a*c)/c))\operatorname{erf}(1/2*\sqrt{2}*(2*c*x-b)/\sqrt{c})) + 8*c*x/c \end{aligned}$$

3.22.6 Sympy [F]

$$\int \sinh^2(a + bx - cx^2) dx = \int \sinh^2(a + bx - cx^2) dx$$

input `integrate(sinh(-c*x**2+b*x+a)**2,x)`

output `Integral(sinh(a + b*x - c*x**2)**2, x)`

3.22.7 Maxima [A] (verification not implemented)

Time = 0.27 (sec), antiderivative size = 96, normalized size of antiderivative = 0.87

$$\begin{aligned} \int \sinh^2(a + bx - cx^2) dx &= \frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(\sqrt{2}\sqrt{c}x - \frac{\sqrt{2}b}{2\sqrt{c}}\right) e^{(2a+\frac{b^2}{2c})}}{16\sqrt{c}} \\ &\quad + \frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(\sqrt{2}\sqrt{-c}x + \frac{\sqrt{2}b}{2\sqrt{-c}}\right) e^{(-2a-\frac{b^2}{2c})}}{16\sqrt{-c}} - \frac{1}{2}x \end{aligned}$$

input `integrate(sinh(-c*x^2+b*x+a)^2,x, algorithm="maxima")`

output `1/16*sqrt(2)*sqrt(pi)*erf(sqrt(2)*sqrt(c)*x - 1/2*sqrt(2)*b/sqrt(c))*e^(2*a + 1/2*b^2/c)/sqrt(c) + 1/16*sqrt(2)*sqrt(pi)*erf(sqrt(2)*sqrt(-c)*x + 1/2*sqrt(2)*b/sqrt(-c))*e^(-2*a - 1/2*b^2/c)/sqrt(-c) - 1/2*x`

3.22.8 Giac [A] (verification not implemented)

Time = 0.28 (sec), antiderivative size = 96, normalized size of antiderivative = 0.87

$$\begin{aligned} \int \sinh^2(a + bx - cx^2) dx &= -\frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{c}(2x - \frac{b}{c})\right) e^{\left(\frac{b^2+4ac}{2c}\right)}}{16\sqrt{c}} \\ &\quad - \frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{-c}(2x - \frac{b}{c})\right) e^{\left(-\frac{b^2+4ac}{2c}\right)}}{16\sqrt{-c}} - \frac{1}{2}x \end{aligned}$$

input `integrate(sinh(-c*x^2+b*x+a)^2,x, algorithm="giac")`

output
$$\begin{aligned} & -\frac{1}{16}\sqrt{2}\sqrt{\pi}\operatorname{erf}\left(\frac{-1}{2}\sqrt{2}\sqrt{c}(2x - \frac{b}{c})\right)e^{(1/2(b^2 + 4ac)/c)}\sqrt{c} \\ & -\frac{1}{16}\sqrt{2}\sqrt{\pi}\operatorname{erf}\left(\frac{-1}{2}\sqrt{2}\sqrt{-c}(2x - \frac{b}{c})\right)e^{(-1/2(b^2 + 4ac)/c)}\sqrt{-c} - \frac{1}{2}x \end{aligned}$$

3.22.9 Mupad [F(-1)]

Timed out.

$$\int \sinh^2(a + bx - cx^2) dx = \int \sinh(-cx^2 + bx + a)^2 dx$$

input `int(sinh(a + b*x - c*x^2)^2,x)`

output `int(sinh(a + b*x - c*x^2)^2, x)`

3.23 $\int \frac{\sinh^2(a+bx-cx^2)}{x} dx$

3.23.1	Optimal result	162
3.23.2	Mathematica [N/A]	162
3.23.3	Rubi [N/A]	163
3.23.4	Maple [N/A] (verified)	164
3.23.5	Fricas [N/A]	164
3.23.6	Sympy [N/A]	164
3.23.7	Maxima [N/A]	165
3.23.8	Giac [N/A]	165
3.23.9	Mupad [N/A]	165

3.23.1 Optimal result

Integrand size = 18, antiderivative size = 18

$$\int \frac{\sinh^2(a + bx - cx^2)}{x} dx = -\frac{\log(x)}{2} + \frac{1}{2} \text{Int}\left(\frac{\cosh(2a + 2bx - 2cx^2)}{x}, x\right)$$

output `-1/2*ln(x)+1/2*Unintegrable(cosh(-2*c*x^2+2*b*x+2*a)/x,x)`

3.23.2 Mathematica [N/A]

Not integrable

Time = 14.14 (sec) , antiderivative size = 20, normalized size of antiderivative = 1.11

$$\int \frac{\sinh^2(a + bx - cx^2)}{x} dx = \int \frac{\sinh^2(a + bx - cx^2)}{x} dx$$

input `Integrate[Sinh[a + b*x - c*x^2]^2/x, x]`

output `Integrate[Sinh[a + b*x - c*x^2]^2/x, x]`

3.23.3 Rubi [N/A]

Not integrable

Time = 0.21 (sec), antiderivative size = 18, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int \frac{\sinh^2(a + bx - cx^2)}{x} dx \\ & \quad \downarrow \textcolor{blue}{5917} \\ & \int \left(\frac{\cosh(2a + 2bx - 2cx^2)}{2x} - \frac{1}{2x} \right) dx \\ & \quad \downarrow \textcolor{blue}{2009} \\ & \frac{1}{2} \int \frac{\cosh(-2cx^2 + 2bx + 2a)}{x} dx - \frac{\log(x)}{2} \end{aligned}$$

input `Int[Sinh[a + b*x - c*x^2]^2/x, x]`

output `$Aborted`

3.23.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simplify[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_) + (e_)*(x_))^(m_)*Sinh[(a_) + (b_)*(x_) + (c_)*(x_)^2]^(n_), x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.23.4 Maple [N/A] (verified)

Not integrable

Time = 0.24 (sec) , antiderivative size = 18, normalized size of antiderivative = 1.00

$$\int \frac{\sinh(-cx^2 + bx + a)^2}{x} dx$$

input `int(sinh(-c*x^2+b*x+a)^2/x,x)`

output `int(sinh(-c*x^2+b*x+a)^2/x,x)`

3.23.5 Fricas [N/A]

Not integrable

Time = 0.24 (sec) , antiderivative size = 22, normalized size of antiderivative = 1.22

$$\int \frac{\sinh^2(a + bx - cx^2)}{x} dx = \int \frac{\sinh(-cx^2 + bx + a)^2}{x} dx$$

input `integrate(sinh(-c*x^2+b*x+a)^2/x,x, algorithm="fricas")`

output `integral(sinh(c*x^2 - b*x - a)^2/x, x)`

3.23.6 Sympy [N/A]

Not integrable

Time = 0.75 (sec) , antiderivative size = 15, normalized size of antiderivative = 0.83

$$\int \frac{\sinh^2(a + bx - cx^2)}{x} dx = \int \frac{\sinh^2(a + bx - cx^2)}{x} dx$$

input `integrate(sinh(-c*x**2+b*x+a)**2/x,x)`

output `Integral(sinh(a + b*x - c*x**2)**2/x, x)`

3.23.7 Maxima [N/A]

Not integrable

Time = 0.35 (sec) , antiderivative size = 51, normalized size of antiderivative = 2.83

$$\int \frac{\sinh^2(a + bx - cx^2)}{x} dx = \int \frac{\sinh(-cx^2 + bx + a)^2}{x} dx$$

input `integrate(sinh(-c*x^2+b*x+a)^2/x,x, algorithm="maxima")`

output `1/4*integrate(e^(2*c*x^2 - 2*b*x - 2*a)/x, x) + 1/4*integrate(e^(-2*c*x^2 + 2*b*x + 2*a)/x, x) - 1/2*log(x)`

3.23.8 Giac [N/A]

Not integrable

Time = 0.30 (sec) , antiderivative size = 20, normalized size of antiderivative = 1.11

$$\int \frac{\sinh^2(a + bx - cx^2)}{x} dx = \int \frac{\sinh(-cx^2 + bx + a)^2}{x} dx$$

input `integrate(sinh(-c*x^2+b*x+a)^2/x,x, algorithm="giac")`

output `integrate(sinh(-c*x^2 + b*x + a)^2/x, x)`

3.23.9 Mupad [N/A]

Not integrable

Time = 1.09 (sec) , antiderivative size = 20, normalized size of antiderivative = 1.11

$$\int \frac{\sinh^2(a + bx - cx^2)}{x} dx = \int \frac{\sinh(-cx^2 + bx + a)^2}{x} dx$$

input `int(sinh(a + b*x - c*x^2)^2/x,x)`

output `int(sinh(a + b*x - c*x^2)^2/x, x)`

3.24 $\int x^2 \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx$

3.24.1	Optimal result	166
3.24.2	Mathematica [A] (verified)	166
3.24.3	Rubi [A] (verified)	167
3.24.4	Maple [A] (verified)	168
3.24.5	Fricas [B] (verification not implemented)	168
3.24.6	Sympy [F]	169
3.24.7	Maxima [C] (verification not implemented)	169
3.24.8	Giac [A] (verification not implemented)	169
3.24.9	Mupad [F(-1)]	170

3.24.1 Optimal result

Integrand size = 15, antiderivative size = 68

$$\begin{aligned} \int x^2 \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = & -\frac{x^3}{6} + \frac{1}{16} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{1+2x}{\sqrt{2}}\right) \\ & - \frac{1}{16} \sinh\left(\frac{1}{2} + 2x + 2x^2\right) + \frac{1}{8} x \sinh\left(\frac{1}{2} + 2x + 2x^2\right) \end{aligned}$$

output
$$-\frac{1}{6}x^3 - \frac{1}{16}\sinh(1/2 + 2x + 2x^2) + \frac{1}{8}x\sinh(1/2 + 2x + 2x^2) + \frac{1}{32}\operatorname{erf}(1/2*(1+2x)*2^{(1/2)})*2^{(1/2)}*\operatorname{Pi}^{(1/2)}$$

3.24.2 Mathematica [A] (verified)

Time = 0.16 (sec), antiderivative size = 99, normalized size of antiderivative = 1.46

$$\begin{aligned} \int x^2 \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx \\ = \frac{-16\sqrt{e}x^3 + 3(-1+e)(-1+2x)\cosh(2x(1+x)) + 3\sqrt{2e\pi}\operatorname{erf}\left(\frac{1+2x}{\sqrt{2}}\right) - 3\sinh(2x(1+x)) - 3e\sinh(2x(1+x))}{96\sqrt{e}} \end{aligned}$$

input `Integrate[x^2*Sinh[1/4 + x + x^2]^2, x]`

output
$$\frac{(-16\operatorname{Sqrt}[E]*x^3 + 3*(-1+E)*(-1+2x)*\cosh[2*x*(1+x)] + 3\operatorname{Sqrt}[2*E*\operatorname{Pi}]*\operatorname{Erf}[(1+2x)/\operatorname{Sqrt}[2]] - 3\sinh[2*x*(1+x)] - 3E*\sinh[2*x*(1+x)] + 6*x*\sinh[2*x*(1+x)] + 6E*x*\sinh[2*x*(1+x)])/(96\operatorname{Sqrt}[E])}{96\operatorname{Sqrt}[E]}$$

3.24.3 Rubi [A] (verified)

Time = 0.27 (sec), antiderivative size = 68, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.133$, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int x^2 \sinh^2 \left(x^2 + x + \frac{1}{4} \right) dx \\
 & \quad \downarrow \textcolor{blue}{5917} \\
 & \int \left(\frac{1}{2}x^2 \cosh \left(2x^2 + 2x + \frac{1}{2} \right) - \frac{x^2}{2} \right) dx \\
 & \quad \downarrow \textcolor{blue}{2009} \\
 & \frac{1}{16} \sqrt{\frac{\pi}{2}} \operatorname{erf} \left(\frac{2x+1}{\sqrt{2}} \right) - \frac{x^3}{6} + \frac{1}{8} x \sinh \left(2x^2 + 2x + \frac{1}{2} \right) - \frac{1}{16} \sinh \left(2x^2 + 2x + \frac{1}{2} \right)
 \end{aligned}$$

input `Int[x^2*Sinh[1/4 + x + x^2]^2, x]`

output `-1/6*x^3 + (Sqrt[Pi/2]*Erf[(1 + 2*x)/Sqrt[2]])/16 - Sinh[1/2 + 2*x + 2*x^2]/16 + (x*Sinh[1/2 + 2*x + 2*x^2])/8`

3.24.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_.) + (e_)*(x_))^(m_.)*Sinh[(a_.) + (b_)*(x_) + (c_)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.24.4 Maple [A] (verified)

Time = 0.80 (sec) , antiderivative size = 77, normalized size of antiderivative = 1.13

method	result	size
risch	$-\frac{x^3}{6} - \frac{xe^{-\frac{(1+2x)^2}{2}}}{16} + \frac{e^{-\frac{(1+2x)^2}{2}}}{32} + \frac{\sqrt{\pi}\sqrt{2}\operatorname{erf}\left(\sqrt{2}x + \frac{\sqrt{2}}{2}\right)}{32} + \frac{xe^{\frac{(1+2x)^2}{2}}}{16} - \frac{e^{\frac{(1+2x)^2}{2}}}{32}$	77

input `int(x^2*sinh(1/4+x+x^2)^2,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & -1/6*x^3 - 1/16*x*\exp(-1/2*(1+2*x)^2) + 1/32*\exp(-1/2*(1+2*x)^2) + 1/32*\Pi^{(1/2)} \\ & *2^{(1/2)}*\operatorname{erf}(2^{(1/2)}*x + 1/2*2^{(1/2)}) + 1/16*x*\exp(1/2*(1+2*x)^2) - 1/32*\exp(1/2 \\ & *(1+2*x)^2) \end{aligned}$$

3.24.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 268 vs. $2(52) = 104$.

Time = 0.26 (sec) , antiderivative size = 268, normalized size of antiderivative = 3.94

$$\int x^2 \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \frac{16 x^3 \cosh \left(x^2 + x + \frac{1}{4} \right)^2 - 3 (2x - 1) \cosh \left(x^2 + x + \frac{1}{4} \right)^4 - 12 (2x - 1) \cosh \left(x^2 + x + \frac{1}{4} \right) \sinh \left(x^2 + x + \frac{1}{4} \right)^2 + 4 (8x^3 - 9(2x - 1) \cosh \left(x^2 + x + \frac{1}{4} \right)^2) \sinh \left(x^2 + x + \frac{1}{4} \right)^2 + 4 (8x^3 \cosh \left(x^2 + x + \frac{1}{4} \right) - 3(2x - 1) \cosh \left(x^2 + x + \frac{1}{4} \right)^3) \sinh \left(x^2 + x + \frac{1}{4} \right) - 3\sqrt{\pi} (\sqrt{2} \cosh \left(x^2 + x + \frac{1}{4} \right)^2 \operatorname{erf} \left(\frac{1}{2}\sqrt{2}(\sqrt{2}x + 1) \right) + 2\sqrt{2} \cosh \left(x^2 + x + \frac{1}{4} \right) \operatorname{erf} \left(\frac{1}{2}\sqrt{2}(\sqrt{2}x + 1) \right) \sinh \left(x^2 + x + \frac{1}{4} \right)^2) + \sqrt{2} \operatorname{erf} \left(\frac{1}{2}\sqrt{2}(\sqrt{2}x + 1) \right) \sinh \left(x^2 + x + \frac{1}{4} \right)^2 + 6x - 3) / (\cosh \left(x^2 + x + \frac{1}{4} \right)^2 + 2 \cosh \left(x^2 + x + \frac{1}{4} \right) \sinh \left(x^2 + x + \frac{1}{4} \right) + \sinh \left(x^2 + x + \frac{1}{4} \right)^2)$$

input `integrate(x^2*sinh(1/4+x+x^2)^2,x, algorithm="fricas")`

output
$$\begin{aligned} & -1/96*(16*x^3*cosh(x^2 + x + 1/4)^2 - 3*(2*x - 1)*cosh(x^2 + x + 1/4)^4 - \\ & 12*(2*x - 1)*cosh(x^2 + x + 1/4)*sinh(x^2 + x + 1/4)^3 - 3*(2*x - 1)*sinh(x^2 + x + 1/4)^4 + 2*(8*x^3 - 9*(2*x - 1)*cosh(x^2 + x + 1/4)^2)*sinh(x^2 + x + 1/4)^2 + 4*(8*x^3*cosh(x^2 + x + 1/4) - 3*(2*x - 1)*cosh(x^2 + x + 1/4)^3)*sinh(x^2 + x + 1/4) - 3*sqrt(pi)*(sqrt(2)*cosh(x^2 + x + 1/4)^2*erf(1/2*sqrt(2)*(2*x + 1)) + 2*sqrt(2)*cosh(x^2 + x + 1/4)*erf(1/2*sqrt(2)*(2*x + 1))*sinh(x^2 + x + 1/4)^2) + sqrt(2)*erf(1/2*sqrt(2)*(2*x + 1))*sinh(x^2 + x + 1/4)^2) + 6*x - 3) / (\cosh(x^2 + x + 1/4)^2 + 2*cosh(x^2 + x + 1/4)*sinh(x^2 + x + 1/4) + sinh(x^2 + x + 1/4)^2) \end{aligned}$$

3.24.6 Sympy [F]

$$\int x^2 \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \int x^2 \sinh^2 \left(x^2 + x + \frac{1}{4} \right) dx$$

input `integrate(x**2*sinh(1/4+x+x**2)**2, x)`

output `Integral(x**2*sinh(x**2 + x + 1/4)**2, x)`

3.24.7 Maxima [C] (verification not implemented)

Result contains complex when optimal does not.

Time = 0.30 (sec), antiderivative size = 113, normalized size of antiderivative = 1.66

$$\begin{aligned} \int x^2 \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx &= -\frac{1}{6} x^3 + \frac{1}{32} \left(2 x e^{\frac{1}{2}} - e^{\frac{1}{2}} \right) e^{(2x^2+2x)} \\ &\quad - \frac{1}{64} i \sqrt{2} \left(-\frac{2i (2x+1)^3 \Gamma(\frac{3}{2}, \frac{1}{2}(2x+1)^2)}{((2x+1)^2)^{\frac{3}{2}}} + \frac{i \sqrt{\pi} (2x+1) \left(\operatorname{erf} \left(\sqrt{\frac{1}{2}} \sqrt{(2x+1)^2} \right) - 1 \right)}{\sqrt{(2x+1)^2}} + 2i \sqrt{2} e^{(-\frac{1}{2})} \right. \end{aligned}$$

input `integrate(x^2*sinh(1/4+x+x^2)^2, x, algorithm="maxima")`

output `-1/6*x^3 + 1/32*(2*x*e^(1/2) - e^(1/2))*e^(2*x^2 + 2*x) - 1/64*I*sqrt(2)*(-2*I*(2*x + 1)^3*gamma(3/2, 1/2*(2*x + 1)^2)/((2*x + 1)^2)^(3/2) + I*sqrt(pi)*(2*x + 1)*(erf(sqrt(1/2)*sqrt((2*x + 1)^2)) - 1)/sqrt((2*x + 1)^2) + 2*I*sqrt(2)*e^(-1/2*(2*x + 1)^2))`

3.24.8 Giac [A] (verification not implemented)

Time = 0.28 (sec), antiderivative size = 61, normalized size of antiderivative = 0.90

$$\begin{aligned} \int x^2 \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx &= -\frac{1}{6} x^3 + \frac{1}{32} \sqrt{2} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2} \sqrt{2} (2x+1) \right) \\ &\quad + \frac{1}{32} (2x-1) e^{(2x^2+2x+\frac{1}{2})} - \frac{1}{32} (2x-1) e^{(-2x^2-2x-\frac{1}{2})} \end{aligned}$$

input `integrate(x^2*sinh(1/4+x+x^2)^2,x, algorithm="giac")`

output `-1/6*x^3 + 1/32*sqrt(2)*sqrt(pi)*erf(1/2*sqrt(2)*(2*x + 1)) + 1/32*(2*x - 1)*e^(2*x^2 + 2*x + 1/2) - 1/32*(2*x - 1)*e^(-2*x^2 - 2*x - 1/2)`

3.24.9 Mupad [F(-1)]

Timed out.

$$\int x^2 \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \int x^2 \sinh \left(x^2 + x + \frac{1}{4} \right)^2 dx$$

input `int(x^2*sinh(x + x^2 + 1/4)^2,x)`

output `int(x^2*sinh(x + x^2 + 1/4)^2, x)`

3.25 $\int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx$

3.25.1	Optimal result	171
3.25.2	Mathematica [A] (verified)	171
3.25.3	Rubi [A] (verified)	172
3.25.4	Maple [C] (verified)	173
3.25.5	Fricas [B] (verification not implemented)	173
3.25.6	Sympy [F]	174
3.25.7	Maxima [C] (verification not implemented)	174
3.25.8	Giac [C] (verification not implemented)	175
3.25.9	Mupad [F(-1)]	175

3.25.1 Optimal result

Integrand size = 13, antiderivative size = 75

$$\begin{aligned} \int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = & -\frac{x^2}{4} - \frac{1}{16} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{1+2x}{\sqrt{2}}\right) \\ & - \frac{1}{16} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{1+2x}{\sqrt{2}}\right) + \frac{1}{8} \sinh\left(\frac{1}{2} + 2x + 2x^2\right) \end{aligned}$$

output
$$-\frac{1}{4}x^2 + \frac{1}{8}\sinh(1/2 + 2x + 2x^2) - \frac{1}{32}\operatorname{erf}(1/2 * (1 + 2x) * 2^{1/2}) * 2^{1/2} * \operatorname{Pi}^{1/2} - \frac{1}{32}\operatorname{erfi}(1/2 * (1 + 2x) * 2^{1/2}) * 2^{1/2} * \operatorname{Pi}^{1/2}$$

3.25.2 Mathematica [A] (verified)

Time = 0.16 (sec), antiderivative size = 88, normalized size of antiderivative = 1.17

$$\begin{aligned} \int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx \\ = \frac{-8\sqrt{e}x^2 + 2(-1 + e)\cosh(2x(1 + x)) - \sqrt{2e\pi}\operatorname{erf}\left(\frac{1+2x}{\sqrt{2}}\right) - \sqrt{2e\pi}\operatorname{erfi}\left(\frac{1+2x}{\sqrt{2}}\right) + 2(1 + e)\sinh(2x(1 + x))}{32\sqrt{e}} \end{aligned}$$

input `Integrate[x*Sinh[1/4 + x + x^2]^2, x]`

output
$$\frac{(-8\sqrt{e}x^2 + 2(-1 + e)\cosh(2x(1 + x)) - \sqrt{2e\pi}\operatorname{Erf}\left[\frac{(1 + 2x)}{\sqrt{2}}\right] - \sqrt{2e\pi}\operatorname{Erfi}\left[\frac{(1 + 2x)}{\sqrt{2}}\right] + 2(1 + e)\sinh(2x(1 + x)))}{32\sqrt{e}}$$

3.25. $\int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx$

3.25.3 Rubi [A] (verified)

Time = 0.24 (sec), antiderivative size = 75, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.154, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int x \sinh^2 \left(x^2 + x + \frac{1}{4} \right) dx \\
 & \quad \downarrow \textcolor{blue}{5917} \\
 & \int \left(\frac{1}{2}x \cosh \left(2x^2 + 2x + \frac{1}{2} \right) - \frac{x}{2} \right) dx \\
 & \quad \downarrow \textcolor{blue}{2009} \\
 & -\frac{1}{16} \sqrt{\frac{\pi}{2}} \operatorname{erf} \left(\frac{2x+1}{\sqrt{2}} \right) - \frac{1}{16} \sqrt{\frac{\pi}{2}} \operatorname{erfi} \left(\frac{2x+1}{\sqrt{2}} \right) - \frac{x^2}{4} + \frac{1}{8} \sinh \left(2x^2 + 2x + \frac{1}{2} \right)
 \end{aligned}$$

input `Int[x*Sinh[1/4 + x + x^2]^2, x]`

output `-1/4*x^2 - (Sqrt[Pi/2]*Erf[(1 + 2*x)/Sqrt[2]])/16 - (Sqrt[Pi/2]*Erfi[(1 + 2*x)/Sqrt[2]])/16 + Sinh[1/2 + 2*x + 2*x^2]/8`

3.25.3.1 Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_.) + (e_.)*(x_.))^(m_.)*Sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.25.4 Maple [C] (verified)

Result contains complex when optimal does not.

Time = 0.79 (sec) , antiderivative size = 75, normalized size of antiderivative = 1.00

method	result	size
risch	$-\frac{x^2}{4} - \frac{e^{-\frac{(1+2x)^2}{2}}}{16} - \frac{\sqrt{\pi} \sqrt{2} \operatorname{erf}\left(\sqrt{2} x + \frac{\sqrt{2}}{2}\right)}{32} + \frac{e^{\frac{(1+2x)^2}{2}}}{16} + \frac{i \sqrt{\pi} \sqrt{2} \operatorname{erf}\left(i \sqrt{2} x + \frac{i \sqrt{2}}{2}\right)}{32}$	75

input `int(x*sinh(1/4+x+x^2)^2,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & -1/4*x^2 - 1/16*\exp(-1/2*(1+2*x)^2) - 1/32*\text{Pi}^{(1/2)}*2^{(1/2)}*\operatorname{erf}(2^{(1/2)}*x + 1/2*2^{(1/2)}) \\ & + 1/16*\exp(1/2*(1+2*x)^2) + 1/32*I*\text{Pi}^{(1/2)}*2^{(1/2)}*\operatorname{erf}(I*2^{(1/2)}*x + 1/2*I*2^{(1/2)}) \end{aligned}$$

3.25.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 307 vs. $2(57) = 114$.

Time = 0.25 (sec) , antiderivative size = 307, normalized size of antiderivative = 4.09

$$\begin{aligned} & \int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \\ & \frac{8 x^2 \cosh \left(x^2 + x + \frac{1}{4} \right)^2 - 2 \cosh \left(x^2 + x + \frac{1}{4} \right)^4 - 8 \cosh \left(x^2 + x + \frac{1}{4} \right) \sinh \left(x^2 + x + \frac{1}{4} \right)^3 - 2 \sinh \left(x^2 + x + \frac{1}{4} \right)^5}{-} \end{aligned}$$

input `integrate(x*sinh(1/4+x+x^2)^2,x, algorithm="fricas")`

output
$$\begin{aligned} & -1/32*(8*x^2*cosh(x^2 + x + 1/4)^2 - 2*cosh(x^2 + x + 1/4)^4 - 8*cosh(x^2 + x + 1/4)*sinh(x^2 + x + 1/4)^3 - 2*sinh(x^2 + x + 1/4)^4 + 4*(2*x^2 - 3*cosh(x^2 + x + 1/4)^2)*sinh(x^2 + x + 1/4)^2 + 8*(2*x^2*cosh(x^2 + x + 1/4) - cosh(x^2 + x + 1/4)^3)*sinh(x^2 + x + 1/4) + sqrt(pi)*(sqrt(2)*cosh(x^2 + x + 1/4)^2*erf(1/2*sqrt(2)*(2*x + 1)) - sqrt(-2)*cosh(x^2 + x + 1/4)^2*erf(1/2*sqrt(-2)*(2*x + 1)) + (sqrt(2)*erf(1/2*sqrt(2)*(2*x + 1)) - sqrt(-2)*erf(1/2*sqrt(-2)*(2*x + 1)))*sinh(x^2 + x + 1/4)^2 + 2*(sqrt(2)*cosh(x^2 + x + 1/4)^2*erf(1/2*sqrt(2)*(2*x + 1)) - sqrt(-2)*cosh(x^2 + x + 1/4)*erf(1/2*sqrt(-2)*(2*x + 1)))*sinh(x^2 + x + 1/4)^2 + 2)/(\cosh(x^2 + x + 1/4)^2 + 2*cosh(x^2 + x + 1/4)*sinh(x^2 + x + 1/4) + sinh(x^2 + x + 1/4)^2) \end{aligned}$$

3.25. $\int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx$

3.25.6 Sympy [F]

$$\int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \int x \sinh^2 \left(x^2 + x + \frac{1}{4} \right) dx$$

input `integrate(x*sinh(1/4+x+x**2)**2,x)`

output `Integral(x*sinh(x**2 + x + 1/4)**2, x)`

3.25.7 Maxima [C] (verification not implemented)

Result contains complex when optimal does not.

Time = 0.32 (sec) , antiderivative size = 121, normalized size of antiderivative = 1.61

$$\begin{aligned} & \int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx \\ &= -\frac{1}{4}x^2 - \frac{1}{32}\sqrt{2} \left(\frac{\sqrt{\pi}(2x+1)\left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-(2x+1)^2}\right) - 1\right)}{\sqrt{-(2x+1)^2}} - \sqrt{2}e^{\left(\frac{1}{2}(2x+1)^2\right)} \right) \\ &\quad - \frac{1}{32}i\sqrt{2} \left(-\frac{i\sqrt{\pi}(2x+1)\left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{(2x+1)^2}\right) - 1\right)}{\sqrt{(2x+1)^2}} - i\sqrt{2}e^{\left(-\frac{1}{2}(2x+1)^2\right)} \right) \end{aligned}$$

input `integrate(x*sinh(1/4+x+x^2)^2,x, algorithm="maxima")`

output `-1/4*x^2 - 1/32*sqrt(2)*(sqrt(pi)*(2*x + 1)*(erf(sqrt(1/2)*sqrt(-(2*x + 1)^2)) - 1)/sqrt(-(2*x + 1)^2) - sqrt(2)*e^(1/2*(2*x + 1)^2)) - 1/32*I*sqrt(2)*(-I*sqrt(pi)*(2*x + 1)*(erf(sqrt(1/2)*sqrt((2*x + 1)^2)) - 1)/sqrt((2*x + 1)^2) - I*sqrt(2)*e^(-1/2*(2*x + 1)^2))`

3.25.8 Giac [C] (verification not implemented)

Result contains complex when optimal does not.

Time = 0.28 (sec) , antiderivative size = 70, normalized size of antiderivative = 0.93

$$\int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = -\frac{1}{4} x^2 - \frac{1}{32} \sqrt{2} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2} \sqrt{2}(2x+1) \right) \\ - \frac{1}{32} i \sqrt{2} \sqrt{\pi} \operatorname{erf} \left(-\frac{1}{2} i \sqrt{2}(2x+1) \right) \\ + \frac{1}{16} e^{(2x^2+2x+\frac{1}{2})} - \frac{1}{16} e^{(-2x^2-2x-\frac{1}{2})}$$

input `integrate(x*sinh(1/4+x+x^2)^2,x, algorithm="giac")`

output `-1/4*x^2 - 1/32*sqrt(2)*sqrt(pi)*erf(1/2*sqrt(2)*(2*x + 1)) - 1/32*I*sqrt(2)*sqrt(pi)*erf(-1/2*I*sqrt(2)*(2*x + 1)) + 1/16*e^(2*x^2 + 2*x + 1/2) - 1/16*e^(-2*x^2 - 2*x - 1/2)`

3.25.9 Mupad [F(-1)]

Timed out.

$$\int x \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \int x \sinh \left(x^2 + x + \frac{1}{4} \right)^2 dx$$

input `int(x*sinh(x + x^2 + 1/4)^2,x)`

output `int(x*sinh(x + x^2 + 1/4)^2, x)`

3.26 $\int \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx$

3.26.1	Optimal result	176
3.26.2	Mathematica [A] (verified)	176
3.26.3	Rubi [A] (verified)	177
3.26.4	Maple [C] (verified)	178
3.26.5	Fricas [A] (verification not implemented)	178
3.26.6	Sympy [F]	179
3.26.7	Maxima [C] (verification not implemented)	179
3.26.8	Giac [C] (verification not implemented)	179
3.26.9	Mupad [F(-1)]	180

3.26.1 Optimal result

Integrand size = 11, antiderivative size = 56

$$\int \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = -\frac{x}{2} + \frac{1}{8} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{1+2x}{\sqrt{2}}\right) + \frac{1}{8} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{1+2x}{\sqrt{2}}\right)$$

output
$$-\frac{1}{2}x + \frac{1}{16}\operatorname{erf}\left(\frac{1}{2}(1+2x)\right)2^{1/2} + \frac{1}{16}\operatorname{erfi}\left(\frac{1}{2}(1+2x)\right)2^{1/2}$$

3.26.2 Mathematica [A] (verified)

Time = 0.06 (sec), antiderivative size = 48, normalized size of antiderivative = 0.86

$$\int \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \frac{1}{16} \left(-8x + \sqrt{2\pi} \operatorname{erf}\left(\frac{1+2x}{\sqrt{2}}\right) + \sqrt{2\pi} \operatorname{erfi}\left(\frac{1+2x}{\sqrt{2}}\right) \right)$$

input `Integrate[Sinh[1/4 + x + x^2]^2, x]`

output
$$-\frac{8x}{16} + \frac{\sqrt{2\pi} \operatorname{Erf}\left[\frac{1+2x}{\sqrt{2}}\right]}{16} + \frac{\sqrt{2\pi} \operatorname{Erfi}\left[\frac{1+2x}{\sqrt{2}}\right]}{16}$$

3.26.3 Rubi [A] (verified)

Time = 0.21 (sec), antiderivative size = 56, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.182$, Rules used = {5899, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int \sinh^2 \left(x^2 + x + \frac{1}{4} \right) dx \\ & \quad \downarrow \textcolor{blue}{5899} \\ & \int \left(\frac{1}{2} \cosh \left(2x^2 + 2x + \frac{1}{2} \right) - \frac{1}{2} \right) dx \\ & \quad \downarrow \textcolor{blue}{2009} \\ & \frac{1}{8} \sqrt{\frac{\pi}{2}} \operatorname{erf} \left(\frac{2x+1}{\sqrt{2}} \right) + \frac{1}{8} \sqrt{\frac{\pi}{2}} \operatorname{erfi} \left(\frac{2x+1}{\sqrt{2}} \right) - \frac{x}{2} \end{aligned}$$

input `Int[Sinh[1/4 + x + x^2]^2, x]`

output `-1/2*x + (Sqrt[Pi/2]*Erf[(1 + 2*x)/Sqrt[2]])/8 + (Sqrt[Pi/2]*Erfi[(1 + 2*x)/Sqrt[2]])/8`

3.26.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5899 `Int[Sinh[(a_.) + (b_)*(x_) + (c_)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c}, x] && IGtQ[n, 1]`

3.26.4 Maple [C] (verified)

Result contains complex when optimal does not.

Time = 0.70 (sec) , antiderivative size = 49, normalized size of antiderivative = 0.88

method	result	size
risch	$-\frac{x}{2} + \frac{\sqrt{\pi} \sqrt{2} \operatorname{erf}\left(\sqrt{2} x+\frac{\sqrt{2}}{2}\right)}{16} - \frac{i \sqrt{\pi} \sqrt{2} \operatorname{erf}\left(i \sqrt{2} x+\frac{i \sqrt{2}}{2}\right)}{16}$	49

input `int(sinh(1/4+x+x^2)^2,x,method=_RETURNVERBOSE)`

output $-1/2*x+1/16*\operatorname{Pi}^{(1/2)}*2^{(1/2)}*\operatorname{erf}(2^{(1/2)}*x+1/2*2^{(1/2)})-1/16*I*\operatorname{Pi}^{(1/2)}*2^{(1/2)}*\operatorname{erf}(I*2^{(1/2)}*x+1/2*I*2^{(1/2)})$

3.26.5 Fricas [A] (verification not implemented)

Time = 0.25 (sec) , antiderivative size = 41, normalized size of antiderivative = 0.73

$$\begin{aligned} & \int \sinh^2\left(\frac{1}{4} + x + x^2\right) dx \\ &= \frac{1}{16} \sqrt{\pi} \left(\sqrt{2} \operatorname{erf}\left(\frac{1}{2} \sqrt{2}(2x+1)\right) - \sqrt{-2} \operatorname{erf}\left(\frac{1}{2} \sqrt{-2}(2x+1)\right) \right) \\ & \quad - \frac{1}{2} x \end{aligned}$$

input `integrate(sinh(1/4+x+x^2)^2,x, algorithm="fricas")`

output $1/16*\sqrt{\pi}*(\sqrt{2}*\operatorname{erf}(1/2*\sqrt{2}*(2*x+1)) - \sqrt{-2}*\operatorname{erf}(1/2*\sqrt{-2}*(2*x+1))) - 1/2*x$

3.26.6 Sympy [F]

$$\int \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \int \sinh^2 \left(x^2 + x + \frac{1}{4} \right) dx$$

input `integrate(sinh(1/4+x+x**2)**2, x)`

output `Integral(sinh(x**2 + x + 1/4)**2, x)`

3.26.7 Maxima [C] (verification not implemented)

Result contains complex when optimal does not.

Time = 0.27 (sec), antiderivative size = 45, normalized size of antiderivative = 0.80

$$\begin{aligned} \int \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx &= \frac{1}{16} \sqrt{2} \sqrt{\pi} \operatorname{erf} \left(\sqrt{2}x + \frac{1}{2} \sqrt{2} \right) \\ &\quad - \frac{1}{16} i \sqrt{2} \sqrt{\pi} \operatorname{erf} \left(i \sqrt{2}x + \frac{1}{2} i \sqrt{2} \right) - \frac{1}{2} x \end{aligned}$$

input `integrate(sinh(1/4+x+x^2)^2, x, algorithm="maxima")`

output `1/16*sqrt(2)*sqrt(pi)*erf(sqrt(2)*x + 1/2*sqrt(2)) - 1/16*I*sqrt(2)*sqrt(pi)*erf(I*sqrt(2)*x + 1/2*I*sqrt(2)) - 1/2*x`

3.26.8 Giac [C] (verification not implemented)

Result contains complex when optimal does not.

Time = 0.28 (sec), antiderivative size = 42, normalized size of antiderivative = 0.75

$$\begin{aligned} \int \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx &= \frac{1}{16} \sqrt{2} \sqrt{\pi} \operatorname{erf} \left(\frac{1}{2} \sqrt{2}(2x + 1) \right) \\ &\quad + \frac{1}{16} i \sqrt{2} \sqrt{\pi} \operatorname{erf} \left(-\frac{1}{2} i \sqrt{2}(2x + 1) \right) - \frac{1}{2} x \end{aligned}$$

input `integrate(sinh(1/4+x+x^2)^2, x, algorithm="giac")`

output `1/16*sqrt(2)*sqrt(pi)*erf(1/2*sqrt(2)*(2*x + 1)) + 1/16*I*sqrt(2)*sqrt(pi)*erf(-1/2*I*sqrt(2)*(2*x + 1)) - 1/2*x`

3.26.9 Mupad [F(-1)]

Timed out.

$$\int \sinh^2 \left(\frac{1}{4} + x + x^2 \right) dx = \int \sinh \left(x^2 + x + \frac{1}{4} \right)^2 dx$$

input `int(sinh(x + x^2 + 1/4)^2,x)`

output `int(sinh(x + x^2 + 1/4)^2, x)`

3.27 $\int \frac{\sinh^2\left(\frac{1}{4}+x+x^2\right)}{x} dx$

3.27.1 Optimal result	181
3.27.2 Mathematica [N/A]	181
3.27.3 Rubi [N/A]	182
3.27.4 Maple [N/A] (verified)	183
3.27.5 Fricas [N/A]	183
3.27.6 Sympy [N/A]	183
3.27.7 Maxima [N/A]	184
3.27.8 Giac [N/A]	184
3.27.9 Mupad [N/A]	184

3.27.1 Optimal result

Integrand size = 15, antiderivative size = 15

$$\int \frac{\sinh^2\left(\frac{1}{4} + x + x^2\right)}{x} dx = -\frac{\log(x)}{2} + \frac{1}{2} \text{Int}\left(\frac{\cosh\left(\frac{1}{2} + 2x + 2x^2\right)}{x}, x\right)$$

output `-1/2*ln(x)+1/2*Unintegrable(cosh(1/2+2*x+2*x^2)/x,x)`

3.27.2 Mathematica [N/A]

Not integrable

Time = 13.85 (sec) , antiderivative size = 17, normalized size of antiderivative = 1.13

$$\int \frac{\sinh^2\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh^2\left(\frac{1}{4} + x + x^2\right)}{x} dx$$

input `Integrate[Sinh[1/4 + x + x^2]^2/x, x]`

output `Integrate[Sinh[1/4 + x + x^2]^2/x, x]`

3.27. $\int \frac{\sinh^2\left(\frac{1}{4}+x+x^2\right)}{x} dx$

3.27.3 Rubi [N/A]

Not integrable

Time = 0.20 (sec), antiderivative size = 15, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int \frac{\sinh^2(x^2 + x + \frac{1}{4})}{x} dx \\ & \quad \downarrow \textcolor{blue}{5917} \\ & \int \left(\frac{\cosh(2x^2 + 2x + \frac{1}{2})}{2x} - \frac{1}{2x} \right) dx \\ & \quad \downarrow \textcolor{blue}{2009} \\ & \frac{1}{2} \int \frac{\cosh(2x^2 + 2x + \frac{1}{2})}{x} dx - \frac{\log(x)}{2} \end{aligned}$$

input `Int[Sinh[1/4 + x + x^2]^2/x, x]`

output `$Aborted`

3.27.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simplify[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_.) + (e_)*(x_))^(m_.)*Sinh[(a_.) + (b_)*(x_) + (c_)*(x_)^2]^(n_), x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.27.4 Maple [N/A] (verified)

Not integrable

Time = 0.32 (sec) , antiderivative size = 13, normalized size of antiderivative = 0.87

$$\int \frac{\sinh\left(\frac{1}{4} + x + x^2\right)^2}{x} dx$$

input `int(sinh(1/4+x+x^2)^2/x, x)`

output `int(sinh(1/4+x+x^2)^2/x, x)`

3.27.5 Fricas [N/A]

Not integrable

Time = 0.25 (sec) , antiderivative size = 15, normalized size of antiderivative = 1.00

$$\int \frac{\sinh^2\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)^2}{x} dx$$

input `integrate(sinh(1/4+x+x^2)^2/x, x, algorithm="fricas")`

output `integral(sinh(x^2 + x + 1/4)^2/x, x)`

3.27.6 Sympy [N/A]

Not integrable

Time = 0.68 (sec) , antiderivative size = 14, normalized size of antiderivative = 0.93

$$\int \frac{\sinh^2\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh^2\left(x^2 + x + \frac{1}{4}\right)}{x} dx$$

input `integrate(sinh(1/4+x+x**2)**2/x, x)`

output `Integral(sinh(x**2 + x + 1/4)**2/x, x)`

3.27.7 Maxima [N/A]

Not integrable

Time = 0.32 (sec) , antiderivative size = 43, normalized size of antiderivative = 2.87

$$\int \frac{\sinh^2\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)^2}{x} dx$$

input `integrate(sinh(1/4+x+x^2)^2/x, x, algorithm="maxima")`

output `1/4*integrate(e^(2*x^2 + 2*x + 1/2)/x, x) + 1/4*integrate(e^(-2*x^2 - 2*x - 1/2)/x, x) - 1/2*log(x)`

3.27.8 Giac [N/A]

Not integrable

Time = 0.29 (sec) , antiderivative size = 15, normalized size of antiderivative = 1.00

$$\int \frac{\sinh^2\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)^2}{x} dx$$

input `integrate(sinh(1/4+x+x^2)^2/x, x, algorithm="giac")`

output `integrate(sinh(x^2 + x + 1/4)^2/x, x)`

3.27.9 Mupad [N/A]

Not integrable

Time = 1.09 (sec) , antiderivative size = 15, normalized size of antiderivative = 1.00

$$\int \frac{\sinh^2\left(\frac{1}{4} + x + x^2\right)}{x} dx = \int \frac{\sinh\left(x^2 + x + \frac{1}{4}\right)^2}{x} dx$$

input `int(sinh(x + x^2 + 1/4)^2/x, x)`

output `int(sinh(x + x^2 + 1/4)^2/x, x)`

3.28 $\int (d + ex)^2 \sinh(a + bx + cx^2) dx$

3.28.1 Optimal result	185
3.28.2 Mathematica [A] (verified)	186
3.28.3 Rubi [A] (verified)	186
3.28.4 Maple [B] (verified)	190
3.28.5 Fricas [B] (verification not implemented)	190
3.28.6 Sympy [F]	191
3.28.7 Maxima [B] (verification not implemented)	192
3.28.8 Giac [A] (verification not implemented)	193
3.28.9 Mupad [F(-1)]	194

3.28.1 Optimal result

Integrand size = 19, antiderivative size = 261

$$\begin{aligned} \int (d + ex)^2 \sinh(a + bx + cx^2) dx &= \frac{e(2cd - be) \cosh(a + bx + cx^2)}{4c^2} \\ &+ \frac{e(d + ex) \cosh(a + bx + cx^2)}{2c} \\ &- \frac{e^2 e^{-a + \frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \\ &- \frac{(2cd - be)^2 e^{-a + \frac{b^2}{4c}} \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{16c^{5/2}} \\ &- \frac{e^2 e^{a - \frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \\ &+ \frac{(2cd - be)^2 e^{a - \frac{b^2}{4c}} \sqrt{\pi} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{16c^{5/2}} \end{aligned}$$

```
output 1/4*e*(-b*e+2*c*d)*cosh(c*x^2+b*x+a)/c^2+1/2*e*(e*x+d)*cosh(c*x^2+b*x+a)/c
-1/8*e^2*exp(-a+1/4*b^2/c)*erf(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)-1/1
6*(-b*e+2*c*d)^2*exp(-a+1/4*b^2/c)*erf(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(5/2)
-1/8*e^2*exp(a-1/4*b^2/c)*erfi(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)
+1/16*(-b*e+2*c*d)^2*exp(a-1/4*b^2/c)*erfi(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)
/c^(5/2)
```

3.28.2 Mathematica [A] (verified)

Time = 0.40 (sec) , antiderivative size = 194, normalized size of antiderivative = 0.74

$$\int (d + ex)^2 \sinh(a + bx + cx^2) dx \\ = \frac{4\sqrt{c}e(4cd - be + 2cex) \cosh(a + x(b + cx)) + (4c^2d^2 + b^2e^2 + 2ce(-2bd + e)) \sqrt{\pi} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right) \left(-\cosh(a + x(b + cx)) + \frac{4c^2d^2 + b^2e^2 + 2ce(-2bd + e)}{4\sqrt{c}} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)\right)}{16c}$$

input `Integrate[(d + e*x)^2*Sinh[a + b*x + c*x^2], x]`

output $(4*\text{Sqrt}[c]*e*(4*c*d - b*e + 2*c*e*x)*\text{Cosh}[a + x*(b + c*x)] + (4*c^2*d^2 + b^2*e^2 + 2*c*e*(-2*b*d + e))*\text{Sqrt}[\text{Pi}]*\text{Erf}[(b + 2*c*x)/(2*\text{Sqrt}[c])]*(-\text{Cosh}[a - b^2/(4*c)] + \text{Sinh}[a - b^2/(4*c)]) + (4*c^2*d^2 + b^2*e^2 - 2*c*e*(2*b*d + e))*\text{Sqrt}[\text{Pi}]*\text{Erfi}[(b + 2*c*x)/(2*\text{Sqrt}[c])]*(\text{Cosh}[a - b^2/(4*c)] + \text{Sinh}[a - b^2/(4*c)]))/(16*c^{(5/2)})$

3.28.3 Rubi [A] (verified)

Time = 0.86 (sec) , antiderivative size = 269, normalized size of antiderivative = 1.03, number of steps used = 10, number of rules used = 10, $\frac{\text{number of rules}}{\text{integrand size}} = 0.526$, Rules used = {5909, 5898, 2664, 2633, 2634, 5905, 5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (d + ex)^2 \sinh(a + bx + cx^2) dx \\ \downarrow 5909 \\ \frac{(2cd - be) \int (d + ex) \sinh(cx^2 + bx + a) dx}{2c} - \frac{e^2 \int \cosh(cx^2 + bx + a) dx}{2c} + \\ \frac{e(d + ex) \cosh(a + bx + cx^2)}{2c} \\ \downarrow 5898 \\ \frac{(2cd - be) \int (d + ex) \sinh(cx^2 + bx + a) dx}{2c} - \frac{e^2 \left(\frac{1}{2} \int e^{-cx^2 - bx - a} dx + \frac{1}{2} \int e^{cx^2 + bx + a} dx \right)}{2c} + \\ \frac{e(d + ex) \cosh(a + bx + cx^2)}{2c} \\ \downarrow 2664$$

$$\begin{aligned}
& - \frac{e^2 \left(\frac{1}{2} e^{\frac{b^2}{4c}-a} \int e^{-\frac{(b+2cx)^2}{4c}} dx + \frac{1}{2} e^{a-\frac{b^2}{4c}} \int e^{\frac{(b+2cx)^2}{4c}} dx \right)}{2c} + \\
& \frac{(2cd-be) \int (d+ex) \sinh(cx^2+bx+a) dx}{2c} + \frac{e(d+ex) \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{2633} \\
& - \frac{e^2 \left(\frac{1}{2} e^{\frac{b^2}{4c}-a} \int e^{-\frac{(b+2cx)^2}{4c}} dx + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} + \\
& \frac{(2cd-be) \int (d+ex) \sinh(cx^2+bx+a) dx}{2c} + \frac{e(d+ex) \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{2634} \\
& \frac{(2cd-be) \int (d+ex) \sinh(cx^2+bx+a) dx}{2c} - \frac{e^2 \left(\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} + \\
& \frac{e(d+ex) \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{5905} \\
& \frac{(2cd-be) \left(\frac{(2cd-be) \int \sinh(cx^2+bx+a) dx}{2c} + \frac{e \cosh(a+bx+cx^2)}{2c} \right)}{2c} - \\
& \frac{e^2 \left(\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} + \frac{e(d+ex) \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{5897} \\
& \frac{(2cd-be) \left(\frac{(2cd-be) \left(\frac{1}{2} \int e^{cx^2+bx+a} dx - \frac{1}{2} \int e^{-cx^2-bx-a} dx \right)}{2c} + \frac{e \cosh(a+bx+cx^2)}{2c} \right)}{2c} - \\
& \frac{e^2 \left(\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} + \frac{e(d+ex) \cosh(a+bx+cx^2)}{2c} \\
& \quad \downarrow \text{2664}
\end{aligned}$$

$$\begin{aligned}
 & \frac{(2cd-be) \left(\frac{(2cd-be) \left(\frac{1}{2} e^{a-\frac{b^2}{4c}} \int e^{\frac{(b+2cx)^2}{4c}} dx - \frac{1}{2} e^{\frac{b^2}{4c}-a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \right)}{2c} + \frac{e \cosh(a+bx+cx^2)}{2c} \right)}{2c} - \\
 & \frac{e^2 \left(\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} + \frac{e(d+ex) \cosh(a+bx+cx^2)}{2c} \\
 & \quad \downarrow \text{2633} \\
 & \frac{(2cd-be) \left(\frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right) - \frac{1}{2} e^{\frac{b^2}{4c}-a} \int e^{-\frac{(b+2cx)^2}{4c}} dx}{2c} + \frac{e \cosh(a+bx+cx^2)}{2c} \right)}{2c} - \\
 & \frac{e^2 \left(\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} + \frac{e(d+ex) \cosh(a+bx+cx^2)}{2c} \\
 & \quad \downarrow \text{2634} \\
 & \frac{(2cd-be) \left(\frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right) - \frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}}}{2c} + \frac{e \cosh(a+bx+cx^2)}{2c} \right)}{2c} - \\
 & \frac{e^2 \left(\frac{\sqrt{\pi} e^{\frac{b^2}{4c}-a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} + \frac{\sqrt{\pi} e^{a-\frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} + \frac{e(d+ex) \cosh(a+bx+cx^2)}{2c}
 \end{aligned}$$

input `Int[(d + e*x)^2*Sinh[a + b*x + c*x^2],x]`

output `(e*(d + e*x)*Cosh[a + b*x + c*x^2])/(2*c) - (e^2*((E^(-a + b^2/(4*c))*Sqrt[Pi]*Erf[(b + 2*c*x)/(2*Sqrt[c])]))/(4*Sqrt[c]) + (E^(a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b + 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c]))/(2*c) + ((2*c*d - b*e)*(e*Cosh[a + b*x + c*x^2])/(2*c) + ((2*c*d - b*e)*(-1/4*(E^(-a + b^2/(4*c))*Sqrt[Pi]*Erf[(b + 2*c*x)/(2*Sqrt[c])])/Sqrt[c] + (E^(a - b^2/(4*c))*Sqrt[Pi]*Erfi[(b + 2*c*x)/(2*Sqrt[c])])/(4*Sqrt[c])))/(2*c)))/(2*c)`

3.28.3.1 Definitions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erfi}[(c + d*x)*\text{Rt}[b*\text{Log}[F], 2]]/(2*d*\text{Rt}[b*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a * \text{Sqrt}[\text{Pi}] * (\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2), x_{\text{Symbol}}] \rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{((b + 2*c*x)^2/(4*c))}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5898 $\text{Int}[\text{Cosh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] + \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5905 $\text{Int}[((d_{_}) + (e_{_})*(x_{_}))*\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(\text{Cosh}[a + b*x + c*x^2]/(2*c)), x] - \text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[\text{Sinh}[a + b*x + c*x^2], x], x] /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{NeQ}[b*e - 2*c*d, 0]$

rule 5909 $\text{Int}[((d_{_}) + (e_{_})*(x_{_}))^{(m)}*\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_})^2], x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(d + e*x)^{(m - 1)}*(\text{Cosh}[a + b*x + c*x^2]/(2*c)), x] + (-\text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[(d + e*x)^{(m - 1)}*\text{Sinh}[a + b*x + c*x^2], x], x] - \text{Simp}[e^{2*((m - 1)/(2*c))} \text{Int}[(d + e*x)^{(m - 2)}*\text{Cosh}[a + b*x + c*x^2], x], x]) /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{GtQ}[m, 1] \&& \text{NeQ}[b*e - 2*c*d, 0]$

3.28.4 Maple [B] (verified)

Leaf count of result is larger than twice the leaf count of optimal. 459 vs. $2(205) = 410$.

Time = 0.64 (sec), antiderivative size = 460, normalized size of antiderivative = 1.76

method	result
risch	$-\frac{\operatorname{erf}\left(\sqrt{c}x + \frac{b}{2\sqrt{c}}\right)\sqrt{\pi}d^2e^{-\frac{4ac-b^2}{4c}}}{4\sqrt{c}} + \frac{e^{-a}e^2xe^{-x(cx+b)}}{4c} - \frac{e^{-a}e^2be^{-x(cx+b)}}{8c^2} - \frac{e^{-a}e^2b^2\sqrt{\pi}e^{\frac{b^2}{4c}}\operatorname{erf}\left(\sqrt{c}x + \frac{b}{2\sqrt{c}}\right)}{16c^{\frac{5}{2}}} - \frac{e^{-a}e^2\sqrt{\pi}e^{\frac{b^2}{4c}}}{16c^{\frac{5}{2}}}$

input `int((e*x+d)^2*sinh(c*x^2+b*x+a),x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & -1/4*\operatorname{erf}(c^{(1/2)}*x+1/2*b/c^{(1/2)})/c^{(1/2)}*\operatorname{Pi}^{(1/2)}*d^2*\exp(-1/4*(4*a*c-b^2)/c)+1/4*\exp(-a)*e^2/c*x*\exp(-x*(c*x+b))-1/8*\exp(-a)*e^2*b/c^2*\exp(-x*(c*x+b))-1/16*\exp(-a)*e^2*b^2/c^{(5/2)}*\operatorname{Pi}^{(1/2)}*\exp(1/4*b^2/c)*\operatorname{erf}(c^{(1/2)}*x+1/2*b/c^{(1/2)})-1/8*\exp(-a)*e^2/c^{(3/2)}*\operatorname{Pi}^{(1/2)}*\exp(1/4*b^2/c)*\operatorname{erf}(c^{(1/2)}*x+1/2*b/c^{(1/2)})+1/2*\exp(-a)*d*e/c*\exp(-x*(c*x+b))+1/4*\exp(-a)*d*e*b/c^{(3/2)}*\operatorname{Pi}^{(1/2)}*\exp(1/4*b^2/c)*\operatorname{erf}(c^{(1/2)}*x+1/2*b/c^{(1/2)})-1/4*\operatorname{erf}(-(-c)^{(1/2)}*x+1/2*b/(-c))/(-c)^{(1/2})*\operatorname{Pi}^{(1/2)}*d^2*\exp(1/4*(4*a*c-b^2)/c)+1/4*\exp(a)*e^2/c*x*\exp(x*(c*x+b))-1/8*\exp(a)*e^2*b/c^2*\exp(x*(c*x+b))-1/16*\exp(a)*e^2*b^2/c^2*\operatorname{Pi}^{(1/2)}*\exp(-1/4*b^2/c)/(-c)^{(1/2})*\operatorname{erf}(-(-c)^{(1/2)}*x+1/2*b/(-c)^{(1/2})+1/8*\exp(a)*e^2/c*\operatorname{Pi}^{(1/2)}*\exp(-1/4*b^2/c)/(-c)^{(1/2})*\operatorname{erf}(-(-c)^{(1/2)}*x+1/2*b/(-c)^{(1/2})+1/2*\exp(a)*d*e/c*\exp(x*(c*x+b))+1/4*\exp(a)*d*e*b/c*\operatorname{Pi}^{(1/2)}*\exp(-1/4*b^2/c)/(-c)^{(1/2})*\operatorname{erf}(-(-c)^{(1/2)}*x+1/2*b/(-c)^{(1/2}) \end{aligned}$$

3.28.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 634 vs. $2(205) = 410$.

Time = 0.26 (sec), antiderivative size = 634, normalized size of antiderivative = 2.43

$$\int (d + ex)^2 \sinh(a + bx + cx^2) dx = \frac{4 c^2 e^2 x + 8 c^2 d e - 2 b c e^2 + 2 (2 c^2 e^2 x + 4 c^2 d e - b c e^2) \cosh(cx^2 + bx + a)^2 - \sqrt{\pi} \left((4 c^2 d^2 - 4 b c d e + (b^2 -$$

input `integrate((e*x+d)^2*sinh(c*x^2+b*x+a),x, algorithm="fricas")`

```
output 1/16*(4*c^2*e^2*x + 8*c^2*d*e - 2*b*c*e^2 + 2*(2*c^2*e^2*x + 4*c^2*d*e - b
*c*e^2)*cosh(c*x^2 + b*x + a)^2 - sqrt(pi)*((4*c^2*d^2 - 4*b*c*d*e + (b^2
- 2*c)*e^2)*cosh(c*x^2 + b*x + a)*cosh(-1/4*(b^2 - 4*a*c)/c) + (4*c^2*d^2
- 4*b*c*d*e + (b^2 - 2*c)*e^2)*cosh(c*x^2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*
c)/c) + ((4*c^2*d^2 - 4*b*c*d*e + (b^2 - 2*c)*e^2)*cosh(-1/4*(b^2 - 4*a*c)
/c) + (4*c^2*d^2 - 4*b*c*d*e + (b^2 - 2*c)*e^2)*sinh(-1/4*(b^2 - 4*a*c)/c)
)*sinh(c*x^2 + b*x + a)*sqrt(-c)*erf(1/2*(2*c*x + b)*sqrt(-c)/c) - sqrt(p
i)*((4*c^2*d^2 - 4*b*c*d*e + (b^2 + 2*c)*e^2)*cosh(c*x^2 + b*x + a)*cosh(-
1/4*(b^2 - 4*a*c)/c) - (4*c^2*d^2 - 4*b*c*d*e + (b^2 + 2*c)*e^2)*cosh(c*x^
2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*c)/c) + ((4*c^2*d^2 - 4*b*c*d*e + (b^2 +
2*c)*e^2)*cosh(-1/4*(b^2 - 4*a*c)/c) - (4*c^2*d^2 - 4*b*c*d*e + (b^2 + 2*
c)*e^2)*sinh(-1/4*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(c)*erf(1/2
*(2*c*x + b)/sqrt(c)) + 4*(2*c^2*e^2*x + 4*c^2*d*e - b*c*e^2)*cosh(c*x^2 +
b*x + a)*sinh(c*x^2 + b*x + a) + 2*(2*c^2*e^2*x + 4*c^2*d*e - b*c*e^2)*si
nh(c*x^2 + b*x + a)^2)/(c^3*cosh(c*x^2 + b*x + a) + c^3*sinh(c*x^2 + b*x +
a))
```

3.28.6 Sympy [F]

$$\int (d + ex)^2 \sinh(a + bx + cx^2) dx = \int (d + ex)^2 \sinh(a + bx + cx^2) dx$$

```
input integrate((e*x+d)**2*sinh(c*x**2+b*x+a),x)
```

```
output Integral((d + e*x)**2*sinh(a + b*x + c*x**2), x)
```

3.28.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 536 vs. $2(205) = 410$.

Time = 0.37 (sec), antiderivative size = 536, normalized size of antiderivative = 2.05

$$\begin{aligned}
 & \int (d + ex)^2 \sinh(a + bx + cx^2) dx \\
 &= \frac{\sqrt{\pi} d^2 \operatorname{erf}\left(\sqrt{-c}x - \frac{b}{2\sqrt{-c}}\right) e^{\left(a - \frac{b^2}{4c}\right)}}{4\sqrt{-c}} - \frac{\sqrt{\pi} d^2 \operatorname{erf}\left(\sqrt{c}x + \frac{b}{2\sqrt{c}}\right) e^{\left(-a + \frac{b^2}{4c}\right)}}{4\sqrt{c}} \\
 & - \frac{\left(\frac{\sqrt{\pi}(2cx+b)b\left(\operatorname{erf}\left(\frac{1}{2}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1\right)}{\sqrt{-\frac{(2cx+b)^2}{c}}c^{\frac{3}{2}}} - \frac{2e^{\left(\frac{(2cx+b)^2}{4c}\right)}}{\sqrt{c}} \right) dee^{\left(a - \frac{b^2}{4c}\right)}}{4\sqrt{c}} \\
 & + \frac{\left(\frac{\sqrt{\pi}(2cx+b)b^2\left(\operatorname{erf}\left(\frac{1}{2}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1\right)}{\sqrt{-\frac{(2cx+b)^2}{c}}c^{\frac{5}{2}}} - \frac{4be^{\left(\frac{(2cx+b)^2}{4c}\right)}}{c^{\frac{3}{2}}} - \frac{4(2cx+b)^3\Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{4c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}}c^{\frac{5}{2}}} \right) e^2 e^{\left(a - \frac{b^2}{4c}\right)}}{16\sqrt{c}} \\
 & + \frac{\left(\frac{\sqrt{\pi}(2cx+b)b\left(\operatorname{erf}\left(\frac{1}{2}\sqrt{\frac{(2cx+b)^2}{c}}\right) - 1\right)}{\sqrt{\frac{(2cx+b)^2}{c}}(-c)^{\frac{3}{2}}} + \frac{2ce^{\left(-\frac{(2cx+b)^2}{4c}\right)}}{(-c)^{\frac{3}{2}}} \right) dee^{\left(-a + \frac{b^2}{4c}\right)}}{4\sqrt{-c}} \\
 & + \frac{\left(\frac{\sqrt{\pi}(2cx+b)b^2\left(\operatorname{erf}\left(\frac{1}{2}\sqrt{\frac{(2cx+b)^2}{c}}\right) - 1\right)}{\sqrt{\frac{(2cx+b)^2}{c}}(-c)^{\frac{5}{2}}} + \frac{4bce^{\left(-\frac{(2cx+b)^2}{4c}\right)}}{(-c)^{\frac{5}{2}}} - \frac{4(2cx+b)^3\Gamma\left(\frac{3}{2}, \frac{(2cx+b)^2}{4c}\right)}{\left(\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}}(-c)^{\frac{5}{2}}} \right) e^2 e^{\left(-a + \frac{b^2}{4c}\right)}}{16\sqrt{-c}}
 \end{aligned}$$

```
input integrate((e*x+d)^2*sinh(c*x^2+b*x+a),x, algorithm="maxima")
```

```
output 1/4*sqrt(pi)*d^2*erf(sqrt(-c)*x - 1/2*b/sqrt(-c))*e^(a - 1/4*b^2/c)/sqrt(-c) - 1/4*sqrt(pi)*d^2*erf(sqrt(c)*x + 1/2*b/sqrt(c))*e^(-a + 1/4*b^2/c)/sqrt(c) - 1/4*(sqrt(pi)*(2*c*x + b)*b*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(3/2)) - 2*e^(1/4*(2*c*x + b)^2/c)/sqrt(c))*d*e*e^(a - 1/4*b^2/c)/sqrt(c) + 1/16*(sqrt(pi)*(2*c*x + b)*b^2*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(5/2)) - 4*b*e^(1/4*(2*c*x + b)^2/c)/((-(2*c*x + b)^2/c)^3*c^(5/2)))*e^2*e^(a - 1/4*b^2/c)/sqrt(c) + 1/4*(sqrt(pi)*(2*c*x + b)*b*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(3/2)) + 2*c*e^(-1/4*(2*c*x + b)^2/c)/(-c)^(3/2))*d*e*e^(-a + 1/4*b^2/c)/sqrt(-c) + 1/16*(sqrt(pi)*(2*c*x + b)*b^2*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(5/2)) + 4*b*c*e^(-1/4*(2*c*x + b)^2/c)/((-(2*c*x + b)^2/c)^3*(-c)^(5/2)))*e^2*e^(-a + 1/4*b^2/c)/sqrt(-c)
```

3.28.8 Giac [A] (verification not implemented)

Time = 0.29 (sec), antiderivative size = 227, normalized size of antiderivative = 0.87

$$\int (d + ex)^2 \sinh(a + bx + cx^2) dx$$

$$= \frac{\sqrt{\pi}(4c^2d^2 - 4bcde + b^2e^2 + 2ce^2) \operatorname{erf}\left(-\frac{1}{2}\sqrt{c}\left(2x + \frac{b}{c}\right)\right)e^{\left(\frac{b^2 - 4ac}{4c}\right)}}{\sqrt{c}} + 2\left(ce^2\left(2x + \frac{b}{c}\right) + 4cde - 2be^2\right)e^{(-cx^2 - bx - a)}$$

$$- \frac{\sqrt{\pi}(4c^2d^2 - 4bcde + b^2e^2 - 2ce^2) \operatorname{erf}\left(-\frac{1}{2}\sqrt{-c}\left(2x + \frac{b}{c}\right)\right)e^{\left(-\frac{b^2 - 4ac}{4c}\right)}}{\sqrt{-c}} - 2\left(ce^2\left(2x + \frac{b}{c}\right) + 4cde - 2be^2\right)e^{(cx^2 + bx + a)}$$

$$16c^2$$

```
input integrate((e*x+d)^2*sinh(c*x^2+b*x+a),x, algorithm="giac")
```

```
output 1/16*(sqrt(pi)*(4*c^2*d^2 - 4*b*c*d*e + b^2*e^2 + 2*c*e^2)*erf(-1/2*sqrt(c))*(2*x + b/c))*e^(1/4*(b^2 - 4*a*c)/c)/sqrt(c) + 2*(c*e^2*(2*x + b/c) + 4*c*d*e - 2*b*e^2)*e^(-c*x^2 - b*x - a))/c^2 - 1/16*(sqrt(pi)*(4*c^2*d^2 - 4*b*c*d*e + b^2*e^2 - 2*c*e^2)*erf(-1/2*sqrt(-c)*(2*x + b/c))*e^(-1/4*(b^2 - 4*a*c)/c)/sqrt(-c) - 2*(c*e^2*(2*x + b/c) + 4*c*d*e - 2*b*e^2)*e^(c*x^2 + b*x + a))/c^2
```

3.28.9 Mupad [F(-1)]

Timed out.

$$\int (d + ex)^2 \sinh(a + bx + cx^2) dx = \int \sinh(cx^2 + bx + a) (d + ex)^2 dx$$

input `int(sinh(a + b*x + c*x^2)*(d + e*x)^2,x)`

output `int(sinh(a + b*x + c*x^2)*(d + e*x)^2, x)`

3.29 $\int (d + ex) \sinh(a + bx + cx^2) dx$

3.29.1 Optimal result	195
3.29.2 Mathematica [A] (verified)	195
3.29.3 Rubi [A] (verified)	196
3.29.4 Maple [A] (verified)	198
3.29.5 Fricas [B] (verification not implemented)	198
3.29.6 Sympy [F]	199
3.29.7 Maxima [B] (verification not implemented)	199
3.29.8 Giac [A] (verification not implemented)	200
3.29.9 Mupad [F(-1)]	200

3.29.1 Optimal result

Integrand size = 17, antiderivative size = 128

$$\begin{aligned} \int (d + ex) \sinh(a + bx + cx^2) dx &= \frac{e \cosh(a + bx + cx^2)}{2c} - \frac{(2cd - be)e^{-a+\frac{b^2}{4c}}\sqrt{\pi}\operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \\ &\quad + \frac{(2cd - be)e^{a-\frac{b^2}{4c}}\sqrt{\pi}\operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \end{aligned}$$

output `1/2*e*cosh(c*x^2+b*x+a)/c-1/8*(-b*e+2*c*d)*exp(-a+1/4*b^2/c)*erf(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)+1/8*(-b*e+2*c*d)*exp(a-1/4*b^2/c)*erfi(1/2*(2*c*x+b)/c^(1/2))*Pi^(1/2)/c^(3/2)`

3.29.2 Mathematica [A] (verified)

Time = 0.19 (sec), antiderivative size = 146, normalized size of antiderivative = 1.14

$$\begin{aligned} \int (d + ex) \sinh(a + bx + cx^2) dx \\ = \frac{4\sqrt{c}e \cosh(a + x(b + cx)) + (2cd - be)\sqrt{\pi}\operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right) \left(-\cosh\left(a - \frac{b^2}{4c}\right) + \sinh\left(a - \frac{b^2}{4c}\right)\right) + (2cd - be)\sqrt{\pi}\operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{8c^{3/2}} \end{aligned}$$

input `Integrate[(d + e*x)*Sinh[a + b*x + c*x^2],x]`

```
output (4*.Sqrt[c]*e*Cosh[a + x*(b + c*x)] + (2*c*d - b*e)*Sqrt[Pi]*Erf[(b + 2*c*x)/(2*Sqrt[c])]*(-Cosh[a - b^2/(4*c)] + Sinh[a - b^2/(4*c)]) + (2*c*d - b*e)*Sqrt[Pi]*Erfi[(b + 2*c*x)/(2*Sqrt[c])]*(Cosh[a - b^2/(4*c)] + Sinh[a - b^2/(4*c)]))/(8*c^(3/2))
```

3.29.3 Rubi [A] (verified)

Time = 0.38 (sec) , antiderivative size = 127, normalized size of antiderivative = 0.99, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.294$, Rules used = {5905, 5897, 2664, 2633, 2634}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int (d + ex) \sinh(a + bx + cx^2) dx \\
 & \downarrow \textcolor{blue}{5905} \\
 & \frac{(2cd - be) \int \sinh(cx^2 + bx + a) dx}{2c} + \frac{e \cosh(a + bx + cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{5897} \\
 & \frac{(2cd - be) \left(\frac{1}{2} \int e^{cx^2 + bx + a} dx - \frac{1}{2} \int e^{-cx^2 - bx - a} dx \right)}{2c} + \frac{e \cosh(a + bx + cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2664} \\
 & \frac{(2cd - be) \left(\frac{1}{2} e^{a - \frac{b^2}{4c}} \int e^{\frac{(b+2cx)^2}{4c}} dx - \frac{1}{2} e^{\frac{b^2}{4c} - a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \right)}{2c} + \frac{e \cosh(a + bx + cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2633} \\
 & \frac{(2cd - be) \left(\frac{\sqrt{\pi} e^{a - \frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{1}{2} e^{\frac{b^2}{4c} - a} \int e^{-\frac{(b+2cx)^2}{4c}} dx \right)}{2c} + \frac{e \cosh(a + bx + cx^2)}{2c} \\
 & \downarrow \textcolor{blue}{2634} \\
 & \frac{(2cd - be) \left(\frac{\sqrt{\pi} e^{a - \frac{b^2}{4c}} \operatorname{erfi}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} - \frac{\sqrt{\pi} e^{\frac{b^2}{4c} - a} \operatorname{erf}\left(\frac{b+2cx}{2\sqrt{c}}\right)}{4\sqrt{c}} \right)}{2c} + \frac{e \cosh(a + bx + cx^2)}{2c}
 \end{aligned}$$

input $\text{Int}[(d + e*x)*\text{Sinh}[a + b*x + c*x^2], x]$

output $(e*\text{Cosh}[a + b*x + c*x^2])/(2*c) + ((2*c*d - b*e)*(-1/4*(E^{-a + b^2/(4*c)}) * \text{Sqrt}[\text{Pi}]*\text{Erf}[(b + 2*c*x)/(2*\text{Sqrt}[c])])/\text{Sqrt}[c] + (E^{(a - b^2/(4*c))}*\text{Sqrt}[\text{Pi}]*\text{Erfi}[(b + 2*c*x)/(2*\text{Sqrt}[c])])/(4*\text{Sqrt}[c]))/(2*c)$

3.29.3.1 Definitions of rubi rules used

rule 2633 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_}))^2, x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a*\text{Sqrt}[\text{Pi}]*(\text{Erfi}[(c + d*x)*\text{Rt}[b*\text{Log}[F], 2]]/(2*d*\text{Rt}[b*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{PosQ}[b]$

rule 2634 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(c_{_}) + (d_{_})*(x_{_}))^2, x_{\text{Symbol}}] \rightarrow \text{Simp}[F^a*\text{Sqrt}[\text{Pi}]*(\text{Erf}[(c + d*x)*\text{Rt}[(-b)*\text{Log}[F], 2]]/(2*d*\text{Rt}[(-b)*\text{Log}[F], 2])), x] /; \text{FreeQ}[\{F, a, b, c, d\}, x] \&& \text{NegQ}[b]$

rule 2664 $\text{Int}[(F_{_})^((a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_}))^2, x_{\text{Symbol}}] \rightarrow \text{Simp}[F^{(a - b^2/(4*c))} \text{Int}[F^{(b + 2*c*x)^2/(4*c)}, x], x] /; \text{FreeQ}[\{F, a, b, c\}, x]$

rule 5897 $\text{Int}[\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_}))^2, x_{\text{Symbol}}] \rightarrow \text{Simp}[1/2 \text{Int}[E^{(a + b*x + c*x^2)}, x], x] - \text{Simp}[1/2 \text{Int}[E^{(-a - b*x - c*x^2)}, x], x] /; \text{FreeQ}[\{a, b, c\}, x]$

rule 5905 $\text{Int}[(d_{_} + (e_{_})*(x_{_}))*\text{Sinh}[(a_{_}) + (b_{_})*(x_{_}) + (c_{_})*(x_{_}))^2, x_{\text{Symbol}}] \rightarrow \text{Simp}[e*(\text{Cosh}[a + b*x + c*x^2]/(2*c)), x] - \text{Simp}[(b*e - 2*c*d)/(2*c) \text{Int}[\text{Sinh}[a + b*x + c*x^2], x], x] /; \text{FreeQ}[\{a, b, c, d, e\}, x] \&& \text{NeQ}[b*e - 2*c*d, 0]$

3.29.4 Maple [A] (verified)

Time = 0.34 (sec) , antiderivative size = 200, normalized size of antiderivative = 1.56

method	result
risch	$-\frac{\operatorname{erf}\left(\sqrt{c}x + \frac{b}{2\sqrt{c}}\right)\sqrt{\pi}de^{-\frac{4ac-b^2}{4c}}}{4\sqrt{c}} + \frac{e^{-a}ee^{-x(cx+b)}}{4c} + \frac{e^{-a}eb\sqrt{\pi}e^{\frac{b^2}{4c}}\operatorname{erf}\left(\sqrt{c}x + \frac{b}{2\sqrt{c}}\right)}{8c^{\frac{3}{2}}} - \frac{\operatorname{erf}\left(-\sqrt{-c}x + \frac{b}{2\sqrt{-c}}\right)\sqrt{\pi}de^{\frac{4ac-b^2}{4c}}}{4\sqrt{-c}}$

input `int((e*x+d)*sinh(c*x^2+b*x+a),x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & -1/4*\operatorname{erf}(c^{(1/2)}*x+1/2*b/c^{(1/2)})/c^{(1/2)}*\operatorname{Pi}^{(1/2)}*d*\exp(-1/4*(4*a*c-b^2)/ \\ & c)+1/4*\exp(-a)*e/c*\exp(-x*(c*x+b))+1/8*\exp(-a)*e*b/c^{(3/2)}*\operatorname{Pi}^{(1/2)}*\exp(1/ \\ & 4*b^2/c)*\operatorname{erf}(c^{(1/2)}*x+1/2*b/c^{(1/2)})-1/4*\operatorname{erf}((-c)^{(1/2)}*x+1/2*b/(-c)^{(1/2)})/ \\ & (-c)^{(1/2)}*\operatorname{Pi}^{(1/2)}*d*\exp(1/4*(4*a*c-b^2)/c)+1/4*\exp(a)*e/c*\exp(x*(c*x+b))+1/8*\exp(a)*e*b/c*\operatorname{Pi}^{(1/2)}*\exp(-1/4*b^2/c)/(-c)^{(1/2)}*\operatorname{erf}((-c)^{(1/2)}* \\ & x+1/2*b/(-c)^{(1/2)}) \end{aligned}$$

3.29.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 413 vs. 2(100) = 200.

Time = 0.25 (sec) , antiderivative size = 413, normalized size of antiderivative = 3.23

$$\int (d + ex) \sinh(a + bx + cx^2) dx = \frac{2ce \cosh(cx^2 + bx + a)^2 + 4ce \cosh(cx^2 + bx + a) \sinh(cx^2 + bx + a) + 2ce \sinh(cx^2 + bx + a)^2 - \sqrt{\pi} \left(\operatorname{erf}\left(\frac{bx + a}{\sqrt{c}}\right) + \operatorname{erf}\left(\frac{bx + a}{\sqrt{c}}\right)\right)}{8c^2}$$

input `integrate((e*x+d)*sinh(c*x^2+b*x+a),x, algorithm="fricas")`

```
output 1/8*(2*c*e*cosh(c*x^2 + b*x + a)^2 + 4*c*e*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a) + 2*c*e*sinh(c*x^2 + b*x + a)^2 - sqrt(pi)*((2*c*d - b*e)*cosh(c*x^2 + b*x + a)*cosh(-1/4*(b^2 - 4*a*c)/c) + (2*c*d - b*e)*cosh(c*x^2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*c)/c) + ((2*c*d - b*e)*cosh(-1/4*(b^2 - 4*a*c)/c) + (2*c*d - b*e)*sinh(-1/4*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(-c)*erf(1/2*(2*c*x + b)*sqrt(-c)/c) - sqrt(pi)*((2*c*d - b*e)*cosh(c*x^2 + b*x + a)*cosh(-1/4*(b^2 - 4*a*c)/c) - (2*c*d - b*e)*cosh(c*x^2 + b*x + a)*sinh(-1/4*(b^2 - 4*a*c)/c) + ((2*c*d - b*e)*cosh(-1/4*(b^2 - 4*a*c)/c) - (2*c*d - b*e)*sinh(-1/4*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(c)*erf(1/2*(2*c*x + b)/sqrt(c)) + 2*c*e)/(c^2*cosh(c*x^2 + b*x + a) + c^2*sinh(c*x^2 + b*x + a))
```

3.29.6 Sympy [F]

$$\int (d + ex) \sinh(a + bx + cx^2) dx = \int (d + ex) \sinh(a + bx + cx^2) dx$$

```
input integrate((e*x+d)*sinh(c*x**2+b*x+a),x)
```

```
output Integral((d + e*x)*sinh(a + b*x + c*x**2), x)
```

3.29.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 254 vs. $2(100) = 200$.

Time = 0.28 (sec), antiderivative size = 254, normalized size of antiderivative = 1.98

$$\begin{aligned} & \int (d + ex) \sinh(a + bx + cx^2) dx \\ &= \frac{\sqrt{\pi} d \operatorname{erf}\left(\sqrt{-c}x - \frac{b}{2\sqrt{-c}}\right) e^{\left(a - \frac{b^2}{4c}\right)}}{4\sqrt{-c}} - \frac{\sqrt{\pi} d \operatorname{erf}\left(\sqrt{c}x + \frac{b}{2\sqrt{c}}\right) e^{\left(-a + \frac{b^2}{4c}\right)}}{4\sqrt{c}} \\ & - \frac{\left(\frac{\sqrt{\pi}(2cx+b)\operatorname{erf}\left(\frac{1}{2}\sqrt{-\frac{(2cx+b)^2}{c}}\right)-1)}{\sqrt{-\frac{(2cx+b)^2}{c}}c^{\frac{3}{2}}} - \frac{2e^{\left(\frac{(2cx+b)^2}{4c}\right)}}{\sqrt{c}} \right) ee^{\left(a - \frac{b^2}{4c}\right)}}{8\sqrt{c}} \\ & + \frac{\left(\frac{\sqrt{\pi}(2cx+b)\operatorname{erf}\left(\frac{1}{2}\sqrt{\frac{(2cx+b)^2}{c}}\right)-1)}{\sqrt{\frac{(2cx+b)^2}{c}}(-c)^{\frac{3}{2}}} + \frac{2ce^{\left(-\frac{(2cx+b)^2}{4c}\right)}}{(-c)^{\frac{3}{2}}} \right) ee^{\left(-a + \frac{b^2}{4c}\right)}}{8\sqrt{-c}} \end{aligned}$$

```
input integrate((e*x+d)*sinh(c*x^2+b*x+a),x, algorithm="maxima")
```

```
output 1/4*sqrt(pi)*d*erf(sqrt(-c)*x - 1/2*b/sqrt(-c))*e^(a - 1/4*b^2/c)/sqrt(-c)
      - 1/4*sqrt(pi)*d*erf(sqrt(c)*x + 1/2*b/sqrt(c))*e^(-a + 1/4*b^2/c)/sqrt(c)
      ) - 1/8*(sqrt(pi)*(2*c*x + b)*b*(erf(1/2*sqrt(-(2*c*x + b)^2/c)) - 1)/(sqrt(-(2*c*x + b)^2/c)*c^(3/2)) - 2*e^(1/4*(2*c*x + b)^2/c)/sqrt(c))*e*e^(a - 1/4*b^2/c)/sqrt(c) + 1/8*(sqrt(pi)*(2*c*x + b)*b*(erf(1/2*sqrt((2*c*x + b)^2/c)) - 1)/(sqrt((2*c*x + b)^2/c)*(-c)^(3/2)) + 2*c*e^(-1/4*(2*c*x + b)^2/c)/(-c)^(3/2))*e*e^(-a + 1/4*b^2/c)/sqrt(-c)
```

3.29.8 Giac [A] (verification not implemented)

Time = 0.28 (sec) , antiderivative size = 139, normalized size of antiderivative = 1.09

$$\int (d + ex) \sinh(a + bx + cx^2) dx = \frac{\frac{\sqrt{\pi}(2cd-be) \operatorname{erf}\left(-\frac{1}{2}\sqrt{c}\left(2x+\frac{b}{c}\right)\right)e^{\left(\frac{b^2-4ac}{4c}\right)}}{\sqrt{c}} + 2ee^{(-cx^2-bx-a)}}{8c} - \frac{\frac{\sqrt{\pi}(2cd-be) \operatorname{erf}\left(-\frac{1}{2}\sqrt{-c}\left(2x+\frac{b}{c}\right)\right)e^{\left(-\frac{b^2-4ac}{4c}\right)}}{\sqrt{-c}} - 2ee^{(cx^2+bx+a)}}{8c}$$

```
input integrate((e*x+d)*sinh(c*x^2+b*x+a),x, algorithm="giac")
```

```
output 1/8*(sqrt(pi)*(2*c*d - b*e)*erf(-1/2*sqrt(c)*(2*x + b/c))*e^(1/4*(b^2 - 4*a*c)/c)/sqrt(c) + 2*e*e^(-c*x^2 - b*x - a))/c - 1/8*(sqrt(pi)*(2*c*d - b*e)*erf(-1/2*sqrt(-c)*(2*x + b/c))*e^(-1/4*(b^2 - 4*a*c)/c)/sqrt(-c) - 2*e*e^(c*x^2 + b*x + a))/c
```

3.29.9 Mupad [F(-1)]

Timed out.

$$\int (d + ex) \sinh(a + bx + cx^2) dx = \int \sinh(cx^2 + bx + a) (d + ex) dx$$

```
input int(sinh(a + b*x + c*x^2)*(d + e*x),x)
```

```
output int(sinh(a + b*x + c*x^2)*(d + e*x), x)
```

3.30 $\int \frac{\sinh(a+bx+cx^2)}{d+ex} dx$

3.30.1	Optimal result	201
3.30.2	Mathematica [N/A]	201
3.30.3	Rubi [N/A]	202
3.30.4	Maple [N/A] (verified)	202
3.30.5	Fricas [N/A]	203
3.30.6	Sympy [N/A]	203
3.30.7	Maxima [N/A]	203
3.30.8	Giac [N/A]	204
3.30.9	Mupad [N/A]	204

3.30.1 Optimal result

Integrand size = 19, antiderivative size = 19

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx = \text{Int}\left(\frac{\sinh(a + bx + cx^2)}{d + ex}, x\right)$$

output `Unintegrable(sinh(c*x^2+b*x+a)/(e*x+d),x)`

3.30.2 Mathematica [N/A]

Not integrable

Time = 3.10 (sec) , antiderivative size = 21, normalized size of antiderivative = 1.11

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(a + bx + cx^2)}{d + ex} dx$$

input `Integrate[Sinh[a + b*x + c*x^2]/(d + e*x),x]`

output `Integrate[Sinh[a + b*x + c*x^2]/(d + e*x), x]`

3.30.3 Rubi [N/A]

Not integrable

Time = 0.18 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.00, number of steps used = 1, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {5915}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx$$

↓ 5915

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx$$

input `Int[Sinh[a + b*x + c*x^2]/(d + e*x), x]`

output `$Aborted`

3.30.3.1 Definitions of rubi rules used

rule 5915 `Int[((d_.) + (e_.)*(x_))^(m_.)*Sinh[(a_.) + (b_.)*(x_) + (c_.)*(x_)^2], x_Symbol] :> Unintegrable[(d + e*x)^m*Sinh[a + b*x + c*x^2], x] /; FreeQ[{a, b, c, d, e, m}, x]`

3.30.4 Maple [N/A] (verified)

Not integrable

Time = 0.42 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.00

$$\int \frac{\sinh(cx^2 + bx + a)}{ex + d} dx$$

input `int(sinh(c*x^2+b*x+a)/(e*x+d), x)`

output `int(sinh(c*x^2+b*x+a)/(e*x+d), x)`

3.30.5 Fricas [N/A]

Not integrable

Time = 0.24 (sec) , antiderivative size = 21, normalized size of antiderivative = 1.11

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(cx^2 + bx + a)}{ex + d} dx$$

input `integrate(sinh(c*x^2+b*x+a)/(e*x+d),x, algorithm="fricas")`

output `integral(sinh(c*x^2 + b*x + a)/(e*x + d), x)`

3.30.6 Sympy [N/A]

Not integrable

Time = 0.51 (sec) , antiderivative size = 17, normalized size of antiderivative = 0.89

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(a + bx + cx^2)}{d + ex} dx$$

input `integrate(sinh(c*x**2+b*x+a)/(e*x+d),x)`

output `Integral(sinh(a + b*x + c*x**2)/(d + e*x), x)`

3.30.7 Maxima [N/A]

Not integrable

Time = 0.67 (sec) , antiderivative size = 21, normalized size of antiderivative = 1.11

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(cx^2 + bx + a)}{ex + d} dx$$

input `integrate(sinh(c*x^2+b*x+a)/(e*x+d),x, algorithm="maxima")`

output `integrate(sinh(c*x^2 + b*x + a)/(e*x + d), x)`

3.30.8 Giac [N/A]

Not integrable

Time = 0.29 (sec) , antiderivative size = 21, normalized size of antiderivative = 1.11

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(cx^2 + bx + a)}{ex + d} dx$$

input `integrate(sinh(c*x^2+b*x+a)/(e*x+d),x, algorithm="giac")`

output `integrate(sinh(c*x^2 + b*x + a)/(e*x + d), x)`

3.30.9 Mupad [N/A]

Not integrable

Time = 1.14 (sec) , antiderivative size = 21, normalized size of antiderivative = 1.11

$$\int \frac{\sinh(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(cx^2 + bx + a)}{d + ex} dx$$

input `int(sinh(a + b*x + c*x^2)/(d + e*x),x)`

output `int(sinh(a + b*x + c*x^2)/(d + e*x), x)`

3.31 $\int (d + ex)^2 \sinh^2(a + bx + cx^2) dx$

3.31.1 Optimal result	205
3.31.2 Mathematica [A] (verified)	206
3.31.3 Rubi [A] (verified)	206
3.31.4 Maple [B] (verified)	207
3.31.5 Fricas [B] (verification not implemented)	208
3.31.6 Sympy [F]	209
3.31.7 Maxima [B] (verification not implemented)	210
3.31.8 Giac [A] (verification not implemented)	211
3.31.9 Mupad [F(-1)]	211

3.31.1 Optimal result

Integrand size = 21, antiderivative size = 311

$$\begin{aligned} \int (d + ex)^2 \sinh^2(a + bx + cx^2) dx = & -\frac{(d + ex)^3}{6e} + \frac{e^2 e^{-2a + \frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} \\ & + \frac{(2cd - be)^2 e^{-2a + \frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} \\ & - \frac{e^2 e^{2a - \frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} \\ & + \frac{(2cd - be)^2 e^{2a - \frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} \\ & + \frac{e(2cd - be) \sinh(2a + 2bx + 2cx^2)}{16c^2} \\ & + \frac{e(d + ex) \sinh(2a + 2bx + 2cx^2)}{8c} \end{aligned}$$

```
output -1/6*(e*x+d)^3/e+1/16*e*(-b*e+2*c*d)*sinh(2*c*x^2+2*b*x+2*a)/c^2+1/8*e*(e*x+d)*sinh(2*c*x^2+2*b*x+2*a)/c+1/64*e^2*exp(-2*a+1/2*b^2/c)*erf(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)+1/64*(-b*e+2*c*d)^2*exp(-2*a+1/2*b^2/c)*erf(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(5/2)-1/64*e^2*exp(2*a-1/2*b^2/c)*erfi(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)+1/64*(-b*e+2*c*d)^2*exp(2*a-1/2*b^2/c)*erfi(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(5/2)
```

3.31.2 Mathematica [A] (verified)

Time = 0.95 (sec) , antiderivative size = 240, normalized size of antiderivative = 0.77

$$\int (d + ex)^2 \sinh^2(a + bx + cx^2) dx \\ = \frac{3(4c^2d^2 + b^2e^2 + ce(-4bd + e))\sqrt{2\pi}\operatorname{erf}\left(\frac{b+2cx}{\sqrt{2\sqrt{c}}}\right)\left(\cosh\left(2a - \frac{b^2}{2c}\right) - \sinh\left(2a - \frac{b^2}{2c}\right)\right) + 3(4c^2d^2 + b^2e^2 - ce(-4bd + e))\sqrt{2\pi}\operatorname{erf}\left(\frac{b-2cx}{\sqrt{2\sqrt{c}}}\right)\left(\cosh\left(2a - \frac{b^2}{2c}\right) + \sinh\left(2a - \frac{b^2}{2c}\right)\right)}{192c^{5/2}}$$

input `Integrate[(d + e*x)^2*Sinh[a + b*x + c*x^2]^2,x]`

output `(3*(4*c^2*d^2 + b^2*e^2 + c*e*(-4*b*d + e))*Sqrt[2*Pi]*Erf[(b + 2*c*x)/(Sqr
rt[2]*Sqrt[c])]*(Cosh[2*a - b^2/(2*c)] - Sinh[2*a - b^2/(2*c)]) + 3*(4*c^2
*d^2 + b^2*e^2 - c*e*(4*b*d + e))*Sqrt[2*Pi]*Erfi[(b + 2*c*x)/(Sqrt[2]*Sqr
t[c])]*(Cosh[2*a - b^2/(2*c)] + Sinh[2*a - b^2/(2*c)]) - 4*Sqrt[c]*(8*c^2*x
(3*d^2 + 3*d*e*x + e^2*x^2) - 3*e*(4*c*d - b*e + 2*c*e*x)*Sinh[2*(a + x*(
b + c*x))]))/(192*c^(5/2))`

3.31.3 Rubi [A] (verified)

Time = 0.59 (sec) , antiderivative size = 311, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.095$, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (d + ex)^2 \sinh^2(a + bx + cx^2) dx \\ \downarrow 5917 \\ \int \left(\frac{1}{2}(d + ex)^2 \cosh(2a + 2bx + 2cx^2) - \frac{1}{2}(d + ex)^2 \right) dx \\ \downarrow 2009$$

$$\begin{aligned} & \frac{\sqrt{\frac{\pi}{2}} e^{\frac{b^2}{2c}-2a} (2cd-be)^2 \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} + \frac{\sqrt{\frac{\pi}{2}} e^{2a-\frac{b^2}{2c}} (2cd-be)^2 \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{5/2}} + \frac{\sqrt{\frac{\pi}{2}} e^{2a-\frac{b^2}{2c}} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} - \\ & \frac{\sqrt{\frac{\pi}{2}} e^{2a-\frac{b^2}{2c}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{32c^{3/2}} + \frac{e(2cd-be) \sinh(2a+2bx+2cx^2)}{16c^2} + \\ & \frac{e(d+ex) \sinh(2a+2bx+2cx^2)}{8c} - \frac{(d+ex)^3}{6e} \end{aligned}$$

input `Int[(d + e*x)^2*Sinh[a + b*x + c*x^2]^2, x]`

output `-1/6*(d + e*x)^3/e + (e^2*E^(-2*a + b^2/(2*c))*Sqrt[Pi/2]*Erf[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(32*c^(3/2)) + ((2*c*d - b*e)^2*E^(-2*a + b^2/(2*c))*Sqrt[Pi/2]*Erf[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(32*c^(5/2)) - (e^2*E^(2*a - b^2/(2*c))*Sqrt[Pi/2]*Erfi[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(32*c^(3/2)) + ((2*c*d - b*e)^2*E^(2*a - b^2/(2*c))*Sqrt[Pi/2]*Erfi[(b + 2*c*x)/(Sqrt[2]*Sqrt[c])])/(32*c^(5/2)) + (e*(2*c*d - b*e)*Sinh[2*a + 2*b*x + 2*c*x^2])/(16*c^2) + (e*(d + e*x)*Sinh[2*a + 2*b*x + 2*c*x^2])/(8*c)`

3.31.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_.) + (e_.)*(x_.))^(m_.)*Sinh[(a_.) + (b_.)*(x_.) + (c_.)*(x_.)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.31.4 Maple [B] (verified)

Leaf count of result is larger than twice the leaf count of optimal. 527 vs. $2(253) = 506$.

Time = 0.90 (sec), antiderivative size = 528, normalized size of antiderivative = 1.70

method	result
risch	$-\frac{d^2 x}{2} - \frac{e^2 x^3}{6} + \frac{\operatorname{erf}\left(\sqrt{2} \sqrt{c} x + \frac{b \sqrt{2}}{2 \sqrt{c}}\right) \sqrt{2} \sqrt{\pi} d^2 e^{-\frac{4 a c - b^2}{2 c}}}{16 \sqrt{c}} - \frac{e^{-2 a} e^2 x e^{-2 x (c x + b)}}{16 c} + \frac{e^{-2 a} e^2 b e^{-2 x (c x + b)}}{32 c^2} + \frac{e^{-2 a} e^2 b^2 \sqrt{\pi} e^{\frac{b^2}{2 c}}}{8 c^2}$

input `int((e*x+d)^2*sinh(c*x^2+b*x+a)^2,x,method=_RETURNVERBOSE)`

```
output -1/2*d^2*x-1/6*e^2*x^3+1/16*erf(2^(1/2)*c^(1/2)*x+1/2*b*2^(1/2)/c^(1/2))/c
^(1/2)*2^(1/2)*Pi^(1/2)*d^2*exp(-1/2*(4*a*c-b^2)/c)-1/16*exp(-2*a)*e^2/c*x
*exp(-2*x*(c*x+b))+1/32*exp(-2*a)*e^2*b/c^2*exp(-2*x*(c*x+b))+1/64*exp(-2*
a)*e^2*b^2/c^(5/2)*Pi^(1/2)*exp(1/2*b^2/c)*2^(1/2)*erf(2^(1/2)*c^(1/2)*x+1
/2*b*2^(1/2)/c^(1/2))+1/64*exp(-2*a)*e^2/c^(3/2)*Pi^(1/2)*exp(1/2*b^2/c)*2
^(1/2)*erf(2^(1/2)*c^(1/2)*x+1/2*b*2^(1/2)/c^(1/2))-1/8*exp(-2*a)*d*e/c*ex
p(-2*x*(c*x+b))-1/16*exp(-2*a)*d*e*b/c^(3/2)*Pi^(1/2)*exp(1/2*b^2/c)*2^(1/
2)*erf(2^(1/2)*c^(1/2)*x+1/2*b*2^(1/2)/c^(1/2))-1/8*erf(-(-2*c)^(1/2)*x+b/
(-2*c)^(1/2))/(-2*c)^(1/2)*Pi^(1/2)*d^2*exp(1/2*(4*a*c-b^2)/c)+1/16*exp(2*
a)*e^2/c*x*exp(2*x*(c*x+b))-1/32*exp(2*a)*e^2*b/c^2*exp(2*x*(c*x+b))-1/32*
exp(2*a)*e^2*b^2/c^2*Pi^(1/2)*exp(-1/2*b^2/c)/(-2*c)^(1/2)*erf(-(-2*c)^(1/
2)*x+b/(-2*c)^(1/2))+1/32*exp(2*a)*e^2/c*Pi^(1/2)*exp(-1/2*b^2/c)/(-2*c)^(1/
2)*erf(-(-2*c)^(1/2)*x+b/(-2*c)^(1/2))+1/8*exp(2*a)*d*e/c*exp(2*x*(c*x+b))
)+1/8*exp(2*a)*d*e*b/c*Pi^(1/2)*exp(-1/2*b^2/c)/(-2*c)^(1/2)*erf(-(-2*c)^(1/
2)*x+b/(-2*c)^(1/2))-1/2*d*e*x^2
```

3.31.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 1142 vs. $2(253) = 506$.

Time = 0.27 (sec), antiderivative size = 1142, normalized size of antiderivative = 3.67

$$\int (d + ex)^2 \sinh^2(a + bx + cx^2) dx = \text{Too large to display}$$

```
input integrate((e*x+d)^2*sinh(c*x^2+b*x+a)^2,x, algorithm="fricas")
```

```
output -1/192*(12*c^2*e^2*x - 6*(2*c^2*e^2*x + 4*c^2*d*e - b*c*e^2)*cosh(c*x^2 +
b*x + a)^4 - 24*(2*c^2*e^2*x + 4*c^2*d*e - b*c*e^2)*cosh(c*x^2 + b*x + a)*
sinh(c*x^2 + b*x + a)^3 - 6*(2*c^2*e^2*x + 4*c^2*d*e - b*c*e^2)*sinh(c*x^2
+ b*x + a)^4 + 24*c^2*d*e - 6*b*c*e^2 + 3*sqrt(2)*sqrt(pi)*((4*c^2*d^2 -
4*b*c*d*e + (b^2 - c)*e^2)*cosh(c*x^2 + b*x + a)^2*cosh(-1/2*(b^2 - 4*a*c)
/c) + (4*c^2*d^2 - 4*b*c*d*e + (b^2 - c)*e^2)*cosh(c*x^2 + b*x + a)^2*sinh
(-1/2*(b^2 - 4*a*c)/c) + ((4*c^2*d^2 - 4*b*c*d*e + (b^2 - c)*e^2)*cosh(-1/
2*(b^2 - 4*a*c)/c) + (4*c^2*d^2 - 4*b*c*d*e + (b^2 - c)*e^2)*sinh(-1/2*(b^
2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)^2 + 2*((4*c^2*d^2 - 4*b*c*d*e + (b^2
- c)*e^2)*cosh(c*x^2 + b*x + a)*cosh(-1/2*(b^2 - 4*a*c)/c) + (4*c^2*d^2 -
4*b*c*d*e + (b^2 - c)*e^2)*cosh(c*x^2 + b*x + a)*sinh(-1/2*(b^2 - 4*a*c)/c
))*sinh(c*x^2 + b*x + a))*sqrt(-c)*erf(1/2*sqrt(2)*(2*c*x + b)*sqrt(-c)/c)
- 3*sqrt(2)*sqrt(pi)*((4*c^2*d^2 - 4*b*c*d*e + (b^2 + c)*e^2)*cosh(c*x^2
+ b*x + a)^2*cosh(-1/2*(b^2 - 4*a*c)/c) - (4*c^2*d^2 - 4*b*c*d*e + (b^2 +
c)*e^2)*cosh(c*x^2 + b*x + a)^2*sinh(-1/2*(b^2 - 4*a*c)/c) + ((4*c^2*d^2 -
4*b*c*d*e + (b^2 + c)*e^2)*cosh(-1/2*(b^2 - 4*a*c)/c) - (4*c^2*d^2 - 4*b*
c*d*e + (b^2 + c)*e^2)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)^2
+ 2*((4*c^2*d^2 - 4*b*c*d*e + (b^2 + c)*e^2)*cosh(c*x^2 + b*x + a)*cosh(-
1/2*(b^2 - 4*a*c)/c) - (4*c^2*d^2 - 4*b*c*d*e + (b^2 + c)*e^2)*cosh(c*x^2
+ b*x + a)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a))*sqrt(c)*e...
```

3.31.6 Sympy [F]

$$\int (d + ex)^2 \sinh^2(a + bx + cx^2) dx = \int (d + ex)^2 \sinh^2(a + bx + cx^2) dx$$

```
input integrate((e*x+d)**2*sinh(c*x**2+b*x+a)**2,x)
```

```
output Integral((d + e*x)**2*sinh(a + b*x + c*x**2)**2, x)
```

3.31.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 601 vs. $2(253) = 506$.

Time = 0.46 (sec), antiderivative size = 601, normalized size of antiderivative = 1.93

$$\begin{aligned} & \int (d + ex)^2 \sinh^2(a + bx + cx^2) dx \\ &= \frac{1}{16} \left(\frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(\sqrt{2}\sqrt{-c}x - \frac{\sqrt{2}b}{2\sqrt{-c}}\right) e^{\left(2a - \frac{b^2}{2c}\right)}}{\sqrt{-c}} + \frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(\sqrt{2}\sqrt{c}x + \frac{\sqrt{2}b}{2\sqrt{c}}\right) e^{\left(-2a + \frac{b^2}{2c}\right)}}{\sqrt{c}} - 8x \right) d^2 \\ & - \frac{1}{16} \left(8x^2 + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}e^{\left(\frac{(2cx+b)^2}{2c}\right)}}{\sqrt{c}} \right) e^{\left(2a - \frac{b^2}{2c}\right)}}{\sqrt{c}} + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}be^{\left(\frac{(2cx+b)^2}{2c}\right)}}{c^{\frac{3}{2}}} - \frac{2(2cx+b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{2c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} c^{\frac{5}{2}}} \right) e^{\left(2a - \frac{b^2}{2c}\right)}}{\sqrt{c}} \right. \\ & \left. - \frac{1}{192} \left(32x^3 - \frac{3\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b^2 \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{5}{2}}} - \frac{2\sqrt{2}be^{\left(\frac{(2cx+b)^2}{2c}\right)}}{c^{\frac{3}{2}}} - \frac{2(2cx+b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{2c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} c^{\frac{5}{2}}} \right) e^{\left(2a - \frac{b^2}{2c}\right)}}{\sqrt{c}} \right) \right) \end{aligned}$$

input `integrate((e*x+d)^2*sinh(c*x^2+b*x+a)^2,x, algorithm="maxima")`

output
$$\begin{aligned} & \frac{1}{16} (\sqrt{2} \sqrt{\pi} \operatorname{erf}(\sqrt{2} \sqrt{-c}x - \frac{\sqrt{2}b}{2\sqrt{-c}}) e^{(2a - \frac{b^2}{2c})} - \frac{1}{2} \sqrt{2} \sqrt{c} b e^{(-2a + \frac{b^2}{2c})} - 8x) d^2 \\ & - \frac{1}{16} \left(8x^2 + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}e^{\left(\frac{(2cx+b)^2}{2c}\right)}}{\sqrt{c}} \right) e^{\left(2a - \frac{b^2}{2c}\right)}}{\sqrt{c}} + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}be^{\left(\frac{(2cx+b)^2}{2c}\right)}}{c^{\frac{3}{2}}} - \frac{2(2cx+b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{2c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} c^{\frac{5}{2}}} \right) e^{\left(2a - \frac{b^2}{2c}\right)}}{\sqrt{c}} \right. \\ & \left. - \frac{1}{192} \left(32x^3 - \frac{3\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b^2 \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{5}{2}}} - \frac{2\sqrt{2}be^{\left(\frac{(2cx+b)^2}{2c}\right)}}{c^{\frac{3}{2}}} - \frac{2(2cx+b)^3 \Gamma\left(\frac{3}{2}, -\frac{(2cx+b)^2}{2c}\right)}{\left(-\frac{(2cx+b)^2}{c}\right)^{\frac{3}{2}} c^{\frac{5}{2}}} \right) e^{\left(2a - \frac{b^2}{2c}\right)}}{\sqrt{c}} \right) \right) \end{aligned}$$

3.31.8 Giac [A] (verification not implemented)

Time = 0.29 (sec) , antiderivative size = 263, normalized size of antiderivative = 0.85

$$\int (d + ex)^2 \sinh^2(a + bx + cx^2) dx = -\frac{1}{6} e^2 x^3 - \frac{1}{2} d e x^2 - \frac{1}{2} d^2 x$$

$$-\frac{\sqrt{2}\sqrt{\pi}(4c^2d^2 - 4bcde + b^2e^2 + ce^2) \operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{c}(2x + \frac{b}{c})\right)e^{\left(\frac{b^2 - 4ac}{2c}\right)}}{\sqrt{c}} + 2\left(ce^2(2x + \frac{b}{c}) + 4cde - 2be^2\right)e^{(-2cx^2 - 2bx - 2a)}$$

$$-\frac{\sqrt{2}\sqrt{\pi}(4c^2d^2 - 4bcde + b^2e^2 - ce^2) \operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{-c}(2x + \frac{b}{c})\right)e^{\left(-\frac{b^2 - 4ac}{2c}\right)}}{\sqrt{-c}} - 2\left(ce^2(2x + \frac{b}{c}) + 4cde - 2be^2\right)e^{(2cx^2 + 2bx + 2a)}$$

$$64c^2$$

input `integrate((e*x+d)^2*sinh(c*x^2+b*x+a)^2,x, algorithm="giac")`

output
$$-1/6e^2x^3 - 1/2d^2e^2x^2 - 1/2d^2e^2x - 1/64*(\sqrt{2}*\sqrt{\pi}*(4*c^2d^2 - 4*b*c*d*e + b^2e^2 + c^2e^2)*\operatorname{erf}\left(-1/2\sqrt{2}\sqrt{c}(2x + b/c)\right)*e^{(1/2*(b^2 - 4*a*c)/c)}/\sqrt{c} + 2*(c^2e^2(2x + b/c) + 4*c*d^2e - 2*b^2e^2)*e^{(-2*c*x^2 - 2*b*x - 2*a)}/c^2 - 1/64*(\sqrt{2}*\sqrt{\pi}*(4*c^2d^2 - 4*b*c*d*e + b^2e^2 - c^2e^2)*\operatorname{erf}\left(-1/2\sqrt{2}\sqrt{-c}(2x + b/c)\right)*e^{(-1/2*(b^2 - 4*a*c)/c)}/\sqrt{-c} - 2*(c^2e^2(2x + b/c) + 4*c*d^2e - 2*b^2e^2)*e^{(2*c*x^2 + 2*b*x + 2*a)}/c^2$$

3.31.9 Mupad [F(-1)]

Timed out.

$$\int (d + ex)^2 \sinh^2(a + bx + cx^2) dx = \int \sinh(cx^2 + bx + a)^2 (d + ex)^2 dx$$

input `int(sinh(a + b*x + c*x^2)^2*(d + e*x)^2,x)`

output `int(sinh(a + b*x + c*x^2)^2*(d + e*x)^2, x)`

3.32 $\int (d + ex) \sinh^2(a + bx + cx^2) dx$

3.32.1 Optimal result	212
3.32.2 Mathematica [A] (verified)	212
3.32.3 Rubi [A] (verified)	213
3.32.4 Maple [A] (verified)	214
3.32.5 Fricas [B] (verification not implemented)	214
3.32.6 Sympy [F]	215
3.32.7 Maxima [B] (verification not implemented)	216
3.32.8 Giac [A] (verification not implemented)	216
3.32.9 Mupad [F(-1)]	217

3.32.1 Optimal result

Integrand size = 19, antiderivative size = 160

$$\begin{aligned} \int (d + ex) \sinh^2(a + bx + cx^2) dx = & -\frac{(d + ex)^2}{4e} + \frac{(2cd - be)e^{-2a + \frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} \\ & + \frac{(2cd - be)e^{2a - \frac{b^2}{2c}} \sqrt{\frac{\pi}{2}} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} \\ & + \frac{e \sinh(2a + 2bx + 2cx^2)}{8c} \end{aligned}$$

```
output -1/4*(e*x+d)^2/e+1/8*e*sinh(2*c*x^2+2*b*x+2*a)/c+1/32*(-b*e+2*c*d)*exp(-2*a+1/2*b^2/c)*erf(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)+1/32*(-b*e+2*c*d)*exp(2*a-1/2*b^2/c)*erfi(1/2*(2*c*x+b)*2^(1/2)/c^(1/2))*2^(1/2)*Pi^(1/2)/c^(3/2)
```

3.32.2 Mathematica [A] (verified)

Time = 0.47 (sec), antiderivative size = 177, normalized size of antiderivative = 1.11

$$\begin{aligned} & \int (d + ex) \sinh^2(a + bx + cx^2) dx \\ &= \frac{(2cd - be)\sqrt{2\pi} \operatorname{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right) \left(\cosh\left(2a - \frac{b^2}{2c}\right) - \sinh\left(2a - \frac{b^2}{2c}\right)\right) + (2cd - be)\sqrt{2\pi} \operatorname{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right) \left(\cosh\left(2a - \frac{b^2}{2c}\right) + \sinh\left(2a - \frac{b^2}{2c}\right)\right)}{32c^{3/2}} \end{aligned}$$

input `Integrate[(d + e*x)*Sinh[a + b*x + c*x^2]^2, x]`

output $\frac{((2*c*d - b*e)*\text{Sqrt}[2*\text{Pi}]*\text{Erf}[(b + 2*c*x)/(\text{Sqrt}[2]*\text{Sqrt}[c])]*(\text{Cosh}[2*a - b^{^2}/(2*c)] - \text{Sinh}[2*a - b^{^2}/(2*c)]) + (2*c*d - b*e)*\text{Sqrt}[2*\text{Pi}]*\text{Erfi}[(b + 2*c*x)/(\text{Sqrt}[2]*\text{Sqrt}[c])]*(\text{Cosh}[2*a - b^{^2}/(2*c)] + \text{Sinh}[2*a - b^{^2}/(2*c)]) + 4*\text{Sqrt}[c]*(-2*c*x*(2*d + e*x) + e*\text{Sinh}[2*(a + x*(b + c*x))]))/(32*c^{(3/2)})$

3.32.3 Rubi [A] (verified)

Time = 0.35 (sec), antiderivative size = 160, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.105, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int (d + ex) \sinh^2(a + bx + cx^2) dx \\ & \quad \downarrow \textcolor{blue}{5917} \\ & \int \left(\frac{1}{2}(d + ex) \cosh(2a + 2bx + 2cx^2) + \frac{1}{2}(-d - ex) \right) dx \\ & \quad \downarrow \textcolor{blue}{2009} \\ & \frac{\sqrt{\frac{\pi}{2}} e^{\frac{b^2}{2c}-2a} (2cd - be) \text{erf}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} + \frac{\sqrt{\frac{\pi}{2}} e^{2a-\frac{b^2}{2c}} (2cd - be) \text{erfi}\left(\frac{b+2cx}{\sqrt{2}\sqrt{c}}\right)}{16c^{3/2}} + \frac{e \sinh(2a + 2bx + 2cx^2)}{8c} - \\ & \quad \frac{(d + ex)^2}{4e} \end{aligned}$$

input `Int[(d + e*x)*Sinh[a + b*x + c*x^2]^2, x]`

output $-1/4*(d + e*x)^2/e + ((2*c*d - b*e)*E^{-(-2*a + b^{^2}/(2*c))}*\text{Sqrt}[\text{Pi}/2]*\text{Erf}[(b + 2*c*x)/(\text{Sqrt}[2]*\text{Sqrt}[c])]/(16*c^{(3/2)}) + ((2*c*d - b*e)*E^{(2*a - b^{^2}/(2*c))}*\text{Sqrt}[\text{Pi}/2]*\text{Erfi}[(b + 2*c*x)/(\text{Sqrt}[2]*\text{Sqrt}[c])]/(16*c^{(3/2)}) + (e*\text{Sinh}[2*a + 2*b*x + 2*c*x^2])/(8*c)$

3.32.3.1 Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_) + (e_)*(x_))^(m_)*Sinh[(a_) + (b_)*(x_) + (c_)*(x_)^2]^n_, x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.32.4 Maple [A] (verified)

Time = 0.72 (sec), antiderivative size = 231, normalized size of antiderivative = 1.44

method	result
risch	$-\frac{ex^2}{4} - \frac{dx}{2} + \frac{\operatorname{erf}\left(\sqrt{2}\sqrt{c}x + \frac{b\sqrt{2}}{2\sqrt{c}}\right)\sqrt{2}\sqrt{\pi}de^{-\frac{4ac-b^2}{2c}}}{16\sqrt{c}} - \frac{e^{-2a}ee^{-2x(cx+b)}}{16c} - \frac{e^{-2a}eb\sqrt{\pi}e^{\frac{b^2}{2c}}\sqrt{2}\operatorname{erf}\left(\sqrt{2}\sqrt{c}x + \frac{b\sqrt{2}}{2\sqrt{c}}\right)}{32c^{\frac{3}{2}}} - \frac{\operatorname{erf}\left(\sqrt{2}\sqrt{c}x + \frac{b\sqrt{2}}{2\sqrt{c}}\right)\sqrt{2}\sqrt{\pi}de^{-\frac{4ac-b^2}{2c}}}{16\sqrt{c}}$

input `int((e*x+d)*sinh(c*x^2+b*x+a)^2,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & -1/4*e*x^2 - 1/2*d*x + 1/16*\operatorname{erf}(2^{(1/2)}*c^{(1/2)}*x + 1/2*b*2^{(1/2)}/c^{(1/2)})/c^{(1/2)}*2^{(1/2)}*\operatorname{Pi}^{(1/2)}*d*\exp(-1/2*(4*a*c - b^2)/c) - 1/16*\exp(-2*a)*e/c*\exp(-2*x*(c*x + b)) - 1/32*\exp(-2*a)*e*b/c^{(3/2)}*\operatorname{Pi}^{(1/2)}*\exp(1/2*b^2/c)*2^{(1/2)}*\operatorname{erf}(2^{(1/2)}*c^{(1/2)}*x + 1/2*b*2^{(1/2)}/c^{(1/2)}) - 1/8*\operatorname{erf}(-(-2*c)^{(1/2)}*x + b/(-2*c)^{(1/2)})/(-2*c)^{(1/2)}*\operatorname{Pi}^{(1/2)}*d*\exp(1/2*(4*a*c - b^2)/c) + 1/16*\exp(2*a)*e/c*\exp(2*x*(c*x + b)) + 1/16*\exp(2*a)*e*b/c*\operatorname{Pi}^{(1/2)}*\exp(-1/2*b^2/c)/(-2*c)^{(1/2)}*\operatorname{erf}(-(-2*c)^{(1/2)}*x + b/(-2*c)^{(1/2)}) \end{aligned}$$

3.32.5 Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 777 vs. $2(130) = 260$.

Time = 0.27 (sec), antiderivative size = 777, normalized size of antiderivative = 4.86

$$\begin{aligned} & \int (d + ex) \sinh^2(a + bx + cx^2) dx \\ & = \frac{2ce \cosh(cx^2 + bx + a)^4 + 8ce \cosh(cx^2 + bx + a) \sinh(cx^2 + bx + a)^3 + 2ce \sinh(cx^2 + bx + a)^4 - \sqrt{2}ce \cosh(cx^2 + bx + a)^2 \sinh(cx^2 + bx + a)^2}{\sqrt{2}} \end{aligned}$$

input `integrate((e*x+d)*sinh(c*x^2+b*x+a)^2,x, algorithm="fricas")`

output
$$\begin{aligned} & \frac{1}{32}*(2*c*e*cosh(c*x^2 + b*x + a)^4 + 8*c*e*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a)^3 + 2*c*e*sinh(c*x^2 + b*x + a)^4 - sqrt(2)*sqrt(pi)*((2*c*d - b*e)*cosh(c*x^2 + b*x + a)^2*cosh(-1/2*(b^2 - 4*a*c)/c) + (2*c*d - b*e)*cosh(c*x^2 + b*x + a)^2*sinh(-1/2*(b^2 - 4*a*c)/c) + ((2*c*d - b*e)*cosh(-1/2*(b^2 - 4*a*c)/c) + (2*c*d - b*e)*sinh(-1/2*(b^2 - 4*a*c)/c)))*sinh(c*x^2 + b*x + a)^2 + 2*((2*c*d - b*e)*cosh(c*x^2 + b*x + a)*cosh(-1/2*(b^2 - 4*a*c)/c) + (2*c*d - b*e)*cosh(c*x^2 + b*x + a)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)*sqrt(-c)*erf(1/2*sqrt(2)*(2*c*x + b)*sqrt(-c)/c) + sqrt(2)*sqrt(pi)*((2*c*d - b*e)*cosh(c*x^2 + b*x + a)^2*cosh(-1/2*(b^2 - 4*a*c)/c) - (2*c*d - b*e)*cosh(c*x^2 + b*x + a)^2*sinh(-1/2*(b^2 - 4*a*c)/c) /c + ((2*c*d - b*e)*cosh(-1/2*(b^2 - 4*a*c)/c) - (2*c*d - b*e)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)^2 + 2*((2*c*d - b*e)*cosh(c*x^2 + b*x + a)*cosh(-1/2*(b^2 - 4*a*c)/c) - (2*c*d - b*e)*cosh(c*x^2 + b*x + a)*sinh(-1/2*(b^2 - 4*a*c)/c))*sinh(c*x^2 + b*x + a)*sqrt(c)*erf(1/2*sqrt(2)*(2*c*x + b)/sqrt(c)) - 8*(c^2*e*x^2 + 2*c^2*d*x)*cosh(c*x^2 + b*x + a)^2 - 4*(2*c^2*e*x^2 + 4*c^2*d*x - 3*c*e*cosh(c*x^2 + b*x + a)^2)*sinh(c*x^2 + b*x + a)^2 - 2*c^2*e + 8*(c*e*cosh(c*x^2 + b*x + a)^3 - 2*(c^2*e*x^2 + 2*c^2*d*x)*cosh(c*x^2 + b*x + a))*sinh(c*x^2 + b*x + a))/(c^2*cosh(c*x^2 + b*x + a)^2 + 2*c^2*cosh(c*x^2 + b*x + a)*sinh(c*x^2 + b*x + a) + c^2*sinh(c*x^2 + b*x + a)^2) \end{aligned}$$

3.32.6 Sympy [F]

$$\int (d + ex) \sinh^2(a + bx + cx^2) dx = \int (d + ex) \sinh^2(a + bx + cx^2) dx$$

input `integrate((e*x+d)*sinh(c*x**2+b*x+a)**2,x)`

output `Integral((d + e*x)*sinh(a + b*x + c*x**2)**2, x)`

3.32.7 Maxima [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 299 vs. $2(130) = 260$.

Time = 0.37 (sec), antiderivative size = 299, normalized size of antiderivative = 1.87

$$\begin{aligned} & \int (d + ex) \sinh^2(a + bx + cx^2) dx \\ &= \frac{1}{16} \left(\frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(\sqrt{2}\sqrt{-c}x - \frac{\sqrt{2}b}{2\sqrt{-c}}\right) e^{(2a - \frac{b^2}{2c})}}{\sqrt{-c}} + \frac{\sqrt{2}\sqrt{\pi} \operatorname{erf}\left(\sqrt{2}\sqrt{c}x + \frac{\sqrt{2}b}{2\sqrt{c}}\right) e^{(-2a + \frac{b^2}{2c})}}{\sqrt{c}} - 8x \right) \\ & - \frac{1}{32} \left(8x^2 + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}e^{\left(\frac{(2cx+b)^2}{2c}\right)}}{\sqrt{c}} \right) e^{(2a - \frac{b^2}{2c})}}{\sqrt{c}} + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}e^{\left(\frac{(2cx+b)^2}{2c}\right)}}{\sqrt{c}} \right) e^{(-2a + \frac{b^2}{2c})}}{\sqrt{c}} \right) \end{aligned}$$

input `integrate((e*x+d)*sinh(c*x^2+b*x+a)^2,x, algorithm="maxima")`

output
$$\begin{aligned} & \frac{1}{16} (\sqrt{2} \sqrt{\pi} \operatorname{erf}(\sqrt{2} \sqrt{-c} x - \frac{1}{2} \sqrt{2} \sqrt{-c} b) e^{(2a - 1/2 b^2/c)}) \\ & + \sqrt{2} \sqrt{\pi} \operatorname{erf}(\sqrt{2} \sqrt{c} x + \frac{1}{2} \sqrt{2} \sqrt{c} b) e^{(-2a + 1/2 b^2/c)} \\ & - \frac{1}{32} (8x^2 + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}e^{\left(\frac{(2cx+b)^2}{2c}\right)}}{\sqrt{c}} \right) e^{(2a - \frac{b^2}{2c})}}{\sqrt{c}} + \frac{\sqrt{2} \left(\frac{\sqrt{\pi}(2cx+b)b \left(\operatorname{erf}\left(\sqrt{\frac{1}{2}}\sqrt{-\frac{(2cx+b)^2}{c}}\right) - 1 \right)}{\sqrt{-\frac{(2cx+b)^2}{c}} c^{\frac{3}{2}}} - \frac{\sqrt{2}e^{\left(\frac{(2cx+b)^2}{2c}\right)}}{\sqrt{c}} \right) e^{(-2a + \frac{b^2}{2c})}}{\sqrt{c}}) \end{aligned}$$

3.32.8 Giac [A] (verification not implemented)

Time = 0.29 (sec), antiderivative size = 165, normalized size of antiderivative = 1.03

$$\begin{aligned} & \int (d + ex) \sinh^2(a + bx + cx^2) dx \\ &= -\frac{1}{4} ex^2 - \frac{1}{2} dx - \frac{\frac{\sqrt{2}\sqrt{\pi}(2cd-be)\operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{c}\left(2x+\frac{b}{c}\right)\right)e^{\left(\frac{b^2-4ac}{2c}\right)}}{\sqrt{c}} + 2ee^{(-2cx^2-2bx-2a)}}{32c} \\ & - \frac{\frac{\sqrt{2}\sqrt{\pi}(2cd-be)\operatorname{erf}\left(-\frac{1}{2}\sqrt{2}\sqrt{-c}\left(2x+\frac{b}{c}\right)\right)e^{\left(-\frac{b^2-4ac}{2c}\right)}}{\sqrt{-c}} - 2ee^{(2cx^2+2bx+2a)}}{32c} \end{aligned}$$

input `integrate((e*x+d)*sinh(c*x^2+b*x+a)^2,x, algorithm="giac")`

output
$$\begin{aligned} & -\frac{1}{4}e^2x^2 - \frac{1}{2}dx - \frac{1}{32}\sqrt{2}\sqrt{\pi}(2cd - be)\operatorname{erf}\left(\frac{-1}{2}\sqrt{2}\right) \\ & \times \sqrt{c}(2x + b/c)e^{(1/2(b^2 - 4ac)/c)}\sqrt{c} + 2e^2e^{(-2cx^2 - 2bx - 2a)/c} \\ & - \frac{1}{32}\sqrt{2}\sqrt{\pi}(2cd - be)\operatorname{erf}\left(\frac{-1}{2}\sqrt{2}\right) \\ & \times \sqrt{-c}(2x + b/c)e^{(-1/2(b^2 - 4ac)/c)}\sqrt{-c} - 2e^2e^{(2cx^2 + 2bx + 2a)/c} \end{aligned}$$

3.32.9 Mupad [F(-1)]

Timed out.

$$\int (d + ex) \sinh^2(a + bx + cx^2) dx = \int \sinh(cx^2 + bx + a)^2 (d + ex) dx$$

input `int(sinh(a + b*x + c*x^2)^2*(d + e*x),x)`

output `int(sinh(a + b*x + c*x^2)^2*(d + e*x), x)`

3.33 $\int \frac{\sinh^2(a+bx+cx^2)}{d+ex} dx$

3.33.1	Optimal result	218
3.33.2	Mathematica [N/A]	218
3.33.3	Rubi [N/A]	219
3.33.4	Maple [N/A] (verified)	220
3.33.5	Fricas [N/A]	220
3.33.6	Sympy [N/A]	220
3.33.7	Maxima [N/A]	221
3.33.8	Giac [N/A]	221
3.33.9	Mupad [N/A]	221

3.33.1 Optimal result

Integrand size = 21, antiderivative size = 21

$$\int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx = -\frac{\log(d + ex)}{2e} + \frac{1}{2}\text{Int}\left(\frac{\cosh(2a + 2bx + 2cx^2)}{d + ex}, x\right)$$

output `-1/2*ln(e*x+d)/e+1/2*Unintegrable(cosh(2*c*x^2+2*b*x+2*a)/(e*x+d),x)`

3.33.2 Mathematica [N/A]

Not integrable

Time = 6.41 (sec) , antiderivative size = 23, normalized size of antiderivative = 1.10

$$\int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx$$

input `Integrate[Sinh[a + b*x + c*x^2]^2/(d + e*x), x]`

output `Integrate[Sinh[a + b*x + c*x^2]^2/(d + e*x), x]`

3.33. $\int \frac{\sinh^2(a+bx+cx^2)}{d+ex} dx$

3.33.3 Rubi [N/A]

Not integrable

Time = 0.23 (sec), antiderivative size = 21, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {5917, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx \\ & \quad \downarrow \textcolor{blue}{5917} \\ & \int \left(\frac{\cosh(2a + 2bx + 2cx^2)}{2(d + ex)} - \frac{1}{2(d + ex)} \right) dx \\ & \quad \downarrow \textcolor{blue}{2009} \\ & \frac{1}{2} \int \frac{\cosh(2cx^2 + 2bx + 2a)}{d + ex} dx - \frac{\log(d + ex)}{2e} \end{aligned}$$

input `Int[Sinh[a + b*x + c*x^2]^2/(d + e*x), x]`

output `$Aborted`

3.33.3.1 Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simplify[IntSum[u, x], x] /; SumQ[u]`

rule 5917 `Int[((d_.) + (e_.)*(x_.))^(m_.)*Sinh[(a_.) + (b_.)*(x_.) + (c_.)*(x_.)^2]^(n_), x_Symbol] :> Int[ExpandTrigReduce[(d + e*x)^m, Sinh[a + b*x + c*x^2]^n, x], x] /; FreeQ[{a, b, c, d, e, m}, x] && IGtQ[n, 1]`

3.33.4 Maple [N/A] (verified)

Not integrable

Time = 0.48 (sec) , antiderivative size = 21, normalized size of antiderivative = 1.00

$$\int \frac{\sinh(cx^2 + bx + a)^2}{ex + d} dx$$

input `int(sinh(c*x^2+b*x+a)^2/(e*x+d),x)`

output `int(sinh(c*x^2+b*x+a)^2/(e*x+d),x)`

3.33.5 Fricas [N/A]

Not integrable

Time = 0.25 (sec) , antiderivative size = 23, normalized size of antiderivative = 1.10

$$\int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(cx^2 + bx + a)^2}{ex + d} dx$$

input `integrate(sinh(c*x^2+b*x+a)^2/(e*x+d),x, algorithm="fricas")`

output `integral(sinh(c*x^2 + b*x + a)^2/(e*x + d), x)`

3.33.6 SymPy [N/A]

Not integrable

Time = 40.26 (sec) , antiderivative size = 19, normalized size of antiderivative = 0.90

$$\int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx$$

input `integrate(sinh(c*x**2+b*x+a)**2/(e*x+d),x)`

output `Integral(sinh(a + b*x + c*x**2)**2/(d + e*x), x)`

3.33.7 Maxima [N/A]

Not integrable

Time = 0.35 (sec) , antiderivative size = 72, normalized size of antiderivative = 3.43

$$\int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(cx^2 + bx + a)^2}{ex + d} dx$$

input `integrate(sinh(c*x^2+b*x+a)^2/(e*x+d),x, algorithm="maxima")`

output `-1/2*log(e*x + d)/e + 1/4*integrate(e^(2*c*x^2 + 2*b*x + 2*a)/(e*x + d), x) + 1/4*integrate(e^(-2*c*x^2 - 2*b*x)/(e*x*e^(2*a) + d*e^(2*a)), x)`

3.33.8 Giac [N/A]

Not integrable

Time = 0.33 (sec) , antiderivative size = 23, normalized size of antiderivative = 1.10

$$\int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(cx^2 + bx + a)^2}{ex + d} dx$$

input `integrate(sinh(c*x^2+b*x+a)^2/(e*x+d),x, algorithm="giac")`

output `integrate(sinh(c*x^2 + b*x + a)^2/(e*x + d), x)`

3.33.9 Mupad [N/A]

Not integrable

Time = 1.12 (sec) , antiderivative size = 23, normalized size of antiderivative = 1.10

$$\int \frac{\sinh^2(a + bx + cx^2)}{d + ex} dx = \int \frac{\sinh(cx^2 + bx + a)^2}{d + ex} dx$$

input `int(sinh(a + b*x + c*x^2)^2/(d + e*x),x)`

output `int(sinh(a + b*x + c*x^2)^2/(d + e*x), x)`

CHAPTER 4

APPENDIX

4.1 Listing of Grading functions	222
--	-----

4.1 Listing of Grading functions

The following are the current version of the grading functions used for grading the quality of the antiderivative with reference to the optimal antiderivative included in the test suite.

There is a version for Maple and for Mathematica/Rubi. There is a version for grading Sympy and version for use with Sagemath.

The following are links to the current source code.

The following are the listings of source code of the grading functions.

4.1.1 Mathematica and Rubi grading function

```
(* Original version thanks to Albert Rich emailed on 03/21/2017 *)
(* ::Package:: *)

(* Nasser: April 7,2022. add second output which gives reason for the grade *)
(*                         Small rewrite of logic in main function to make it*)
(*                         match Maple's logic. No change in functionality otherwise*)

(* ::Subsection:: *)
(*GradeAntiderivative[result,optimal]*)

(* ::Text:: *)
(*If result and optimal are mathematical expressions, *)
(*      GradeAntiderivative[result,optimal] returns*)
```

```

(* "F" if the result fails to integrate an expression that*)
(*      is integrable*)
(* "C" if result involves higher level functions than necessary*)
(* "B" if result is more than twice the size of the optimal*)
(*      antiderivative*)
(* "A" if result can be considered optimal*)

GradeAntiderivative[result_,optimal_] := Module[{expnResult,expnOptimal,leafCountResult,leafC
expnResult = ExpnType[result];
expnOptimal = ExpnType[optimal];
leafCountResult = LeafCount[result];
leafCountOptimal = LeafCount[optimal];

(*Print["expnResult=",expnResult," expnOptimal=",expnOptimal];*)
If[expnResult<=expnOptimal,
    If[Not[FreeQ[result,Complex]], (*result contains complex*)
        If[Not[FreeQ[optimal,Complex]], (*optimal contains complex*)
            If[leafCountResult<=2*leafCountOptimal,
                finalresult={"A"," "}
                ,(*ELSE*)
                finalresult={"B","Both result and optimal contain complex but leaf count
]
                ]
            ,(*ELSE*)
            finalresult={"C","Result contains complex when optimal does not."}
]
        ,(*ELSE*)(*result does not contains complex*)
        If[leafCountResult<=2*leafCountOptimal,
            finalresult={"A"," "}
            ,(*ELSE*)
            finalresult={"B","Leaf count is larger than twice the leaf count of optimal. "}
]
        ]
    ,(*ELSE*)(*expnResult>expnOptimal*)
    If[FreeQ[result,Integrate] && FreeQ[result,Int],
        finalresult={"C","Result contains higher order function than in optimal. Order "<
        ,
        finalresult={"F","Contains unresolved integral."}
]
];
finalresult
]

```

```

(* ::Text:: *)
(*The following summarizes the type number assigned an *)
(*expression based on the functions it involves*)
(*1 = rational function*)
(*2 = algebraic function*)
(*3 = elementary function*)
(*4 = special function*)
(*5 = hypergeometric function*)
(*6 = appell function*)
(*7 = rootsum function*)
(*8 = integrate function*)
(*9 = unknown function*)

ExpnType[expn_] :=
  If[AtomQ[expn],
    1,
    If[ListQ[expn],
      Max[Map[ExpnType, expn]],
      If[Head[expn] === Power,
        If[IntegerQ[expn[[2]]],
          ExpnType[expn[[1]]],
          If[Head[expn[[2]]] === Rational,
            If[IntegerQ[expn[[1]]] || Head[expn[[1]]] === Rational,
              1,
              Max[ExpnType[expn[[1]]], 2]],
            Max[ExpnType[expn[[1]]], ExpnType[expn[[2]]], 3]]],
        If[Head[expn] === Plus || Head[expn] === Times,
          Max[ExpnType[First[expn]], ExpnType[Rest[expn]]],
          If[ElementaryFunctionQ[Head[expn]],
            Max[3, ExpnType[expn[[1]]]],
            If[SpecialFunctionQ[Head[expn]],
              Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 4]],
              If[HypergeometricFunctionQ[Head[expn]],
                Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 5]],
                If[AppellFunctionQ[Head[expn]],
                  Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 6]],
                  If[Head[expn] === RootSum,
                    Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 7]],
                    If[Head[expn] === Integrate || Head[expn] === Int,
                      Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 8]],
                      9]]]]]]]]]]]

```

```

ElementaryFunctionQ[func_] :=
  MemberQ[{  

    Exp, Log,  

    Sin, Cos, Tan, Cot, Sec, Csc,  

    ArcSin, ArcCos, ArcTan, ArcCot, ArcSec, ArcCsc,  

    Sinh, Cosh, Tanh, Coth, Sech, Csch,  

    ArcSinh, ArcCosh, ArcTanh, ArcCoth, ArcSech, ArcCsch
  }, func]

SpecialFunctionQ[func_] :=
  MemberQ[{  

    Erf, Erfc, Erfi,  

    FresnelS, FresnelC,  

    ExpIntegralE, ExpIntegralEi, LogIntegral,  

    SinIntegral, CosIntegral, SinhIntegral, CoshIntegral,  

    Gamma, LogGamma, PolyGamma,  

    Zeta, PolyLog, ProductLog,  

    EllipticF, EllipticE, EllipticPi
  }, func]

HypergeometricFunctionQ[func_] :=
  MemberQ[{Hypergeometric1F1, Hypergeometric2F1, HypergeometricPFQ}, func]

AppellFunctionQ[func_] :=
  MemberQ[{AppellF1}, func]

```

4.1.2 Maple grading function

```

# File: GradeAntiderivative.mpl
# Original version thanks to Albert Rich emailed on 03/21/2017

#Nasser 03/22/2017 Use Maple leaf count instead since buildin
#Nasser 03/23/2017 missing 'ln' for ElementaryFunctionQ added
#Nasser 03/24/2017 corrected the check for complex result
#Nasser 10/27/2017 check for leafsize and do not call ExpnType()
#                               if leaf size is "too large". Set at 500,000

```

```

#Nasser 12/22/2019 Added debug flag, added 'dilog' to special functions
#
# see problem 156, file Apostol_Problems
#Nasser 4/07/2022 add second output which gives reason for the grade

GradeAntiderivative := proc(result,optimal)
local leaf_count_result,
      leaf_count_optimal,
      ExpnType_result,
      ExpnType_optimal,
      debug:=false;

      leaf_count_result:=leafcount(result);
      #do NOT call ExpnType() if leaf size is too large. Recursion problem
      if leaf_count_result > 500000 then
          return "B","result has leaf size over 500,000. Avoiding possible recursion issues
      fi;

      leaf_count_optimal := leafcount(optimal);
      ExpnType_result := ExpnType(result);
      ExpnType_optimal := ExpnType(optimal);

      if debug then
          print("ExpnType_result",ExpnType_result," ExpnType_optimal=",ExpnType_optimal);
      fi;

# If result and optimal are mathematical expressions,
# GradeAntiderivative[result,optimal] returns
# "F" if the result fails to integrate an expression that
#     is integrable
# "C" if result involves higher level functions than necessary
# "B" if result is more than twice the size of the optimal
#     antiderivative
# "A" if result can be considered optimal

#This check below actually is not needed, since I only
#call this grading only for passed integrals. i.e. I check
#for "F" before calling this. But no harm of keeping it here.
#just in case.

      if not type(result,freeof('int')) then
          return "F","Result contains unresolved integral";
      fi;

```

```

if ExpnType_result<=ExpnType_optimal then
    if debug then
        print("ExpnType_result<=ExpnType_optimal");
    fi;
    if is_contains_complex(result) then
        if is_contains_complex(optimal) then
            if debug then
                print("both result and optimal complex");
            fi;
            if leaf_count_result<=2*leaf_count_optimal then
                return "A"," ";
            else
                return "B",cat("Both result and optimal contain complex but leaf count of
                                convert(leaf_count_result,string)," vs. $2 (
                                convert(leaf_count_optimal,string)," ) = ",convert(2*leaf_
                end if
            else #result contains complex but optimal is not
                if debug then
                    print("result contains complex but optimal is not");
                fi;
                return "C","Result contains complex when optimal does not.";
            fi;
        else # result do not contain complex
            # this assumes optimal do not as well. No check is needed here.
            if debug then
                print("result do not contain complex, this assumes optimal do not as well");
            fi;
            if leaf_count_result<=2*leaf_count_optimal then
                if debug then
                    print("leaf_count_result<=2*leaf_count_optimal");
                fi;
                return "A"," ";
            else
                if debug then
                    print("leaf_count_result>2*leaf_count_optimal");
                fi;
                return "B",cat("Leaf count of result is larger than twice the leaf count of o
                                convert(leaf_count_result,string)," vs. $2(
                                convert(leaf_count_optimal,string)," )=",convert(2*leaf_cou
                fi;
            fi;
        else
    fi;
fi;

```

```

else #ExpnType(result) > ExpnType(optimal)
    if debug then
        print("ExpnType(result) > ExpnType(optimal)");
    fi;
    return "C",cat("Result contains higher order function than in optimal. Order ",
                  convert(ExpnType_result,string)," vs. order ",
                  convert(ExpnType_optimal,string),".");
fi;

end proc:

#
# is_contains_complex(result)
# takes expressions and returns true if it contains "I" else false
#
#Nasser 032417
is_contains_complex:= proc(expression)
    return (has(expression,I));
end proc:

# The following summarizes the type number assigned an expression
# based on the functions it involves
# 1 = rational function
# 2 = algebraic function
# 3 = elementary function
# 4 = special function
# 5 = hypergeometric function
# 6 = appell function
# 7 = rootsum function
# 8 = integrate function
# 9 = unknown function

ExpnType := proc(expn)
    if type(expn,'atomic') then
        1
    elif type(expn,'list') then
        apply(max,map(ExpnType,expn))
    elif type(expn,'sqrt') then
        if type(op(1,expn),'rational') then
            1
        else
            max(2,ExpnType(op(1,expn)))
        end if
    else
        max(2,ExpnType(op(1,expn)))
    end if
end proc;

```

```

        elif type(expn,'`^') then
            if type(op(2,expn),'integer') then
                ExpnType(op(1,expn))
            elif type(op(2,expn),'rational') then
                if type(op(1,expn),'rational') then
                    1
                else
                    max(2,ExpnType(op(1,expn)))
                end if
            else
                max(3,ExpnType(op(1,expn)),ExpnType(op(2,expn)))
            end if
        elif type(expn,'`+`') or type(expn,'`*`') then
            max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
        elif ElementaryFunctionQ(op(0,expn)) then
            max(3,ExpnType(op(1,expn)))
        elif SpecialFunctionQ(op(0,expn)) then
            max(4,apply(max,map(ExpnType,[op(expn)])))
        elif HypergeometricFunctionQ(op(0,expn)) then
            max(5,apply(max,map(ExpnType,[op(expn)])))
        elif AppellFunctionQ(op(0,expn)) then
            max(6,apply(max,map(ExpnType,[op(expn)])))
        elif op(0,expn)='int' then
            max(8,apply(max,map(ExpnType,[op(expn)]))) else
9
    end if
end proc:

ElementaryFunctionQ := proc(func)
    member(func,[
        exp,log,ln,
        sin,cos,tan,cot,sec,csc,
        arcsin,arccos,arctan,arccot,arcsec,arccsc,
        sinh,cosh,tanh,coth,sech,csch,
        arcsinh,arccosh,arctanh,arccoth,arcsech,arccsch])
end proc:

SpecialFunctionQ := proc(func)
    member(func,[
        erf,erfc,erfi,
        FresnelS,FresnelC,
        Ei,Ei,Li,Si,Ci,Shi,Chi,

```

```

GAMMA,lnGAMMA,Psi,Zeta,polylog,dilog,LambertW,
EllipticF,EllipticE,EllipticPi])
end proc:

HypergeometricFunctionQ := proc(func)
  member(func,[HypergeometricF1,hypergeom,HypergeometricPFQ])
end proc:

AppellFunctionQ := proc(func)
  member(func,[AppellF1])
end proc:

# u is a sum or product.  rest(u) returns all but the
# first term or factor of u.
rest := proc(u) local v;
  if nops(u)=2 then
    op(2,u)
  else
    apply(op(0,u),op(2..nops(u),u))
  end if
end proc:

#leafcount(u) returns the number of nodes in u.
#Nasser 3/23/17 Replaced by build-in leafCount from package in Maple
leafcount := proc(u)
  MmaTranslator[Mma][LeafCount](u);
end proc:
```

4.1.3 Sympy grading function

```

#Dec 24, 2019. Nasser M. Abbasi:
#          Port of original Maple grading function by
#          Albert Rich to use with Sympy/Python
#Dec 27, 2019 Nasser. Added `RootSum`. See problem 177, Timofeev file
#          added 'exp_polar'
from sympy import *

def leaf_count(expr):
    #sympy do not have leaf count function. This is approximation
    return round(1.7*count_ops(expr))

def is_sqrt(expr):
```

```

if isinstance(expr,Pow):
    if expr.args[1] == Rational(1,2):
        return True
    else:
        return False
else:
    return False

def is_elementary_function(func):
    return func in [exp,log,ln,sin,cos,tan,cot,sec,csc,
        asin,acos,atan,acot,asec,acsc,sinh,cosh,tanh,coth,sech,csch,
        asinh,acosh,atanh,acoth,asech,acsch
    ]

def is_special_function(func):
    return func in [ erf,erfc,erfi,
        fresnels,fresnelc,Ei,Ei,Li,Si,Ci,Shi,Chi,
        gamma,loggamma,digamma,zeta,polylog,LambertW,
        elliptic_f,elliptic_e,elliptic_pi,exp_polar
    ]

def is_hypergeometric_function(func):
    return func in [hyper]

def is_appell_function(func):
    return func in [appellf1]

def is_atom(expn):
    try:
        if expn.isAtom or isinstance(expn,int) or isinstance(expn,float):
            return True
        else:
            return False

    except AttributeError as error:
        return False

def expnType(expn):
    debug=False
    if debug:
        print("expn=",expn,"type(expn)=",type(expn))

    if is_atom(expn):

```

```

    return 1
elif isinstance(expn,list):
    return max(map(expnType, expn))  #apply(max,map(ExpnType,expn))
elif is_sqrt(expn):
    if isinstance(expn.args[0],Rational): #type(op(1,expn),'rational')
        return 1
    else:
        return max(2,expnType(expn.args[0])) #max(2,ExpnType(op(1,expn)))
elif isinstance(expn,Pow):  #type(expn,'`^`)
    if isinstance(expn.args[1],Integer): #type(op(2,expn),'integer')
        return expnType(expn.args[0]) #ExpnType(op(1,expn))
    elif isinstance(expn.args[1],Rational): #type(op(2,expn),'rational')
        if isinstance(expn.args[0],Rational): #type(op(1,expn),'rational')
            return 1
        else:
            return max(2,expnType(expn.args[0])) #max(2,ExpnType(op(1,expn)))
    else:
        return max(3,expnType(expn.args[0]),expnType(expn.args[1])) #max(3,ExpnType(op(1,expn)),ExpnT
elif isinstance(expn,Add) or isinstance(expn,Mul): #type(expn,'`+`) or type(expn,'`*`)
    m1 = expnType(expn.args[0])
    m2 = expnType(list(expn.args[1:]))
    return max(m1,m2) #max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
elif is_elementary_function(expn.func): #ElementaryFunctionQ(op(0,expn))
    return max(3,expnType(expn.args[0])) #max(3,ExpnType(op(1,expn)))
elif is_special_function(expn.func): #SpecialFunctionQ(op(0,expn))
    m1 = max(map(expnType, list(expn.args)))
    return max(4,m1) #max(4,apply(max,map(ExpnType,[op(expn)])))
elif is_hypergeometric_function(expn.func): #HypergeometricFunctionQ(op(0,expn))
    m1 = max(map(expnType, list(expn.args)))
    return max(5,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
elif is_appell_function(expn.func):
    m1 = max(map(expnType, list(expn.args)))
    return max(6,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
elif isinstance(expn,RootSum):
    m1 = max(map(expnType, list(expn.args))) #Apply[Max,Append[Map[ExpnType,Apply[List,expn]],7]],
    return max(7,m1)
elif str(expn).find("Integral") != -1:
    m1 = max(map(expnType, list(expn.args)))
    return max(8,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
else:
    return 9

```

#main function

```

def grade_antiderivative(result,optimal):

    #print ("Enter grade_antiderivative for sageMath")
    #print("Enter grade_antiderivative, result=",result, " optimal=",optimal)

    leaf_count_result = leaf_count(result)
    leaf_count_optimal = leaf_count(optimal)

    #print("leaf_count_result=",leaf_count_result)
    #print("leaf_count_optimal=",leaf_count_optimal)

    expnType_result = expnType(result)
    expnType_optimal = expnType(optimal)

    if str(result).find("Integral") != -1:
        grade = "F"
        grade_annotation = ""
    else:
        if expnType_result <= expnType_optimal:
            if result.has(I):
                if optimal.has(I): #both result and optimal complex
                    if leaf_count_result <= 2*leaf_count_optimal:
                        grade = "A"
                        grade_annotation = ""
                    else:
                        grade = "B"
                        grade_annotation = "Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal."
                else: #result contains complex but optimal is not
                    grade = "C"
                    grade_annotation = "Result contains complex when optimal does not."
            else: # result do not contain complex, this assumes optimal do not as well
                if leaf_count_result <= 2*leaf_count_optimal:
                    grade = "A"
                    grade_annotation = ""
                else:
                    grade = "B"
                    grade_annotation = "Leaf count of result is larger than twice the leaf count of optimal. "+str(leaf_count(result)-2*leaf_count(optimal))
            else:
                grade = "C"
                grade_annotation = "Result contains higher order function than in optimal. Order "+str(ExpnType(result)-ExpnType(optimal))

    #print("Before returning. grade=",grade, " grade_annotation=",grade_annotation)

```

```
return grade, grade_annotation
```

4.1.4 SageMath grading function

```
#Dec 24, 2019. Nasser: Ported original Maple grading function by
#                  Albert Rich to use with Sagemath. This is used to
#                  grade Fricas, Giac and Maxima results.

#Dec 24, 2019. Nasser: Added 'exp_integral_e' and 'sng', 'sin_integral'
#                  'arctan2', 'floor', 'abs', 'log_integral'
#June 4, 2022 Made default grade_annotation "none" instead of "" due
#                  issue later when reading the file.
#July 14, 2022. Added ellipticF. This is until they fix sagemath, then remove it.

from sage.all import *
from sage.symbolic.operators import add_vararg, mul_vararg

debug=False;

def tree_size(expr):
    r'''
    Return the tree size of this expression.
    '''
    #print("Enter tree_size, expr is ",expr)

    if expr not in SR:
        # deal with lists, tuples, vectors
        return 1 + sum(tree_size(a) for a in expr)
    expr = SR(expr)
    x, aa = expr.operator(), expr.operands()
    if x is None:
        return 1
    else:
        return 1 + sum(tree_size(a) for a in aa)

def is_sqrt(expr):
    if expr.operator() == operator.Pow: #isinstance(expr,Pow):
        if expr.operands()[1]==1/2: #expr.args[1] == Rational(1,2):
            if debug: print ("expr is sqrt")
            return True
        else:
```

```

        return False
else:
    return False

def is_elementary_function(func):
    #debug=False
    m = func.name() in ['exp','log','ln',
        'sin','cos','tan','cot','sec','csc',
        'arcsin','arccos','arctan','arccot','arcsec','arccsc',
        'sinh','cosh','tanh','coth','sech','csch',
        'arcsinh','arccosh','arctanh','arccoth','arcsech','arccsch','sgn',
        'arctan2','floor','abs'
    ]
    if debug:
        if m:
            print ("func ", func , " is elementary_function")
        else:
            print ("func ", func , " is NOT elementary_function")

    return m

def is_special_function(func):
    #debug=False
    if debug:
        print ("type(func)=", type(func))

    m= func.name() in ['erf','erfc','erfi','fresnel_sin','fresnel_cos','Ei',
        'Ei','Li','Si','sin_integral','Ci','cos_integral','Shi','sinh_integral',
        'Chi','cosh_integral','gamma','log_gamma','psi,zeta',
        'polylog','lambert_w','elliptic_f','elliptic_e','ellipticF',
        'elliptic_pi','exp_integral_e','log_integral']

    if debug:
        print ("m=",m)
        if m:
            print ("func ", func , " is special_function")
        else:
            print ("func ", func , " is NOT special_function")

    return m

```

```

def is_hypergeometric_function(func):
    return func.name() in ['hypergeometric','hypergeometric_M','hypergeometric_U']

def is_appell_function(func):
    return func.name() in ['hypergeometric']  # [appellf1] can't find this in sagemath

def is_atom(expn):

    #debug=False
    if debug:
        print ("Enter is_atom, expn=",expn)

    if not hasattr(expn, 'parent'):
        return False

#thanks to answer at https://ask.sagemath.org/question/49179/what-is-sagemath-equivalent-to-atomic-
try:
    if expn.parent() is SR:
        return expn.operator() is None
    if expn.parent() in (ZZ, QQ, AA, QQbar):
        return expn in expn.parent() # Should always return True
    if hasattr(expn.parent(),"base_ring") and hasattr(expn.parent(),"gens"):
        return expn in expn.parent().base_ring() or expn in expn.parent().gens()

    return False

except AttributeError as error:
    print("Exception,AttributeError in is_atom")
    print ("caught exception" , type(error).__name__)
    return False

def expnType(expn):

    if debug:
        print (">>>>Enter expnType, expn=", expn)
        print (">>>>is_atom(expn)=", is_atom(expn))

    if is_atom(expn):
        return 1
    elif type(expn)==list: #isinstance(expn,list):

```

```

    return max(map(expnType, expn))  #apply(max,map(ExpnType,expn))
elif is_sqrt(expn):
    if type(expn.operands()[0]) == Rational: #type(isinstance(expn.args[0],Rational)):
        return 1
    else:
        return max(2,expnType(expn.operands()[0]))  #max(2,expnType(expn.args[0]))
elif expn.operator() == operator.pow:  #isinstance(expn,Pow)
    if type(expn.operands()[1]) == Integer: #isinstance(expn.args[1],Integer)
        return expnType(expn.operands()[0])  #expnType(expn.args[0])
    elif type(expn.operands()[1]) == Rational: #isinstance(expn.args[1],Rational)
        if type(expn.operands()[0]) == Rational: #isinstance(expn.args[0],Rational)
            return 1
        else:
            return max(2,expnType(expn.operands()[0]))  #max(2,expnType(expn.args[0]))
    else:
        return max(3,expnType(expn.operands()[0]),expnType(expn.operands()[1])) #max(3,expnType(expn.
elif expn.operator() == add_vararg or expn.operator() == mul_vararg: #isinstance(expn,Add) or isinsta
    m1 = expnType(expn.operands()[0]) #expnType(expn.args[0])
    m2 = expnType(expn.operands()[1:]) #expnType(list(expn.args[1:]))
    return max(m1,m2)  #max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
elif is_elementary_function(expn.operator()): #is_elementary_function(expn.func)
    return max(3,expnType(expn.operands()[0]))
elif is_special_function(expn.operator()): #is_special_function(expn.func)
    m1 = max(map(expnType, expn.operands()))      #max(map(expnType, list(expn.args)))
    return max(4,m1)  #max(4,m1)
elif is_hypergeometric_function(expn.operator()): #is_hypergeometric_function(expn.func)
    m1 = max(map(expnType, expn.operands()))      #max(map(expnType, list(expn.args)))
    return max(5,m1)  #max(5,m1)
elif is_appell_function(expn.operator()):
    m1 = max(map(expnType, expn.operands()))      #max(map(expnType, list(expn.args)))
    return max(6,m1)  #max(6,m1)
elif str(expn).find("Integral") != -1: #this will never happen, since it
    #is checked before calling the grading function that is passed.
    #but kept it here.
    m1 = max(map(expnType, expn.operands()))      #max(map(expnType, list(expn.args)))
    return max(8,m1)  #max(5,apply(max,map(ExpnType,[op(expn)])))
else:
    return 9

#main function
def grade_antiderivative(result,optimal):

```

```

if debug:
    print ("Enter grade_antiderivative for sageMath")
    print("Enter grade_antiderivative, result=",result)
    print("Enter grade_antiderivative, optimal=",optimal)
    print("type(anti)=",type(result))
    print("type(optimal)=",type(optimal))

leaf_count_result = tree_size(result) #leaf_count(result)
leaf_count_optimal = tree_size(optimal) #leaf_count(optimal)

#if debug: print ("leaf_count_result=", leaf_count_result, "leaf_count_optimal=",leaf_count_optimal)

expnType_result = expnType(result)
expnType_optimal = expnType(optimal)

if debug: print ("expnType_result=", expnType_result, "expnType_optimal=",expnType_optimal)

if expnType_result <= expnType_optimal:
    if result.has(I):
        if optimal.has(I): #both result and optimal complex
            if leaf_count_result <= 2*leaf_count_optimal:
                grade = "A"
                grade_annotation = ""
            else:
                grade = "B"
                grade_annotation = "Both result and optimal contain complex but leaf count of result is larger than optimal"
        else: #result contains complex but optimal is not
            grade = "C"
            grade_annotation = "Result contains complex when optimal does not."
    else: # result do not contain complex, this assumes optimal do not as well
        if leaf_count_result <= 2*leaf_count_optimal:
            grade = "A"
            grade_annotation = ""
        else:
            grade = "B"
            grade_annotation = "Leaf count of result is larger than twice the leaf count of optimal. "+str(leaf_count_result)
    else:
        grade = "C"
        grade_annotation = "Result contains higher order function than in optimal. Order "+str(expnType_resu

print("Before returning. grade=",grade, " grade_annotation=",grade_annotation)

```

```
return grade, grade_annotation
```