

Computer Algebra Independent Integration Tests

Summer 2024

1-Algebraic-functions/1.2-Trinomial/1.2.3-General-
trinomial/132-1.2.3.5

Nasser M. Abbasi

May 18, 2024

Compiled on May 18, 2024 at 10:24pm

Contents

1	Introduction	3
1.1	Listing of CAS systems tested	4
1.2	Results	5
1.3	Time and leaf size Performance	9
1.4	Performance based on number of rules Rubi used	11
1.5	Performance based on number of steps Rubi used	12
1.6	Solved integrals histogram based on leaf size of result	13
1.7	Solved integrals histogram based on CPU time used	14
1.8	Leaf size vs. CPU time used	15
1.9	list of integrals with no known antiderivative	16
1.10	List of integrals solved by CAS but has no known antiderivative	16
1.11	list of integrals solved by CAS but failed verification	16
1.12	Timing	17
1.13	Verification	17
1.14	Important notes about some of the results	18
1.15	Current tree layout of integration tests	21
1.16	Design of the test system	22
2	detailed summary tables of results	23
2.1	List of integrals sorted by grade for each CAS	24
2.2	Detailed conclusion table per each integral for all CAS systems	28
2.3	Detailed conclusion table specific for Rubi results	38
3	Listing of integrals	40
3.1	$\int \frac{d+ex+fx^2+gx^3+hx^4+jx^5+kx^6+lx^7+mx^8}{a+bx^3+cx^6} dx$	42
3.2	$\int (a+bx^3+cx^6)^{3/2} (A+Bx^3+Cx^6) dx$	50
3.3	$\int \sqrt{a+bx^3+cx^6} (A+Bx^3+Cx^6) dx$	56
3.4	$\int \frac{A+Bx^3+Cx^6}{\sqrt{a+bx^3+cx^6}} dx$	62
3.5	$\int \frac{A+Bx^3+Cx^6}{(a+bx^3+cx^6)^{3/2}} dx$	68
3.6	$\int \frac{1}{a+bx^n+cx^{2n}} dx$	74

3.7	$\int \frac{d+ex}{a+bx^n+cx^{2n}} dx$	80
3.8	$\int \frac{d+ex+fx^2}{a+bx^n+cx^{2n}} dx$	86
3.9	$\int \frac{d+ex+fx^2+gx^3}{a+bx^n+cx^{2n}} dx$	93
3.10	$\int \frac{1}{(a+bx^n+cx^{2n})^2} dx$	100
3.11	$\int \frac{d+ex}{(a+bx^n+cx^{2n})^2} dx$	106
3.12	$\int \frac{d+ex+fx^2}{(a+bx^n+cx^{2n})^2} dx$	113
3.13	$\int \frac{d+ex+fx^2+gx^3}{(a+bx^n+cx^{2n})^2} dx$	121
3.14	$\int \frac{-1+x^4+7x^5+x^9}{-7+6x^4+x^8} dx$	129
3.15	$\int \frac{-ahx^{-1+\frac{n}{2}}+cfx^{-1+n}+cgx^{-1+2n}+chx^{-1+\frac{5n}{2}}}{(a+bx^n+cx^{2n})^{3/2}} dx$	137
3.16	$\int (a+bx^n+cx^{2n})^p (a+b(1+n+np)x^n+c(1+2n(1+p))x^{2n}) dx$	143
3.17	$\int \frac{A+Bx^n+Cx^{2n}}{a+bx^n+cx^{2n}} dx$	148
3.18	$\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^2} dx$	153
3.19	$\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^3} dx$	160
3.20	$\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{a+bx^n+cx^{2n}} dx$	168
3.21	$\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{(a+bx^n+cx^{2n})^2} dx$	173
3.22	$\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{(a+bx^n+cx^{2n})^3} dx$	180
3.23	$\int (a+bx^n+cx^{2n})^{3/2} (A+Bx^n+Cx^{2n}) dx$	189
3.24	$\int \sqrt{a+bx^n+cx^{2n}} (A+Bx^n+Cx^{2n}) dx$	195
3.25	$\int \frac{A+Bx^n+Cx^{2n}}{\sqrt{a+bx^n+cx^{2n}}} dx$	201
3.26	$\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^{3/2}} dx$	206
3.27	$\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^{5/2}} dx$	211
3.28	$\int (a+bx+cx^2)^p (A+Bx+Cx^2+Dx^3) dx$	216
3.29	$\int (a+bx^2+cx^4)^p (A+Bx^2+Cx^4+Dx^6) dx$	224
3.30	$\int (a+bx^3+cx^6)^p (A+Bx^3+Cx^6+Dx^9) dx$	231
3.31	$\int (a+bx^4+cx^8)^p (A+Bx^4+Cx^8+Dx^{12}) dx$	237
3.32	$\int (a+bx^n+cx^{2n})^p dx$	243
3.33	$\int (A+Bx^n)(a+bx^n+cx^{2n})^p dx$	248
3.34	$\int (a+bx^n+cx^{2n})^p (A+Bx^n+Cx^{2n}) dx$	254
3.35	$\int (a+bx^n+cx^{2n})^p (A+Bx^n+Cx^{2n}+Dx^{3n}) dx$	259
3.36	$\int (a+bx^n+cx^{2n})^p (A+Cx^{2n}) dx$	265

4 Appendix 270

4.1	Listing of Grading functions	270
4.2	Links to plain text integration problems used in this report for each CAS288	

CHAPTER 1

INTRODUCTION

1.1	Listing of CAS systems tested	4
1.2	Results	5
1.3	Time and leaf size Performance	9
1.4	Performance based on number of rules Rubi used	11
1.5	Performance based on number of steps Rubi used	12
1.6	Solved integrals histogram based on leaf size of result	13
1.7	Solved integrals histogram based on CPU time used	14
1.8	Leaf size vs. CPU time used	15
1.9	list of integrals with no known antiderivative	16
1.10	List of integrals solved by CAS but has no known antiderivative	16
1.11	list of integrals solved by CAS but failed verification	16
1.12	Timing	17
1.13	Verification	17
1.14	Important notes about some of the results	18
1.15	Current tree layout of integration tests	21
1.16	Design of the test system	22

This report gives the result of running the computer algebra independent integration test. The download section in on the main webpage contains links to download the problems in plain text format used for all CAS systems. The number of integrals in this report is [36]. This is test number [132].

1.1 Listing of CAS systems tested

The following are the CAS systems tested:

1. Mathematica 14 (January 9, 2024) on windows 10 pro.
2. Rubi 4.17.3 (Sept 25, 2023) on Mathematica 14 on windows 10m pro.
3. Maple 2024 (March 1, 2024) on windows 10 pro.
4. Maxima 5.47 (June 1, 2023) using Lisp SBCL 2.4.0 on Linux Manjaro 23.1.2 KDE via sagemath 10.3.
5. FriCAS 1.3.10 built with sbcl 2.3.11 (January 10, 2024) on Linux Manjaro 23.1.2 KDE via sagemath 10.3.
6. Giac/Xcas 1.9.0-99 on Linux via sagemath 10.3.
7. Sympy 1.12 using Python 3.11.6 (Nov 14 2023, 09:36:21) [GCC 13.2.1 20230801] on Linux Manjaro 23.1.2 KDE.
8. Mupad using Matlab 2021a with Symbolic Math Toolbox Version 8.7 on windows 10.
9. Reduce CSL rev 6687 (January 9, 2024) on Linux Manjaro 23.1.2 KDE.

Maxima and Fricas and Giac are called using Sagemath. This was done using Sagemath `integrate` command by changing the name of the algorithm to use the different CAS systems.

Sympy was run directly in Python not via sagemath.

Reduce was called directly.

1.2 Results

Important note: A number of problems in this test suite have no antiderivative in closed form. This means the antiderivative of these integrals can not be expressed in terms of elementary, special functions or Hypergeometric2F1 functions. RootSum and RootOf are not allowed. If a CAS returns the above integral unevaluated within the time limit, then the result is counted as passed and assigned an A grade.

However, if CAS times out, then it is assigned an F grade even if the integral is not integrable, as this implies CAS could not determine that the integral is not integrable in the time limit.

If a CAS returns an antiderivative to such an integral, it is assigned an A grade automatically and this special result is listed in the introduction section of each individual test report to make it easy to identify as this can be important result to investigate.

The results given in in the table below reflects the above.

System	% solved	% Failed
Mathematica	100.00 (36)	0.00 (0)
Rubi	66.67 (24)	33.33 (12)
Maple	8.33 (3)	91.67 (33)
Fricas	8.33 (3)	91.67 (33)
Reduce	8.33 (3)	91.67 (33)
Mupad	5.56 (2)	94.44 (34)
Giac	5.56 (2)	94.44 (34)
Maxima	5.56 (2)	94.44 (34)
Sympy	5.56 (2)	94.44 (34)

Table 1.1: Percentage solved for each CAS

The table below gives additional break down of the grading of quality of the antiderivatives generated by each CAS. The grading is given using the letters A,B,C and F with A being the best quality. The grading is accomplished by comparing the antiderivative generated with the optimal antiderivatives included in the test suite. The following table describes the meaning of these grades.

grade	description
A	Integral was solved and antiderivative is optimal in quality and leaf size.
B	Integral was solved and antiderivative is optimal in quality but leaf size is larger than twice the optimal antiderivatives leaf size.
C	Integral was solved and antiderivative is non-optimal in quality. This can be due to one or more of the following reasons <ol style="list-style-type: none"> 1. antiderivative contains a hypergeometric function and the optimal antiderivative does not. 2. antiderivative contains a special function and the optimal antiderivative does not. 3. antiderivative contains the imaginary unit and the optimal antiderivative does not.
F	Integral was not solved. Either the integral was returned unevaluated within the time limit, or it timed out, or CAS hanged or crashed or an exception was raised.


Table 1.2: Description of grading applied to integration result

Grading is implemented for all CAS systems. Based on the above, the following table summarizes the grading for this test suite.


System	% A grade	% B grade	% C grade	% F grade
Rubi	66.667	0.000	0.000	33.333
Mathematica	61.111	33.333	5.556	0.000
Fricas	8.333	0.000	0.000	91.667
Maxima	5.556	0.000	0.000	94.444
Maple	2.778	0.000	5.556	91.667
Giac	2.778	2.778	0.000	94.444
Sympy	2.778	2.778	0.000	94.444
Mupad	0.000	5.556	0.000	94.444
Reduce	0.000	8.333	0.000	91.667

Table 1.3: Antiderivative Grade distribution of each CAS

The following is a Bar chart illustration of the data in the above table.

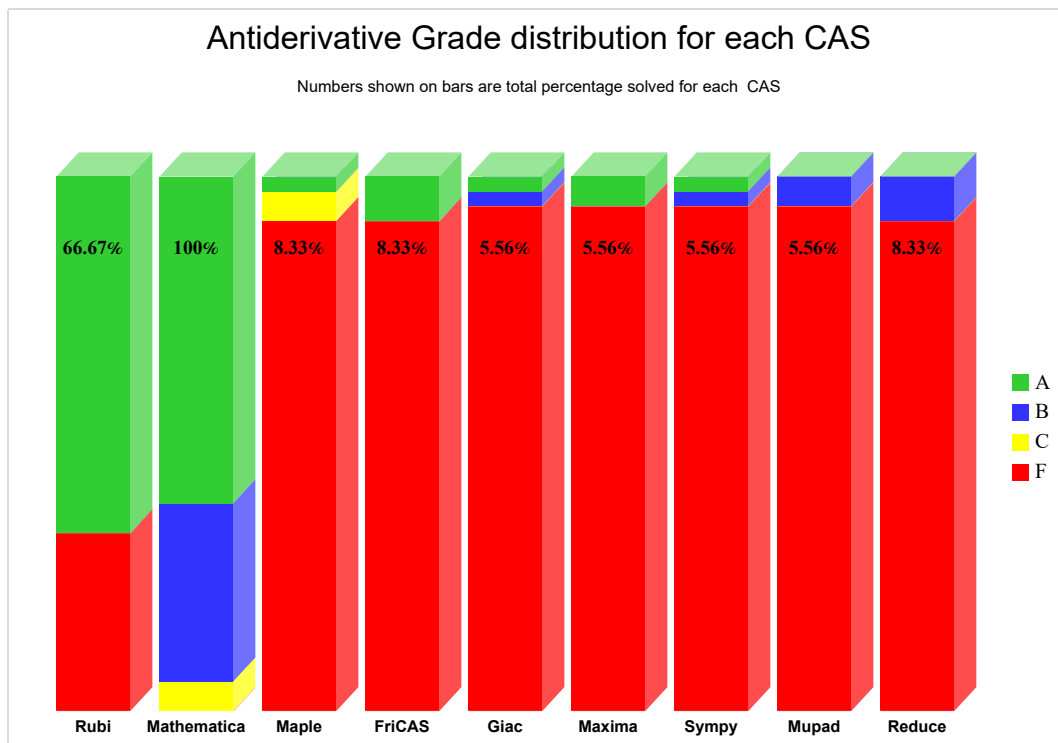

The figure below compares the grades of the CAS systems.

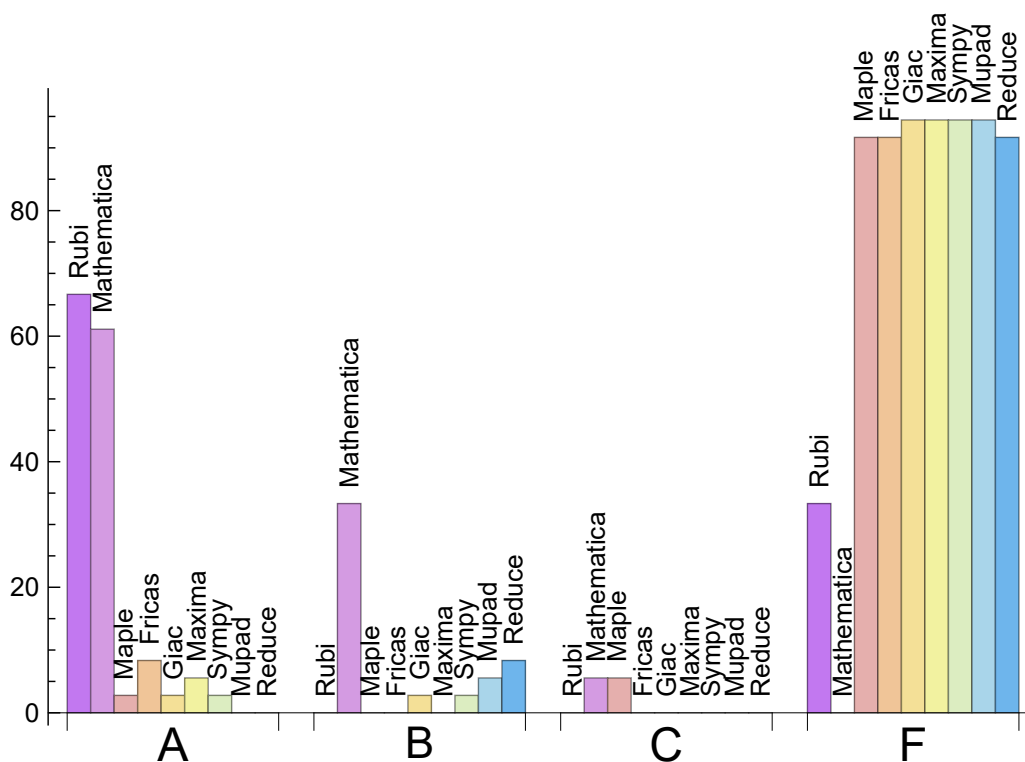

The following table shows the distribution of the different types of failures for each CAS. There are 3 types failures. The first is when CAS returns the input within the time limit, which means it could not solve it. This is the typical failure and given as **F**.

The second failure is due to time out. CAS could not solve the integral within the 3 minutes time limit which is assigned. This is assigned **F(-1)**.

The third is due to an exception generated, indicated as **F(-2)**. This most likely indicates an interface problem between sagemath and the CAS (applicable only to FriCAS, Maxima and Giac) or it could be an indication of an internal error in the CAS itself. This type of error requires more investigation to determine the cause.

System	Number failed	Percentage normal failure	Percentage time-out failure	Percentage exception failure
Mathematica	0	0.00	0.00	0.00
Rubi	12	100.00	0.00	0.00
Fricas	33	81.82	3.03	15.15
Maple	33	100.00	0.00	0.00
Reduce	33	100.00	0.00	0.00
Mupad	34	0.00	100.00	0.00
Giac	34	88.24	2.94	8.82
Maxima	34	100.00	0.00	0.00
Sympy	34	32.35	67.65	0.00

Table 1.4: Failure statistics for each CAS

1.3 Time and leaf size Performance

The table below summarizes the performance of each CAS system in terms of time used and leaf size of results.

Mean size is the average leaf size produced by the CAS (before any normalization). The Normalized mean is relative to the mean size of the optimal anti-derivative given in the input files.

For example, if CAS has **Normalized mean** of 3, then the mean size of its leaf size is 3 times as large as the mean size of the optimal leaf size.

Median size is value of leaf size where half the values are larger than this and half are smaller (before any normalization). i.e. The Middle value.

Similarly the **Normalized median** is relative to the median leaf size of the optimal.

For example, if a CAS has Normalized median of 1.2, then its median is 1.2 as large as the median leaf size of the optimal.

System	Mean time (sec)
Fricas	0.07
Maxima	0.10
Reduce	0.15
Giac	0.16
Rubi	1.01
Mathematica	4.42
Maple	8.69
Mupad	10.50
Sympy	13.93

Table 1.5: Time performance for each CAS

System	Mean size	Normalized mean	Median size	Normalized median
Reduce	52.00	0.90	32.00	1.09
Maple	69.00	0.71	44.00	0.39
Mupad	79.50	1.42	79.50	1.42
Maxima	83.50	1.46	83.50	1.46
Fricas	89.00	1.39	95.00	1.57
Giac	94.00	2.19	94.00	2.19
Sympy	104.50	2.22	104.50	2.22
Rubi	509.79	1.04	362.00	1.00
Mathematica	2514.39	4.88	431.00	1.38

Table 1.6: Leaf size performance for each CAS

1.4 Performance based on number of rules Rubi used

This section shows how each CAS performed based on the number of rules Rubi needed to solve the same integral. One diagram is given for each CAS.

On the y axis is the percentage solved which Rubi itself needed the number of rules given the x axis. These plots show that as more rules are needed then most CAS system percentage of solving decreases which indicates the integral is becoming more complicated to solve.

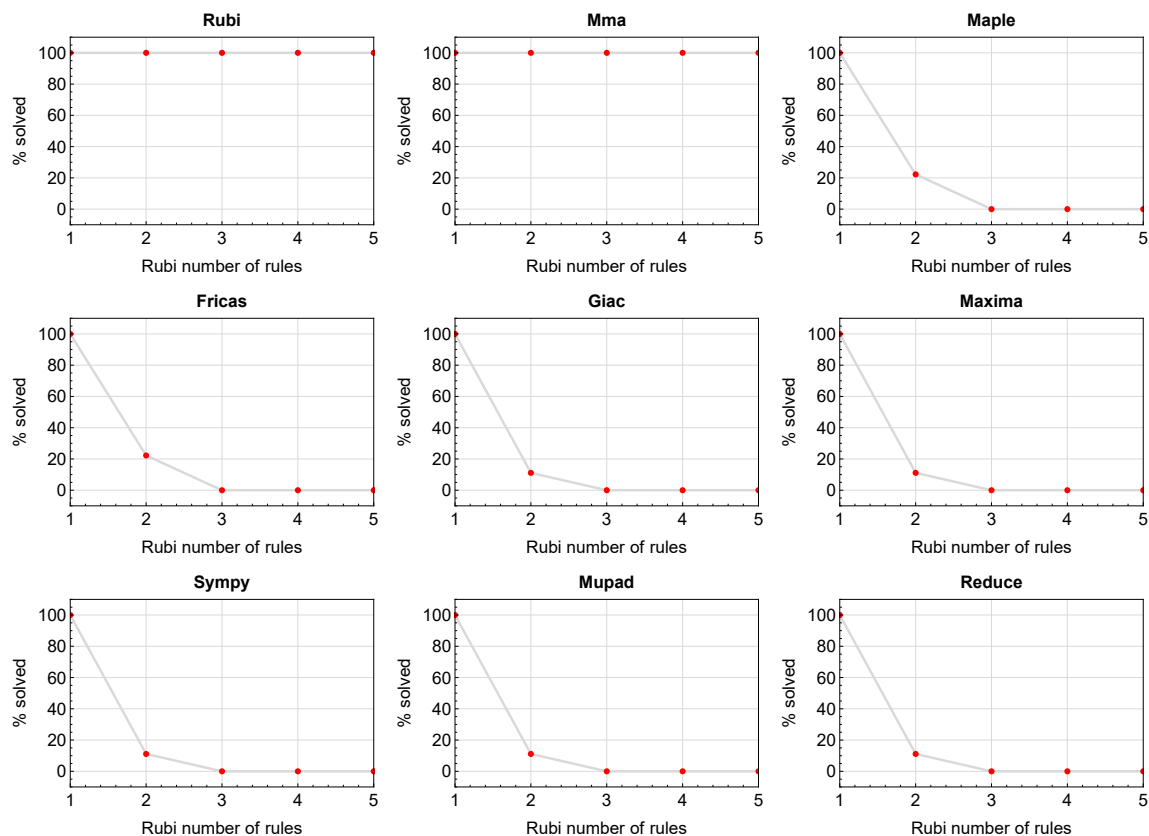


Figure 1.1: Solving statistics per number of Rubi rules used

1.5 Performance based on number of steps Rubi used

This section shows how each CAS performed based on the number of steps Rubi needed to solve the same integral. Note that the number of steps Rubi needed can be much higher than the number of rules, as the same rule could be used more than once.

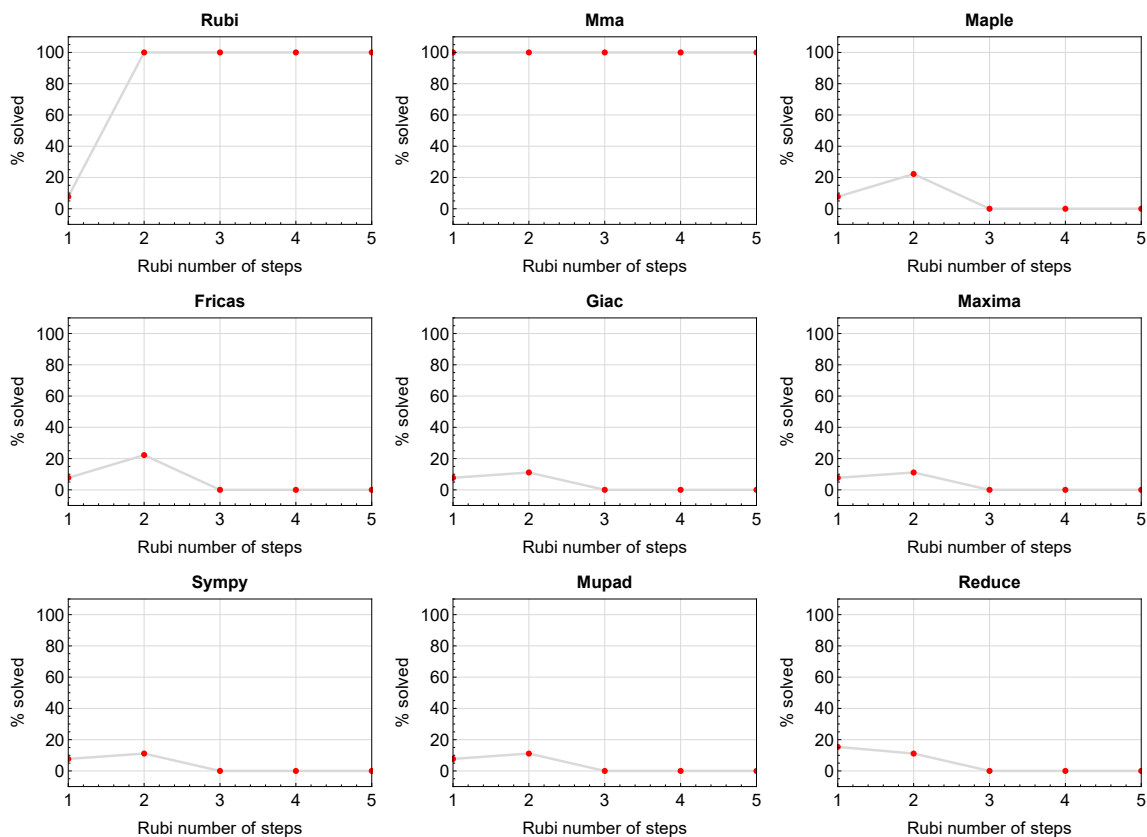


Figure 1.2: Solving statistics per number of Rubi steps used

The above diagram show that the percentage of solved intergals decreases for most CAS systems as the number of steps increases. As expected, for integrals that required less steps by Rubi, CAS systems had more success which indicates the integral was not as hard to solve. As Rubi needed more steps to solve the integral, the solved percentage decreased for most CAS systems which indicates the integral is becoming harder to solve.

1.6 Solved integrals histogram based on leaf size of result

The following shows the distribution of solved integrals for each CAS system based on leaf size of the antiderivatives produced by each CAS. It shows that most integrals solved produced leaf size less than about 100 to 150. The bin size used is 40.

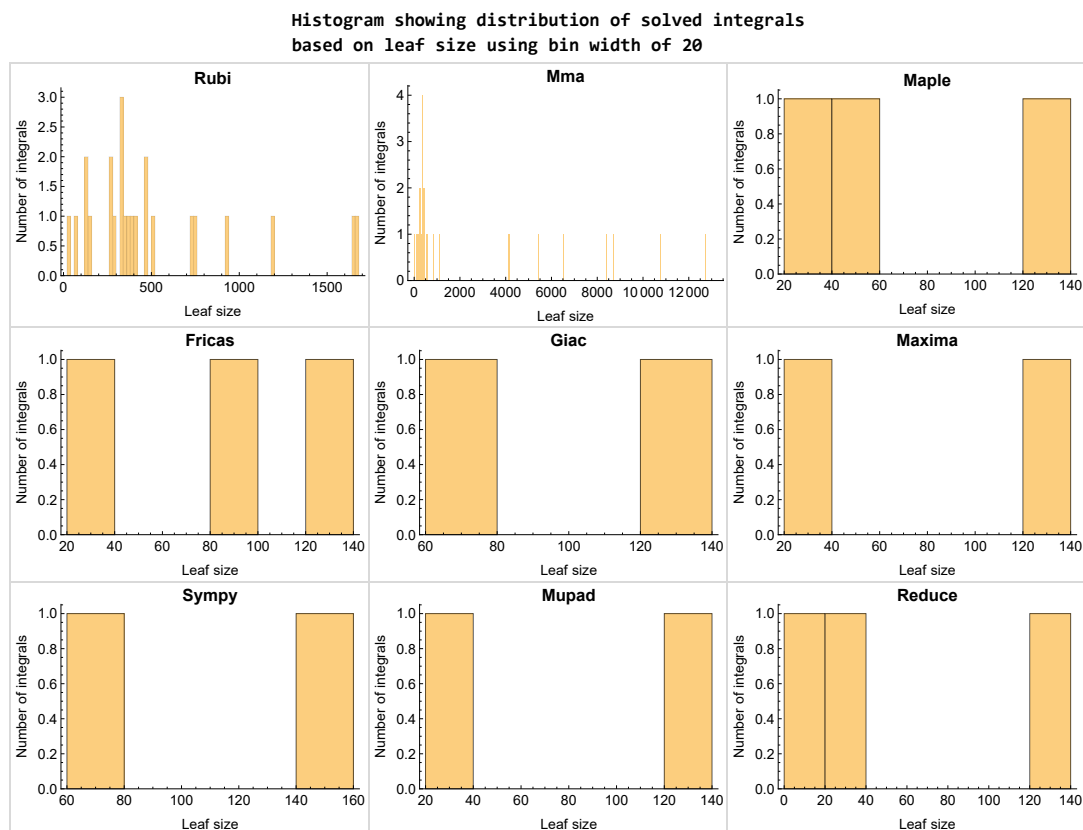


Figure 1.3: Solved integrals based on leaf size distribution

1.7 Solved integrals histogram based on CPU time used

The following shows the distribution of solved integrals for each CAS system based on CPU time used in seconds. The bin size used is 0.1 second.

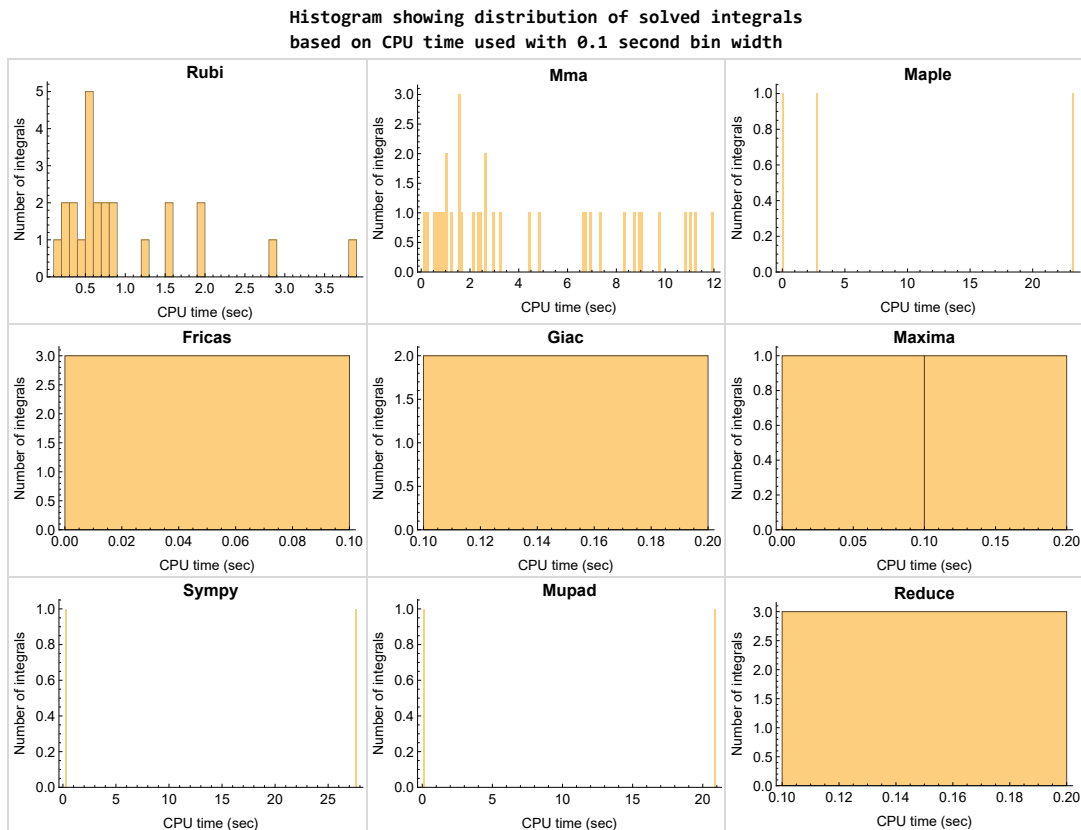


Figure 1.4: Solved integrals histogram based on CPU time used

1.8 Leaf size vs. CPU time used

The following shows the relation between the CPU time used to solve an integral and the leaf size of the antiderivative.

The result for Fracas, Maxima and Giac is shifted more to the right than the other CAS system due to the use of sagemath to call them, which causes an initial slight delay in the timing to start the integration due to overhead of starting a new process each time. This should also be taken into account when looking at the timing of these three CAS systems. Direct calls not using sagemath would result in faster timings, but current implementation uses sagemath as this makes testing much easier to do.

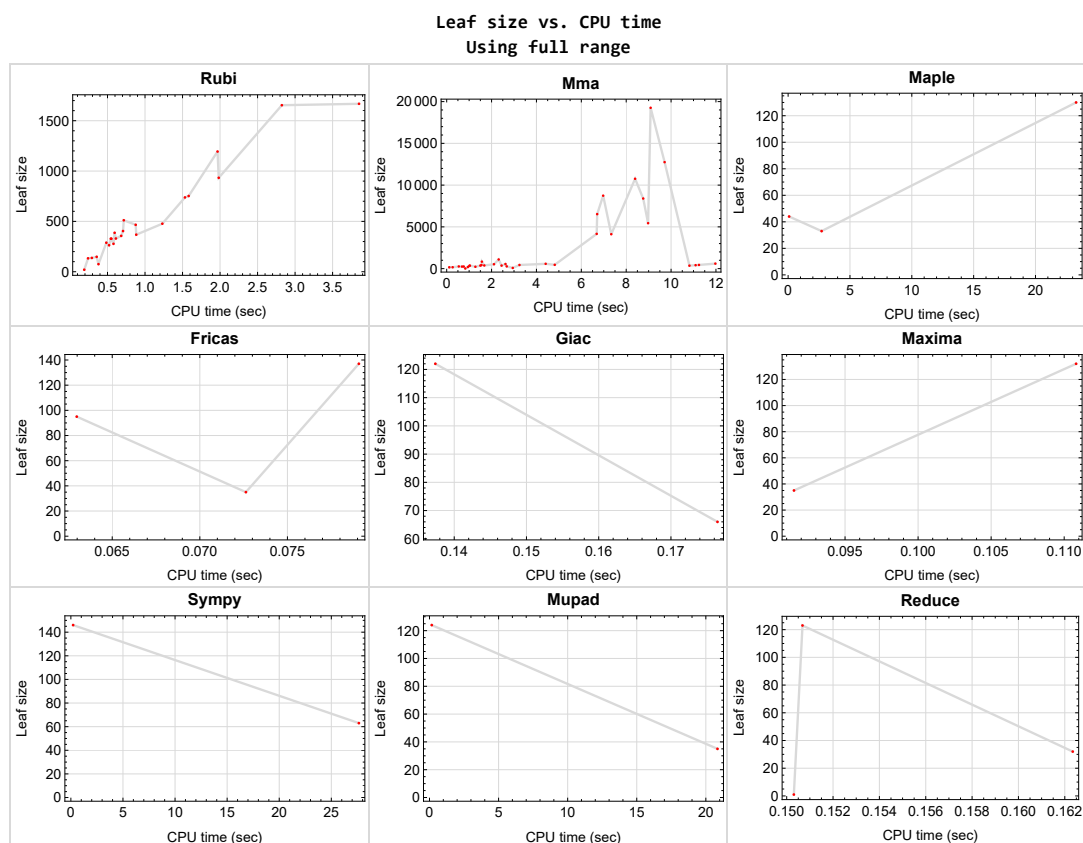


Figure 1.5: Leaf size vs. CPU time. Full range

1.9 list of integrals with no known antiderivative

{}

1.10 List of integrals solved by CAS but has no known antiderivative

Rubi {}

Mathematica {}

Maple {}

Maxima {}

Fricas {}

Sympy {}

Giac {}

Reduce {}

Mupad {}

1.11 list of integrals solved by CAS but failed verification

The following are integrals solved by CAS but the verification phase failed to verify the anti-derivative produced is correct. This does not necessarily mean that the anti-derivative is wrong as additional methods of verification might be needed, or more time is needed (3 minutes time limit was used). These integrals are listed here to make it possible to do further investigation to determine why the result could not be verified.

Rubi {}

Mathematica {2, 3, 4, 5, 8, 9, 10, 11, 12, 13, 18, 19, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 33, 34, 35, 36}

Maple {}

Maxima Verification phase not currently implemented.

Fricas Verification phase not currently implemented.

Sympy Verification phase not currently implemented.

Giac Verification phase not currently implemented.

Reduce Verification phase not currently implemented.

Mupad Verification phase not currently implemented.

1.12 Timing

The command `AbsoluteTiming[]` was used in Mathematica to obtain the elapsed time for each integrate call. In Maple, the command `Usage` was used as in the following example

```
cpu_time := Usage(assign ('result_of_int',int(expr,x)),output='realtime')
```

For all other CAS systems, the elapsed time to complete each integral was found by taking the difference between the time after the call completed from the time before the call was made. This was done using Python's `time.time()` call.

All elapsed times shown are in seconds. A time limit of 3 CPU minutes was used for each integral. If the integrate command did not complete within this time limit, the integral was aborted and considered to have failed and assigned an F grade. The time used by failed integrals due to time out was not counted in the final statistics.

1.13 Verification

A verification phase was applied on the result of integration for **Rubi** and **Mathematica**.

Future version of this report will implement verification for the other CAS systems. For the integrals whose result was not run through a verification phase, it is assumed that the antiderivative was correct.

Verification phase also had 3 minutes time out. An integral whose result was not verified could still be correct, but further investigation is needed on those integrals. These integrals were marked in the summary table below and also in each integral separate section so they are easy to identify and locate.

1.14 Important notes about some of the results

Important note about Maxima results

Since tests were run in a batch mode, and using an automated script, then any integral where Maxima needed an interactive response from the user to answer a question during the evaluation of the integral will fail.

The exception raised is `ValueError`. Therefore Maxima results is lower than what would result if Maxima was run directly and each question was answered correctly.

The percentage of such failures were not counted for each test file, but for an example, for the `Timofeev` test file, there were about 14 such integrals out of total 705, or about 2 percent. This percentage can be higher or lower depending on the specific input test file.

Such integrals can be identified by looking at the output of the integration in each section for Maxima. The exception message will indicate the cause of error.

Maxima `integrate` was run using SageMath with the following settings set by default

```
'besselexpand : true'  
'display2d : false'  
'domain : complex'  
'keepfloat : true'  
'load(to_poly_solve)'  
'load(simplify_sum)'  
'load(abs_integrate)' 'load(diag)'
```

SageMath automatic loading of Maxima `abs_integrate` was found to cause some problems. So the following code was added to disable this effect.

```
from sage.interfaces.maxima_lib import maxima_lib  
maxima_lib.set('extra_definite_integration_methods', '[]')  
maxima_lib.set('extra_integration_methods', '[]')
```

See <https://ask.sagemath.org/question/43088/integrate-results-that-are-different-from-using-maxima/> for reference.

Important note about FriCAS result

There were few integrals which failed due to SageMath interface and not because FriCAS system could not do the integration.

These will fail With error `Exception raised: NotImplementedError`.

The number of such cases seems to be very small. About 1 or 2 percent of all integrals. These can be identified by looking at the exception message given in the result.

Important note about finding leaf size of antiderivative

For Mathematica, Rubi, and Maple, the builtin system function `LeafSize` was used to find the leaf size of each antiderivative.

The other CAS systems (SageMath and Sympy) do not have special builtin function for this purpose at this time. Therefore the leaf size for Fricas and Sympy antiderivative was determined using the following function, thanks to user `slelievre` at https://ask.sagemath.org/question/57123/could-we-have-a-leaf_count-function-in-base-sagemath/

```
def tree_size(expr):
    r"""
    Return the tree size of this expression.
    """
    if expr not in SR:
        # deal with lists, tuples, vectors
        return 1 + sum(tree_size(a) for a in expr)
    expr = SR(expr)
    x, aa = expr.operator(), expr.operands()
    if x is None:
        return 1
    else:
        return 1 + sum(tree_size(a) for a in aa)
```

For Sympy, which was called directly from Python, the following code was used to obtain the leafsize of its result

```
try:  
    # 1.7 is a fudge factor since it is low side from actual leaf count  
    leafCount = round(1.7*count_ops(anti))  
  
except Exception as ee:  
    leafCount = 1
```

Important note about Mupad results

Matlab's symbolic toolbox does not have a leaf count function to measure the size of the antiderivative. Maple was used to determine the leaf size of Mupad output by post processing Mupad result.

Currently no grading of the antiderivative for Mupad is implemented. If it can integrate the problem, it was assigned a B grade automatically as a placeholder. In the future, when grading function is implemented for Mupad, the tests will be rerun again.

The following is an example of using Matlab's symbolic toolbox (Mupad) to solve an integral

```
integrand = evalin(symengine, 'cos(x)*sin(x)')  
the_variable = evalin(symengine, 'x')  
anti = int(integrand,the_variable)
```

Which gives $\sin(x)^2/2$

1.15 Current tree layout of integration tests


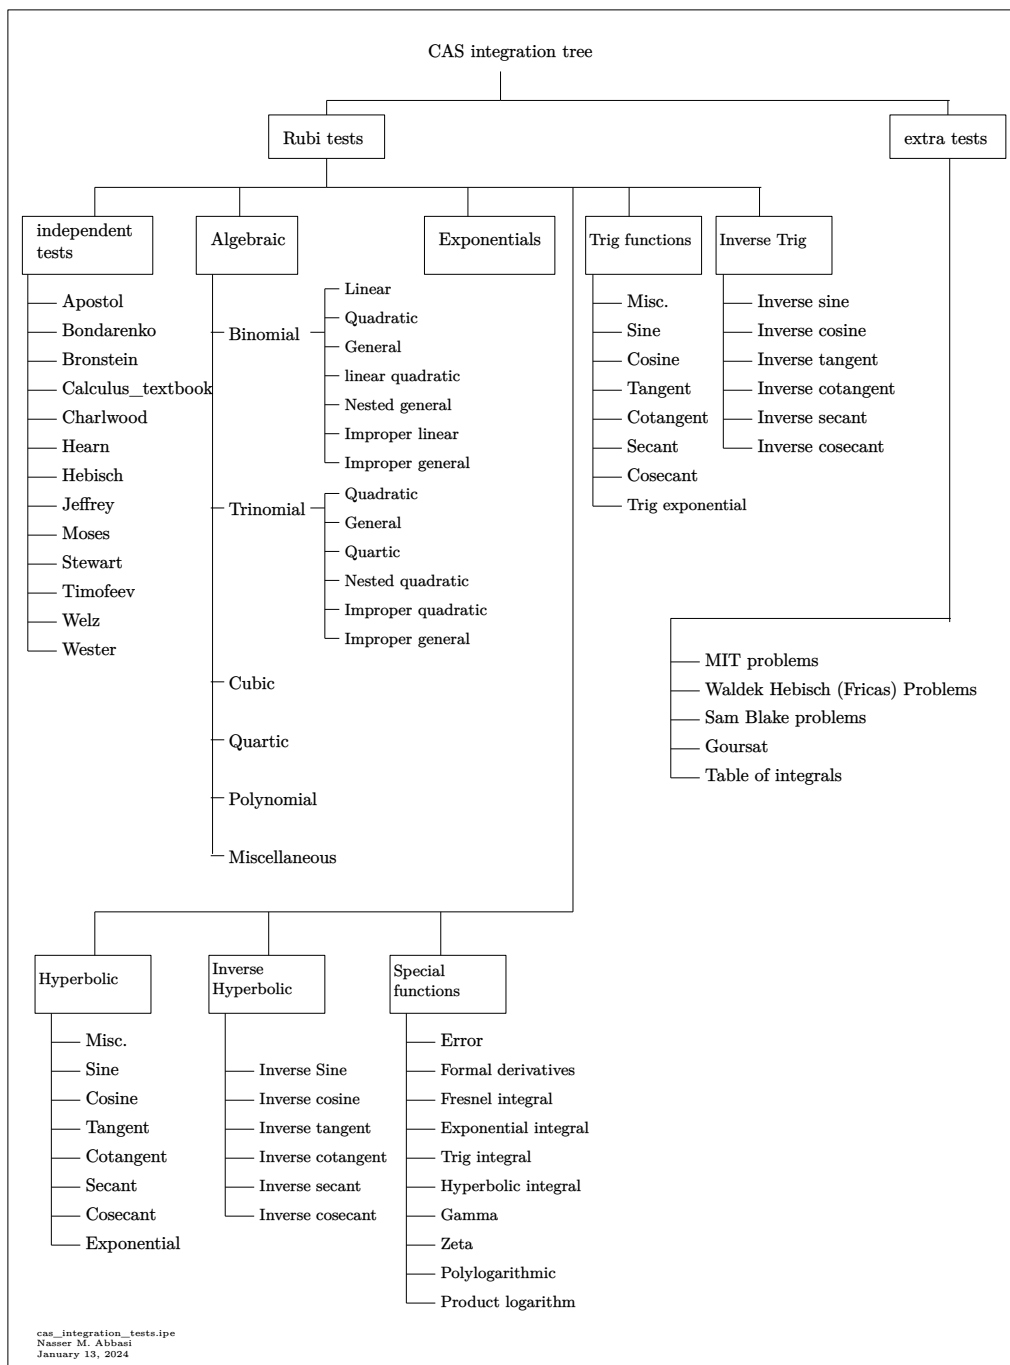


Figure 1.6: CAS integration tests tree

1.16 Design of the test system

The following diagram gives a high level view of the current test build system.

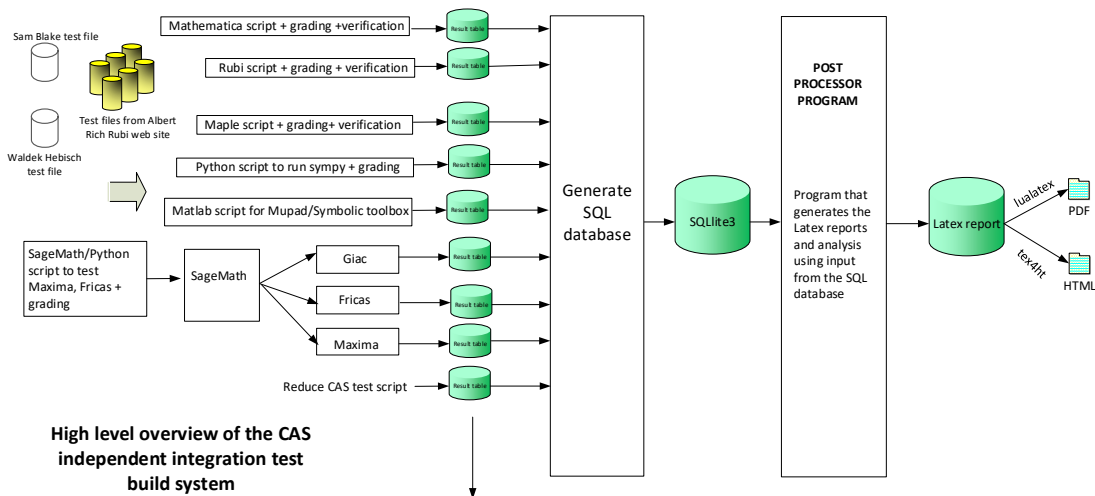

High level overview of the CAS independent integration test build system

One record (line) per one integral result. The line is CSV comma separated. This is description of each record

1. integer, the problem number.
2. integer. 0 for failed, 1 for passed, -1 for timeout, -2 for CAS specific exception. (this is not the grade field)
3. integer. Leaf size of result.
4. integer. Leaf size of the optimal antiderivative.
5. number. CPU time used to solve this integral. 0 if failed.
6. string. The integral in Latex format
7. string. The input used in CAS own syntax.
8. string. The result (antiderivative) produced by CAS in Latex format
9. string. The optimal antiderivative in Latex format.
10. integer. 0 or 1. Indicates if problem has known antiderivative or not
11. String. The result (antiderivative) in CAS own syntax.
12. String. The grade of the antiderivative. Can be "A", "B", "C", or "E"
13. String. Small string description of why the grade was given.
14. integer. 1 if result was verified or 0 if not verified. (For mma, rubi and maple only)

The following fields are present only in Rubi Table file

15. integer. Number of steps used.
16. integer. Number of rules used.
17. integer. Integrand leaf size.
18. real number. Ratio. Field 16 over field 17
19. String of form "{n,n,...}" which is list of the rules used by Rubi
20. String. The optimal antiderivative in Mathematica syntax

Nasser M. Abbasi
January 13, 2024
Design note

CHAPTER 2

DETAILED SUMMARY TABLES OF RESULTS

2.1	List of integrals sorted by grade for each CAS	24
2.2	Detailed conclusion table per each integral for all CAS systems	28
2.3	Detailed conclusion table specific for Rubi results	38

2.1 List of integrals sorted by grade for each CAS

Rubi	24
Mma	24
Maple	25
Fricas	25
Maxima	25
Giac	26
Mupad	26
Sympy	26
Reduce	27

Rubi

A grade { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 19, 21, 22, 28, 29, 32, 33 }

B grade { }

C grade { }

F normal fail { 17, 20, 23, 24, 25, 26, 27, 30, 31, 34, 35, 36 }

F(-1) timedout fail { }

F(-2) exception fail { }

Mma

A grade { 2, 3, 4, 5, 7, 10, 14, 15, 16, 17, 20, 24, 25, 26, 29, 30, 31, 32, 33, 34, 35, 36 }

B grade { 6, 8, 9, 11, 12, 13, 18, 19, 21, 22, 23, 27 }

C grade { 1, 28 }

F normal fail { }

F(-1) timedout fail { }

F(-2) exception fail { }

Maple

A grade { 16 }

B grade { }

C grade { 1, 14 }

F normal fail { 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36 }

F(-1) timedout fail { }

F(-2) exception fail { }

Fricas

A grade { 14, 15, 16 }

B grade { }

C grade { }

F normal fail { 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 17, 18, 19, 20, 21, 22, 28, 29, 30, 31, 32, 33, 34, 35, 36 }

F(-1) timedout fail { 1 }

F(-2) exception fail { 23, 24, 25, 26, 27 }

Maxima

A grade { 14, 16 }

B grade { }

C grade { }

F normal fail { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36 }

F(-1) timedout fail { }

F(-2) exception fail { }

Giac

A grade { 14 }

B grade { 16 }

C grade { }

F normal fail { 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33 }

F(-1) timedout fail { 1 }

F(-2) exception fail { 34, 35, 36 }

Mupad

A grade { }

B grade { 14, 16 }

C grade { }

F normal fail { }

F(-1) timedout fail { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36 }

F(-2) exception fail { }

Sympy

A grade { 14 }

B grade { 16 }

C grade { }

F normal fail { 2, 3, 4, 6, 7, 8, 17, 23, 24, 25, 28 }

F(-1) timedout fail { 1, 5, 9, 10, 11, 12, 13, 15, 18, 19, 20, 21, 22, 26, 27, 29, 30, 31, 32, 33, 34, 35, 36 }

F(-2) exception fail { }

Reduce

A grade { }

B grade { 14, 16, 17 }

C grade { }

F normal fail { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 15, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36 }

F(-1) timedout fail { }

F(-2) exception fail { }

2.2 Detailed conclusion table per each integral for all CAS systems

Detailed conclusion table per each integral is given by the table below. The elapsed time is in seconds. For failed result it is given as **F(-1)** if the failure was due to timeout. It is given as **F(-2)** if the failure was due to an exception being raised, which could indicate a bug in the system. If the failure was due to integral not being evaluated within the time limit, then it is given as **F**.

In this table, the column **N.S.** means **normalized size** and is defined as $\frac{\text{antiderivative leaf size}}{\text{optimal antiderivative leaf size}}$. To make the table fit the page, the name **Mathematica** was abbreviated to **MMA**.

Problem 1	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	C	C	F	F(-1)	F(-1)	F(-1)	F	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	1620	1668	223	130	0	0	0	0	352	0
N.S.	1	1.03	0.14	0.08	0.00	0.00	0.00	0.00	0.22	0.00
time (sec)	N/A	3.852	1.279	23.283	0.000	0.000	0.000	0.000	0.155	0.000

Problem 2	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	330	330	599	0	0	0	0	0	435	0
N.S.	1	1.00	1.82	0.00	0.00	0.00	0.00	0.00	1.32	0.00
time (sec)	N/A	0.612	11.974	0.000	0.000	0.000	0.000	0.000	0.191	0.000

Problem 3	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	328	328	442	0	0	0	0	0	232	0
N.S.	1	1.00	1.35	0.00	0.00	0.00	0.00	0.00	0.71	0.00
time (sec)	N/A	0.544	11.243	0.000	0.000	0.000	0.000	0.000	0.165	0.000

Problem 4	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	328	328	354	0	0	0	0	0	86	0
N.S.	1	1.00	1.08	0.00	0.00	0.00	0.00	0.00	0.26	0.00
time (sec)	N/A	0.552	10.818	0.000	0.000	0.000	0.000	0.000	0.160	0.000

Problem 5	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	415	404	412	0	0	0	0	0	30	0
N.S.	1	0.97	0.99	0.00	0.00	0.00	0.00	0.00	0.07	0.00
time (sec)	N/A	0.707	11.094	0.000	0.000	0.000	0.000	0.000	0.172	0.000

Problem 6	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F	F	F	F(-1)
verified	N/A	Yes	Yes	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	124	133	261	0	0	0	0	0	18	0
N.S.	1	1.07	2.10	0.00	0.00	0.00	0.00	0.00	0.15	0.00
time (sec)	N/A	0.241	0.538	0.000	0.000	0.000	0.000	0.000	0.163	0.000

Problem 7	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F	F	F	F(-1)
verified	N/A	Yes	Yes	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	263	263	525	0	0	0	0	0	43	0
N.S.	1	1.00	2.00	0.00	0.00	0.00	0.00	0.00	0.16	0.00
time (sec)	N/A	0.521	2.107	0.000	0.000	0.000	0.000	0.000	0.155	0.000

Problem 8	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	404	387	834	0	0	0	0	0	67	0
N.S.	1	0.96	2.06	0.00	0.00	0.00	0.00	0.00	0.17	0.00
time (sec)	N/A	0.595	1.568	0.000	0.000	0.000	0.000	0.000	0.173	0.000

Problem 9	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	545	511	1093	0	0	0	0	0	91	0
N.S.	1	0.94	2.01	0.00	0.00	0.00	0.00	0.00	0.17	0.00
time (sec)	N/A	0.717	2.316	0.000	0.000	0.000	0.000	0.000	0.154	0.000

Problem 10	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	283	277	456	0	0	0	0	0	51	0
N.S.	1	0.98	1.61	0.00	0.00	0.00	0.00	0.00	0.18	0.00
time (sec)	N/A	0.580	4.815	0.000	0.000	0.000	0.000	0.000	0.158	0.000

Problem 11	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	589	738	4162	0	0	0	0	0	109	0
N.S.	1	1.25	7.07	0.00	0.00	0.00	0.00	0.00	0.19	0.00
time (sec)	N/A	1.532	6.685	0.000	0.000	0.000	0.000	0.000	0.170	0.000

Problem 12	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	892	1194	6525	0	0	0	0	0	166	0
N.S.	1	1.34	7.32	0.00	0.00	0.00	0.00	0.00	0.19	0.00
time (sec)	N/A	1.967	6.707	0.000	0.000	0.000	0.000	0.000	0.178	0.000

Problem 13	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	1195	1654	8737	0	0	0	0	0	223	0
N.S.	1	1.38	7.31	0.00	0.00	0.00	0.00	0.00	0.19	0.00
time (sec)	N/A	2.824	6.973	0.000	0.000	0.000	0.000	0.000	0.185	0.000

Problem 14	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	C	A	A	A	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	113	148	159	44	132	95	146	122	123	124
N.S.	1	1.31	1.41	0.39	1.17	0.84	1.29	1.08	1.09	1.10
time (sec)	N/A	0.356	0.116	0.083	0.111	0.063	0.217	0.137	0.151	0.163

Problem 15	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	A	F(-1)	F	F	F(-1)
verified	N/A	Yes	Yes	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	87	75	84	0	0	137	0	0	0	0
N.S.	1	0.86	0.97	0.00	0.00	1.57	0.00	0.00	0.00	0.00
time (sec)	N/A	0.380	2.945	0.000	0.000	0.079	0.000	0.000	0.358	0.000

Problem 16	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	A	A	B	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	20	20	19	33	35	35	63	66	32	35
N.S.	1	1.00	0.95	1.65	1.75	1.75	3.15	3.30	1.60	1.75
time (sec)	N/A	0.190	0.830	2.708	0.092	0.073	27.643	0.176	0.162	20.843

Problem 17	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F	F	F	B	F(-1)
verified	N/A	N/A	Yes	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	204	0	195	0	0	0	0	0	1	0
N.S.	1	0.00	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.000	0.946	0.000	0.000	0.000	0.000	0.000	0.150	0.000

Problem 18	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	382	368	4120	0	0	0	0	0	18	0
N.S.	1	0.96	10.79	0.00	0.00	0.00	0.00	0.00	0.05	0.00
time (sec)	N/A	0.883	7.335	0.000	0.000	0.000	0.000	0.000	0.167	0.000

Problem 19	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	802	752	10759	0	0	0	0	0	51	0
N.S.	1	0.94	13.42	0.00	0.00	0.00	0.00	0.00	0.06	0.00
time (sec)	N/A	1.582	8.397	0.000	0.000	0.000	0.000	0.000	0.150	0.000

Problem 20	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	N/A	Yes	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	356	0	269	0	0	0	0	0	205	0
N.S.	1	0.00	0.76	0.00	0.00	0.00	0.00	0.00	0.58	0.00
time (sec)	N/A	0.000	2.675	0.000	0.000	0.000	0.000	0.000	0.164	0.000

Problem 21	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	486	477	5439	0	0	0	0	0	0	0
N.S.	1	0.98	11.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	1.231	8.976	0.000	0.000	0.000	0.000	0.000	0.230	0.000

Problem 22	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	933	933	12750	0	0	0	0	0	0	0
N.S.	1	1.00	13.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	1.982	9.712	0.000	0.000	0.000	0.000	0.000	0.288	0.000

Problem 23	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	B	F	F	F(-2)	F	F	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	378	0	19261	0	0	0	0	0	0	0
N.S.	1	0.00	50.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.000	9.089	0.000	0.000	0.000	0.000	0.000	0.367	0.000

Problem 24	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F(-2)	F	F	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	376	0	576	0	0	0	0	0	0	0
N.S.	1	0.00	1.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.000	4.411	0.000	0.000	0.000	0.000	0.000	0.232	0.000

Problem 25	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F(-2)	F	F	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	360	0	379	0	0	0	0	0	274	0
N.S.	1	0.00	1.05	0.00	0.00	0.00	0.00	0.00	0.76	0.00
time (sec)	N/A	0.000	1.676	0.000	0.000	0.000	0.000	0.000	0.159	0.000

Problem 26	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F(-2)	F(-1)	F	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	383	0	436	0	0	0	0	0	34	0
N.S.	1	0.00	1.14	0.00	0.00	0.00	0.00	0.00	0.09	0.00
time (sec)	N/A	0.000	3.243	0.000	0.000	0.000	0.000	0.000	0.155	0.000

Problem 27	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	B	F	F	F(-2)	F(-1)	F	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	383	0	8396	0	0	0	0	0	67	0
N.S.	1	0.00	21.92	0.00	0.00	0.00	0.00	0.00	0.17	0.00
time (sec)	N/A	0.000	8.758	0.000	0.000	0.000	0.000	0.000	0.210	0.000

Problem 28	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	C	F	F	F	F	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	357	356	550	0	0	0	0	0	0	0
N.S.	1	1.00	1.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.683	2.620	0.000	0.000	0.000	0.000	0.000	0.179	0.000

Problem 29	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	484	466	363	0	0	0	0	0	0	0
N.S.	1	0.96	0.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.876	1.033	0.000	0.000	0.000	0.000	0.000	0.304	0.000

Problem 30	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	497	0	363	0	0	0	0	0	0	0
N.S.	1	0.00	0.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.000	1.501	0.000	0.000	0.000	0.000	0.000	0.201	0.000

Problem 31	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	484	0	363	0	0	0	0	0	0	0
N.S.	1	0.00	0.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.000	2.445	0.000	0.000	0.000	0.000	0.000	4.051	0.000

Problem 32	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	Yes	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	137	137	164	0	0	0	0	0	283	0
N.S.	1	1.00	1.20	0.00	0.00	0.00	0.00	0.00	2.07	0.00
time (sec)	N/A	0.292	0.266	0.000	0.000	0.000	0.000	0.000	0.552	0.000

Problem 33	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	F	F	F	F(-1)	F	F	F(-1)
verified	N/A	Yes	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	288	288	243	0	0	0	0	0	0	0
N.S.	1	1.00	0.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.484	0.682	0.000	0.000	0.000	0.000	0.000	0.189	0.000

Problem 34	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F	F(-1)	F(-2)	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	387	0	332	0	0	0	0	0	0	0
N.S.	1	0.00	0.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.000	1.013	0.000	0.000	0.000	0.000	0.000	0.243	0.000

Problem 35	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F	F(-1)	F(-2)	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	556	0	426	0	0	0	0	0	0	0
N.S.	1	0.00	0.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.000	1.550	0.000	0.000	0.000	0.000	0.000	0.663	0.000

Problem 36	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	F	A	F	F	F	F(-1)	F(-2)	F	F(-1)
verified	N/A	N/A	No	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	292	0	249	0	0	0	0	0	0	0
N.S.	1	0.00	0.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00
time (sec)	N/A	0.000	0.758	0.000	0.000	0.000	0.000	0.000	0.252	0.000

2.3 Detailed conclusion table specific for Rubi results

The following table is specific to Rubi only. It gives additional statistics for each integral. the column **steps** is the number of steps used by Rubi to obtain the antiderivative. The **rules** column is the number of unique rules used. The **integrand size** column is the leaf size of the integrand. Finally the ratio $\frac{\text{number of rules}}{\text{integrand size}}$ is also given. The larger this ratio is, the harder the integral is to solve. In this test file, problem number [10] had the largest ratio of [.2500000000000000000]

Table 2.1: Rubi specific breakdown of results for each integral

#	grade	number of steps used	number of unique rules	normalized antiderivative leaf size	integrand leaf size	$\frac{\text{number of rules}}{\text{integrand leaf size}}$
1	A	2	2	1.03	55	0.036
2	A	3	3	1.00	29	0.103
3	A	3	3	1.00	29	0.103
4	A	3	3	1.00	29	0.103
5	A	4	4	0.97	29	0.138
6	A	2	2	1.07	16	0.125
7	A	3	3	1.00	22	0.136
8	A	3	3	0.96	27	0.111
9	A	3	3	0.94	32	0.094
10	A	4	4	0.98	16	0.250
11	A	2	2	1.25	22	0.091
12	A	2	2	1.34	27	0.074
13	A	2	2	1.38	32	0.062
14	A	2	2	1.31	26	0.077
15	A	2	2	0.86	63	0.032
16	A	1	1	1.00	45	0.022
17	F	0	0	N/A	0.000	N/A
18	A	3	3	0.96	31	0.097
19	A	5	5	0.94	31	0.161
20	F	0	0	N/A	0.000	N/A
21	A	3	3	0.98	38	0.079

Continued on next page

Table 2.1 – continued from previous page

#	grade	number of steps used	number of unique rules	normalized antiderivative leaf size	integrand leaf size	$\frac{\text{number of rules}}{\text{integrand leaf size}}$
22	A	4	4	1.00	38	0.105
23	F	0	0	N/A	0.000	N/A
24	F	0	0	N/A	0.000	N/A
25	F	0	0	N/A	0.000	N/A
26	F	0	0	N/A	0.000	N/A
27	F	0	0	N/A	0.000	N/A
28	A	5	5	1.00	28	0.179
29	A	4	4	0.96	32	0.125
30	F	0	0	N/A	0.000	N/A
31	F	0	0	N/A	0.000	N/A
32	A	2	2	1.00	16	0.125
33	A	2	2	1.00	24	0.083
34	F	0	0	N/A	0.000	N/A
35	F	0	0	N/A	0.000	N/A
36	F	0	0	N/A	0.000	N/A

CHAPTER 3

LISTING OF INTEGRALS

3.1	$\int \frac{d+ex+fx^2+gx^3+hx^4+jx^5+kx^6+lx^7+mx^8}{a+bx^3+cx^6} dx$	42
3.2	$\int (a+bx^3+cx^6)^{3/2} (A+Bx^3+Cx^6) dx$	50
3.3	$\int \sqrt{a+bx^3+cx^6} (A+Bx^3+Cx^6) dx$	56
3.4	$\int \frac{A+Bx^3+Cx^6}{\sqrt{a+bx^3+cx^6}} dx$	62
3.5	$\int \frac{A+Bx^3+Cx^6}{(a+bx^3+cx^6)^{3/2}} dx$	68
3.6	$\int \frac{1}{a+bx^n+cx^{2n}} dx$	74
3.7	$\int \frac{d+ex}{a+bx^n+cx^{2n}} dx$	80
3.8	$\int \frac{d+ex+fx^2}{a+bx^n+cx^{2n}} dx$	86
3.9	$\int \frac{d+ex+fx^2+gx^3}{a+bx^n+cx^{2n}} dx$	93
3.10	$\int \frac{1}{(a+bx^n+cx^{2n})^2} dx$	100
3.11	$\int \frac{d+ex}{(a+bx^n+cx^{2n})^2} dx$	106
3.12	$\int \frac{d+ex+fx^2}{(a+bx^n+cx^{2n})^2} dx$	113
3.13	$\int \frac{d+ex+fx^2+gx^3}{(a+bx^n+cx^{2n})^2} dx$	121
3.14	$\int \frac{-1+x^4+7x^5+x^9}{-7+6x^4+x^8} dx$	129
3.15	$\int \frac{-ahx^{-1+\frac{n}{2}}+cfx^{-1+n}+cgx^{-1+2n}+chx^{-1+\frac{5n}{2}}}{(a+bx^n+cx^{2n})^{3/2}} dx$	137
3.16	$\int (a+bx^n+cx^{2n})^p (a+b(1+n+np)x^n+c(1+2n(1+p))x^{2n}) dx$	143
3.17	$\int \frac{A+Bx^n+Cx^{2n}}{a+bx^n+cx^{2n}} dx$	148
3.18	$\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^2} dx$	153
3.19	$\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^3} dx$	160
3.20	$\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{a+bx^n+cx^{2n}} dx$	168
3.21	$\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{(a+bx^n+cx^{2n})^2} dx$	173
3.22	$\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{(a+bx^n+cx^{2n})^3} dx$	180
3.23	$\int (a+bx^n+cx^{2n})^{3/2} (A+Bx^n+Cx^{2n}) dx$	189

3.24	$\int \sqrt{a + bx^n + cx^{2n}}(A + Bx^n + Cx^{2n}) dx$	195
3.25	$\int \frac{A+Bx^n+Cx^{2n}}{\sqrt{a+bx^n+cx^{2n}}} dx$	201
3.26	$\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^{3/2}} dx$	206
3.27	$\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^{5/2}} dx$	211
3.28	$\int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx$	216
3.29	$\int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx$	224
3.30	$\int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx$	231
3.31	$\int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx$	237
3.32	$\int (a + bx^n + cx^{2n})^p dx$	243
3.33	$\int (A + Bx^n)(a + bx^n + cx^{2n})^p dx$	248
3.34	$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx$	254
3.35	$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$	259
3.36	$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx$	265

3.1 $\int \frac{d+ex+fx^2+gx^3+hx^4+jx^5+kx^6+lx^7+mx^8}{a+bx^3+cx^6} dx$

Optimal result	42
Mathematica [C] (verified)	43
Rubi [A] (verified)	44
Maple [C] (verified)	47
Fricas [F(-1)]	47
Sympy [F(-1)]	48
Maxima [F]	48
Giac [F(-1)]	48
Mupad [F(-1)]	49
Reduce [F]	49

Optimal result

Integrand size = 55, antiderivative size = 1620

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx = \text{Too large to display}$$

output

```
k*x/c+1/2*1*x^2/c+1/3*m*x^3/c-1/6*(c*g-b*k+(2*c^2*d+b^2*k-c*(2*a*k+b*g))/(
-4*a*c+b^2)^(1/2))*arctan(1/3*(1-2*2^(1/3)*c^(1/3)*x/(b-(-4*a*c+b^2)^(1/2)
)^(1/3))*3^(1/2))*2^(2/3)*3^(1/2)/c^(4/3)/(b-(-4*a*c+b^2)^(1/2))^(2/3)-1/6
*(c*h-b*1+(2*c^2*e+b^2*1-c*(2*a*1+b*h)))/(-4*a*c+b^2)^(1/2))*arctan(1/3*(1-
2*2^(1/3)*c^(1/3)*x/(b-(-4*a*c+b^2)^(1/2))^(1/3))*3^(1/2))*2^(1/3)*3^(1/2)
/c^(5/3)/(b-(-4*a*c+b^2)^(1/2))^(1/3)-1/6*(c*g-b*k-(-2*a*c*k+b^2*k-b*c*g+2
*c^2*d)/(-4*a*c+b^2)^(1/2))*arctan(1/3*(1-2*2^(1/3)*c^(1/3)*x/(b+(-4*a*c+b
^2)^(1/2))^(1/3))*3^(1/2))*2^(2/3)*3^(1/2)/c^(4/3)/(b+(-4*a*c+b^2)^(1/2))^(
2/3)-1/6*(c*h-b*1-(-2*a*c*1+b^2*1-b*c*h+2*c^2*e)/(-4*a*c+b^2)^(1/2))*arct
an(1/3*(1-2*2^(1/3)*c^(1/3)*x/(b+(-4*a*c+b^2)^(1/2))^(1/3))*3^(1/2))*2^(1/
3)*3^(1/2)/c^(5/3)/(b+(-4*a*c+b^2)^(1/2))^(1/3)-1/3*(-2*a*c*m+b^2*m-b*c*j+
2*c^2*f)*arctanh((2*c*x^3+b)/(-4*a*c+b^2)^(1/2))/c^2/(-4*a*c+b^2)^(1/2)+1/
6*(c*g-b*k+(2*c^2*d+b^2*k-c*(2*a*k+b*g))/(-4*a*c+b^2)^(1/2))*ln((b-(-4*a*c
+b^2)^(1/2))^(1/3)+2^(1/3)*c^(1/3)*x)*2^(2/3)/c^(4/3)/(b-(-4*a*c+b^2)^(1/2)
))^(2/3)-1/6*(c*h-b*1+(2*c^2*e+b^2*1-c*(2*a*1+b*h)))/(-4*a*c+b^2)^(1/2))*ln
((b-(-4*a*c+b^2)^(1/2))^(1/3)+2^(1/3)*c^(1/3)*x)*2^(1/3)/c^(5/3)/(b-(-4*a*
c+b^2)^(1/2))^(1/3)+1/6*(c*g-b*k-(-2*a*c*k+b^2*k-b*c*g+2*c^2*d)/(-4*a*c+b^
2)^(1/2))*ln((b+(-4*a*c+b^2)^(1/2))^(1/3)+2^(1/3)*c^(1/3)*x)*2^(2/3)/c^(4/
3)/(b+(-4*a*c+b^2)^(1/2))^(2/3)-1/6*(c*h-b*1-(-2*a*c*1+b^2*1-b*c*h+2*c^2*e
))/(-4*a*c+b^2)^(1/2))*ln((b+(-4*a*c+b^2)^(1/2))^(1/3)+2^(1/3)*c^(1/3)*x...
```

Mathematica [C] (verified)

Result contains higher order function than in optimal. Order 9 vs. order 3 in optimal.

Time = 1.28 (sec) , antiderivative size = 223, normalized size of antiderivative = 0.14

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx$$

$$= \frac{6kx + 3lx^2 + 2mx^3 - 2\text{RootSum}\left[a + b\#1^3 + c\#1^6 \&, \frac{-cd \log(x - \#1) + ak \log(x - \#1) - ce \log(x - \#1) \#1 + al \log(x - \#1)}{\dots}\right]}{\dots}$$

input

```
Integrate[(d + e*x + f*x^2 + g*x^3 + h*x^4 + j*x^5 + k*x^6 + l*x^7 + m*x^8
)/(a + b*x^3 + c*x^6),x]
```

output

```
(6*k*x + 3*l*x^2 + 2*m*x^3 - 2*RootSum[a + b*#1^3 + c*#1^6 & , (-c*d*Log[x - #1]) + a*k*Log[x - #1] - c*e*Log[x - #1]*#1 + a*l*Log[x - #1]*#1 - c*f*Log[x - #1]*#1^2 + a*m*Log[x - #1]*#1^2 - c*g*Log[x - #1]*#1^3 + b*k*Log[x - #1]*#1^3 - c*h*Log[x - #1]*#1^4 + b*l*Log[x - #1]*#1^4 - c*j*Log[x - #1]*#1^5 + b*m*Log[x - #1]*#1^5)/(b*#1^2 + 2*c*#1^5) & ])/(6*c)
```

Rubi [A] (verified)

Time = 3.85 (sec) , antiderivative size = 1668, normalized size of antiderivative = 1.03, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.036$, Rules used = {2322, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx$$

$$\downarrow \text{2322}$$

$$\int \left(\frac{d + gx^3 + kx^6}{a + bx^3 + cx^6} + \frac{x(e + hx^3 + lx^6)}{a + bx^3 + cx^6} + \frac{x^2(f + jx^3 + mx^6)}{a + bx^3 + cx^6} \right) dx$$

$$\downarrow \text{2009}$$

$$\begin{aligned}
 & \frac{mx^3}{3c} + \frac{lx^2}{2c} + \frac{kx}{c} - \frac{\left(g - \frac{bk}{c} + \frac{kb^2+2c^2d-c(bg+2ak)}{c\sqrt{b^2-4ac}}\right) \arctan\left(\frac{1 - \frac{{}_2\sqrt[3]{2}\sqrt[3]{cx}}{\sqrt{b - \sqrt{b^2-4ac}}}}{\sqrt{3}}\right)}{\sqrt[3]{2}\sqrt[3]{3}\sqrt[3]{c}\left(b - \sqrt{b^2-4ac}\right)^{2/3}} \\
 & \frac{\left(h - \frac{bl}{c} + \frac{lb^2+2c^2e-c(bh+2al)}{c\sqrt{b^2-4ac}}\right) \arctan\left(\frac{1 - \frac{{}_2\sqrt[3]{2}\sqrt[3]{cx}}{\sqrt{b - \sqrt{b^2-4ac}}}}{\sqrt{3}}\right)}{2^{2/3}\sqrt[3]{3}c^{2/3}\sqrt[3]{b - \sqrt{b^2-4ac}}} \\
 & \frac{\left(g - \frac{bk}{c} - \frac{kb^2-cgb+2c^2d-2ack}{c\sqrt{b^2-4ac}}\right) \arctan\left(\frac{1 - \frac{{}_2\sqrt[3]{2}\sqrt[3]{cx}}{\sqrt{b + \sqrt{b^2-4ac}}}}{\sqrt{3}}\right)}{\sqrt[3]{2}\sqrt[3]{3}\sqrt[3]{c}\left(b + \sqrt{b^2-4ac}\right)^{2/3}} \\
 & \frac{\left(h - \frac{bl}{c} - \frac{lb^2-chb+2c^2e-2acl}{c\sqrt{b^2-4ac}}\right) \arctan\left(\frac{1 - \frac{{}_2\sqrt[3]{2}\sqrt[3]{cx}}{\sqrt{b + \sqrt{b^2-4ac}}}}{\sqrt{3}}\right)}{2^{2/3}\sqrt[3]{3}c^{2/3}\sqrt[3]{b + \sqrt{b^2-4ac}}} \\
 & \frac{(mb^2 - cjb + 2c^2f - 2acm) \operatorname{arctanh}\left(\frac{2cx^3+b}{\sqrt{b^2-4ac}}\right) + 3c^2\sqrt{b^2-4ac}}{3c^2\sqrt{b^2-4ac}} \\
 & \frac{\left(g - \frac{bk}{c} + \frac{kb^2+2c^2d-c(bg+2ak)}{c\sqrt{b^2-4ac}}\right) \log\left(\sqrt[3]{2}\sqrt[3]{cx} + \sqrt[3]{b - \sqrt{b^2-4ac}}\right)}{3\sqrt[3]{2}\sqrt[3]{c}\left(b - \sqrt{b^2-4ac}\right)^{2/3}} \\
 & \frac{\left(h - \frac{bl}{c} + \frac{lb^2+2c^2e-c(bh+2al)}{c\sqrt{b^2-4ac}}\right) \log\left(\sqrt[3]{2}\sqrt[3]{cx} + \sqrt[3]{b - \sqrt{b^2-4ac}}\right)}{3 \cdot 2^{2/3}c^{2/3}\sqrt[3]{b - \sqrt{b^2-4ac}}} + \\
 & \frac{\left(g - \frac{bk}{c} - \frac{kb^2-cgb+2c^2d-2ack}{c\sqrt{b^2-4ac}}\right) \log\left(\sqrt[3]{2}\sqrt[3]{cx} + \sqrt[3]{b + \sqrt{b^2-4ac}}\right)}{3\sqrt[3]{2}\sqrt[3]{c}\left(b + \sqrt{b^2-4ac}\right)^{2/3}} \\
 & \frac{\left(h - \frac{bl}{c} - \frac{lb^2-chb+2c^2e-2acl}{c\sqrt{b^2-4ac}}\right) \log\left(\sqrt[3]{2}\sqrt[3]{cx} + \sqrt[3]{b + \sqrt{b^2-4ac}}\right)}{3 \cdot 2^{2/3}c^{2/3}\sqrt[3]{b + \sqrt{b^2-4ac}}} \\
 & \frac{\left(g - \frac{bk}{c} + \frac{kb^2+2c^2d-c(bg+2ak)}{c\sqrt{b^2-4ac}}\right) \log\left(2^{2/3}c^{2/3}x^2 - \sqrt[3]{2}\sqrt[3]{c}\sqrt[3]{b - \sqrt{b^2-4ac}x} + \left(b - \sqrt{b^2-4ac}\right)^{2/3}\right)}{6\sqrt[3]{2}\sqrt[3]{c}\left(b - \sqrt{b^2-4ac}\right)^{2/3}} + \\
 & \frac{\left(h - \frac{bl}{c} + \frac{lb^2+2c^2e-c(bh+2al)}{c\sqrt{b^2-4ac}}\right) \log\left(2^{2/3}c^{2/3}x^2 - \sqrt[3]{2}\sqrt[3]{c}\sqrt[3]{b - \sqrt{b^2-4ac}x} + \left(b - \sqrt{b^2-4ac}\right)^{2/3}\right)}{6\sqrt[3]{2}\sqrt[3]{c}\left(b - \sqrt{b^2-4ac}\right)^{2/3}}
 \end{aligned}$$

input $\text{Int}[(d + e*x + f*x^2 + g*x^3 + h*x^4 + j*x^5 + k*x^6 + l*x^7 + m*x^8)/(a + b*x^3 + c*x^6), x]$

output $(k*x)/c + (l*x^2)/(2*c) + (m*x^3)/(3*c) - ((g - (b*k)/c + (2*c^2*d + b^2*k - c*(b*g + 2*a*k))/(c*\text{Sqrt}[b^2 - 4*a*c]))*\text{ArcTan}[(1 - (2*2^{(1/3)}*c^{(1/3)}*x)/(b - \text{Sqrt}[b^2 - 4*a*c])^{(1/3)})/\text{Sqrt}[3]]/(2^{(1/3)}*\text{Sqrt}[3]*c^{(1/3)}*(b - \text{Sqrt}[b^2 - 4*a*c])^{(2/3)}) - ((h - (b*l)/c + (2*c^2*e + b^2*l - c*(b*h + 2*a*l))/(c*\text{Sqrt}[b^2 - 4*a*c]))*\text{ArcTan}[(1 - (2*2^{(1/3)}*c^{(1/3)}*x)/(b - \text{Sqrt}[b^2 - 4*a*c])^{(1/3)})/\text{Sqrt}[3]]/(2^{(2/3)}*\text{Sqrt}[3]*c^{(2/3)}*(b - \text{Sqrt}[b^2 - 4*a*c])^{(1/3)}) - ((g - (b*k)/c - (2*c^2*d - b*c*g + b^2*k - 2*a*c*k)/(c*\text{Sqrt}[b^2 - 4*a*c]))*\text{ArcTan}[(1 - (2*2^{(1/3)}*c^{(1/3)}*x)/(b + \text{Sqrt}[b^2 - 4*a*c])^{(1/3)})/\text{Sqrt}[3]]/(2^{(1/3)}*\text{Sqrt}[3]*c^{(1/3)}*(b + \text{Sqrt}[b^2 - 4*a*c])^{(2/3)}) - ((h - (b*l)/c - (2*c^2*e - b*c*h + b^2*l - 2*a*c*l)/(c*\text{Sqrt}[b^2 - 4*a*c]))*\text{ArcTan}[(1 - (2*2^{(1/3)}*c^{(1/3)}*x)/(b + \text{Sqrt}[b^2 - 4*a*c])^{(1/3)})/\text{Sqrt}[3]]/(2^{(2/3)}*\text{Sqrt}[3]*c^{(2/3)}*(b + \text{Sqrt}[b^2 - 4*a*c])^{(1/3)}) - ((2*c^2*f - b*c*j + b^2*m - 2*a*c*m)*\text{ArcTanh}[(b + 2*c*x^3)/\text{Sqrt}[b^2 - 4*a*c]])/(3*c^2*\text{Sqrt}[b^2 - 4*a*c]) + ((g - (b*k)/c + (2*c^2*d + b^2*k - c*(b*g + 2*a*k))/(c*\text{Sqrt}[b^2 - 4*a*c]))*\text{Log}[(b - \text{Sqrt}[b^2 - 4*a*c])^{(1/3)} + 2^{(1/3)}*c^{(1/3)}*x]/(3*2^{(1/3)}*c^{(1/3)}*(b - \text{Sqrt}[b^2 - 4*a*c])^{(2/3)}) - ((h - (b*l)/c + (2*c^2*e + b^2*l - c*(b*h + 2*a*l))/(c*\text{Sqrt}[b^2 - 4*a*c]))*\text{Log}[(b - \text{Sqrt}[b^2 - 4*a*c])^{(1/3)} + 2^{(1/3)}*c^{(1/3)}*x]/(3*2^{(2/3)}*c^{(2/3)}*(b - \text{Sqrt}[b^2 - 4*a*c])^{(1/3)}) + ((g - (b*k)/c - (2*c^2*d - b*c*g + b^2*k - 2*a*c*k)/(c*\text{Sqrt}[b^2 - 4*a*c]))*\text{Log}[(b + \text{Sqrt}[b^2 - 4*a*c])^{(1/3)} + 2^{(1/3)}*c^{(1/3)}*x])...$

Defintions of rubi rules used

rule 2009 $\text{Int}[u_, x_Symbol] \rightarrow \text{Simp}[\text{IntSum}[u, x], x] /; \text{SumQ}[u]$

rule 2322 $\text{Int}[(Pq_)*((a_) + (b_.)*(x_)^{(n_)} + (c_.)*(x_)^{(n2_)})^{(p_)}, x_Symbol] \rightarrow \text{Module}\{q = \text{Expon}[Pq, x], j, k\}, \text{Int}[\text{Sum}[x^j*\text{Sum}[\text{Coeff}[Pq, x, j + k*n]*x^{(k*n)}, \{k, 0, (q - j)/n + 1\}*(a + b*x^n + c*x^{(2*n)})^p, \{j, 0, n - 1\}], x]] /; \text{FreeQ}\{a, b, c, p\}, x\} \&\& \text{EqQ}[n2, 2*n] \&\& \text{PolyQ}[Pq, x] \&\& \text{NeQ}[b^2 - 4*a*c, 0] \&\& \text{IGtQ}[n, 0] \&\& \text{!PolyQ}[Pq, x^n]$

Maple [C] (verified)

Result contains higher order function than in optimal. Order 9 vs. order 3.

Time = 23.28 (sec) , antiderivative size = 130, normalized size of antiderivative = 0.08

method	result
default	$\frac{\frac{1}{3}mx^3 + \frac{1}{2}lx^2 + xk}{c} + \frac{\sum_{R=\text{RootOf}(_Z^6c+_Z^3b+a)} \left((-bm+cj)_R^5 + (-bl+ch)_R^4 + (-bk+cg)_R^3 + (-am+cf)_R^2 + (-al+ce)_R \right)}{3c \cdot 2_R^5c + _R^2b}$
risch	$\frac{mx^3}{3c} + \frac{lx^2}{2c} + \frac{kx}{c} + \frac{\sum_{R=\text{RootOf}(_Z^6c+_Z^3b+a)} \left((-bm+cj)_R^5 + (-bl+ch)_R^4 + (-bk+cg)_R^3 + (-am+cf)_R^2 + (-al+ce)_R \right)}{3c \cdot 2_R^5c + _R^2b}$

input `int((m*x^8+l*x^7+k*x^6+j*x^5+h*x^4+g*x^3+f*x^2+e*x+d)/(c*x^6+b*x^3+a),x,method=_RETURNVERBOSE)`

output `1/c*(1/3*m*x^3+1/2*l*x^2+x*k)+1/3/c*sum(((-b*m+c*j)*_R^5+(-b*l+c*h)*_R^4+(-b*k+c*g)*_R^3+(-a*m+c*f)*_R^2+(-a*l+c*e)*_R-a*k+c*d)/(2*_R^5*c+_R^2*b)*ln(x-_R),_R=RootOf(_Z^6*c+_Z^3*b+a))`

Fricas [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx = \text{Timed out}$$

input `integrate((m*x^8+l*x^7+k*x^6+j*x^5+h*x^4+g*x^3+f*x^2+e*x+d)/(c*x^6+b*x^3+a),x,algorithm="fricas")`

output `Timed out`

Sympy [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx = \text{Timed out}$$

input `integrate((m*x**8+l*x**7+k*x**6+j*x**5+h*x**4+g*x**3+f*x**2+e*x+d)/(c*x**6+b*x**3+a),x)`

output Timed out

Maxima [F]

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx$$

$$= \int \frac{mx^8 + lx^7 + kx^6 + jx^5 + hx^4 + gx^3 + fx^2 + ex + d}{cx^6 + bx^3 + a} dx$$

input `integrate((m*x^8+l*x^7+k*x^6+j*x^5+h*x^4+g*x^3+f*x^2+e*x+d)/(c*x^6+b*x^3+a),x, algorithm="maxima")`

output `1/6*(2*m*x^3 + 3*l*x^2 + 6*k*x)/c - integrate(-((c*j - b*m)*x^5 + (c*h - b*l)*x^4 + (c*g - b*k)*x^3 + (c*f - a*m)*x^2 + c*d - a*k + (c*e - a*l)*x)/(c*x^6 + b*x^3 + a), x)/c`

Giac [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx = \text{Timed out}$$

input `integrate((m*x^8+l*x^7+k*x^6+j*x^5+h*x^4+g*x^3+f*x^2+e*x+d)/(c*x^6+b*x^3+a),x, algorithm="giac")`

output Timed out

Mupad [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx = \text{Hanged}$$

input `int((d + e*x + f*x^2 + g*x^3 + h*x^4 + j*x^5 + k*x^6 + l*x^7 + m*x^8)/(a + b*x^3 + c*x^6),x)`

output `\text{Hanged}`

Reduce [F]

$$\int \frac{d + ex + fx^2 + gx^3 + hx^4 + jx^5 + kx^6 + lx^7 + mx^8}{a + bx^3 + cx^6} dx$$

$$= \frac{-6 \left(\int \frac{x^4}{cx^6 + bx^3 + a} dx \right) bcl + 6 \left(\int \frac{x^4}{cx^6 + bx^3 + a} dx \right) c^2h - 6 \left(\int \frac{x^3}{cx^6 + bx^3 + a} dx \right) bck + 6 \left(\int \frac{x^3}{cx^6 + bx^3 + a} dx \right) c^2g - 6 \left(\int \frac{x^2}{cx^6 + bx^3 + a} dx \right) bcl + 6 \left(\int \frac{x^2}{cx^6 + bx^3 + a} dx \right) c^2h - 6 \left(\int \frac{x^2}{cx^6 + bx^3 + a} dx \right) bck + 6 \left(\int \frac{x^2}{cx^6 + bx^3 + a} dx \right) c^2g - 6 \left(\int \frac{x}{cx^6 + bx^3 + a} dx \right) bcl + 6 \left(\int \frac{x}{cx^6 + bx^3 + a} dx \right) c^2h - 6 \left(\int \frac{x}{cx^6 + bx^3 + a} dx \right) bck + 6 \left(\int \frac{x}{cx^6 + bx^3 + a} dx \right) c^2g - 6 \left(\int \frac{1}{cx^6 + bx^3 + a} dx \right) bcl + 6 \left(\int \frac{1}{cx^6 + bx^3 + a} dx \right) c^2h - 6 \left(\int \frac{1}{cx^6 + bx^3 + a} dx \right) bck + 6 \left(\int \frac{1}{cx^6 + bx^3 + a} dx \right) c^2g - 6 \left(\int \frac{1}{cx^6 + bx^3 + a} dx \right) c^2d - \log(a + bx^3 + cx^6) * bm + \log(a + bx^3 + cx^6) * cj + 6 * ck * x + 3 * cl * x^2 + 2 * cm * x^3 / (6 * c^2)$$

input `int((m*x^8+l*x^7+k*x^6+j*x^5+h*x^4+g*x^3+f*x^2+e*x+d)/(c*x^6+b*x^3+a),x)`

output `(- 6*int(x**4/(a + b*x**3 + c*x**6),x)*b*c*l + 6*int(x**4/(a + b*x**3 + c*x**6),x)*c**2*h - 6*int(x**3/(a + b*x**3 + c*x**6),x)*b*c*k + 6*int(x**3/(a + b*x**3 + c*x**6),x)*c**2*g - 6*int(x**2/(a + b*x**3 + c*x**6),x)*a*c*m + 3*int(x**2/(a + b*x**3 + c*x**6),x)*b**2*m - 3*int(x**2/(a + b*x**3 + c*x**6),x)*b*c*j + 6*int(x**2/(a + b*x**3 + c*x**6),x)*c**2*f - 6*int(x/(a + b*x**3 + c*x**6),x)*a*c*l + 6*int(x/(a + b*x**3 + c*x**6),x)*c**2*e - 6*int(1/(a + b*x**3 + c*x**6),x)*a*c*k + 6*int(1/(a + b*x**3 + c*x**6),x)*c**2*d - log(a + b*x**3 + c*x**6)*b*m + log(a + b*x**3 + c*x**6)*c*j + 6*c*k*x + 3*c*l*x**2 + 2*c*m*x**3)/(6*c**2)`

3.2 $\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx$

Optimal result	50
Mathematica [A] (warning: unable to verify)	51
Rubi [A] (verified)	51
Maple [F]	53
Fricas [F]	53
Sympy [F]	54
Maxima [F]	54
Giac [F]	54
Mupad [F(-1)]	55
Reduce [F]	55

Optimal result

Integrand size = 29, antiderivative size = 330

$$\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx = \frac{Cx(a + bx^3 + cx^6)^{5/2}}{16c} + \frac{a(16Ac - aC)x\sqrt{a + bx^3 + cx^6} \operatorname{AppellF1}\left(\frac{1}{3}, -\frac{3}{2}, -\frac{3}{2}, \frac{4}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)}{16c\sqrt{1 + \frac{2cx^3}{b - \sqrt{b^2 - 4ac}}}\sqrt{1 + \frac{2cx^3}{b + \sqrt{b^2 - 4ac}}}} + \frac{a(32Bc - 17bC)x^4\sqrt{a + bx^3 + cx^6} \operatorname{AppellF1}\left(\frac{4}{3}, -\frac{3}{2}, -\frac{3}{2}, \frac{7}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)}{128c\sqrt{1 + \frac{2cx^3}{b - \sqrt{b^2 - 4ac}}}\sqrt{1 + \frac{2cx^3}{b + \sqrt{b^2 - 4ac}}}}$$

output

```
1/16*C*x*(c*x^6+b*x^3+a)^(5/2)/c+1/16*a*(16*A*c-C*a)*x*(c*x^6+b*x^3+a)^(1/2)*AppellF1(1/3,-3/2,-3/2,4/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))/c/(1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^(1/2)/(1+2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))^(1/2)+1/128*a*(32*B*c-17*C*b)*x^4*(c*x^6+b*x^3+a)^(1/2)*AppellF1(4/3,-3/2,-3/2,7/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))/c/(1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^(1/2)/(1+2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))^(1/2)
```

Mathematica [A] (warning: unable to verify)

Time = 11.97 (sec) , antiderivative size = 599, normalized size of antiderivative = 1.82

$$\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx = \frac{x \left(8(a + bx^3 + cx^6) (5049b^4C - 216b^3c(44B + 17Cx^3) + 216b^2c(104Ac - 151aC + 32Bcx^3 + Cx^6) \right)}{}$$

input `Integrate[(a + b*x^3 + c*x^6)^(3/2)*(A + B*x^3 + C*x^6),x]`

output

```
(x*(8*(a + b*x^3 + c*x^6)*(5049*b^4*C - 216*b^3*c*(44*B + 17*C*x^3) + 216*
b^2*c*(104*A*c - 151*a*C + 32*B*c*x^3 + 14*c*C*x^6) + 32*b*c^2*(1836*a*B +
4784*A*c*x^3 + 621*a*C*x^3 + 3248*B*c*x^6 + 2450*c*C*x^9) + 16*c^2*(2457*
a^2*C + 56*c^2*x^6*(104*A + 80*B*x^3 + 65*C*x^6) + 4*a*c*(4732*A + 2560*B*
x^3 + 1729*C*x^6))) - 216*a*(-352*b^3*B*c + 2176*a*b*B*c^2 + 187*b^4*C + 8
*b^2*c*(104*A*c - 151*a*C) + 1456*a*c^2*(-16*A*c + a*C))*Sqrt[(b - Sqrt[b^
2 - 4*a*c] + 2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[(b + Sqrt[b^2 - 4*a*c]
+ 2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[1/3, 1/2, 1/2, 4/3, (-2*c*x^
3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])] - 27*(-176
0*b^4*B*c + 12928*a*b^2*B*c^2 - 20480*a^2*B*c^3 + 935*b^5*C + 8*b^3*c*(520
*A*c - 891*a*C) + 16*a*b*c^2*(-2288*A*c + 823*a*C))*x^3*Sqrt[(b - Sqrt[b^2
- 4*a*c] + 2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[(b + Sqrt[b^2 - 4*a*c]
+ 2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[4/3, 1/2, 1/2, 7/3, (-2*c*x^3
)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])])]/(7454720*
c^3*Sqrt[a + b*x^3 + c*x^6])
```

Rubi [A] (verified)

Time = 0.61 (sec) , antiderivative size = 330, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.103$, Rules used = {2321, 1762, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
& \int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx \\
& \quad \downarrow \text{2321} \\
& \int \left(\frac{1}{32} \left(32B - \frac{17bC}{c} \right) x^3 + \frac{1}{16} \left(16A - \frac{aC}{c} \right) \right) (cx^6 + bx^3 + a)^{3/2} dx + \frac{Cx(a + bx^3 + cx^6)^{5/2}}{16c} \\
& \quad \downarrow \text{1762} \\
& \int \left(\frac{(32Bc - 17bC)(cx^6 + bx^3 + a)^{3/2} x^3}{32c} + \frac{(16Ac - aC)(cx^6 + bx^3 + a)^{3/2}}{16c} \right) dx + \\
& \quad \frac{Cx(a + bx^3 + cx^6)^{5/2}}{16c} \\
& \quad \downarrow \text{2009} \\
& \frac{ax(16Ac - aC)\sqrt{a + bx^3 + cx^6} \operatorname{AppellF1}\left(\frac{1}{3}, -\frac{3}{2}, -\frac{3}{2}, \frac{4}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)}{16c\sqrt{\frac{2cx^3}{b - \sqrt{b^2 - 4ac}} + 1}\sqrt{\frac{2cx^3}{\sqrt{b^2 - 4ac} + b} + 1}} + \\
& \frac{ax^4\sqrt{a + bx^3 + cx^6}(32Bc - 17bC) \operatorname{AppellF1}\left(\frac{4}{3}, -\frac{3}{2}, -\frac{3}{2}, \frac{7}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)}{128c\sqrt{\frac{2cx^3}{b - \sqrt{b^2 - 4ac}} + 1}\sqrt{\frac{2cx^3}{\sqrt{b^2 - 4ac} + b} + 1}} + \\
& \quad \frac{Cx(a + bx^3 + cx^6)^{5/2}}{16c}
\end{aligned}$$

input `Int[(a + b*x^3 + c*x^6)^(3/2)*(A + B*x^3 + C*x^6),x]`

output `(C*x*(a + b*x^3 + c*x^6)^(5/2))/(16*c) + (a*(16*A*c - a*C)*x*sqrt[a + b*x^3 + c*x^6]*AppellF1[1/3, -3/2, -3/2, 4/3, (-2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])])/(16*c*Sqrt[1 + (2*c*x^3)/(b - Sqrt[b^2 - 4*a*c])]*Sqrt[1 + (2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])]) + (a*(32*B*c - 17*b*C)*x^4*sqrt[a + b*x^3 + c*x^6]*AppellF1[4/3, -3/2, -3/2, 7/3, (-2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])])/(128*c*Sqrt[1 + (2*c*x^3)/(b - Sqrt[b^2 - 4*a*c])]*Sqrt[1 + (2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])])`

Definitions of rubi rules used

rule 1762

```
Int[((d_) + (e_.)*(x_)^(n_))*((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_))^(p
_), x_Symbol] := Int[ExpandIntegrand[(d + e*x^n)*(a + b*x^n + c*x^(2*n))^p,
x], x] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c,
0]
```

rule 2009

```
Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]
```

rule 2321

```
Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := W
ith[{q = Expon[Pq, x]}, With[{Pqq = Coeff[Pq, x, q]}, Int[ExpandToSum[Pq -
Pqq*x^q - Pqq*((a*(q - 2*n + 1)*x^(q - 2*n) + b*(q + n*(p - 1) + 1)*x^(q -
n))/(c*(q + 2*n*p + 1))), x]*(a + b*x^n + c*x^(2*n))^p, x] + Simp[Pqq*x^(q
- 2*n + 1)*((a + b*x^n + c*x^(2*n))^(p + 1)/(c*(q + 2*n*p + 1))), x]] /; Ge
Q[q, 2*n] && NeQ[q + 2*n*p + 1, 0] && (IntegerQ[2*p] || (EqQ[n, 1] && Integ
erQ[4*p]) || IntegerQ[p + (q + 1)/(2*n)]) /; FreeQ[{a, b, c, p}, x] && EqQ
[n2, 2*n] && PolyQ[Pq, x^n] && NeQ[b^2 - 4*a*c, 0] && IGtQ[n, 0]
```

Maple [F]

$$\int (cx^6 + bx^3 + a)^{\frac{3}{2}} (Cx^6 + Bx^3 + A) dx$$

input

```
int((c*x^6+b*x^3+a)^(3/2)*(C*x^6+B*x^3+A),x)
```

output

```
int((c*x^6+b*x^3+a)^(3/2)*(C*x^6+B*x^3+A),x)
```

Fricas [F]

$$\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx = \int (Cx^6 + Bx^3 + A)(cx^6 + bx^3 + a)^{\frac{3}{2}} dx$$

input

```
integrate((c*x^6+b*x^3+a)^(3/2)*(C*x^6+B*x^3+A),x, algorithm="fricas")
```

output `integral((C*c*x^12 + (C*b + B*c)*x^9 + (C*a + B*b + A*c)*x^6 + (B*a + A*b)*x^3 + A*a)*sqrt(c*x^6 + b*x^3 + a), x)`

Sympy [F]

$$\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx = \int (A + Bx^3 + Cx^6) (a + bx^3 + cx^6)^{\frac{3}{2}} dx$$

input `integrate((c*x**6+b*x**3+a)**(3/2)*(C*x**6+B*x**3+A),x)`

output `Integral((A + B*x**3 + C*x**6)*(a + b*x**3 + c*x**6)**(3/2), x)`

Maxima [F]

$$\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx = \int (Cx^6 + Bx^3 + A)(cx^6 + bx^3 + a)^{\frac{3}{2}} dx$$

input `integrate((c*x^6+b*x^3+a)^(3/2)*(C*x^6+B*x^3+A),x, algorithm="maxima")`

output `integrate((C*x^6 + B*x^3 + A)*(c*x^6 + b*x^3 + a)^(3/2), x)`

Giac [F]

$$\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx = \int (Cx^6 + Bx^3 + A)(cx^6 + bx^3 + a)^{\frac{3}{2}} dx$$

input `integrate((c*x^6+b*x^3+a)^(3/2)*(C*x^6+B*x^3+A),x, algorithm="giac")`

output `integrate((C*x^6 + B*x^3 + A)*(c*x^6 + b*x^3 + a)^(3/2), x)`

Mupad [F(-1)]

Timed out.

$$\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx = \int (Cx^6 + Bx^3 + A) (cx^6 + bx^3 + a)^{3/2} dx$$

input `int((A + B*x^3 + C*x^6)*(a + b*x^3 + c*x^6)^(3/2),x)`

output `int((A + B*x^3 + C*x^6)*(a + b*x^3 + c*x^6)^(3/2), x)`

Reduce [F]

$$\int (a + bx^3 + cx^6)^{3/2} (A + Bx^3 + Cx^6) dx = \frac{136864\sqrt{cx^6 + bx^3 + a} a^2 c^2 x + 19440\sqrt{cx^6 + bx^3 + a} a b^2 c x + 134720\sqrt{cx^6 + bx^3 + a} ab c^2 x + 81536\sqrt{cx^6 + bx^3 + a} a^2 c^2 x^4 + 1782\sqrt{cx^6 + bx^3 + a} b^3 c x^4 + 42784\sqrt{cx^6 + bx^3 + a} b^2 c^2 x^7 + 60032\sqrt{cx^6 + bx^3 + a} b c^3 x^{10} + 23296\sqrt{cx^6 + bx^3 + a} c^4 x^{13} + 235872 \int \sqrt{cx^6 + bx^3 + a} dx}{(a + bx^3 + cx^6)^{3/2}}$$

input `int((c*x^6+b*x^3+a)^(3/2)*(C*x^6+B*x^3+A),x)`

output `(136864*sqrt(a + b*x**3 + c*x**6)*a**2*c**2*x + 19440*sqrt(a + b*x**3 + c*x**6)*a*b**2*c*x + 134720*sqrt(a + b*x**3 + c*x**6)*a*b*c**2*x**4 + 81536*sqrt(a + b*x**3 + c*x**6)*a*c**3*x**7 - 1782*sqrt(a + b*x**3 + c*x**6)*b**4*x + 1296*sqrt(a + b*x**3 + c*x**6)*b**3*c*x**4 + 42784*sqrt(a + b*x**3 + c*x**6)*b**2*c**2*x**7 + 60032*sqrt(a + b*x**3 + c*x**6)*b*c**3*x**10 + 23296*sqrt(a + b*x**3 + c*x**6)*c**4*x**13 + 235872*int(sqrt(a + b*x**3 + c*x**6)/(a + b*x**3 + c*x**6),x)*a**3*c**2 - 19440*int(sqrt(a + b*x**3 + c*x**6)/(a + b*x**3 + c*x**6),x)*a**2*b**2*c + 1782*int(sqrt(a + b*x**3 + c*x**6)/(a + b*x**3 + c*x**6),x)*a*b**4 + 237168*int((sqrt(a + b*x**3 + c*x**6)*x**3)/(a + b*x**3 + c*x**6),x)*a**2*b*c**2 - 53784*int((sqrt(a + b*x**3 + c*x**6)*x**3)/(a + b*x**3 + c*x**6),x)*a*b**3*c + 4455*int((sqrt(a + b*x**3 + c*x**6)*x**3)/(a + b*x**3 + c*x**6),x)*b**5)/(372736*c**2)`

3.3 $\int \sqrt{a + bx^3 + cx^6}(A + Bx^3 + Cx^6) dx$

Optimal result	56
Mathematica [A] (warning: unable to verify)	57
Rubi [A] (verified)	57
Maple [F]	59
Fricas [F]	59
Sympy [F]	60
Maxima [F]	60
Giac [F]	60
Mupad [F(-1)]	61
Reduce [F]	61

Optimal result

Integrand size = 29, antiderivative size = 328

$$\int \sqrt{a + bx^3 + cx^6}(A + Bx^3 + Cx^6) dx = \frac{Cx(a + bx^3 + cx^6)^{3/2}}{10c} + \frac{(10Ac - aC)x\sqrt{a + bx^3 + cx^6} \operatorname{AppellF1}\left(\frac{1}{3}, -\frac{1}{2}, -\frac{1}{2}, \frac{4}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)}{10c\sqrt{1 + \frac{2cx^3}{b - \sqrt{b^2 - 4ac}}}\sqrt{1 + \frac{2cx^3}{b + \sqrt{b^2 - 4ac}}}} + \frac{(20Bc - 11bC)x^4\sqrt{a + bx^3 + cx^6} \operatorname{AppellF1}\left(\frac{4}{3}, -\frac{1}{2}, -\frac{1}{2}, \frac{7}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)}{80c\sqrt{1 + \frac{2cx^3}{b - \sqrt{b^2 - 4ac}}}\sqrt{1 + \frac{2cx^3}{b + \sqrt{b^2 - 4ac}}}}$$

output

```
1/10*C*x*(c*x^6+b*x^3+a)^(3/2)/c+1/10*(10*A*c-C*a)*x*(c*x^6+b*x^3+a)^(1/2)
*AppellF1(1/3,-1/2,-1/2,4/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^3/(b+(-
4*a*c+b^2)^(1/2)))/c/(1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^(1/2)/(1+2*c*x^3/(
b+(-4*a*c+b^2)^(1/2)))^(1/2)+1/80*(20*B*c-11*C*b)*x^4*(c*x^6+b*x^3+a)^(1/2)
)*AppellF1(4/3,-1/2,-1/2,7/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^3/(b+(-
4*a*c+b^2)^(1/2)))/c/(1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^(1/2)/(1+2*c*x^3/
(b+(-4*a*c+b^2)^(1/2)))^(1/2)
```

Mathematica [A] (warning: unable to verify)

Time = 11.24 (sec) , antiderivative size = 442, normalized size of antiderivative = 1.35

$$\int \sqrt{a + bx^3 + cx^6} (A + Bx^3 + Cx^6) dx$$

$$= \frac{x \left(8(a + bx^3 + cx^6) (-33b^2C + 12bc(5B + 2Cx^3)) + 4c(70Ac + 21aC + 40Bcx^3 + 28cCx^6) \right) + 24a(-20b^2C + 11b^2C + 28c(10Ac - aC)) \sqrt{(b - \sqrt{b^2 - 4ac}) + 2cx^3} / (b - \sqrt{b^2 - 4ac}) \sqrt{(b + \sqrt{b^2 - 4ac}) + 2cx^3} / (b + \sqrt{b^2 - 4ac}) \operatorname{AppellF1}[1/3, 1/2, 1/2, 4/3, (-2cx^3)/(b + \sqrt{b^2 - 4ac}), (2cx^3)/(-b + \sqrt{b^2 - 4ac})] + 3(-100b^2Bc + 320aBc^2 + 55b^3C + 4b^2c(70Ac - 51aC)) x^3 \sqrt{(b - \sqrt{b^2 - 4ac}) + 2cx^3} / (b - \sqrt{b^2 - 4ac}) \sqrt{(b + \sqrt{b^2 - 4ac}) + 2cx^3} / (b + \sqrt{b^2 - 4ac}) \operatorname{AppellF1}[4/3, 1/2, 1/2, 7/3, (-2cx^3)/(b + \sqrt{b^2 - 4ac}), (2cx^3)/(-b + \sqrt{b^2 - 4ac})]} \right)}{(8960c^2 \sqrt{a + bx^3 + cx^6})}$$

input

Integrate[Sqrt[a + b*x^3 + c*x^6]*(A + B*x^3 + C*x^6),x]

output

```
(x*(8*(a + b*x^3 + c*x^6)*(-33*b^2*C + 12*b*c*(5*B + 2*C*x^3) + 4*c*(70*A*c + 21*a*C + 40*B*c*x^3 + 28*c*C*x^6)) + 24*a*(-20*b*B*c + 11*b^2*C + 28*c*(10*A*c - a*C))*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^3)/(b - Sqrt[b^2 - 4*a*c])]*Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])]*AppellF1[1/3, 1/2, 1/2, 4/3, (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])] + 3*(-100*b^2*B*c + 320*a*B*c^2 + 55*b^3*C + 4*b^2*c*(70*A*c - 51*a*C))*x^3*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^3)/(b - Sqrt[b^2 - 4*a*c])]*Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])]*AppellF1[4/3, 1/2, 1/2, 7/3, (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])]))/(8960*c^2*Sqrt[a + b*x^3 + c*x^6])
```

Rubi [A] (verified)Time = 0.54 (sec) , antiderivative size = 328, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.103$, Rules used = {2321, 1762, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \sqrt{a + bx^3 + cx^6} (A + Bx^3 + Cx^6) dx$$

$$\downarrow 2321$$

$$\int \left(\frac{1}{20} \left(20B - \frac{11bC}{c} \right) x^3 + \frac{1}{10} \left(10A - \frac{aC}{c} \right) \right) \sqrt{cx^6 + bx^3 + adx} + \frac{Cx(a + bx^3 + cx^6)^{3/2}}{10c}$$

$$\begin{aligned}
 & \int \left(\frac{(20Bc - 11bC)\sqrt{cx^6 + bx^3 + ax^3}}{20c} + \frac{(10Ac - aC)\sqrt{cx^6 + bx^3 + a}}{10c} \right) dx + \\
 & \quad \frac{Cx(a + bx^3 + cx^6)^{3/2}}{10c} \\
 & \quad \downarrow \text{1762} \\
 & \quad \downarrow \text{2009} \\
 & \frac{x(10Ac - aC)\sqrt{a + bx^3 + cx^6} \operatorname{AppellF1}\left(\frac{1}{3}, -\frac{1}{2}, -\frac{1}{2}, \frac{4}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)}{10c\sqrt{\frac{2cx^3}{b - \sqrt{b^2 - 4ac}} + 1}\sqrt{\frac{2cx^3}{\sqrt{b^2 - 4ac} + b} + 1}} + \\
 & \frac{x^4\sqrt{a + bx^3 + cx^6}(20Bc - 11bC) \operatorname{AppellF1}\left(\frac{4}{3}, -\frac{1}{2}, -\frac{1}{2}, \frac{7}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)}{80c\sqrt{\frac{2cx^3}{b - \sqrt{b^2 - 4ac}} + 1}\sqrt{\frac{2cx^3}{\sqrt{b^2 - 4ac} + b} + 1}} + \\
 & \quad \frac{Cx(a + bx^3 + cx^6)^{3/2}}{10c}
 \end{aligned}$$

input `Int[Sqrt[a + b*x^3 + c*x^6]*(A + B*x^3 + C*x^6),x]`

output `(C*x*(a + b*x^3 + c*x^6)^(3/2))/(10*c) + ((10*A*c - a*C)*x*Sqrt[a + b*x^3 + c*x^6]*AppellF1[1/3, -1/2, -1/2, 4/3, (-2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])]/(10*c*Sqrt[1 + (2*c*x^3)/(b - Sqrt[b^2 - 4*a*c])]*Sqrt[1 + (2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])]) + ((20*B*c - 11*b*C)*x^4*Sqrt[a + b*x^3 + c*x^6]*AppellF1[4/3, -1/2, -1/2, 7/3, (-2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])]/(80*c*Sqrt[1 + (2*c*x^3)/(b - Sqrt[b^2 - 4*a*c])]*Sqrt[1 + (2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])])`

Defintions of rubi rules used

rule 1762 `Int[((d_) + (e_.)*(x_)^(n_))*((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := Int[ExpandIntegrand[(d + e*x^n)*(a + b*x^n + c*x^(2*n))^p, x], x] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0]`

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

rule 2321

```

Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := W
ith[{q = Expon[Pq, x]}, With[{Pqq = Coeff[Pq, x, q]}, Int[ExpandToSum[Pq -
Pqq*x^q - Pqq*((a*(q - 2*n + 1)*x^(q - 2*n) + b*(q + n*(p - 1) + 1)*x^(q -
n))/(c*(q + 2*n*p + 1))), x]*(a + b*x^n + c*x^(2*n))^p, x] + Simp[Pqq*x^(q
- 2*n + 1)*((a + b*x^n + c*x^(2*n))^(p + 1)/(c*(q + 2*n*p + 1))), x]] /; Ge
Q[q, 2*n] && NeQ[q + 2*n*p + 1, 0] && (IntegerQ[2*p] || (EqQ[n, 1] && Integ
erQ[4*p]) || IntegerQ[p + (q + 1)/(2*n)])] /; FreeQ[{a, b, c, p}, x] && EqQ
[n2, 2*n] && PolyQ[Pq, x^n] && NeQ[b^2 - 4*a*c, 0] && IGtQ[n, 0]

```

Maple [F]

$$\int \sqrt{cx^6 + bx^3 + a} (Cx^6 + Bx^3 + A) dx$$

input

```
int((c*x^6+b*x^3+a)^(1/2)*(C*x^6+B*x^3+A),x)
```

output

```
int((c*x^6+b*x^3+a)^(1/2)*(C*x^6+B*x^3+A),x)
```

Fricas [F]

$$\int \sqrt{a + bx^3 + cx^6} (A + Bx^3 + Cx^6) dx = \int (Cx^6 + Bx^3 + A) \sqrt{cx^6 + bx^3 + a} dx$$

input

```
integrate((c*x^6+b*x^3+a)^(1/2)*(C*x^6+B*x^3+A),x, algorithm="fricas")
```

output

```
integral((C*x^6 + B*x^3 + A)*sqrt(c*x^6 + b*x^3 + a), x)
```

Sympy [F]

$$\int \sqrt{a + bx^3 + cx^6} (A + Bx^3 + Cx^6) dx = \int (A + Bx^3 + Cx^6) \sqrt{a + bx^3 + cx^6} dx$$

input `integrate((c*x**6+b*x**3+a)**(1/2)*(C*x**6+B*x**3+A),x)`

output `Integral((A + B*x**3 + C*x**6)*sqrt(a + b*x**3 + c*x**6), x)`

Maxima [F]

$$\int \sqrt{a + bx^3 + cx^6} (A + Bx^3 + Cx^6) dx = \int (Cx^6 + Bx^3 + A) \sqrt{cx^6 + bx^3 + a} dx$$

input `integrate((c*x^6+b*x^3+a)^(1/2)*(C*x^6+B*x^3+A),x, algorithm="maxima")`

output `integrate((C*x^6 + B*x^3 + A)*sqrt(c*x^6 + b*x^3 + a), x)`

Giac [F]

$$\int \sqrt{a + bx^3 + cx^6} (A + Bx^3 + Cx^6) dx = \int (Cx^6 + Bx^3 + A) \sqrt{cx^6 + bx^3 + a} dx$$

input `integrate((c*x^6+b*x^3+a)^(1/2)*(C*x^6+B*x^3+A),x, algorithm="giac")`

output `integrate((C*x^6 + B*x^3 + A)*sqrt(c*x^6 + b*x^3 + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \sqrt{a + bx^3 + cx^6} (A + Bx^3 + Cx^6) dx = \int (Cx^6 + Bx^3 + A) \sqrt{cx^6 + bx^3 + a} dx$$

input `int((A + B*x^3 + C*x^6)*(a + b*x^3 + c*x^6)^(1/2),x)`

output `int((A + B*x^3 + C*x^6)*(a + b*x^3 + c*x^6)^(1/2), x)`

Reduce [F]

$$\int \sqrt{a + bx^3 + cx^6} (A + Bx^3 + Cx^6) dx$$

$$= \frac{728\sqrt{cx^6 + bx^3 + a} acx + 54\sqrt{cx^6 + bx^3 + a} b^2x + 368\sqrt{cx^6 + bx^3 + a} bcx^4 + 224\sqrt{cx^6 + bx^3 + a} c^2x}{2240}$$

input `int((c*x^6+b*x^3+a)^(1/2)*(C*x^6+B*x^3+A),x)`

output `(728*sqrt(a + b*x**3 + c*x**6)*a*c*x + 54*sqrt(a + b*x**3 + c*x**6)*b**2*x + 368*sqrt(a + b*x**3 + c*x**6)*b*c*x**4 + 224*sqrt(a + b*x**3 + c*x**6)*c**2*x**7 + 1512*int(sqrt(a + b*x**3 + c*x**6)/(a + b*x**3 + c*x**6),x)*a**2*c - 54*int(sqrt(a + b*x**3 + c*x**6)/(a + b*x**3 + c*x**6),x)*a*b**2 + 1188*int((sqrt(a + b*x**3 + c*x**6)*x**3)/(a + b*x**3 + c*x**6),x)*a*b*c - 135*int((sqrt(a + b*x**3 + c*x**6)*x**3)/(a + b*x**3 + c*x**6),x)*b**3)/(2240*c)`

3.4 $\int \frac{A+Bx^3+Cx^6}{\sqrt{a+bx^3+cx^6}} dx$

Optimal result	62
Mathematica [A] (warning: unable to verify)	63
Rubi [A] (verified)	63
Maple [F]	65
Fricas [F]	65
Sympy [F]	66
Maxima [F]	66
Giac [F]	66
Mupad [F(-1)]	67
Reduce [F]	67

Optimal result

Integrand size = 29, antiderivative size = 328

$$\int \frac{A+Bx^3+Cx^6}{\sqrt{a+bx^3+cx^6}} dx = \frac{Cx\sqrt{a+bx^3+cx^6}}{4c} + \frac{(4Ac-aC)x\sqrt{1+\frac{2cx^3}{b-\sqrt{b^2-4ac}}}\sqrt{1+\frac{2cx^3}{b+\sqrt{b^2-4ac}}}\text{AppellF1}\left(\frac{1}{3}, \frac{1}{2}, \frac{1}{2}, \frac{4}{3}, -\frac{2cx^3}{b-\sqrt{b^2-4ac}}, -\frac{2cx^3}{b+\sqrt{b^2-4ac}}\right)}{4c\sqrt{a+bx^3+cx^6}} + \frac{(8Bc-5bC)x^4\sqrt{1+\frac{2cx^3}{b-\sqrt{b^2-4ac}}}\sqrt{1+\frac{2cx^3}{b+\sqrt{b^2-4ac}}}\text{AppellF1}\left(\frac{4}{3}, \frac{1}{2}, \frac{1}{2}, \frac{7}{3}, -\frac{2cx^3}{b-\sqrt{b^2-4ac}}, -\frac{2cx^3}{b+\sqrt{b^2-4ac}}\right)}{32c\sqrt{a+bx^3+cx^6}}$$

output

```
1/4*C*x*(c*x^6+b*x^3+a)^(1/2)/c+1/4*(4*A*c-C*a)*x*(1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))^(1/2)*AppellF1(1/3,1/2,1/2,4/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))/c/(c*x^6+b*x^3+a)^(1/2)+1/32*(8*B*c-5*C*b)*x^4*(1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))^(1/2)*AppellF1(4/3,1/2,1/2,7/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))/c/(c*x^6+b*x^3+a)^(1/2)
```

Mathematica [A] (warning: unable to verify)

Time = 10.82 (sec) , antiderivative size = 354, normalized size of antiderivative = 1.08

$$\int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx$$

$$= \frac{x \left(8C(a + bx^3 + cx^6) + 8(4Ac - aC) \sqrt{\frac{b - \sqrt{b^2 - 4ac} + 2cx^3}{b - \sqrt{b^2 - 4ac}}} \sqrt{\frac{b + \sqrt{b^2 - 4ac} + 2cx^3}{b + \sqrt{b^2 - 4ac}}} \operatorname{AppellF1} \left(\frac{1}{3}, \frac{1}{2}, \frac{1}{2}, \frac{4}{3}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}} \right) \right)}{32c\sqrt{c}}$$

input `Integrate[(A + B*x^3 + C*x^6)/Sqrt[a + b*x^3 + c*x^6],x]`output
$$\frac{(x*(8*C*(a + b*x^3 + c*x^6) + 8*(4*A*c - a*C)*\operatorname{Sqrt}[(b - \operatorname{Sqrt}[b^2 - 4*a*c] + 2*c*x^3)/(b - \operatorname{Sqrt}[b^2 - 4*a*c]])*\operatorname{Sqrt}[(b + \operatorname{Sqrt}[b^2 - 4*a*c] + 2*c*x^3)/(b + \operatorname{Sqrt}[b^2 - 4*a*c]])*\operatorname{AppellF1}[1/3, 1/2, 1/2, 4/3, (-2*c*x^3)/(b + \operatorname{Sqrt}[b^2 - 4*a*c]), (2*c*x^3)/(-b + \operatorname{Sqrt}[b^2 - 4*a*c])] + (8*B*c - 5*b*C)*x^3*\operatorname{Sqrt}[(b - \operatorname{Sqrt}[b^2 - 4*a*c] + 2*c*x^3)/(b - \operatorname{Sqrt}[b^2 - 4*a*c]])*\operatorname{Sqrt}[(b + \operatorname{Sqrt}[b^2 - 4*a*c] + 2*c*x^3)/(b + \operatorname{Sqrt}[b^2 - 4*a*c]])*\operatorname{AppellF1}[4/3, 1/2, 1/2, 7/3, (-2*c*x^3)/(b + \operatorname{Sqrt}[b^2 - 4*a*c]), (2*c*x^3)/(-b + \operatorname{Sqrt}[b^2 - 4*a*c])])]))/(32*c*\operatorname{Sqrt}[a + b*x^3 + c*x^6])$$
Rubi [A] (verified)Time = 0.55 (sec) , antiderivative size = 328, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.103$, Rules used = {2321, 1762, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx$$

$$\downarrow \text{2321}$$

$$\int \frac{\frac{1}{8} \left(8B - \frac{5bC}{c} \right) x^3 + \frac{1}{4} \left(4A - \frac{aC}{c} \right)}{\sqrt{cx^6 + bx^3 + a}} dx + \frac{Cx\sqrt{a + bx^3 + cx^6}}{4c}$$

$$\downarrow \text{1762}$$

$$\int \left(\frac{(8Bc - 5bC)x^3}{8c\sqrt{cx^6 + bx^3 + a}} + \frac{4Ac - aC}{4c\sqrt{cx^6 + bx^3 + a}} \right) dx + \frac{Cx\sqrt{a + bx^3 + cx^6}}{4c}$$

↓ 2009

$$\frac{x(4Ac - aC)\sqrt{\frac{2cx^3}{b - \sqrt{b^2 - 4ac}} + 1}\sqrt{\frac{2cx^3}{\sqrt{b^2 - 4ac} + b} + 1} \operatorname{AppellF1}\left(\frac{1}{3}, \frac{1}{2}, \frac{1}{2}, \frac{4}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right) + x^4\sqrt{\frac{2cx^3}{b - \sqrt{b^2 - 4ac}} + 1}\sqrt{\frac{2cx^3}{\sqrt{b^2 - 4ac} + b} + 1}(8Bc - 5bC) \operatorname{AppellF1}\left(\frac{4}{3}, \frac{1}{2}, \frac{1}{2}, \frac{7}{3}, -\frac{2cx^3}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right) + \frac{32c\sqrt{a + bx^3 + cx^6}}{Cx\sqrt{a + bx^3 + cx^6}}}{4c}$$

input `Int[(A + B*x^3 + C*x^6)/Sqrt[a + b*x^3 + c*x^6],x]`

output `(C*x*Sqrt[a + b*x^3 + c*x^6])/(4*c) + ((4*A*c - a*C)*x*Sqrt[1 + (2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[1 + (2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[1/3, 1/2, 1/2, 4/3, (-2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])]/(4*c*Sqrt[a + b*x^3 + c*x^6]) + ((8*B*c - 5*b*C)*x^4*Sqrt[1 + (2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[1 + (2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[4/3, 1/2, 1/2, 7/3, (-2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c])]/(32*c*Sqrt[a + b*x^3 + c*x^6])`

Defintions of rubi rules used

rule 1762 `Int[((d_) + (e_.)*(x_)^(n_))*((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(2n_))^(p_), x_Symbol] := Int[ExpandIntegrand[(d + e*x^n)*(a + b*x^n + c*x^(2*n))^p, x], x] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0]`

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

rule 2321

```

Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := W
ith[{q = Expon[Pq, x]}, With[{Pqq = Coeff[Pq, x, q]}, Int[ExpandToSum[Pq -
Pqq*x^q - Pqq*((a*(q - 2*n + 1)*x^(q - 2*n) + b*(q + n*(p - 1) + 1)*x^(q -
n))/(c*(q + 2*n*p + 1))), x]*(a + b*x^n + c*x^(2*n))^p, x] + Simp[Pqq*x^(q
- 2*n + 1)*((a + b*x^n + c*x^(2*n))^(p + 1)/(c*(q + 2*n*p + 1))), x]] /; Ge
Q[q, 2*n] && NeQ[q + 2*n*p + 1, 0] && (IntegerQ[2*p] || (EqQ[n, 1] && Integ
erQ[4*p]) || IntegerQ[p + (q + 1)/(2*n)])] /; FreeQ[{a, b, c, p}, x] && EqQ
[n2, 2*n] && PolyQ[Pq, x^n] && NeQ[b^2 - 4*a*c, 0] && IGtQ[n, 0]

```

Maple [F]

$$\int \frac{C x^6 + B x^3 + A}{\sqrt{c x^6 + b x^3 + a}} dx$$

input

```
int((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(1/2),x)
```

output

```
int((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(1/2),x)
```

Fricas [F]

$$\int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx = \int \frac{Cx^6 + Bx^3 + A}{\sqrt{cx^6 + bx^3 + a}} dx$$

input

```
integrate((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(1/2),x, algorithm="fricas")
```

output

```
integral((C*x^6 + B*x^3 + A)/sqrt(c*x^6 + b*x^3 + a), x)
```

Sympy [F]

$$\int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx = \int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx$$

input `integrate((C*x**6+B*x**3+A)/(c*x**6+b*x**3+a)**(1/2),x)`

output `Integral((A + B*x**3 + C*x**6)/sqrt(a + b*x**3 + c*x**6), x)`

Maxima [F]

$$\int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx = \int \frac{Cx^6 + Bx^3 + A}{\sqrt{cx^6 + bx^3 + a}} dx$$

input `integrate((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(1/2),x, algorithm="maxima")`

output `integrate((C*x^6 + B*x^3 + A)/sqrt(c*x^6 + b*x^3 + a), x)`

Giac [F]

$$\int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx = \int \frac{Cx^6 + Bx^3 + A}{\sqrt{cx^6 + bx^3 + a}} dx$$

input `integrate((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(1/2),x, algorithm="giac")`

output `integrate((C*x^6 + B*x^3 + A)/sqrt(c*x^6 + b*x^3 + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx = \int \frac{Cx^6 + Bx^3 + A}{\sqrt{cx^6 + bx^3 + a}} dx$$

input `int((A + B*x^3 + C*x^6)/(a + b*x^3 + c*x^6)^(1/2),x)`

output `int((A + B*x^3 + C*x^6)/(a + b*x^3 + c*x^6)^(1/2), x)`

Reduce [F]

$$\int \frac{A + Bx^3 + Cx^6}{\sqrt{a + bx^3 + cx^6}} dx = \frac{\sqrt{cx^6 + bx^3 + a} x}{4} + \frac{3 \left(\int \frac{\sqrt{cx^6 + bx^3 + a}}{cx^6 + bx^3 + a} dx \right) a}{4} + \frac{3 \left(\int \frac{\sqrt{cx^6 + bx^3 + a} x^3}{cx^6 + bx^3 + a} dx \right) b}{8}$$

input `int((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(1/2),x)`

output `(2*sqrt(a + b*x**3 + c*x**6)*x + 6*int(sqrt(a + b*x**3 + c*x**6)/(a + b*x**3 + c*x**6),x)*a + 3*int((sqrt(a + b*x**3 + c*x**6)*x**3)/(a + b*x**3 + c*x**6),x)*b)/8`

3.5 $\int \frac{A+Bx^3+Cx^6}{(a+bx^3+cx^6)^{3/2}} dx$

Optimal result	68
Mathematica [A] (warning: unable to verify)	69
Rubi [A] (verified)	69
Maple [F]	71
Fricas [F]	72
Sympy [F(-1)]	72
Maxima [F]	72
Giac [F]	73
Mupad [F(-1)]	73
Reduce [F]	73

Optimal result

Integrand size = 29, antiderivative size = 415

$$\int \frac{A+Bx^3+Cx^6}{(a+bx^3+cx^6)^{3/2}} dx = \frac{2x(Ab^2-abB-2aAc+2a^2C+(Abc-2aBc+abC)x^3)}{3a(b^2-4ac)\sqrt{a+bx^3+cx^6}} + \frac{(A(b^2-8ac)+2a(bB-2aC))x\sqrt{1+\frac{2cx^3}{b-\sqrt{b^2-4ac}}}\sqrt{1+\frac{2cx^3}{b+\sqrt{b^2-4ac}}}\operatorname{AppellF1}\left(\frac{1}{3},\frac{1}{2},\frac{1}{2},\frac{4}{3},-\frac{2cx^3}{b-\sqrt{b^2-4ac}},-\frac{2cx^3}{b+\sqrt{b^2-4ac}}\right)}{3a(b^2-4ac)\sqrt{a+bx^3+cx^6}} - \frac{(Abc-2aBc+abC)x^4\sqrt{1+\frac{2cx^3}{b-\sqrt{b^2-4ac}}}\sqrt{1+\frac{2cx^3}{b+\sqrt{b^2-4ac}}}\operatorname{AppellF1}\left(\frac{4}{3},\frac{1}{2},\frac{1}{2},\frac{7}{3},-\frac{2cx^3}{b-\sqrt{b^2-4ac}},-\frac{2cx^3}{b+\sqrt{b^2-4ac}}\right)}{6a(b^2-4ac)\sqrt{a+bx^3+cx^6}}$$

output

```
2/3*x*(A*b^2-a*b*B-2*a*A*c+2*a^2*C+(A*b*c-2*B*a*c+C*a*b)*x^3)/a/(-4*a*c+b^2)/(c*x^6+b*x^3+a)^(1/2)+1/3*(A*(-8*a*c+b^2)+2*a*(B*b-2*C*a))*x*(1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))^(1/2)*AppellF1(1/3,1/2,1/2,4/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(c*x^6+b*x^3+a)^(1/2)-1/6*(A*b*c-2*B*a*c+C*a*b)*x^4*(1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))^(1/2)*AppellF1(4/3,1/2,1/2,7/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(c*x^6+b*x^3+a)^(1/2)
```

Mathematica [A] (warning: unable to verify)

Time = 11.09 (sec) , antiderivative size = 412, normalized size of antiderivative = 0.99

$$\int \frac{A + Bx^3 + Cx^6}{(a + bx^3 + cx^6)^{3/2}} dx = \frac{x \left(-4(A(b^2 - 2ac + bcx^3) + a(-bB + 2aC - 2Bcx^3 + bCx^3)) - 2(A(b^2 - 8ac) \right)}{(a + bx^3 + cx^6)^{3/2}}$$

input

```
Integrate[(A + B*x^3 + C*x^6)/(a + b*x^3 + c*x^6)^(3/2),x]
```

output

```
(x*(-4*(A*(b^2 - 2*a*c + b*c*x^3) + a*(-(b*B) + 2*a*C - 2*B*c*x^3 + b*C*x^3)) - 2*(A*(b^2 - 8*a*c) + 2*a*(b*B - 2*a*C))*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[1/3, 1/2, 1/2, 4/3, (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])] + (A*b*c - 2*a*B*c + a*b*C)*x^3*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[4/3, 1/2, 1/2, 7/3, (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])]))/(6*a*(-b^2 + 4*a*c)*Sqrt[a + b*x^3 + c*x^6])
```

Rubi [A] (verified)

Time = 0.71 (sec) , antiderivative size = 404, normalized size of antiderivative = 0.97, number of steps used = 4, number of rules used = 4, $\frac{\text{number of rules}}{\text{integrand size}} = 0.138$, Rules used = {2317, 27, 1762, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^3 + Cx^6}{(a + bx^3 + cx^6)^{3/2}} dx$$

↓ 2317

$$\frac{2x(A(b^2 - 2ac) + x^3(abC - 2aBc + Abc) - a(bB - 2aC))}{3a(b^2 - 4ac)\sqrt{a + bx^3 + cx^6}} - \frac{2 \int -\frac{b^2c^2(-2(abc - 2aBc + abC)x^3 + A(b^2 - 8ac) + 2a(bB - 2aC))}{2\sqrt{cx^6 + bx^3 + a}} dx}{3ab^2c^2(b^2 - 4ac)}$$

$$\begin{aligned} & \downarrow 27 \\ & \int \frac{-2(ABC-2aBc+abC)x^3+A(b^2-8ac)+2a(bB-2aC)}{\sqrt{cx^6+bx^3+a}} dx + \\ & \frac{2x(A(b^2-2ac) + x^3(abC - 2aBc + Abc) - a(bB - 2aC))}{3a(b^2-4ac)\sqrt{a+bx^3+cx^6}} \end{aligned}$$

$$\begin{aligned} & \downarrow 1762 \\ & \int \left(\frac{A(b^2-8ac) \left(\frac{2a(bB-2aC)}{A(b^2-8ac)} + 1 \right)}{\sqrt{cx^6+bx^3+a}} - \frac{2(ABC-2aBc+abC)x^3}{\sqrt{cx^6+bx^3+a}} \right) dx + \\ & \frac{2x(A(b^2-2ac) + x^3(abC - 2aBc + Abc) - a(bB - 2aC))}{3a(b^2-4ac)\sqrt{a+bx^3+cx^6}} \end{aligned}$$

$$\begin{aligned} & \downarrow 2009 \\ & \frac{x\sqrt{\frac{2cx^3}{b-\sqrt{b^2-4ac}}+1}\sqrt{\frac{2cx^3}{\sqrt{b^2-4ac}+b}+1}\operatorname{AppellF1}\left(\frac{1}{3}, \frac{1}{2}, \frac{1}{2}, \frac{4}{3}, -\frac{2cx^3}{b-\sqrt{b^2-4ac}}, -\frac{2cx^3}{b+\sqrt{b^2-4ac}}\right)(A(b^2-8ac)+2a(bB-2aC)) - x^4\sqrt{\frac{2cx^3}{b-\sqrt{b^2-4ac}}+1}\sqrt{\frac{2cx^3}{\sqrt{b^2-4ac}+b}+1}}{\sqrt{a+bx^3+cx^6}} - \frac{2x(A(b^2-2ac) + x^3(abC - 2aBc + Abc) - a(bB - 2aC))}{3a(b^2-4ac)\sqrt{a+bx^3+cx^6}} \end{aligned}$$

input `Int[(A + B*x^3 + C*x^6)/(a + b*x^3 + c*x^6)^(3/2),x]`

output `(2*x*(A*(b^2 - 2*a*c) - a*(b*B - 2*a*C) + (A*b*c - 2*a*B*c + a*b*C)*x^3))/(3*a*(b^2 - 4*a*c)*Sqrt[a + b*x^3 + c*x^6]) + (((A*(b^2 - 8*a*c) + 2*a*(b*B - 2*a*C))*x*Sqrt[1 + (2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[1 + (2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[1/3, 1/2, 1/2, 4/3, (-2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])]/Sqrt[a + b*x^3 + c*x^6] - ((A*b*c - 2*a*B*c + a*b*C)*x^4*Sqrt[1 + (2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[1 + (2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[4/3, 1/2, 1/2, 7/3, (-2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]])]/(2*Sqrt[a + b*x^3 + c*x^6]))/(3*a*(b^2 - 4*a*c))`

Definitions of rubi rules used

rule 27 `Int[(a_)*(Fx_), x_Symbol] := Simp[a Int[Fx, x], x] /; FreeQ[a, x] && !MatchQ[Fx, (b_)*(Gx_)] /; FreeQ[b, x]`

rule 1762 `Int[((d_) + (e_)*(x_)^(n_))*((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p_), x_Symbol] := Int[ExpandIntegrand[(d + e*x^n)*(a + b*x^n + c*x^(2*n))^p, x], x] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0]`

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

rule 2317 `Int[(Pq_)*((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p_), x_Symbol] := With[{q = Expon[Pq, x]}, Module[{Q = PolynomialQuotient[(b*c)^(Floor[(q - 1)/n] + 1)*Pq, a + b*x^n + c*x^(2*n), x], R = PolynomialRemainder[(b*c)^(Floor[(q - 1)/n] + 1)*Pq, a + b*x^n + c*x^(2*n), x], i}, Simp[1/(a*n*(p + 1)*(b^2 - 4*a*c)*(b*c)^(Floor[(q - 1)/n] + 1)) Int[(a + b*x^n + c*x^(2*n))^(p + 1)*ExpandToSum[a*n*(p + 1)*(b^2 - 4*a*c)*Q + Sum[((b^2*(n*(p + 1) + i + 1) - 2*a*c*(2*n*(p + 1) + i + 1))*Coeff[R, x, i] - a*b*(i + 1)*Coeff[R, x, n + i])*x^i + c*(n*(2*p + 3) + i + 1)*(b*Coeff[R, x, i] - 2*a*Coeff[R, x, n + i])*x^(n + i), {i, 0, n - 1}], x], x] + Simp[(-x)*((a + b*x^n + c*x^(2*n))^(p + 1)/(a*n*(p + 1)*(b^2 - 4*a*c)*(b*c)^(Floor[(q - 1)/n] + 1)))*Sum[((b^2 - 2*a*c)*Coeff[R, x, i] - a*b*Coeff[R, x, n + i])*x^i + c*(b*Coeff[R, x, i] - 2*a*Coeff[R, x, n + i])*x^(n + i), {i, 0, n - 1}], x]] /; GeQ[q, 2*n]] /; FreeQ[{a, b, c}, x] && EqQ[n2, 2*n] && PolyQ[Pq, x] && NeQ[b^2 - 4*a*c, 0] && IGtQ[n, 0] && LtQ[p, -1]`

Maple [F]

$$\int \frac{C x^6 + B x^3 + A}{(c x^6 + b x^3 + a)^{\frac{3}{2}}} dx$$

input `int((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(3/2),x)`

output `int((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(3/2),x)`

Fricas [F]

$$\int \frac{A + Bx^3 + Cx^6}{(a + bx^3 + cx^6)^{3/2}} dx = \int \frac{Cx^6 + Bx^3 + A}{(cx^6 + bx^3 + a)^{\frac{3}{2}}} dx$$

input `integrate((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(3/2),x, algorithm="fricas")`

output `integral((C*x^6 + B*x^3 + A)*sqrt(c*x^6 + b*x^3 + a)/(c^2*x^12 + 2*b*c*x^9 + (b^2 + 2*a*c)*x^6 + 2*a*b*x^3 + a^2), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{A + Bx^3 + Cx^6}{(a + bx^3 + cx^6)^{3/2}} dx = \text{Timed out}$$

input `integrate((C*x**6+B*x**3+A)/(c*x**6+b*x**3+a)**(3/2),x)`

output `Timed out`

Maxima [F]

$$\int \frac{A + Bx^3 + Cx^6}{(a + bx^3 + cx^6)^{3/2}} dx = \int \frac{Cx^6 + Bx^3 + A}{(cx^6 + bx^3 + a)^{\frac{3}{2}}} dx$$

input `integrate((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(3/2),x, algorithm="maxima")`

output `integrate((C*x^6 + B*x^3 + A)/(c*x^6 + b*x^3 + a)^(3/2), x)`

Giac [F]

$$\int \frac{A + Bx^3 + Cx^6}{(a + bx^3 + cx^6)^{3/2}} dx = \int \frac{Cx^6 + Bx^3 + A}{(cx^6 + bx^3 + a)^{3/2}} dx$$

input `integrate((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(3/2),x, algorithm="giac")`

output `integrate((C*x^6 + B*x^3 + A)/(c*x^6 + b*x^3 + a)^(3/2), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^3 + Cx^6}{(a + bx^3 + cx^6)^{3/2}} dx = \int \frac{Cx^6 + Bx^3 + A}{(cx^6 + bx^3 + a)^{3/2}} dx$$

input `int((A + B*x^3 + C*x^6)/(a + b*x^3 + c*x^6)^(3/2),x)`

output `int((A + B*x^3 + C*x^6)/(a + b*x^3 + c*x^6)^(3/2), x)`

Reduce [F]

$$\int \frac{A + Bx^3 + Cx^6}{(a + bx^3 + cx^6)^{3/2}} dx = \int \frac{\sqrt{cx^6 + bx^3 + a}}{cx^6 + bx^3 + a} dx$$

input `int((C*x^6+B*x^3+A)/(c*x^6+b*x^3+a)^(3/2),x)`

output `int(sqrt(a + b*x**3 + c*x**6)/(a + b*x**3 + c*x**6),x)`

3.6 $\int \frac{1}{a+bx^n+cx^{2n}} dx$

Optimal result	74
Mathematica [B] (verified)	75
Rubi [A] (verified)	75
Maple [F]	77
Fricas [F]	77
Sympy [F]	77
Maxima [F]	78
Giac [F]	78
Mupad [F(-1)]	78
Reduce [F]	79

Optimal result

Integrand size = 16, antiderivative size = 124

$$\int \frac{1}{a + bx^n + cx^{2n}} dx = \frac{2cx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)}{b^2 - 4ac - b\sqrt{b^2 - 4ac}} - \frac{2cx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)}{b^2 - 4ac + b\sqrt{b^2 - 4ac}}$$

output

```
-2*c*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(b^2-4*
a*c-b*(-4*a*c+b^2)^(1/2))-2*c*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b+(-4
*a*c+b^2)^(1/2)))/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)
```

Mathematica [B] (verified)

Leaf count is larger than twice the leaf count of optimal. 261 vs. $2(124) = 248$.

Time = 0.54 (sec) , antiderivative size = 261, normalized size of antiderivative = 2.10

$$\int \frac{1}{a + bx^n + cx^{2n}} dx =$$

$$-2cx \left(\frac{1 - \left(\frac{x^n}{-b + \sqrt{b^2 - 4ac} + x^n} \right)^{-1/n} \text{Hypergeometric2F1} \left(-\frac{1}{n}, -\frac{1}{n}, \frac{-1+n}{n}, \frac{b - \sqrt{b^2 - 4ac}}{b - \sqrt{b^2 - 4ac} + 2cx^n} \right)}{b^2 - 4ac - b\sqrt{b^2 - 4ac}} \right.$$

$$\left. + \frac{1 - 2^{-1/n} \left(\frac{cx^n}{b + \sqrt{b^2 - 4ac} + 2cx^n} \right)^{-1/n} \text{Hypergeometric2F1} \left(-\frac{1}{n}, -\frac{1}{n}, \frac{-1+n}{n}, \frac{b + \sqrt{b^2 - 4ac}}{b + \sqrt{b^2 - 4ac} + 2cx^n} \right)}{\sqrt{b^2 - 4ac} (b + \sqrt{b^2 - 4ac})} \right)$$

input

```
Integrate[(a + b*x^n + c*x^(2*n))^(-1), x]
```

output

```
-2*c*x*((1 - Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(-1))/(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c]) + (1 - Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(2^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(-1)))/(Sqrt[b^2 - 4*a*c]*(b + Sqrt[b^2 - 4*a*c])))
```

Rubi [A] (verified)

Time = 0.24 (sec) , antiderivative size = 133, normalized size of antiderivative = 1.07, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.125$, Rules used = {1685, 778}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{1}{a + bx^n + cx^{2n}} dx$$

$$\begin{array}{c}
\downarrow 1685 \\
\frac{c \int \frac{1}{cx^n + \frac{1}{2}(b - \sqrt{b^2 - 4ac})} dx}{\sqrt{b^2 - 4ac}} - \frac{c \int \frac{1}{cx^n + \frac{1}{2}(b + \sqrt{b^2 - 4ac})} dx}{\sqrt{b^2 - 4ac}} \\
\downarrow 778 \\
\frac{2cx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)}{\sqrt{b^2 - 4ac} (b - \sqrt{b^2 - 4ac})} - \\
\frac{2cx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)}{\sqrt{b^2 - 4ac} (\sqrt{b^2 - 4ac} + b)}
\end{array}$$

input `Int[(a + b*x^n + c*x^(2*n))^(-1),x]`

output `(2*c*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]])/(Sqrt[b^2 - 4*a*c]*(b - Sqrt[b^2 - 4*a*c])) - (2*c*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]])/(Sqrt[b^2 - 4*a*c]*(b + Sqrt[b^2 - 4*a*c]))`

Defintions of rubi rules used

rule 778 `Int[((a_) + (b_.)*(x_)^(n_))^(p_), x_Symbol] := Simp[a^p*x*Hypergeometric2F1[-p, 1/n, 1/n + 1, (-b)*(x^n/a)], x] /; FreeQ[{a, b, n, p}, x] && !IGtQ[p, 0] && !IntegerQ[1/n] && !ILtQ[Simplify[1/n + p], 0] && (IntegerQ[p] || GtQ[a, 0])`

rule 1685 `Int[((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[c/q Int[1/(b/2 - q/2 + c*x^n), x], x] - Simp[c/q Int[1/(b/2 + q/2 + c*x^n), x], x]] /; FreeQ[{a, b, c}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0]`

Maple [F]

$$\int \frac{1}{a + bx^n + cx^{2n}} dx$$

input `int(1/(a+b*x^n+c*x^(2*n)),x)`

output `int(1/(a+b*x^n+c*x^(2*n)),x)`

Fricas [F]

$$\int \frac{1}{a + bx^n + cx^{2n}} dx = \int \frac{1}{cx^{2n} + bx^n + a} dx$$

input `integrate(1/(a+b*x^n+c*x^(2*n)),x, algorithm="fricas")`

output `integral(1/(c*x^(2*n) + b*x^n + a), x)`

Sympy [F]

$$\int \frac{1}{a + bx^n + cx^{2n}} dx = \int \frac{1}{a + bx^n + cx^{2n}} dx$$

input `integrate(1/(a+b*x**n+c*x**(2*n)),x)`

output `Integral(1/(a + b*x**n + c*x**(2*n)), x)`

Maxima [F]

$$\int \frac{1}{a + bx^n + cx^{2n}} dx = \int \frac{1}{cx^{2n} + bx^n + a} dx$$

input `integrate(1/(a+b*x^n+c*x^(2*n)),x, algorithm="maxima")`

output `integrate(1/(c*x^(2*n) + b*x^n + a), x)`

Giac [F]

$$\int \frac{1}{a + bx^n + cx^{2n}} dx = \int \frac{1}{cx^{2n} + bx^n + a} dx$$

input `integrate(1/(a+b*x^n+c*x^(2*n)),x, algorithm="giac")`

output `integrate(1/(c*x^(2*n) + b*x^n + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{1}{a + bx^n + cx^{2n}} dx = \int \frac{1}{a + b x^n + c x^{2n}} dx$$

input `int(1/(a + b*x^n + c*x^(2*n)),x)`

output `int(1/(a + b*x^n + c*x^(2*n)), x)`

Reduce [F]

$$\int \frac{1}{a + bx^n + cx^{2n}} dx = \int \frac{1}{x^{2n}c + x^n b + a} dx$$

input `int(1/(a+b*x^n+c*x^(2*n)),x)`

output `int(1/(x**(2*n)*c + x**n*b + a),x)`

3.7 $\int \frac{d+ex}{a+bx^n+cx^{2n}} dx$

Optimal result	80
Mathematica [A] (verified)	81
Rubi [A] (verified)	82
Maple [F]	83
Fricas [F]	84
Sympy [F]	84
Maxima [F]	84
Giac [F]	85
Mupad [F(-1)]	85
Reduce [F]	85

Optimal result

Integrand size = 22, antiderivative size = 263

$$\int \frac{d+ex}{a+bx^n+cx^{2n}} dx = -\frac{2cdx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{b^2-4ac-b\sqrt{b^2-4ac}} - \frac{2cdx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{b^2-4ac+b\sqrt{b^2-4ac}} - \frac{ce x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{b^2-4ac-b\sqrt{b^2-4ac}} - \frac{ce x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{b^2-4ac+b\sqrt{b^2-4ac}}$$

output

```
-2*c*d*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))-2*c*d*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)-c*e*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))-c*e*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)
```

Mathematica [A] (verified)

Time = 2.11 (sec) , antiderivative size = 525, normalized size of antiderivative = 2.00

$$\int \frac{d + ex}{a + bx^n + cx^{2n}} dx$$

$$= cx \left(-ex \frac{\left(1 - \left(\frac{x^n}{-\frac{b+\sqrt{b^2-4ac}}{2c} + x^n} \right)^{-2/n} \text{Hypergeometric2F1} \left(-\frac{2}{n}, -\frac{2}{n}, \frac{-2+n}{n}, \frac{b-\sqrt{b^2-4ac}}{b-\sqrt{b^2-4ac}+2cx^n} \right) \right)}{b^2 - 4ac - b\sqrt{b^2 - 4ac}} \right.$$

$$\left. + \frac{1 - 4^{-1/n} \left(\frac{cx^n}{b+\sqrt{b^2-4ac}+2cx^n} \right)^{-2/n} \text{Hypergeometric2F1} \left(-\frac{2}{n}, -\frac{2}{n}, \frac{-2+n}{n}, \frac{b+\sqrt{b^2-4ac}}{b+\sqrt{b^2-4ac}+2cx^n} \right)}{\sqrt{b^2 - 4ac} (b + \sqrt{b^2 - 4ac})} \right) - 2d \left(\frac{1 - \left(\frac{x^n}{-\frac{b+\sqrt{b^2-4ac}}{2c} + x^n} \right)^{-2/n} \text{Hypergeometric2F1} \left(-\frac{2}{n}, -\frac{2}{n}, \frac{-2+n}{n}, \frac{b-\sqrt{b^2-4ac}}{b-\sqrt{b^2-4ac}+2cx^n} \right)}{b^2 - 4ac - b\sqrt{b^2 - 4ac}} \right)$$

input `Integrate[(d + e*x)/(a + b*x^n + c*x^(2*n)),x]`

output

```
c*x*(-(e*x*((1 - Hypergeometric2F1[-2/n, -2/n, (-2 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(2/n))/(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c]) + (1 - Hypergeometric2F1[-2/n, -2/n, (-2 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(4^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(2/n)))/(Sqrt[b^2 - 4*a*c]*(b + Sqrt[b^2 - 4*a*c]))) - 2*d*((1 - Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(n^(-1)))/(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c]) + (1 - Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(2^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(n^(-1)))/(Sqrt[b^2 - 4*a*c]*(b + Sqrt[b^2 - 4*a*c])))
```

Rubi [A] (verified)

Time = 0.52 (sec) , antiderivative size = 263, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.136$, Rules used = {2325, 2432, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{d + ex}{a + bx^n + cx^{2n}} dx \\
 & \quad \downarrow \text{2325} \\
 & \frac{2c \int \frac{d+ex}{2cx^n+b-\sqrt{b^2-4ac}} dx}{\sqrt{b^2-4ac}} - \frac{2c \int \frac{d+ex}{2cx^n+b+\sqrt{b^2-4ac}} dx}{\sqrt{b^2-4ac}} \\
 & \quad \downarrow \text{2432} \\
 & \frac{2c \int \left(-\frac{d}{-2cx^n-b+\sqrt{b^2-4ac}} - \frac{ex}{-2cx^n-b+\sqrt{b^2-4ac}} \right) dx}{\sqrt{b^2-4ac}} - \\
 & \quad \frac{2c \int \left(\frac{d}{2cx^n+b+\sqrt{b^2-4ac}} + \frac{ex}{2cx^n+b+\sqrt{b^2-4ac}} \right) dx}{\sqrt{b^2-4ac}} \\
 & \quad \downarrow \text{2009} \\
 & \frac{2c \left(\frac{dx \operatorname{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}} \right)}{b-\sqrt{b^2-4ac}} + \frac{ex^2 \operatorname{Hypergeometric2F1} \left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}} \right)}{2(b-\sqrt{b^2-4ac})} \right)}{\sqrt{b^2-4ac}} \\
 & \frac{2c \left(\frac{dx \operatorname{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}} \right)}{\sqrt{b^2-4ac}+b} + \frac{ex^2 \operatorname{Hypergeometric2F1} \left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}} \right)}{2(\sqrt{b^2-4ac}+b)} \right)}{\sqrt{b^2-4ac}}
 \end{aligned}$$

input

```
Int[(d + e*x)/(a + b*x^n + c*x^(2*n)), x]
```

output

```
(2*c*((d*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(b - Sqrt[b^2 - 4*a*c]) + (e*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(2*(b - Sqrt[b^2 - 4*a*c])))/Sqrt[b^2 - 4*a*c] - (2*c*((d*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(b + Sqrt[b^2 - 4*a*c]) + (e*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(2*(b + Sqrt[b^2 - 4*a*c])))/Sqrt[b^2 - 4*a*c])
```

Defintions of rubi rules used

rule 2009

```
Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]
```

rule 2325

```
Int[(Pq_)/((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.)), x_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[2*(c/q) Int[Pq/(b - q + 2*c*x^n), x], x] - Simp[2*(c/q) Int[Pq/(b + q + 2*c*x^n), x], x]] /; FreeQ[{a, b, c, n}, x] && EqQ[n2, 2*n] && PolyQ[Pq, x] && NeQ[b^2 - 4*a*c, 0]
```

rule 2432

```
Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.))^(p_.), x_Symbol] := Int[ExpandIntegrand[Pq*(a + b*x^n)^p, x], x] /; FreeQ[{a, b, n, p}, x] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])
```

Maple [F]

$$\int \frac{ex + d}{a + bx^n + cx^{2n}} dx$$

input

```
int((e*x+d)/(a+b*x^n+c*x^(2*n)),x)
```

output

```
int((e*x+d)/(a+b*x^n+c*x^(2*n)),x)
```

Fricas [F]

$$\int \frac{d + ex}{a + bx^n + cx^{2n}} dx = \int \frac{ex + d}{cx^{2n} + bx^n + a} dx$$

input `integrate((e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="fricas")`

output `integral((e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Sympy [F]

$$\int \frac{d + ex}{a + bx^n + cx^{2n}} dx = \int \frac{d + ex}{a + bx^n + cx^{2n}} dx$$

input `integrate((e*x+d)/(a+b*x**n+c*x**(2*n)),x)`

output `Integral((d + e*x)/(a + b*x**n + c*x**(2*n)), x)`

Maxima [F]

$$\int \frac{d + ex}{a + bx^n + cx^{2n}} dx = \int \frac{ex + d}{cx^{2n} + bx^n + a} dx$$

input `integrate((e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="maxima")`

output `integrate((e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Giac [F]

$$\int \frac{d + ex}{a + bx^n + cx^{2n}} dx = \int \frac{ex + d}{cx^{2n} + bx^n + a} dx$$

input `integrate((e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="giac")`

output `integrate((e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{d + ex}{a + bx^n + cx^{2n}} dx = \int \frac{d + ex}{a + bx^n + cx^{2n}} dx$$

input `int((d + e*x)/(a + b*x^n + c*x^(2*n)),x)`

output `int((d + e*x)/(a + b*x^n + c*x^(2*n)), x)`

Reduce [F]

$$\int \frac{d + ex}{a + bx^n + cx^{2n}} dx = \left(\int \frac{x}{x^{2n}c + x^n b + a} dx \right) e + \left(\int \frac{1}{x^{2n}c + x^n b + a} dx \right) d$$

input `int((e*x+d)/(a+b*x^n+c*x^(2*n)),x)`

output `int(x/(x**(2*n)*c + x**n*b + a),x)*e + int(1/(x**(2*n)*c + x**n*b + a),x)*d`

3.8 $\int \frac{d+ex+fx^2}{a+bx^n+cx^{2n}} dx$

Optimal result	86
Mathematica [B] (warning: unable to verify)	87
Rubi [A] (verified)	88
Maple [F]	90
Fricas [F]	90
Sympy [F]	91
Maxima [F]	91
Giac [F]	91
Mupad [F(-1)]	92
Reduce [F]	92

Optimal result

Integrand size = 27, antiderivative size = 404

$$\int \frac{d+ex+fx^2}{a+bx^n+cx^{2n}} dx = -\frac{2cdx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{b^2-4ac-b\sqrt{b^2-4ac}} - \frac{2cdx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{b^2-4ac+b\sqrt{b^2-4ac}} - \frac{ce x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{b^2-4ac-b\sqrt{b^2-4ac}} - \frac{ce x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{b^2-4ac+b\sqrt{b^2-4ac}} - \frac{2cf x^3 \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{3+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{3(b^2-4ac-b\sqrt{b^2-4ac})} - \frac{2cf x^3 \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{3+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{3(b^2-4ac+b\sqrt{b^2-4ac})}$$

output

```
-2*c*d*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))-2*c*d*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)-c*e*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))-c*e*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)-2*c*f*x^3*hypergeom([1, 3/n], [(3+n)/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(3*b^2-12*a*c-3*b*(-4*a*c+b^2)^(1/2))-2*c*f*x^3*hypergeom([1, 3/n], [(3+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(3*b^2-12*a*c+3*b*(-4*a*c+b^2)^(1/2))
```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 834 vs. $2(404) = 808$.

Time = 1.57 (sec) , antiderivative size = 834, normalized size of antiderivative = 2.06

$$\int \frac{d + ex + fx^2}{a + bx^n + cx^{2n}} dx$$

$$= \frac{x \left(2fx^2 \left((-b^2 + 4ac - b\sqrt{b^2 - 4ac}) \left(1 - \left(\frac{x^n}{-\frac{-b + \sqrt{b^2 - 4ac}}{2c} + x^n} \right)^{-3/n} \right) \right) \right)}{\text{Hypergeometric2F1} \left(-\frac{3}{n}, -\frac{3}{n}, \frac{-3+n}{n}, \dots \right)}$$

input

```
Integrate[(d + e*x + f*x^2)/(a + b*x^n + c*x^(2*n)),x]
```


output

```
(x*(2*f*x^2*((-b^2 + 4*a*c - b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-3/n, -3/n, (-3 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(3/n)) + (-b^2 + 4*a*c + b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-3/n, -3/n, (-3 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(8^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(3/n)))) + 3*e*x*((-b^2 + 4*a*c - b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-2/n, -2/n, (-2 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(2/n)) + (-b^2 + 4*a*c + b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-2/n, -2/n, (-2 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(4^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(2/n)))) + 6*d*((-b^2 + 4*a*c - b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(n^(-1))) - (Sqrt[b^2 - 4*a*c]*(-b + Sqrt[b^2 - 4*a*c]))*(2^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(n^(-1)) - Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)])))/(2^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(n^(-1))))/(12*a*(-b^2 + 4*a*c))
```

Rubi [A] (verified)

Time = 0.59 (sec) , antiderivative size = 387, normalized size of antiderivative = 0.96, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.111$, Rules used = {2325, 2432, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{d + ex + fx^2}{a + bx^n + cx^{2n}} dx$$

$$\downarrow 2325$$

$$\frac{2c \int \frac{fx^2 + ex + d}{2cx^n + b - \sqrt{b^2 - 4ac}} dx}{\sqrt{b^2 - 4ac}} - \frac{2c \int \frac{fx^2 + ex + d}{2cx^n + b + \sqrt{b^2 - 4ac}} dx}{\sqrt{b^2 - 4ac}}$$

$$\downarrow 2432$$

$$\frac{2c \int \left(-\frac{fx^2}{-2cx^n - b + \sqrt{b^2 - 4ac}} - \frac{ex}{-2cx^n - b + \sqrt{b^2 - 4ac}} - \frac{d}{-2cx^n - b + \sqrt{b^2 - 4ac}} \right) dx}{\sqrt{b^2 - 4ac}}$$

$$\frac{2c \int \left(\frac{fx^2}{2cx^n + b + \sqrt{b^2 - 4ac}} + \frac{ex}{2cx^n + b + \sqrt{b^2 - 4ac}} + \frac{d}{2cx^n + b + \sqrt{b^2 - 4ac}} \right) dx}{\sqrt{b^2 - 4ac}}$$

↓ 2009

$$\frac{2c \left(\frac{dx \operatorname{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right)}{b - \sqrt{b^2 - 4ac}} + \frac{ex^2 \operatorname{Hypergeometric2F1} \left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right)}{2(b - \sqrt{b^2 - 4ac})} + \frac{fx^3 \operatorname{Hypergeometric2F1} \left(1, \frac{3}{n}, \frac{n+3}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right)}{3(b - \sqrt{b^2 - 4ac})} \right)}{\sqrt{b^2 - 4ac}}$$

$$\frac{2c \left(\frac{dx \operatorname{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}} \right)}{\sqrt{b^2 - 4ac} + b} + \frac{ex^2 \operatorname{Hypergeometric2F1} \left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}} \right)}{2(\sqrt{b^2 - 4ac} + b)} + \frac{fx^3 \operatorname{Hypergeometric2F1} \left(1, \frac{3}{n}, \frac{n+3}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}} \right)}{3(\sqrt{b^2 - 4ac} + b)} \right)}{\sqrt{b^2 - 4ac}}$$

input

```
Int[(d + e*x + f*x^2)/(a + b*x^n + c*x^(2*n)),x]
```

output

```
(2*c*((d*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(b - Sqrt[b^2 - 4*a*c]) + (e*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(2*(b - Sqrt[b^2 - 4*a*c])) + (f*x^3*Hypergeometric2F1[1, 3/n, (3 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(3*(b - Sqrt[b^2 - 4*a*c]))))/Sqrt[b^2 - 4*a*c] - (2*c*((d*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(b + Sqrt[b^2 - 4*a*c]) + (e*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(2*(b + Sqrt[b^2 - 4*a*c])) + (f*x^3*Hypergeometric2F1[1, 3/n, (3 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(3*(b + Sqrt[b^2 - 4*a*c]))))/Sqrt[b^2 - 4*a*c])
```

Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

rule 2325 `Int[(Pq_)/((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.)), x_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[2*(c/q) Int[Pq/(b - q + 2*c*x^n), x], x] - Simp[2*(c/q) Int[Pq/(b + q + 2*c*x^n), x], x]] /; FreeQ[{a, b, c, n}, x] && EqQ[n2, 2*n] && PolyQ[Pq, x] && NeQ[b^2 - 4*a*c, 0]`

rule 2432 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.))^(p_.), x_Symbol] := Int[ExpandIntegrand[Pq*(a + b*x^n)^p, x], x] /; FreeQ[{a, b, n, p}, x] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int \frac{f x^2 + e x + d}{a + b x^n + c x^{2n}} dx$$

input `int((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x)`

output `int((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x)`

Fricas [F]

$$\int \frac{d + e x + f x^2}{a + b x^n + c x^{2n}} dx = \int \frac{f x^2 + e x + d}{c x^{2n} + b x^n + a} dx$$

input `integrate((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="fricas")`

output `integral((f*x^2 + e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Sympy [F]

$$\int \frac{d + ex + fx^2}{a + bx^n + cx^{2n}} dx = \int \frac{d + ex + fx^2}{a + bx^n + cx^{2n}} dx$$

input `integrate((f*x**2+e*x+d)/(a+b*x**n+c*x**(2*n)),x)`

output `Integral((d + e*x + f*x**2)/(a + b*x**n + c*x**(2*n)), x)`

Maxima [F]

$$\int \frac{d + ex + fx^2}{a + bx^n + cx^{2n}} dx = \int \frac{fx^2 + ex + d}{cx^{2n} + bx^n + a} dx$$

input `integrate((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="maxima")`

output `integrate((f*x^2 + e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Giac [F]

$$\int \frac{d + ex + fx^2}{a + bx^n + cx^{2n}} dx = \int \frac{fx^2 + ex + d}{cx^{2n} + bx^n + a} dx$$

input `integrate((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="giac")`

output `integrate((f*x^2 + e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2}{a + bx^n + cx^{2n}} dx = \int \frac{fx^2 + ex + d}{a + bx^n + cx^{2n}} dx$$

input `int((d + e*x + f*x^2)/(a + b*x^n + c*x^(2*n)),x)`

output `int((d + e*x + f*x^2)/(a + b*x^n + c*x^(2*n)), x)`

Reduce [F]

$$\int \frac{d + ex + fx^2}{a + bx^n + cx^{2n}} dx = \left(\int \frac{x^2}{x^{2n}c + x^n b + a} dx \right) f + \left(\int \frac{x}{x^{2n}c + x^n b + a} dx \right) e + \left(\int \frac{1}{x^{2n}c + x^n b + a} dx \right) d$$

input `int((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x)`

output `int(x**2/(x**(2*n)*c + x**n*b + a),x)*f + int(x/(x**(2*n)*c + x**n*b + a),x)*e + int(1/(x**(2*n)*c + x**n*b + a),x)*d`

3.9 $\int \frac{d+ex+fx^2+gx^3}{a+bx^n+cx^{2n}} dx$

Optimal result	93
Mathematica [B] (warning: unable to verify)	94
Rubi [A] (verified)	95
Maple [F]	97
Fricas [F]	97
Sympy [F(-1)]	98
Maxima [F]	98
Giac [F]	98
Mupad [F(-1)]	99
Reduce [F]	99

Optimal result

Integrand size = 32, antiderivative size = 545

$$\int \frac{d+ex+fx^2+gx^3}{a+bx^n+cx^{2n}} dx = -\frac{2cdx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{b^2-4ac-b\sqrt{b^2-4ac}} - \frac{2cdx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{b^2-4ac+b\sqrt{b^2-4ac}} - \frac{ce x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{b^2-4ac-b\sqrt{b^2-4ac}} - \frac{ce x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{b^2-4ac+b\sqrt{b^2-4ac}} - \frac{2cf x^3 \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{3+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{3(b^2-4ac-b\sqrt{b^2-4ac})} - \frac{2cf x^3 \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{3+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{3(b^2-4ac+b\sqrt{b^2-4ac})} - \frac{cg x^4 \operatorname{Hypergeometric2F1}\left(1, \frac{4}{n}, \frac{4+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{2(b^2-4ac-b\sqrt{b^2-4ac})} - \frac{cg x^4 \operatorname{Hypergeometric2F1}\left(1, \frac{4}{n}, \frac{4+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{2(b^2-4ac+b\sqrt{b^2-4ac})}$$

output

```

-2*c*d*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(b^2-
4*a*c-b*(-4*a*c+b^2)^(1/2))-2*c*d*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b
+(-4*a*c+b^2)^(1/2)))/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)-c*e*x^2*hypergeom([
1, 2/n], [(2+n)/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(b^2-4*a*c-b*(-4*a*c+b^
2)^(1/2))-c*e*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1
/2)))/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)-2*c*f*x^3*hypergeom([1, 3/n], [(3+n)
/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(3*b^2-12*a*c-3*b*(-4*a*c+b^2)^(1/2))
-2*c*f*x^3*hypergeom([1, 3/n], [(3+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(
3*b^2-12*a*c+3*b*(-4*a*c+b^2)^(1/2))-c*g*x^4*hypergeom([1, 4/n], [(4+n)/n],
-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/(2*b^2-8*a*c-2*b*(-4*a*c+b^2)^(1/2))-c*g*
x^4*hypergeom([1, 4/n], [(4+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(2*b^2-8
*a*c+2*b*(-4*a*c+b^2)^(1/2))

```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 1093 vs. $2(545) = 1090$.

Time = 2.32 (sec) , antiderivative size = 1093, normalized size of antiderivative = 2.01

$$\int \frac{d + ex + fx^2 + gx^3}{a + bx^n + cx^{2n}} dx = \text{Too large to display}$$

input

```
Integrate[(d + e*x + f*x^2 + g*x^3)/(a + b*x^n + c*x^(2*n)), x]
```

output

```
(x*(3*g*x^3*((-b^2 + 4*a*c - b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-4/n, -4/n, (-4 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(4/n)) + (-b^2 + 4*a*c + b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-4/n, -4/n, (-4 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(2^(4/n)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(4/n)))) + 4*f*x^2*((-b^2 + 4*a*c - b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-3/n, -3/n, (-3 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(3/n)) + (-b^2 + 4*a*c + b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-3/n, -3/n, (-3 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(8^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(3/n)))) + 6*e*x*((-b^2 + 4*a*c - b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-2/n, -2/n, (-2 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(2/n)) + (-b^2 + 4*a*c + b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-2/n, -2/n, (-2 + n)/n, (b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(4^n^(-1)*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n))^(2/n)))) + 12*d*((-b^2 + 4*a*c - b*Sqrt[b^2 - 4*a*c]))*(1 - Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, (b - Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(n^(-1))) - (Sqrt[b^2 - 4*a*c]*(...
```

Rubi [A] (verified)

Time = 0.72 (sec) , antiderivative size = 511, normalized size of antiderivative = 0.94, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.094$, Rules used = {2325, 2432, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{d + ex + fx^2 + gx^3}{a + bx^n + cx^{2n}} dx$$

$$\downarrow \text{2325}$$

$$\frac{2c \int \frac{gx^3 + fx^2 + ex + d}{2cx^n + b - \sqrt{b^2 - 4ac}} dx}{\sqrt{b^2 - 4ac}} - \frac{2c \int \frac{gx^3 + fx^2 + ex + d}{2cx^n + b + \sqrt{b^2 - 4ac}} dx}{\sqrt{b^2 - 4ac}}$$

$$\downarrow \text{2432}$$

$$\begin{aligned}
& \frac{2c \int \left(-\frac{gx^3}{-2cx^n - b + \sqrt{b^2 - 4ac}} - \frac{fx^2}{-2cx^n - b + \sqrt{b^2 - 4ac}} - \frac{ex}{-2cx^n - b + \sqrt{b^2 - 4ac}} - \frac{d}{-2cx^n - b + \sqrt{b^2 - 4ac}} \right) dx}{\sqrt{b^2 - 4ac}} \\
& \frac{2c \int \left(\frac{gx^3}{2cx^n + b + \sqrt{b^2 - 4ac}} + \frac{fx^2}{2cx^n + b + \sqrt{b^2 - 4ac}} + \frac{ex}{2cx^n + b + \sqrt{b^2 - 4ac}} + \frac{d}{2cx^n + b + \sqrt{b^2 - 4ac}} \right) dx}{\sqrt{b^2 - 4ac}} \\
& \quad \downarrow \text{2009} \\
& \frac{2c \left(\frac{dx \operatorname{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right)}{b - \sqrt{b^2 - 4ac}} + \frac{ex^2 \operatorname{Hypergeometric2F1} \left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right)}{2(b - \sqrt{b^2 - 4ac})} + \frac{fx^3 \operatorname{Hypergeometric2F1} \left(1, \frac{3}{n}, \frac{n+3}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right)}{3(b - \sqrt{b^2 - 4ac})} \right)}{\sqrt{b^2 - 4ac}} \\
& \frac{2c \left(\frac{dx \operatorname{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}} \right)}{\sqrt{b^2 - 4ac} + b} + \frac{ex^2 \operatorname{Hypergeometric2F1} \left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}} \right)}{2(\sqrt{b^2 - 4ac} + b)} + \frac{fx^3 \operatorname{Hypergeometric2F1} \left(1, \frac{3}{n}, \frac{n+3}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}} \right)}{3(\sqrt{b^2 - 4ac} + b)} \right)}{\sqrt{b^2 - 4ac}}
\end{aligned}$$

input

```
Int[(d + e*x + f*x^2 + g*x^3)/(a + b*x^n + c*x^(2*n)),x]
```

output

```
(2*c*((d*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(b - Sqrt[b^2 - 4*a*c]) + (e*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(2*(b - Sqrt[b^2 - 4*a*c])) + (f*x^3*Hypergeometric2F1[1, 3/n, (3 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(3*(b - Sqrt[b^2 - 4*a*c])) + (g*x^4*Hypergeometric2F1[1, 4/n, (4 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(4*(b - Sqrt[b^2 - 4*a*c])))/Sqrt[b^2 - 4*a*c] - (2*c*((d*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(b + Sqrt[b^2 - 4*a*c]) + (e*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(2*(b + Sqrt[b^2 - 4*a*c])) + (f*x^3*Hypergeometric2F1[1, 3/n, (3 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(3*(b + Sqrt[b^2 - 4*a*c])) + (g*x^4*Hypergeometric2F1[1, 4/n, (4 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(4*(b + Sqrt[b^2 - 4*a*c])))/Sqrt[b^2 - 4*a*c])
```

Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

rule 2325 `Int[(Pq_)/((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.)), x_Symbol] := With[
{q = Rt[b^2 - 4*a*c, 2]}, Simp[2*(c/q) Int[Pq/(b - q + 2*c*x^n), x], x] -
Simp[2*(c/q) Int[Pq/(b + q + 2*c*x^n), x], x]] /; FreeQ[{a, b, c, n}, x]
&& EqQ[n2, 2*n] && PolyQ[Pq, x] && NeQ[b^2 - 4*a*c, 0]`

rule 2432 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.))^(p_.), x_Symbol] := Int[ExpandIntegrand[
Pq*(a + b*x^n)^p, x], x] /; FreeQ[{a, b, n, p}, x] && (PolyQ[Pq, x] || Poly
Q[Pq, x^n])`

Maple [F]

$$\int \frac{g x^3 + f x^2 + e x + d}{a + b x^n + c x^{2n}} dx$$

input `int((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x)`

output `int((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x)`

Fricas [F]

$$\int \frac{d + e x + f x^2 + g x^3}{a + b x^n + c x^{2n}} dx = \int \frac{g x^3 + f x^2 + e x + d}{c x^{2n} + b x^n + a} dx$$

input `integrate((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="fricas")`

output `integral((g*x^3 + f*x^2 + e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2 + gx^3}{a + bx^n + cx^{2n}} dx = \text{Timed out}$$

input `integrate((g*x**3+f*x**2+e*x+d)/(a+b*x**n+c*x**(2*n)),x)`

output `Timed out`

Maxima [F]

$$\int \frac{d + ex + fx^2 + gx^3}{a + bx^n + cx^{2n}} dx = \int \frac{gx^3 + fx^2 + ex + d}{cx^{2n} + bx^n + a} dx$$

input `integrate((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="maxima")`

output `integrate((g*x^3 + f*x^2 + e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Giac [F]

$$\int \frac{d + ex + fx^2 + gx^3}{a + bx^n + cx^{2n}} dx = \int \frac{gx^3 + fx^2 + ex + d}{cx^{2n} + bx^n + a} dx$$

input `integrate((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x, algorithm="giac")`

output `integrate((g*x^3 + f*x^2 + e*x + d)/(c*x^(2*n) + b*x^n + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2 + gx^3}{a + bx^n + cx^{2n}} dx = \int \frac{gx^3 + fx^2 + ex + d}{a + bx^n + cx^{2n}} dx$$

input `int((d + e*x + f*x^2 + g*x^3)/(a + b*x^n + c*x^(2*n)),x)`

output `int((d + e*x + f*x^2 + g*x^3)/(a + b*x^n + c*x^(2*n)), x)`

Reduce [F]

$$\int \frac{d + ex + fx^2 + gx^3}{a + bx^n + cx^{2n}} dx = \left(\int \frac{x^3}{x^{2n}c + x^nb + a} dx \right) g + \left(\int \frac{x^2}{x^{2n}c + x^nb + a} dx \right) f$$

$$+ \left(\int \frac{x}{x^{2n}c + x^nb + a} dx \right) e + \left(\int \frac{1}{x^{2n}c + x^nb + a} dx \right) d$$

input `int((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n)),x)`

output `int(x**3/(x**(2*n)*c + x**n*b + a),x)*g + int(x**2/(x**(2*n)*c + x**n*b + a),x)*f + int(x/(x**(2*n)*c + x**n*b + a),x)*e + int(1/(x**(2*n)*c + x**n*b + a),x)*d`

3.10 $\int \frac{1}{(a+bx^n+cx^{2n})^2} dx$

Optimal result	100
Mathematica [A] (warning: unable to verify)	101
Rubi [A] (verified)	101
Maple [F]	103
Fricas [F]	104
Sympy [F(-1)]	104
Maxima [F]	104
Giac [F]	105
Mupad [F(-1)]	105
Reduce [F]	105

Optimal result

Integrand size = 16, antiderivative size = 283

$$\int \frac{1}{(a+bx^n+cx^{2n})^2} dx = \frac{x(b^2-2ac+bcx^n)}{a(b^2-4ac)n(a+bx^n+cx^{2n})}$$

$$\frac{c(4ac(1-2n)-b^2(1-n)-b\sqrt{b^2-4ac}(1-n)) x \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{a(b^2-4ac)(b^2-4ac-b\sqrt{b^2-4ac})n}$$

$$\frac{c(4ac(1-2n)-b^2(1-n)+b\sqrt{b^2-4ac}(1-n)) x \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{a(b^2-4ac)(b^2-4ac+b\sqrt{b^2-4ac})n}$$

output

```
x*(b^2-2*a*c+b*c*x^n)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))-c*(4*a*c*(1-2*n)
)-b^2*(1-n)-b*(-4*a*c+b^2)^(1/2)*(1-n))*x*hypergeom([1, 1/n], [1+1/n], -2*c*
x^n/(b-(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2)
)/n-c*(4*a*c*(1-2*n)-b^2*(1-n)+b*(-4*a*c+b^2)^(1/2)*(1-n))*x*hypergeom([1,
1/n], [1+1/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b*(-4*a*c+b
^2)^(1/2)-4*a*c+b^2)/n
```

Mathematica [A] (warning: unable to verify)

Time = 4.81 (sec) , antiderivative size = 456, normalized size of antiderivative = 1.61

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx =$$

$$x \left(\frac{4a^2cn - b^2(-1+n)x^n(b+cx^n) + a(-b^2n + bc(-3+4n)x^n + 2c^2(-1+2n)x^{2n})}{a+x^n(b+cx^n)} + \frac{2^{-1/n}ac(4ac\sqrt{b^2-4ac}(1-2n) + b^3(-1+n) - 4abc(-1+n))}{a+x^n(b+cx^n)} \right)$$

input `Integrate[(a + b*x^n + c*x^(2*n))^(-2), x]`

output

```

-((x*((4*a^2*c*n - b^2*(-1 + n))*x^n*(b + c*x^n) + a*(-(b^2*n) + b*c*(-3 +
4*n))*x^n + 2*c^2*(-1 + 2*n))*x^(2*n)))/(a + x^n*(b + c*x^n)) + (a*c*(4*a*c*
Sqrt[b^2 - 4*a*c]*(1 - 2*n) + b^3*(-1 + n) - 4*a*b*c*(-1 + n) + b^2*Sqrt[b
^2 - 4*a*c]*(-1 + n))*Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, (b -
Sqrt[b^2 - 4*a*c])/(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(2^n^(-1)*Sqrt[b^2
- 4*a*c]*(-b^2 + 4*a*c + b*Sqrt[b^2 - 4*a*c])*((c*x^n)/(b - Sqrt[b^2 - 4*
a*c] + 2*c*x^n))^n^(-1)) + (a*c*(-(b^2*(-1 + n)) + b*Sqrt[b^2 - 4*a*c]*(-1
+ n) + 4*a*c*(-1 + 2*n))*Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n,
(b + Sqrt[b^2 - 4*a*c])/(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)]/(2^n^(-1)*Sqrt
[b^2 - 4*a*c]*(b + Sqrt[b^2 - 4*a*c])*((c*x^n)/(b + Sqrt[b^2 - 4*a*c] + 2*
c*x^n))^n^(-1)))/(a^2*(b^2 - 4*a*c)*n)

```

Rubi [A] (verified)Time = 0.58 (sec) , antiderivative size = 277, normalized size of antiderivative = 0.98, number of steps used = 4, number of rules used = 4, $\frac{\text{number of rules}}{\text{integrand size}} = 0.250$, Rules used = {1683, 25, 1752, 778}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx$$

↓ 1683

$$\frac{x(-2ac + b^2 + bcx^n)}{an(b^2 - 4ac)(a + bx^n + cx^{2n})} - \frac{\int -\frac{bc(1-n)x^n + 2ac(1-2n) - b^2(1-n)}{bx^n + cx^{2n} + a} dx}{an(b^2 - 4ac)}$$

↓ 25

$$\frac{\int -\frac{bc(1-n)x^n + 2ac(1-2n) - b^2(1-n)}{bx^n + cx^{2n} + a} dx}{an(b^2 - 4ac)} + \frac{x(-2ac + b^2 + bcx^n)}{an(b^2 - 4ac)(a + bx^n + cx^{2n})}$$

↓ 1752

$$\frac{c(-b(1-n)\sqrt{b^2-4ac} + 4ac(1-2n) - (b^2(1-n))) \int \frac{1}{cx^n + \frac{1}{2}(b - \sqrt{b^2-4ac})} dx}{2\sqrt{b^2-4ac}} - \frac{c(b(1-n)\sqrt{b^2-4ac} + 4ac(1-2n) - (b^2(1-n))) \int \frac{1}{cx^n + \frac{1}{2}(b + \sqrt{b^2-4ac})} dx}{2\sqrt{b^2-4ac}}$$

$$\frac{an(b^2 - 4ac)}{an(b^2 - 4ac)(a + bx^n + cx^{2n})} \frac{x(-2ac + b^2 + bcx^n)}{an(b^2 - 4ac)(a + bx^n + cx^{2n})}$$

↓ 778

$$\frac{cx(-b(1-n)\sqrt{b^2-4ac} + 4ac(1-2n) - (b^2(1-n))) \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2-4ac}}\right)}{\sqrt{b^2-4ac}(b - \sqrt{b^2-4ac})} - \frac{cx(b(1-n)\sqrt{b^2-4ac} + 4ac(1-2n) - (b^2(1-n))) \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b + \sqrt{b^2-4ac}}\right)}{\sqrt{b^2-4ac}(b + \sqrt{b^2-4ac})}$$

$$\frac{x(-2ac + b^2 + bcx^n)}{an(b^2 - 4ac)(a + bx^n + cx^{2n})} \frac{1}{an(b^2 - 4ac)}$$

input `Int[(a + b*x^n + c*x^(2*n))^(-2), x]`

output `(x*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))) + ((c*(4*a*c*(1 - 2*n) - b^2*(1 - n) - b*Sqrt[b^2 - 4*a*c]*(1 - n))*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(Sqrt[b^2 - 4*a*c]*(b - Sqrt[b^2 - 4*a*c])) - (c*(4*a*c*(1 - 2*n) - b^2*(1 - n) + b*Sqrt[b^2 - 4*a*c]*(1 - n))*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(Sqrt[b^2 - 4*a*c]*(b + Sqrt[b^2 - 4*a*c])))/(a*(b^2 - 4*a*c)*n)`

Definitions of rubi rules used

rule 25 `Int[-(Fx_), x_Symbol] := Simp[Identity[-1] Int[Fx, x], x]`

rule 778 `Int[((a_) + (b_)*(x_)^(n_))^(p_), x_Symbol] := Simp[a^p*x*Hypergeometric2F1[-p, 1/n, 1/n + 1, (-b)*(x^n/a)], x] /; FreeQ[{a, b, n, p}, x] && !IGtQ[p, 0] && !IntegerQ[1/n] && !ILtQ[Simplify[1/n + p], 0] && (IntegerQ[p] || GtQ[a, 0])`

rule 1683 `Int[((a_) + (c_)*(x_)^(n2_) + (b_)*(x_)^(n_))^(p_), x_Symbol] := Simp[(-x)*(b^2 - 2*a*c + b*c*x^n)*((a + b*x^n + c*x^(2*n))^(p + 1)/(a*n*(p + 1)*(b^2 - 4*a*c)), x] + Simp[1/(a*n*(p + 1)*(b^2 - 4*a*c)) Int[(b^2 - 2*a*c + n*(p + 1)*(b^2 - 4*a*c) + b*c*(n*(2*p + 3) + 1)*x^n*(a + b*x^n + c*x^(2*n)))^(p + 1), x], x] /; FreeQ[{a, b, c, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0] && ILtQ[p, -1]`

rule 1752 `Int[((d_) + (e_)*(x_)^(n_))/((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_)), x_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[(e/2 + (2*c*d - b*e)/(2*q)) Int[1/(b/2 - q/2 + c*x^n), x], x] + Simp[(e/2 - (2*c*d - b*e)/(2*q)) Int[1/(b/2 + q/2 + c*x^n), x], x]] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0] && NeQ[c*d^2 - b*d*e + a*e^2, 0] && (PosQ[b^2 - 4*a*c] || !IGtQ[n/2, 0])`

Maple **[F]**

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx$$

input `int(1/(a+b*x^n+c*x^(2*n))^2,x)`

output `int(1/(a+b*x^n+c*x^(2*n))^2,x)`

Fricas [F]

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx = \int \frac{1}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate(1/(a+b*x^n+c*x^(2*n))^2,x, algorithm="fricas")`

output `integral(1/(c^2*x^(4*n) + b^2*x^(2*n) + 2*a*b*x^n + a^2 + 2*(b*c*x^n + a*c)*x^(2*n)), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx = \text{Timed out}$$

input `integrate(1/(a+b*x**n+c*x**(2*n))**2,x)`

output `Timed out`

Maxima [F]

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx = \int \frac{1}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate(1/(a+b*x^n+c*x^(2*n))^2,x, algorithm="maxima")`

output `(b*c*x*x^n + (b^2 - 2*a*c)*x)/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n) - integrate(-(b*c*(n - 1)*x^n - 2*a*c*(2*n - 1) + b^2*(n - 1))/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n), x)`

Giac [F]

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx = \int \frac{1}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate(1/(a+b*x^n+c*x^(2*n))^2,x, algorithm="giac")`

output `integrate((c*x^(2*n) + b*x^n + a)^(-2), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx = \int \frac{1}{(a + bx^n + cx^{2n})^2} dx$$

input `int(1/(a + b*x^n + c*x^(2*n))^2,x)`

output `int(1/(a + b*x^n + c*x^(2*n))^2, x)`

Reduce [F]

$$\int \frac{1}{(a + bx^n + cx^{2n})^2} dx = \int \frac{1}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^na b + a^2} dx$$

input `int(1/(a+b*x^n+c*x^(2*n))^2,x)`

output `int(1/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)`

3.11 $\int \frac{d+ex}{(a+bx^n+cx^{2n})^2} dx$

Optimal result	106
Mathematica [B] (warning: unable to verify)	107
Rubi [A] (verified)	108
Maple [F]	110
Fricas [F]	111
Sympy [F(-1)]	111
Maxima [F]	111
Giac [F]	112
Mupad [F(-1)]	112
Reduce [F]	112

Optimal result

Integrand size = 22, antiderivative size = 589

$$\begin{aligned}
 & \int \frac{d+ex}{(a+bx^n+cx^{2n})^2} dx \\
 = & \frac{dx(b^2-2ac+bcx^n)}{a(b^2-4ac)n(a+bx^n+cx^{2n})} + \frac{ex^2(b^2-2ac+bcx^n)}{a(b^2-4ac)n(a+bx^n+cx^{2n})} \\
 & \frac{cd(4ac(1-2n)-b^2(1-n)-b\sqrt{b^2-4ac}(1-n))x \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{a(b^2-4ac)(b^2-4ac-b\sqrt{b^2-4ac})n} \\
 & \frac{cd(4ac(1-2n)-b^2(1-n)+b\sqrt{b^2-4ac}(1-n))x \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{a(b^2-4ac)(b^2-4ac+b\sqrt{b^2-4ac})n} \\
 & \frac{ce(8ac(1-n)-b^2(2-n)-b\sqrt{b^2-4ac}(2-n))x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{2a(b^2-4ac)(b^2-4ac-b\sqrt{b^2-4ac})n} \\
 & \frac{ce(8ac(1-n)-b^2(2-n)+b\sqrt{b^2-4ac}(2-n))x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{2a(b^2-4ac)(b^2-4ac+b\sqrt{b^2-4ac})n}
 \end{aligned}$$

output

```
d*x*(b^2-2*a*c+b*c*x^n)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))+e*x^2*(b^2-2*
a*c+b*c*x^n)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))-c*d*(4*a*c*(1-2*n)-b^2*(
1-n)-b*(-4*a*c+b^2)^(1/2)*(1-n))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-
(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))/n-c*d
*(4*a*c*(1-2*n)-b^2*(1-n)+b*(-4*a*c+b^2)^(1/2)*(1-n))*x*hypergeom([1, 1/n]
, [1+1/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b*(-4*a*c+b^2)^(
1/2)-4*a*c+b^2)/n-1/2*c*e*(8*a*c*(1-n)-b^2*(2-n)-b*(-4*a*c+b^2)^(1/2)*(2-n
))*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/a/(-4
*a*c+b^2)/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))/n-1/2*c*e*(8*a*c*(1-n)-b^2*(2-n
)+b*(-4*a*c+b^2)^(1/2)*(2-n))*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b
+(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)/n
```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 4162 vs. $2(589) = 1178$.

Time = 6.69 (sec) , antiderivative size = 4162, normalized size of antiderivative = 7.07

$$\int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx = \text{Result too large to show}$$

input

```
Integrate[(d + e*x)/(a + b*x^n + c*x^(2*n))^2, x]
```

output

```
(x*(d + e*x)*(-b^2 + 2*a*c - b*c*x^n))/(a*(-b^2 + 4*a*c)*n*(a + b*x^n + c*
x^(2*n))) - (b*c*e*x^(2 + n)*(x^n)^(2/n - (2 + n)/n)*(-Hypergeometric2F1[
-2/n, -2/n, (-2 + n)/n, -1/2*(-b - Sqrt[b^2 - 4*a*c])/(c*(-1/2*(-b - Sqrt[
b^2 - 4*a*c])/c + x^n))]/(Sqrt[b^2 - 4*a*c]*(x^n/(-1/2*(-b - Sqrt[b^2 - 4*
a*c])/c + x^n))^(2/n))) + Hypergeometric2F1[-2/n, -2/n, (-2 + n)/n, -1/2*(
-b + Sqrt[b^2 - 4*a*c])/(c*(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))]/(Sqrt
[b^2 - 4*a*c]*(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(2/n))))/(2*a*
(-b^2 + 4*a*c)) + (b*c*e*x^(2 + n)*(x^n)^(2/n - (2 + n)/n)*(-Hypergeometr
ic2F1[-2/n, -2/n, (-2 + n)/n, -1/2*(-b - Sqrt[b^2 - 4*a*c])/(c*(-1/2*(-b -
Sqrt[b^2 - 4*a*c])/c + x^n))]/(Sqrt[b^2 - 4*a*c]*(x^n/(-1/2*(-b - Sqrt[b^
2 - 4*a*c])/c + x^n))^(2/n))) + Hypergeometric2F1[-2/n, -2/n, (-2 + n)/n,
-1/2*(-b + Sqrt[b^2 - 4*a*c])/(c*(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))]
/(Sqrt[b^2 - 4*a*c]*(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))^(2/n)))
/(a*(-b^2 + 4*a*c)*n) + (b^2*e*x^2*((1 - Hypergeometric2F1[-2/n, -2/n, (-2
+ n)/n, -1/2*(-b - Sqrt[b^2 - 4*a*c])/(c*(-1/2*(-b - Sqrt[b^2 - 4*a*c])/c
+ x^n))]/(x^n/(-1/2*(-b - Sqrt[b^2 - 4*a*c])/c + x^n))^(2/n))/((b*(-b - S
qrt[b^2 - 4*a*c]))/(2*c) + (-b - Sqrt[b^2 - 4*a*c])^2/(2*c)) + (1 - Hyperg
eometric2F1[-2/n, -2/n, (-2 + n)/n, -1/2*(-b + Sqrt[b^2 - 4*a*c])/(c*(-1/2
*(-b + Sqrt[b^2 - 4*a*c])/c + x^n))]/(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c])/c
+ x^n))^(2/n))/((b*(-b + Sqrt[b^2 - 4*a*c]))/(2*c) + (-b + Sqrt[b^2 - ...
```

Rubi [A] (verified)

Time = 1.53 (sec) , antiderivative size = 738, normalized size of antiderivative = 1.25, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.091$, Rules used = {2328, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx$$

↓ 2328

$$\int \left(\frac{d}{(a + bx^n + cx^{2n})^2} + \frac{ex}{(a + bx^n + cx^{2n})^2} \right) dx$$

↓ 2009

$$\begin{aligned}
& \frac{2bc^2e(2-n)x^{n+2} \operatorname{Hypergeometric2F1}\left(1, \frac{n+2}{n}, 2\left(1+\frac{1}{n}\right), -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{an(n+2)(b^2-4ac)^{3/2}\left(b-\sqrt{b^2-4ac}\right)} + \\
& \frac{2bc^2e(2-n)x^{n+2} \operatorname{Hypergeometric2F1}\left(1, \frac{n+2}{n}, 2\left(1+\frac{1}{n}\right), -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{an(n+2)(b^2-4ac)^{3/2}\left(\sqrt{b^2-4ac}+b\right)} - \\
& \frac{cdx\left(-b(1-n)\sqrt{b^2-4ac}+4ac(1-2n)-(b^2(1-n))\right) \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{an(b^2-4ac)\left(-b\sqrt{b^2-4ac}-4ac+b^2\right)} \\
& \frac{cdx\left(b(1-n)\sqrt{b^2-4ac}+4ac(1-2n)-(b^2(1-n))\right) \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{an(b^2-4ac)\left(b\sqrt{b^2-4ac}-4ac+b^2\right)} + \\
& \frac{dx(-2ac+b^2+bcx^n)}{an(b^2-4ac)(a+bx^n+cx^{2n})} - \\
& \frac{ce x^2(4ac(1-n)-b^2(2-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{an(b^2-4ac)\left(-b\sqrt{b^2-4ac}-4ac+b^2\right)} - \\
& \frac{ce x^2(4ac(1-n)-b^2(2-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{an(b^2-4ac)\left(b\sqrt{b^2-4ac}-4ac+b^2\right)} + \\
& \frac{ex^2(-2ac+b^2+bcx^n)}{an(b^2-4ac)(a+bx^n+cx^{2n})}
\end{aligned}$$

input `Int[(d + e*x)/(a + b*x^n + c*x^(2*n))^2,x]`

output

```
(d*x*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))
+ (e*x^2*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n)
))) - (c*d*(4*a*c*(1 - 2*n) - b^2*(1 - n) - b*Sqrt[b^2 - 4*a*c]*(1 - n))*
*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c
]])/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (c*d*(4*a*c
*(1 - 2*n) - b^2*(1 - n) + b*Sqrt[b^2 - 4*a*c]*(1 - n))*x*Hypergeometric2F
1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]])/(a*(b^2 - 4*
a*c)*(b^2 - 4*a*c + b*Sqrt[b^2 - 4*a*c])*n) - (c*e*(4*a*c*(1 - n) - b^2*(2
- n))*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 -
4*a*c]])/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (c*e*
(4*a*c*(1 - n) - b^2*(2 - n))*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2
*c*x^n)/(b + Sqrt[b^2 - 4*a*c]])/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c + b*Sqrt[b
^2 - 4*a*c])*n) - (2*b*c^2*e*(2 - n)*x^(2 + n)*Hypergeometric2F1[1, (2 + n
)/n, 2*(1 + n^(-1)), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]])/(a*(b^2 - 4*a*c)
^(3/2)*(b - Sqrt[b^2 - 4*a*c])*n*(2 + n)) + (2*b*c^2*e*(2 - n)*x^(2 + n)*H
ypergeometric2F1[1, (2 + n)/n, 2*(1 + n^(-1)), (-2*c*x^n)/(b + Sqrt[b^2 -
4*a*c]])/(a*(b^2 - 4*a*c)^(3/2)*(b + Sqrt[b^2 - 4*a*c])*n*(2 + n))
```

Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

rule 2328 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_, x_Symbol] :=
Int[ExpandIntegrand[Pq*(a + b*x^n + c*x^(2*n))^p, x], x] /; FreeQ[{a, b, c,
n}, x] && EqQ[n2, 2*n] && PolyQ[Pq, x] && ILtQ[p, -1]`

Maple [F]

$$\int \frac{ex + d}{(a + bx^n + cx^{2n})^2} dx$$

input `int((e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)`

output `int((e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)`

Fricas [F]

$$\int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx = \int \frac{ex + d}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="fricas")`

output `integral((e*x + d)/(c^2*x^(4*n) + b^2*x^(2*n) + 2*a*b*x^n + a^2 + 2*(b*c*x^n + a*c)*x^(2*n)), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx = \text{Timed out}$$

input `integrate((e*x+d)/(a+b*x**n+c*x**(2*n))**2,x)`

output `Timed out`

Maxima [F]

$$\int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx = \int \frac{ex + d}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="maxima")`

output `((b^2*e - 2*a*c*e)*x^2 + (b*c*e*x^2 + b*c*d*x)*x^n + (b^2*d - 2*a*c*d)*x)/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n) - integrate((2*a*c*d*(2*n - 1) - b^2*d*(n - 1) - (b*c*e*(n - 2)*x + b*c*d*(n - 1))*x^n + (4*a*c*e*(n - 1) - b^2*e*(n - 2))*x)/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n), x)`

Giac [F]

$$\int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx = \int \frac{ex + d}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="giac")`

output `integrate((e*x + d)/(c*x^(2*n) + b*x^n + a)^2, x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx = \int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx$$

input `int((d + e*x)/(a + b*x^n + c*x^(2*n))^2,x)`

output `int((d + e*x)/(a + b*x^n + c*x^(2*n))^2, x)`

Reduce [F]

$$\int \frac{d + ex}{(a + bx^n + cx^{2n})^2} dx = \left(\int \frac{x}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^na b + a^2} dx \right) e + \left(\int \frac{1}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^na b + a^2} dx \right) d$$

input `int((e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)`

output `int(x/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*e + int(1/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*d`

$$3.12 \quad \int \frac{d+ex+fx^2}{(a+bx^n+cx^{2n})^2} dx$$

Optimal result	113
Mathematica [B] (warning: unable to verify)	114
Rubi [A] (verified)	115
Maple [F]	117
Fricas [F]	118
Sympy [F(-1)]	118
Maxima [F]	118
Giac [F]	119
Mupad [F(-1)]	119
Reduce [F]	120

Optimal result

Integrand size = 27, antiderivative size = 892

$$\int \frac{d+ex+fx^2}{(a+bx^n+cx^{2n})^2} dx = \frac{dx(b^2-2ac+bcx^n)}{a(b^2-4ac)n(a+bx^n+cx^{2n})} + \frac{ex^2(b^2-2ac+bcx^n)}{a(b^2-4ac)n(a+bx^n+cx^{2n})} + \frac{fx^3(b^2-2ac+bcx^n)}{a(b^2-4ac)n(a+bx^n+cx^{2n})}$$

$$\frac{cd(4ac(1-2n)-b^2(1-n)-b\sqrt{b^2-4ac}(1-n))x \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{a(b^2-4ac)(b^2-4ac-b\sqrt{b^2-4ac})n}$$

$$\frac{cd(4ac(1-2n)-b^2(1-n)+b\sqrt{b^2-4ac}(1-n))x \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{a(b^2-4ac)(b^2-4ac+b\sqrt{b^2-4ac})n}$$

$$\frac{ce(8ac(1-n)-b^2(2-n)-b\sqrt{b^2-4ac}(2-n))x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{2a(b^2-4ac)(b^2-4ac-b\sqrt{b^2-4ac})n}$$

$$\frac{ce(8ac(1-n)-b^2(2-n)+b\sqrt{b^2-4ac}(2-n))x^2 \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{2+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{2a(b^2-4ac)(b^2-4ac+b\sqrt{b^2-4ac})n}$$

$$\frac{cf(4ac(3-2n)-b^2(3-n)-b\sqrt{b^2-4ac}(3-n))x^3 \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{3+n}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{3a(b^2-4ac)(b^2-4ac-b\sqrt{b^2-4ac})n}$$

$$\frac{cf(4ac(3-2n)-b^2(3-n)+b\sqrt{b^2-4ac}(3-n))x^3 \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{3+n}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{3a(b^2-4ac)(b^2-4ac+b\sqrt{b^2-4ac})n}$$

output

```
d*x*(b^2-2*a*c+b*c*x^n)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))+e*x^2*(b^2-2*
a*c+b*c*x^n)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))+f*x^3*(b^2-2*a*c+b*c*x^n
)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))-c*d*(4*a*c*(1-2*n)-b^2*(1-n)-b*(-4*
a*c+b^2)^(1/2)*(1-n))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2
)^(1/2)))/a/(-4*a*c+b^2)/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))/n-c*d*(4*a*c*(1-
2*n)-b^2*(1-n)+b*(-4*a*c+b^2)^(1/2)*(1-n))*x*hypergeom([1, 1/n], [1+1/n], -2
*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b*(-4*a*c+b^2)^(1/2)-4*a*c+
b^2)/n-1/2*c*e*(8*a*c*(1-n)-b^2*(2-n)-b*(-4*a*c+b^2)^(1/2)*(2-n))*x^2*hype
rgeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(
b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))/n-1/2*c*e*(8*a*c*(1-n)-b^2*(2-n)+b*(-4*a*c
+b^2)^(1/2)*(2-n))*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b+(-4*a*c+b^
2)^(1/2)))/a/(-4*a*c+b^2)/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)/n-1/3*c*f*(4*a*
c*(3-2*n)-b^2*(3-n)-b*(-4*a*c+b^2)^(1/2)*(3-n))*x^3*hypergeom([1, 3/n], [(3
+n)/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b^2-4*a*c-b*(-4*a*
c+b^2)^(1/2))/n-1/3*c*f*(4*a*c*(3-2*n)-b^2*(3-n)+b*(-4*a*c+b^2)^(1/2)*(3-n
))*x^3*hypergeom([1, 3/n], [(3+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a/(-4
*a*c+b^2)/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)/n
```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 6525 vs. $2(892) = 1784$.

Time = 6.71 (sec) , antiderivative size = 6525, normalized size of antiderivative = 7.32

$$\int \frac{d + ex + fx^2}{(a + bx^n + cx^{2n})^2} dx = \text{Result too large to show}$$

input

```
Integrate[(d + e*x + f*x^2)/(a + b*x^n + c*x^(2*n))^2,x]
```

output

```
Result too large to show
```

Rubi [A] (verified)

Time = 1.97 (sec) , antiderivative size = 1194, normalized size of antiderivative = 1.34, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.074$, Rules used = {2328, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{d + ex + fx^2}{(a + bx^n + cx^{2n})^2} dx$$

↓ 2328

$$\int \left(\frac{d}{(a + bx^n + cx^{2n})^2} + \frac{ex}{(a + bx^n + cx^{2n})^2} + \frac{fx^2}{(a + bx^n + cx^{2n})^2} \right) dx$$

↓ 2009

$$\begin{aligned}
& - \frac{2bc^2e(2-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+2}{n}, 2\left(1+\frac{1}{n}\right), -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^{n+2}}{a(b^2-4ac)^{3/2}\left(b-\sqrt{b^2-4ac}\right)n(n+2)} + \\
& \frac{2bc^2e(2-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+2}{n}, 2\left(1+\frac{1}{n}\right), -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^{n+2}}{a(b^2-4ac)^{3/2}\left(b+\sqrt{b^2-4ac}\right)n(n+2)} - \\
& \frac{2bc^2f(3-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+3}{n}, 2+\frac{3}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^{n+3}}{a(b^2-4ac)^{3/2}\left(b-\sqrt{b^2-4ac}\right)n(n+3)} + \\
& \frac{2bc^2f(3-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+3}{n}, 2+\frac{3}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^{n+3}}{a(b^2-4ac)^{3/2}\left(b+\sqrt{b^2-4ac}\right)n(n+3)} - \\
& \frac{2cf(2ac(3-2n)-b^2(3-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{n+3}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^3}{3a(b^2-4ac)\left(b^2-\sqrt{b^2-4ac}b-4ac\right)n} - \\
& \frac{2cf(2ac(3-2n)-b^2(3-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{n+3}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^3}{3a(b^2-4ac)\left(b^2+\sqrt{b^2-4ac}b-4ac\right)n} + \\
& \frac{f(bcx^n+b^2-2ac)x^3}{a(b^2-4ac)n(bx^n+cx^{2n}+a)} - \\
& \frac{ce(4ac(1-n)-b^2(2-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^2}{a(b^2-4ac)\left(b^2-\sqrt{b^2-4ac}b-4ac\right)n} - \\
& \frac{ce(4ac(1-n)-b^2(2-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^2}{a(b^2-4ac)\left(b^2+\sqrt{b^2-4ac}b-4ac\right)n} + \\
& \frac{e(bcx^n+b^2-2ac)x^2}{a(b^2-4ac)n(bx^n+cx^{2n}+a)} - \\
& \frac{cd\left(-((1-n)b^2)-\sqrt{b^2-4ac}(1-n)b+4ac(1-2n)\right) \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x}{a(b^2-4ac)\left(b^2-\sqrt{b^2-4ac}b-4ac\right)n} - \\
& \frac{cd\left(-((1-n)b^2)+\sqrt{b^2-4ac}(1-n)b+4ac(1-2n)\right) \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x}{a(b^2-4ac)\left(b^2+\sqrt{b^2-4ac}b-4ac\right)n} + \\
& \frac{d(bcx^n+b^2-2ac)x}{a(b^2-4ac)n(bx^n+cx^{2n}+a)}
\end{aligned}$$

input

```
Int[(d + e*x + f*x^2)/(a + b*x^n + c*x^(2*n))^2,x]
```

output

```
(d*x*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))
+ (e*x^2*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n
))) + (f*x^3*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(
2*n))) - (c*d*(4*a*c*(1 - 2*n) - b^2*(1 - n) - b*Sqrt[b^2 - 4*a*c]*(1 - n
))*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4
*a*c])]/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (c*d*(4
*a*c*(1 - 2*n) - b^2*(1 - n) + b*Sqrt[b^2 - 4*a*c]*(1 - n))*Hypergeometr
ic2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]/(a*(b^2
- 4*a*c)*(b^2 - 4*a*c + b*Sqrt[b^2 - 4*a*c])*n) - (c*e*(4*a*c*(1 - n) - b^
2*(2 - n))*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b - Sqrt[b
^2 - 4*a*c])]/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (
c*e*(4*a*c*(1 - n) - b^2*(2 - n))*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n,
(-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c + b*Sq
rt[b^2 - 4*a*c])*n) - (2*c*f*(2*a*c*(3 - 2*n) - b^2*(3 - n))*x^3*Hypergeom
etric2F1[1, 3/n, (3 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])]/(3*a*(b^2
- 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (2*c*f*(2*a*c*(3 - 2*n)
- b^2*(3 - n))*x^3*Hypergeometric2F1[1, 3/n, (3 + n)/n, (-2*c*x^n)/(b + S
qrt[b^2 - 4*a*c])]/(3*a*(b^2 - 4*a*c)*(b^2 - 4*a*c + b*Sqrt[b^2 - 4*a*c])
*n) - (2*b*c^2*e*(2 - n)*x^(2 + n)*Hypergeometric2F1[1, (2 + n)/n, 2*(1 +
n^(-1)), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])]/(a*(b^2 - 4*a*c)^(3/2)*(b...
```

Defintions of rubi rules used

rule 2009

```
Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]
```

rule 2328

```
Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_, x_Symbol] :=
Int[ExpandIntegrand[Pq*(a + b*x^n + c*x^(2*n))^p, x], x] /; FreeQ[{a, b, c,
n}, x] && EqQ[n2, 2*n] && PolyQ[Pq, x] && ILtQ[p, -1]
```

Maple [F]

$$\int \frac{f x^2 + e x + d}{(a + b x^n + c x^{2n})^2} dx$$

input

```
int((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)
```

output `int((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)`

Fricas [F]

$$\int \frac{d + ex + fx^2}{(a + bx^n + cx^{2n})^2} dx = \int \frac{fx^2 + ex + d}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="fricas")`

output `integral((f*x^2 + e*x + d)/(c^2*x^(4*n) + b^2*x^(2*n) + 2*a*b*x^n + a^2 + 2*(b*c*x^n + a*c)*x^(2*n)), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2}{(a + bx^n + cx^{2n})^2} dx = \text{Timed out}$$

input `integrate((f*x**2+e*x+d)/(a+b*x**n+c*x**(2*n))**2,x)`

output `Timed out`

Maxima [F]

$$\int \frac{d + ex + fx^2}{(a + bx^n + cx^{2n})^2} dx = \int \frac{fx^2 + ex + d}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="maxima")`

output

```
((b^2*f - 2*a*c*f)*x^3 + (b^2*e - 2*a*c*e)*x^2 + (b*c*f*x^3 + b*c*e*x^2 +
b*c*d*x)*x^n + (b^2*d - 2*a*c*d)*x)/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n -
4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n) - integrate((2*a*c*d*(
2*n - 1) - b^2*d*(n - 1) + (2*a*c*f*(2*n - 3) - b^2*f*(n - 3))*x^2 - (b*c*
f*(n - 3)*x^2 + b*c*e*(n - 2)*x + b*c*d*(n - 1))*x^n + (4*a*c*e*(n - 1) -
b^2*e*(n - 2))*x)/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*
n) + (a*b^3*n - 4*a^2*b*c*n)*x^n), x)
```

Giac [F]

$$\int \frac{d + ex + fx^2}{(a + bx^n + cx^{2n})^2} dx = \int \frac{fx^2 + ex + d}{(cx^{2n} + bx^n + a)^2} dx$$

input

```
integrate((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="giac")
```

output

```
integrate((f*x^2 + e*x + d)/(c*x^(2*n) + b*x^n + a)^2, x)
```

Mupad [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2}{(a + bx^n + cx^{2n})^2} dx = \int \frac{fx^2 + ex + d}{(a + bx^n + cx^{2n})^2} dx$$

input

```
int((d + e*x + f*x^2)/(a + b*x^n + c*x^(2*n))^2,x)
```

output

```
int((d + e*x + f*x^2)/(a + b*x^n + c*x^(2*n))^2, x)
```


Reduce [F]

$$\int \frac{d + ex + fx^2}{(a + bx^n + cx^{2n})^2} dx = \left(\int \frac{x^2}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^na b + a^2} dx \right) f$$

$$+ \left(\int \frac{x}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^na b + a^2} dx \right) e$$

$$+ \left(\int \frac{1}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^na b + a^2} dx \right) d$$

input `int((f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)`

output `int(x**2/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*f + int(x/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*e + int(1/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*d`

$$3.13 \quad \int \frac{d+ex+fx^2+gx^3}{(a+bx^n+cx^{2n})^2} dx$$

Optimal result	121
Mathematica [B] (warning: unable to verify)	122
Rubi [A] (verified)	123
Maple [F]	126
Fricas [F]	126
Sympy [F(-1)]	126
Maxima [F]	127
Giac [F]	127
Mupad [F(-1)]	127
Reduce [F]	128

Optimal result

Integrand size = 32, antiderivative size = 1195

$$\int \frac{d+ex+fx^2+gx^3}{(a+bx^n+cx^{2n})^2} dx = \text{Too large to display}$$

output

```

d*x*(b^2-2*a*c+b*c*x^n)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))+e*x^2*(b^2-2*
a*c+b*c*x^n)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))+f*x^3*(b^2-2*a*c+b*c*x^n
)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))+g*x^4*(b^2-2*a*c+b*c*x^n)/a/(-4*a*c
+b^2)/n/(a+b*x^n+c*x^(2*n))-c*d*(4*a*c*(1-2*n)-b^2*(1-n)-b*(-4*a*c+b^2)^(1
/2)*(1-n))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/a
/(-4*a*c+b^2)/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))/n-c*d*(4*a*c*(1-2*n)-b^2*(1
-n)+b*(-4*a*c+b^2)^(1/2)*(1-n))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b+(
-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)/n-1/2*
c*e*(8*a*c*(1-n)-b^2*(2-n)-b*(-4*a*c+b^2)^(1/2)*(2-n))*x^2*hypergeom([1, 2
/n], [(2+n)/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b^2-4*a*c-b
*(-4*a*c+b^2)^(1/2))/n-1/2*c*e*(8*a*c*(1-n)-b^2*(2-n)+b*(-4*a*c+b^2)^(1/2)
*(2-n))*x^2*hypergeom([1, 2/n], [(2+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/
a/(-4*a*c+b^2)/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)/n-1/3*c*f*(4*a*c*(3-2*n)-b
^2*(3-n)-b*(-4*a*c+b^2)^(1/2)*(3-n))*x^3*hypergeom([1, 3/n], [(3+n)/n], -2*c
*x^n/(b-(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2)
)/n-1/3*c*f*(4*a*c*(3-2*n)-b^2*(3-n)+b*(-4*a*c+b^2)^(1/2)*(3-n))*x^3*hype
rgeom([1, 3/n], [(3+n)/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(
b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)/n-1/4*c*g*(8*a*c*(2-n)-b^2*(4-n)-b*(-4*a*c
+b^2)^(1/2)*(4-n))*x^4*hypergeom([1, 4/n], [(4+n)/n], -2*c*x^n/(b-(-4*a*c+b
^2)^(1/2)))/a/(-4*a*c+b^2)/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))/n-1/4*c*g*(8...

```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 8737 vs. $2(1195) = 2390$.

Time = 6.97 (sec) , antiderivative size = 8737, normalized size of antiderivative = 7.31

$$\int \frac{d + ex + fx^2 + gx^3}{(a + bx^n + cx^{2n})^2} dx = \text{Result too large to show}$$

input

```
Integrate[(d + e*x + f*x^2 + g*x^3)/(a + b*x^n + c*x^(2*n))^2,x]
```

output

```
Result too large to show
```

Rubi [A] (verified)

Time = 2.82 (sec) , antiderivative size = 1654, normalized size of antiderivative = 1.38, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.062$, Rules used = {2328, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{d + ex + fx^2 + gx^3}{(a + bx^n + cx^{2n})^2} dx$$

$$\downarrow \text{2328}$$

$$\int \left(\frac{d}{(a + bx^n + cx^{2n})^2} + \frac{ex}{(a + bx^n + cx^{2n})^2} + \frac{fx^2}{(a + bx^n + cx^{2n})^2} + \frac{gx^3}{(a + bx^n + cx^{2n})^2} \right) dx$$

$$\downarrow \text{2009}$$

$$\begin{aligned}
& \frac{2bc^2e(2-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+2}{n}, 2\left(1+\frac{1}{n}\right), -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^{n+2}}{a(b^2-4ac)^{3/2}\left(b-\sqrt{b^2-4ac}\right)n(n+2)} + \\
& \frac{2bc^2e(2-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+2}{n}, 2\left(1+\frac{1}{n}\right), -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^{n+2}}{a(b^2-4ac)^{3/2}\left(b+\sqrt{b^2-4ac}\right)n(n+2)} - \\
& \frac{2bc^2f(3-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+3}{n}, 2+\frac{3}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^{n+3}}{a(b^2-4ac)^{3/2}\left(b-\sqrt{b^2-4ac}\right)n(n+3)} + \\
& \frac{2bc^2f(3-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+3}{n}, 2+\frac{3}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^{n+3}}{a(b^2-4ac)^{3/2}\left(b+\sqrt{b^2-4ac}\right)n(n+3)} - \\
& \frac{2bc^2g(4-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+4}{n}, 2\left(1+\frac{2}{n}\right), -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^{n+4}}{a(b^2-4ac)^{3/2}\left(b-\sqrt{b^2-4ac}\right)n(n+4)} + \\
& \frac{2bc^2g(4-n) \operatorname{Hypergeometric2F1}\left(1, \frac{n+4}{n}, 2\left(1+\frac{2}{n}\right), -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^{n+4}}{a(b^2-4ac)^{3/2}\left(b+\sqrt{b^2-4ac}\right)n(n+4)} - \\
& \frac{cg(4ac(2-n)-b^2(4-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{4}{n}, \frac{n+4}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^4}{2a(b^2-4ac)\left(b^2-\sqrt{b^2-4ac}b-4ac\right)n} - \\
& \frac{cg(4ac(2-n)-b^2(4-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{4}{n}, \frac{n+4}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^4}{2a(b^2-4ac)\left(b^2+\sqrt{b^2-4ac}b-4ac\right)n} + \\
& \frac{g(bcx^n+b^2-2ac)x^4}{a(b^2-4ac)n(bx^n+cx^{2n}+a)} - \\
& \frac{2cf(2ac(3-2n)-b^2(3-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{n+3}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^3}{3a(b^2-4ac)\left(b^2-\sqrt{b^2-4ac}b-4ac\right)n} - \\
& \frac{2cf(2ac(3-2n)-b^2(3-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{3}{n}, \frac{n+3}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^3}{3a(b^2-4ac)\left(b^2+\sqrt{b^2-4ac}b-4ac\right)n} + \\
& \frac{f(bcx^n+b^2-2ac)x^3}{a(b^2-4ac)n(bx^n+cx^{2n}+a)} - \\
& \frac{ce(4ac(1-n)-b^2(2-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x^2}{a(b^2-4ac)\left(b^2-\sqrt{b^2-4ac}b-4ac\right)n} - \\
& \frac{ce(4ac(1-n)-b^2(2-n)) \operatorname{Hypergeometric2F1}\left(1, \frac{2}{n}, \frac{n+2}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x^2}{a(b^2-4ac)\left(b^2+\sqrt{b^2-4ac}b-4ac\right)n} + \\
& \frac{e(bcx^n+b^2-2ac)x^2}{a(b^2-4ac)n(bx^n+cx^{2n}+a)} - \\
& \frac{cd\left(-((1-n)b^2)-\sqrt{b^2-4ac}(1-n)b+4ac(1-2n)\right) \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) x}{a(b^2-4ac)\left(b^2-\sqrt{b^2-4ac}b-4ac\right)n} - \\
& \frac{cd\left(-((1-n)b^2)+\sqrt{b^2-4ac}(1-n)b+4ac(1-2n)\right) \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right) x}{a(b^2-4ac)\left(b^2+\sqrt{b^2-4ac}b-4ac\right)n} + \\
& \frac{d(bcx^n+b^2-2ac)x}{a(b^2-4ac)n(bx^n+cx^{2n}+a)}
\end{aligned}$$

input `Int[(d + e*x + f*x^2 + g*x^3)/(a + b*x^n + c*x^(2*n))^2,x]`

output

$$\begin{aligned} & (d*x*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))) \\ & + (e*x^2*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))) \\ & + (f*x^3*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))) \\ & + (g*x^4*(b^2 - 2*a*c + b*c*x^n))/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))) \\ & - (c*d*(4*a*c*(1 - 2*n) - b^2*(1 - n) - b*Sqrt[b^2 - 4*a*c]*(1 - n))*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])]/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (c*d*(4*a*c*(1 - 2*n) - b^2*(1 - n) + b*Sqrt[b^2 - 4*a*c]*(1 - n))*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c + b*Sqrt[b^2 - 4*a*c])*n) - (c*e*(4*a*c*(1 - n) - b^2*(2 - n))*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])]/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (c*e*(4*a*c*(1 - n) - b^2*(2 - n))*x^2*Hypergeometric2F1[1, 2/n, (2 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]/(a*(b^2 - 4*a*c)*(b^2 - 4*a*c + b*Sqrt[b^2 - 4*a*c])*n) - (2*c*f*(2*a*c*(3 - 2*n) - b^2*(3 - n))*x^3*Hypergeometric2F1[1, 3/n, (3 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])]/(3*a*(b^2 - 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (2*c*f*(2*a*c*(3 - 2*n) - b^2*(3 - n))*x^3*Hypergeometric2F1[1, 3/n, (3 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]/(3*a*(b^2 - 4*a*c)*(b^2 - 4*a*c + b*Sqrt[b^2 - 4*a*c])*n) - (c*g*(4*a*c*(2 - n) - b^2*(4 - n))*x^4*Hypergeometric2F1[1, 4/n, (4 + n)/n, (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])]/(4*a*(b^2 - 4*a*c)*(b^2 - 4*a*c - b*Sqrt[b^2 - 4*a*c])*n) - (c*g*(4*a*c*(2 - n) - b^2*(4 - n))*x^4*Hypergeometric2F1[1, 4/n, (4 + n)/n, (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]/(4*a*(b^2 - 4*a*c)*(b^2 - 4*a*c + b*Sqrt[b^2 - 4*a*c])*n) \end{aligned}$$

Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

rule 2328 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_, x_Symbol] := Int[ExpandIntegrand[Pq*(a + b*x^n + c*x^(2*n))^p, x], x] /; FreeQ[{a, b, c, n}, x] && EqQ[n2, 2*n] && PolyQ[Pq, x] && ILtQ[p, -1]`

Maple [F]

$$\int \frac{g x^3 + f x^2 + e x + d}{(a + b x^n + c x^{2n})^2} dx$$

input `int((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)`

output `int((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)`

Fricas [F]

$$\int \frac{d + e x + f x^2 + g x^3}{(a + b x^n + c x^{2n})^2} dx = \int \frac{g x^3 + f x^2 + e x + d}{(c x^{2n} + b x^n + a)^2} dx$$

input `integrate((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="fricas")`

output `integral((g*x^3 + f*x^2 + e*x + d)/(c^2*x^(4*n) + b^2*x^(2*n) + 2*a*b*x^n + a^2 + 2*(b*c*x^n + a*c)*x^(2*n)), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{d + e x + f x^2 + g x^3}{(a + b x^n + c x^{2n})^2} dx = \text{Timed out}$$

input `integrate((g*x**3+f*x**2+e*x+d)/(a+b*x**n+c*x**(2*n))**2,x)`

output `Timed out`

Maxima [F]

$$\int \frac{d + ex + fx^2 + gx^3}{(a + bx^n + cx^{2n})^2} dx = \int \frac{gx^3 + fx^2 + ex + d}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="maxima")`

output `((b^2*g - 2*a*c*g)*x^4 + (b^2*f - 2*a*c*f)*x^3 + (b^2*e - 2*a*c*e)*x^2 + (b*c*g*x^4 + b*c*f*x^3 + b*c*e*x^2 + b*c*d*x)*x^n + (b^2*d - 2*a*c*d)*x)/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n) - integrate((2*a*c*d*(2*n - 1) - b^2*d*(n - 1) + (4*a*c*g*(n - 2) - b^2*g*(n - 4))*x^3 + (2*a*c*f*(2*n - 3) - b^2*f*(n - 3))*x^2 - (b*c*g*(n - 4)*x^3 + b*c*f*(n - 3)*x^2 + b*c*e*(n - 2)*x + b*c*d*(n - 1))*x^n + (4*a*c*e*(n - 1) - b^2*e*(n - 2))*x)/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n), x)`

Giac [F]

$$\int \frac{d + ex + fx^2 + gx^3}{(a + bx^n + cx^{2n})^2} dx = \int \frac{gx^3 + fx^2 + ex + d}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x, algorithm="giac")`

output `integrate((g*x^3 + f*x^2 + e*x + d)/(c*x^(2*n) + b*x^n + a)^2, x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{d + ex + fx^2 + gx^3}{(a + bx^n + cx^{2n})^2} dx = \int \frac{gx^3 + fx^2 + ex + d}{(a + bx^n + cx^{2n})^2} dx$$

input `int((d + e*x + f*x^2 + g*x^3)/(a + b*x^n + c*x^(2*n))^2,x)`

output `int((d + e*x + f*x^2 + g*x^3)/(a + b*x^n + c*x^(2*n))^2, x)`

Reduce [F]

$$\int \frac{d + ex + fx^2 + gx^3}{(a + bx^n + cx^{2n})^2} dx = \left(\int \frac{x^3}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^nab + a^2} dx \right) g$$

$$+ \left(\int \frac{x^2}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^nab + a^2} dx \right) f$$

$$+ \left(\int \frac{x}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^nab + a^2} dx \right) e$$

$$+ \left(\int \frac{1}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^nab + a^2} dx \right) d$$

input `int((g*x^3+f*x^2+e*x+d)/(a+b*x^n+c*x^(2*n))^2,x)`

output `int(x**3/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*g + int(x**2/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*f + int(x/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*e + int(1/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)*d`

3.14 $\int \frac{-1+x^4+7x^5+x^9}{-7+6x^4+x^8} dx$

Optimal result	129
Mathematica [A] (verified)	130
Rubi [A] (verified)	130
Maple [C] (verified)	131
Fricas [A] (verification not implemented)	132
Sympy [A] (verification not implemented)	133
Maxima [A] (verification not implemented)	133
Giac [A] (verification not implemented)	134
Mupad [B] (verification not implemented)	135
Reduce [B] (verification not implemented)	135

Optimal result

Integrand size = 26, antiderivative size = 113

$$\int \frac{-1+x^4+7x^5+x^9}{-7+6x^4+x^8} dx = \frac{x^2}{2} - \frac{\arctan\left(1 - \frac{\sqrt{2}x}{\sqrt[4]{7}}\right)}{2\sqrt{2}7^{3/4}} + \frac{\arctan\left(1 + \frac{\sqrt{2}x}{\sqrt[4]{7}}\right)}{2\sqrt{2}7^{3/4}} - \frac{\operatorname{arctanh}(x^2)}{2} + \frac{\operatorname{arctanh}\left(\frac{\sqrt{2}\sqrt[4]{7}x}{\sqrt{7+x^2}}\right)}{2\sqrt{2}7^{3/4}}$$

output

```
1/2*x^2+1/28*arctan(-1+1/7*2^(1/2)*x*7^(3/4))*2^(1/2)*7^(1/4)+1/28*arctan(
1+1/7*2^(1/2)*x*7^(3/4))*2^(1/2)*7^(1/4)-1/2*arctanh(x^2)+1/28*arctanh(2^(
1/2)*7^(1/4)*x/(7^(1/2)+x^2))*2^(1/2)*7^(1/4)
```

Mathematica [A] (verified)

Time = 0.12 (sec) , antiderivative size = 159, normalized size of antiderivative = 1.41

$$\int \frac{-1 + x^4 + 7x^5 + x^9}{-7 + 6x^4 + x^8} dx = \frac{1}{56} \left(28x^2 - 2\sqrt{2}\sqrt[4]{7} \arctan \left(1 - \frac{\sqrt{2}x}{\sqrt[4]{7}} \right) \right. \\ \left. + 2\sqrt{2}\sqrt[4]{7} \arctan \left(1 + \frac{\sqrt{2}x}{\sqrt[4]{7}} \right) + 14 \log(1 - x) \right. \\ \left. + 14 \log(1 + x) - 14 \log(1 + x^2) - \sqrt{2}\sqrt[4]{7} \log \left(7 \right. \right. \\ \left. \left. - \sqrt{2}7^{3/4}x + \sqrt{7}x^2 \right) + \sqrt{2}\sqrt[4]{7} \log \left(7 + \sqrt{2}7^{3/4}x + \sqrt{7}x^2 \right) \right)$$

input

```
Integrate[(-1 + x^4 + 7*x^5 + x^9)/(-7 + 6*x^4 + x^8), x]
```

output

```
(28*x^2 - 2*Sqrt[2]*7^(1/4)*ArcTan[1 - (Sqrt[2]*x)/7^(1/4)] + 2*Sqrt[2]*7^(1/4)*ArcTan[1 + (Sqrt[2]*x)/7^(1/4)] + 14*Log[1 - x] + 14*Log[1 + x] - 14*Log[1 + x^2] - Sqrt[2]*7^(1/4)*Log[7 - Sqrt[2]*7^(3/4)*x + Sqrt[7]*x^2] + Sqrt[2]*7^(1/4)*Log[7 + Sqrt[2]*7^(3/4)*x + Sqrt[7]*x^2])/56
```

Rubi [A] (verified)

Time = 0.36 (sec) , antiderivative size = 148, normalized size of antiderivative = 1.31, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.077$, Rules used = {2322, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{x^9 + 7x^5 + x^4 - 1}{x^8 + 6x^4 - 7} dx$$

↓ 2322

$$\int \left(\frac{x^4 - 1}{x^8 + 6x^4 - 7} + \frac{x(x^8 + 7x^4)}{x^8 + 6x^4 - 7} \right) dx$$

↓ 2009

$$-\frac{\arctan\left(1 - \frac{\sqrt{2x}}{\sqrt[4]{7}}\right)}{2\sqrt[4]{27^3}} + \frac{\arctan\left(\frac{\sqrt{2x}}{\sqrt[4]{7}} + 1\right)}{2\sqrt[4]{27^3}} - \frac{\operatorname{arctanh}(x^2)}{2} + \frac{x^2}{2} - \frac{\log\left(x^2 - \sqrt{2}\sqrt[4]{7}x + \sqrt{7}\right)}{4\sqrt[4]{27^3}} + \frac{\log\left(x^2 + \sqrt{2}\sqrt[4]{7}x + \sqrt{7}\right)}{4\sqrt[4]{27^3}}$$

input `Int[(-1 + x^4 + 7*x^5 + x^9)/(-7 + 6*x^4 + x^8),x]`

output `x^2/2 - ArcTan[1 - (Sqrt[2]*x)/7^(1/4)]/(2*Sqrt[2]*7^(3/4)) + ArcTan[1 + (Sqrt[2]*x)/7^(1/4)]/(2*Sqrt[2]*7^(3/4)) - ArcTanh[x^2]/2 - Log[Sqrt[7] - Sqrt[2]*7^(1/4)*x + x^2]/(4*Sqrt[2]*7^(3/4)) + Log[Sqrt[7] + Sqrt[2]*7^(1/4)*x + x^2]/(4*Sqrt[2]*7^(3/4))`

Defintions of rubi rules used

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

rule 2322 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := Module[{q = Expon[Pq, x], j, k}, Int[Sum[x^j*Sum[Coeff[Pq, x, j + k*n]*x^(k*n), {k, 0, (q - j)/n + 1}]*(a + b*x^n + c*x^(2*n))^p, {j, 0, n - 1}], x] /; FreeQ[{a, b, c, p}, x] && EqQ[n2, 2*n] && PolyQ[Pq, x] && NeQ[b^2 - 4*a*c, 0] && IGtQ[n, 0] && !PolyQ[Pq, x^n]`

Maple [C] (verified)

Result contains higher order function than in optimal. Order 9 vs. order 3.

Time = 0.08 (sec) , antiderivative size = 44, normalized size of antiderivative = 0.39

method	result
risch	$\frac{x^2}{2} + \frac{\sum_{R=\text{RootOf}(343Z^4+1)} -R \ln(x+7R)}{4} - \frac{\ln(x^2+1)}{4} + \frac{\ln(x^2-1)}{4}$
default	$\frac{x^2}{2} + \frac{7^{\frac{1}{4}}\sqrt{2} \left(\ln\left(\frac{x^2+7^{\frac{1}{4}}x\sqrt{2}+\sqrt{7}}{x^2-7^{\frac{1}{4}}x\sqrt{2}+\sqrt{7}}\right) + 2\arctan\left(1+\frac{\sqrt{2}x7^{\frac{3}{4}}}{7}\right) + 2\arctan\left(-1+\frac{\sqrt{2}x7^{\frac{3}{4}}}{7}\right) \right)}{56} + \frac{\ln(x-1)}{4} - \frac{\ln(x^2+1)}{4} + \frac{\ln(x+1)}{4}$

input `int((x^9+7*x^5+x^4-1)/(x^8+6*x^4-7),x,method=_RETURNVERBOSE)`

output `1/2*x^2+1/4*sum(_R*ln(x+7*_R),_R=RootOf(343*_Z^4+1))-1/4*ln(x^2+1)+1/4*ln(x^2-1)`

Fricas [A] (verification not implemented)

Time = 0.06 (sec) , antiderivative size = 95, normalized size of antiderivative = 0.84

$$\int \frac{-1 + x^4 + 7x^5 + x^9}{-7 + 6x^4 + x^8} dx = \frac{1}{2}x^2 + \frac{1}{2744} \cdot 1372^{\frac{3}{4}} \arctan\left(\frac{1}{7} \cdot 1372^{\frac{1}{4}}x + 1\right) + \frac{1}{2744} \cdot 1372^{\frac{3}{4}} \arctan\left(\frac{1}{7} \cdot 1372^{\frac{1}{4}}x - 1\right) + \frac{1}{5488} \cdot 1372^{\frac{3}{4}} \log\left(98x^2 + 1372^{\frac{3}{4}}x + 98\sqrt{7}\right) - \frac{1}{5488} \cdot 1372^{\frac{3}{4}} \log\left(98x^2 - 1372^{\frac{3}{4}}x + 98\sqrt{7}\right) - \frac{1}{4} \log(x^2 + 1) + \frac{1}{4} \log(x^2 - 1)$$

input `integrate((x^9+7*x^5+x^4-1)/(x^8+6*x^4-7),x, algorithm="fricas")`

output `1/2*x^2 + 1/2744*1372^(3/4)*arctan(1/7*1372^(1/4)*x + 1) + 1/2744*1372^(3/4)*arctan(1/7*1372^(1/4)*x - 1) + 1/5488*1372^(3/4)*log(98*x^2 + 1372^(3/4)*x + 98*sqrt(7)) - 1/5488*1372^(3/4)*log(98*x^2 - 1372^(3/4)*x + 98*sqrt(7)) - 1/4*log(x^2 + 1) + 1/4*log(x^2 - 1)`

Sympy [A] (verification not implemented)

Time = 0.22 (sec) , antiderivative size = 146, normalized size of antiderivative = 1.29

$$\int \frac{-1 + x^4 + 7x^5 + x^9}{-7 + 6x^4 + x^8} dx = \frac{x^2}{2} + \frac{\log(x^2 - 1)}{4} - \frac{\log(x^2 + 1)}{4} - \frac{\sqrt{2} \cdot \sqrt[4]{7} \log(x^2 - \sqrt{2} \cdot \sqrt[4]{7}x + \sqrt{7})}{56} + \frac{\sqrt{2} \cdot \sqrt[4]{7} \log(x^2 + \sqrt{2} \cdot \sqrt[4]{7}x + \sqrt{7})}{56} + \frac{\sqrt{2} \cdot \sqrt[4]{7} \operatorname{atan}\left(\frac{\sqrt{2} \cdot 7^{3/4}x}{7} - 1\right)}{28} + \frac{\sqrt{2} \cdot \sqrt[4]{7} \operatorname{atan}\left(\frac{\sqrt{2} \cdot 7^{3/4}x}{7} + 1\right)}{28}$$

input `integrate((x**9+7*x**5+x**4-1)/(x**8+6*x**4-7),x)`output `x**2/2 + log(x**2 - 1)/4 - log(x**2 + 1)/4 - sqrt(2)*7**(1/4)*log(x**2 - sqrt(2)*7**(1/4)*x + sqrt(7))/56 + sqrt(2)*7**(1/4)*log(x**2 + sqrt(2)*7**(1/4)*x + sqrt(7))/56 + sqrt(2)*7**(1/4)*atan(sqrt(2)*7**(3/4)*x/7 - 1)/28 + sqrt(2)*7**(1/4)*atan(sqrt(2)*7**(3/4)*x/7 + 1)/28`**Maxima [A] (verification not implemented)**

Time = 0.11 (sec) , antiderivative size = 132, normalized size of antiderivative = 1.17

$$\int \frac{-1 + x^4 + 7x^5 + x^9}{-7 + 6x^4 + x^8} dx = \frac{1}{2} x^2 + \frac{1}{28} \cdot 7^{1/4} \sqrt{2} \arctan\left(\frac{1}{14} \cdot 7^{3/4} \sqrt{2} (2x + 7^{1/4} \sqrt{2})\right) + \frac{1}{28} \cdot 7^{1/4} \sqrt{2} \arctan\left(\frac{1}{14} \cdot 7^{3/4} \sqrt{2} (2x - 7^{1/4} \sqrt{2})\right) + \frac{1}{56} \cdot 7^{1/4} \sqrt{2} \log(x^2 + 7^{1/4} \sqrt{2}x + \sqrt{7}) - \frac{1}{56} \cdot 7^{1/4} \sqrt{2} \log(x^2 - 7^{1/4} \sqrt{2}x + \sqrt{7}) - \frac{1}{4} \log(x^2 + 1) + \frac{1}{4} \log(x + 1) + \frac{1}{4} \log(x - 1)$$

input `integrate((x^9+7*x^5+x^4-1)/(x^8+6*x^4-7),x, algorithm="maxima")`

output

```
1/2*x^2 + 1/28*7^(1/4)*sqrt(2)*arctan(1/14*7^(3/4)*sqrt(2)*(2*x + 7^(1/4)*
sqrt(2))) + 1/28*7^(1/4)*sqrt(2)*arctan(1/14*7^(3/4)*sqrt(2)*(2*x - 7^(1/4)
)*sqrt(2))) + 1/56*7^(1/4)*sqrt(2)*log(x^2 + 7^(1/4)*sqrt(2)*x + sqrt(7))
- 1/56*7^(1/4)*sqrt(2)*log(x^2 - 7^(1/4)*sqrt(2)*x + sqrt(7)) - 1/4*log(x^
2 + 1) + 1/4*log(x + 1) + 1/4*log(x - 1)
```

Giac [A] (verification not implemented)

Time = 0.14 (sec) , antiderivative size = 122, normalized size of antiderivative = 1.08

$$\int \frac{-1 + x^4 + 7x^5 + x^9}{-7 + 6x^4 + x^8} dx = \frac{1}{2}x^2 + \frac{1}{28} \cdot 28^{\frac{1}{4}} \arctan\left(\frac{1}{14} \cdot 7^{\frac{3}{4}}\sqrt{2}\left(2x + 7^{\frac{1}{4}}\sqrt{2}\right)\right) + \frac{1}{28} \cdot 28^{\frac{1}{4}} \arctan\left(\frac{1}{14} \cdot 7^{\frac{3}{4}}\sqrt{2}\left(2x - 7^{\frac{1}{4}}\sqrt{2}\right)\right) + \frac{1}{56} \cdot 28^{\frac{1}{4}} \log\left(x^2 + 7^{\frac{1}{4}}\sqrt{2}x + \sqrt{7}\right) - \frac{1}{56} \cdot 28^{\frac{1}{4}} \log\left(x^2 - 7^{\frac{1}{4}}\sqrt{2}x + \sqrt{7}\right) - \frac{1}{4} \log(x^2 + 1) + \frac{1}{4} \log(|x + 1|) + \frac{1}{4} \log(|x - 1|)$$

input

```
integrate((x^9+7*x^5+x^4-1)/(x^8+6*x^4-7),x, algorithm="giac")
```

output

```
1/2*x^2 + 1/28*28^(1/4)*arctan(1/14*7^(3/4)*sqrt(2)*(2*x + 7^(1/4)*sqrt(2)
)) + 1/28*28^(1/4)*arctan(1/14*7^(3/4)*sqrt(2)*(2*x - 7^(1/4)*sqrt(2))) +
1/56*28^(1/4)*log(x^2 + 7^(1/4)*sqrt(2)*x + sqrt(7)) - 1/56*28^(1/4)*log(x
^2 - 7^(1/4)*sqrt(2)*x + sqrt(7)) - 1/4*log(x^2 + 1) + 1/4*log(abs(x + 1))
+ 1/4*log(abs(x - 1))
```

Mupad [B] (verification not implemented)

Time = 0.16 (sec) , antiderivative size = 124, normalized size of antiderivative = 1.10

$$\int \frac{-1 + x^4 + 7x^5 + x^9}{-7 + 6x^4 + x^8} dx$$

$$= \frac{\operatorname{atan}(x^2 \operatorname{li}) \operatorname{li}}{2} + \frac{x^2}{2} + \sqrt{2} 7^{1/4} \operatorname{atan}\left(\frac{\sqrt{2} 7^{1/4} x \left(\frac{89653248}{2401} + \frac{89653248i}{2401}\right)}{-\frac{1048576}{49} + \frac{\sqrt{7} 179306496i}{2401}}\right) + \frac{\sqrt{2} 7^{3/4} x \left(-\frac{524288}{343} + \frac{524288i}{343}\right)}{-\frac{1048576}{49} + \frac{\sqrt{7} 179306496i}{2401}} \left(\frac{1}{28} + \frac{1}{28}i\right) + \sqrt{2} 7^{1/4} \operatorname{atan}\left(\frac{\sqrt{2} 7^{1/4} x \left(\frac{89653248}{2401} - \frac{89653248i}{2401}\right)}{\frac{1048576}{49} + \frac{\sqrt{7} 179306496i}{2401}}\right) + \frac{\sqrt{2} 7^{3/4} x \left(-\frac{524288}{343} - \frac{524288i}{343}\right)}{\frac{1048576}{49} + \frac{\sqrt{7} 179306496i}{2401}} \left(\frac{1}{28} - \frac{1}{28}i\right)$$

input `int((x^4 + 7*x^5 + x^9 - 1)/(6*x^4 + x^8 - 7), x)`output `(atan(x^2*1i)*1i)/2 + x^2/2 + 2^(1/2)*7^(1/4)*atan((2^(1/2)*7^(1/4)*x*(89653248/2401 + 89653248i/2401))/((7^(1/2)*179306496i)/2401 - 1048576/49) - (2^(1/2)*7^(3/4)*x*(524288/343 - 524288i/343))/((7^(1/2)*179306496i)/2401 - 1048576/49)*(1/28 + 1i/28) - 2^(1/2)*7^(1/4)*atan((2^(1/2)*7^(1/4)*x*(89653248/2401 - 89653248i/2401))/((7^(1/2)*179306496i)/2401 + 1048576/49) - (2^(1/2)*7^(3/4)*x*(524288/343 + 524288i/343))/((7^(1/2)*179306496i)/2401 + 1048576/49)*(1/28 - 1i/28)`**Reduce [B] (verification not implemented)**

Time = 0.15 (sec) , antiderivative size = 123, normalized size of antiderivative = 1.09

$$\int \frac{-1 + x^4 + 7x^5 + x^9}{-7 + 6x^4 + x^8} dx = -\frac{\sqrt{2} 7^{1/4} \operatorname{atan}\left(\frac{(\sqrt{2} 7^{1/4} - 2x) 7^{3/4}}{7\sqrt{2}}\right)}{28} + \frac{\sqrt{2} 7^{1/4} \operatorname{atan}\left(\frac{(\sqrt{2} 7^{1/4} + 2x) 7^{3/4}}{7\sqrt{2}}\right)}{28}$$

$$- \frac{\sqrt{2} 7^{1/4} \log\left(-\sqrt{2} 7^{1/4} x + \sqrt{7} + x^2\right)}{56}$$

$$+ \frac{\sqrt{2} 7^{1/4} \log\left(\sqrt{2} 7^{1/4} x + \sqrt{7} + x^2\right)}{56}$$

$$- \frac{\log(x^2 + 1)}{4} + \frac{\log(x - 1)}{4} + \frac{\log(x + 1)}{4} + \frac{x^2}{2}$$

input `int((x^9+7*x^5+x^4-1)/(x^8+6*x^4-7), x)`

output

```
( - 2*sqrt(2)*7**(1/4)*atan((sqrt(2)*7**(1/4) - 2*x)/(sqrt(2)*7**(1/4))) +  
 2*sqrt(2)*7**(1/4)*atan((sqrt(2)*7**(1/4) + 2*x)/(sqrt(2)*7**(1/4))) - sq  
rt(2)*7**(1/4)*log( - sqrt(2)*7**(1/4)*x + sqrt(7) + x**2) + sqrt(2)*7**(1  
/4)*log(sqrt(2)*7**(1/4)*x + sqrt(7) + x**2) - 14*log(x**2 + 1) + 14*log(x  
- 1) + 14*log(x + 1) + 28*x**2)/56
```

3.15
$$\int \frac{-ahx^{-1+\frac{n}{2}}+cfx^{-1+n}+cgx^{-1+2n}+chx^{-1+\frac{5n}{2}}}{(a+bx^n+cx^{2n})^{3/2}} dx$$

Optimal result	137
Mathematica [A] (verified)	137
Rubi [A] (verified)	138
Maple [F]	139
Fricas [A] (verification not implemented)	139
Sympy [F(-1)]	140
Maxima [F]	140
Giac [F]	141
Mupad [F(-1)]	141
Reduce [F]	141

Optimal result

Integrand size = 63, antiderivative size = 87

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{3/2}} dx =$$

$$-\frac{2hx^{n/2}}{n\sqrt{a + bx^n + cx^{2n}}} - \frac{2c(bf - 2ag + (2cf - bg)x^n)}{(b^2 - 4ac)n\sqrt{a + bx^n + cx^{2n}}}$$

output `-2*h*x^(1/2*n)/n/(a+b*x^n+c*x^(2*n))^(1/2)-2*c*(b*f-2*a*g+(-b*g+2*c*f)*x^n)/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))^(1/2)`

Mathematica [A] (verified)

Time = 2.94 (sec) , antiderivative size = 84, normalized size of antiderivative = 0.97

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{3/2}} dx =$$

$$-\frac{2(bcf - 2acg + b^2hx^{n/2} - 4achx^{n/2} + 2c^2fx^n - bcgx^n)}{(b^2 - 4ac)n\sqrt{a + bx^n + cx^{2n}}}$$

input `Integrate[(-(a*h*x^(-1 + n/2)) + c*f*x^(-1 + n) + c*g*x^(-1 + 2*n) + c*h*x^(-1 + (5*n)/2))/(a + b*x^n + c*x^(2*n))^(3/2),x]`

output `(-2*(b*c*f - 2*a*c*g + b^2*h*x^(n/2) - 4*a*c*h*x^(n/2) + 2*c^2*f*x^n - b*c*g*x^n)/((b^2 - 4*a*c)*n*Sqrt[a + b*x^n + c*x^(2*n)])`

Rubi [A] (verified)

Time = 0.38 (sec) , antiderivative size = 75, normalized size of antiderivative = 0.86, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.032$, Rules used = {2029, 2289}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{-ahx^{\frac{n}{2}-1} + cfx^{n-1} + cgx^{2n-1} + chx^{\frac{5n}{2}-1}}{(a + bx^n + cx^{2n})^{3/2}} dx$$

↓ 2029

$$\int \frac{x^{\frac{n}{2}-1}(-ah + cfx^{n/2} + cgx^{3n/2} + chx^{2n})}{(a + bx^n + cx^{2n})^{3/2}} dx$$

↓ 2289

$$\frac{2(hx^{n/2}(b^2 - 4ac) + c(bf - 2ag) + cx^n(2cf - bg))}{n(b^2 - 4ac)\sqrt{a + bx^n + cx^{2n}}}$$

input `Int[(-(a*h*x^(-1 + n/2)) + c*f*x^(-1 + n) + c*g*x^(-1 + 2*n) + c*h*x^(-1 + (5*n)/2))/(a + b*x^n + c*x^(2*n))^(3/2),x]`

output `(-2*(c*(b*f - 2*a*g) + (b^2 - 4*a*c)*h*x^(n/2) + c*(2*c*f - b*g)*x^n)/((b^2 - 4*a*c)*n*Sqrt[a + b*x^n + c*x^(2*n)])`

Definitions of rubi rules used

rule 2029

```
Int[(Fx_)*((d_)*(x_)^(q_) + (a_)*(x_)^(r_) + (b_)*(x_)^(s_) + (c_)*
(x_)^(t_))^(p_), x_Symbol] := Int[x^(p*r)*(a + b*x^(s - r) + c*x^(t - r)
+ d*x^(q - r))^p*Fx, x] /; FreeQ[{a, b, c, d, r, s, t, q}, x] && IntegerQ[p]
&& PosQ[s - r] && PosQ[t - r] && PosQ[q - r] && !(EqQ[p, 1] && EqQ[u, 1]
)
```

rule 2289

```
Int[((x_)^(m_)*((e_) + (f_)*(x_)^(q_) + (g_)*(x_)^(r_) + (h_)*(x_)^(s
_)))/((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(3/2), x_Symbol] := Sim
p[-(2*c*(b*f - 2*a*g) + 2*h*(b^2 - 4*a*c)*x^(n/2) + 2*c*(2*c*f - b*g)*x^n)/
(c*n*(b^2 - 4*a*c)*Sqrt[a + b*x^n + c*x^(2*n)]), x] /; FreeQ[{a, b, c, e, f
, g, h, m, n}, x] && EqQ[n2, 2*n] && EqQ[q, n/2] && EqQ[r, 3*(n/2)] && EqQ[
s, 2*n] && NeQ[b^2 - 4*a*c, 0] && EqQ[2*m - n + 2, 0] && EqQ[c*e + a*h, 0]
```

Maple [F]

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{\frac{3}{2}}} dx$$

input

```
int((-a*h*x^(-1+1/2*n)+c*f*x^(-1+n)+c*g*x^(-1+2*n)+c*h*x^(-1+5/2*n))/(a+b*
x^n+c*x^(2*n))^(3/2),x)
```

output

```
int((-a*h*x^(-1+1/2*n)+c*f*x^(-1+n)+c*g*x^(-1+2*n)+c*h*x^(-1+5/2*n))/(a+b*
x^n+c*x^(2*n))^(3/2),x)
```

Fricas [A] (verification not implemented)

Time = 0.08 (sec) , antiderivative size = 137, normalized size of antiderivative = 1.57

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{3/2}} dx =$$

$$\frac{2\sqrt{cx^4x^{2n-4} + bx^2x^{n-2} + a}\left((2c^2f - bcg)x^2x^{n-2} + (b^2 - 4ac)hxx^{\frac{1}{2}n-1} + bcf - 2acg\right)}{(b^2c - 4ac^2)nx^4x^{2n-4} + (b^3 - 4abc)nx^2x^{n-2} + (ab^2 - 4a^2c)n}$$

input `integrate((-a*h*x^(-1+1/2*n)+c*f*x^(-1+n)+c*g*x^(-1+2*n)+c*h*x^(-1+5/2*n))/(a+b*x^n+c*x^(2*n))^(3/2),x, algorithm="fricas")`

output `-2*sqrt(c*x^4*x^(2*n - 4) + b*x^2*x^(n - 2) + a)*((2*c^2*f - b*c*g)*x^2*x^(n - 2) + (b^2 - 4*a*c)*h*x*x^(1/2*n - 1) + b*c*f - 2*a*c*g)/((b^2*c - 4*a*c^2)*n*x^4*x^(2*n - 4) + (b^3 - 4*a*b*c)*n*x^2*x^(n - 2) + (a*b^2 - 4*a^2*c)*n)`

Sympy [F(-1)]

Timed out.

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{3/2}} dx = \text{Timed out}$$

input `integrate((-a*h*x**(-1+1/2*n)+c*f*x**(-1+n)+c*g*x**(-1+2*n)+c*h*x**(-1+5/2*n))/(a+b*x**n+c*x**(2*n))**(3/2),x)`

output Timed out

Maxima [F]

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{3/2}} dx = \int \frac{chx^{\frac{5}{2}n-1} + cgx^{2n-1} + cfx^{n-1} - ahx^{\frac{1}{2}n-1}}{(cx^{2n} + bx^n + a)^{\frac{3}{2}}} dx$$

input `integrate((c*h*x^(5/2*n - 1) + c*g*x^(2*n - 1) + c*f*x^(n - 1) - a*h*x^(1/2*n - 1))/(c*x^(2*n) + b*x^n + a)^(3/2),x, algorithm="maxima")`

output `integrate((c*h*x^(5/2*n - 1) + c*g*x^(2*n - 1) + c*f*x^(n - 1) - a*h*x^(1/2*n - 1))/(c*x^(2*n) + b*x^n + a)^(3/2),x)`

Giac [F]

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{3/2}} dx = \int \frac{chx^{\frac{5}{2}n-1} + cgx^{2n-1} + cfx^{n-1} - ahx^{\frac{1}{2}n-1}}{(cx^{2n} + bx^n + a)^{\frac{3}{2}}} dx$$

input `integrate((-a*h*x^(-1+1/2*n)+c*f*x^(-1+n)+c*g*x^(-1+2*n)+c*h*x^(-1+5/2*n))/(a+b*x^n+c*x^(2*n))^(3/2),x, algorithm="giac")`

output `integrate((c*h*x^(5/2*n - 1) + c*g*x^(2*n - 1) + c*f*x^(n - 1) - a*h*x^(1/2*n - 1))/(c*x^(2*n) + b*x^n + a)^(3/2), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{3/2}} dx = \int \frac{c g x^{2n-1} - a h x^{\frac{n}{2}-1} + c h x^{\frac{5n}{2}-1} + c f x^{n-1}}{(a + b x^n + c x^{2n})^{3/2}} dx$$

input `int((c*g*x^(2*n - 1) - a*h*x^(n/2 - 1) + c*h*x^((5*n)/2 - 1) + c*f*x^(n - 1))/(a + b*x^n + c*x^(2*n))^(3/2),x)`

output `int((c*g*x^(2*n - 1) - a*h*x^(n/2 - 1) + c*h*x^((5*n)/2 - 1) + c*f*x^(n - 1))/(a + b*x^n + c*x^(2*n))^(3/2), x)`

Reduce [F]

$$\int \frac{-ahx^{-1+\frac{n}{2}} + cfx^{-1+n} + cgx^{-1+2n} + chx^{-1+\frac{5n}{2}}}{(a + bx^n + cx^{2n})^{3/2}} dx = \text{too large to display}$$

input `int((-a*h*x^(-1+1/2*n)+c*f*x^(-1+n)+c*g*x^(-1+2*n)+c*h*x^(-1+5/2*n))/(a+b*x^n+c*x^(2*n))^(3/2),x)`

output

```
( - 33948915000*x**((25*n)/2)*sqrt(x**(2*n)*c + x**n*b + a)*a*c**9*h + 848
7228750*x**((25*n)/2)*sqrt(x**(2*n)*c + x**n*b + a)*b**2*c**8*h + 38798760
000*x**((23*n)/2)*sqrt(x**(2*n)*c + x**n*b + a)*a*b*c**8*h - 9699690000*x*
*((23*n)/2)*sqrt(x**(2*n)*c + x**n*b + a)*b**3*c**7*h - 164384220000*x**((
21*n)/2)*sqrt(x**(2*n)*c + x**n*b + a)*a**2*c**8*h + 181996815000*x**((21*
n)/2)*sqrt(x**(2*n)*c + x**n*b + a)*a*b**2*c**7*h - 35225190000*x**((21*n)
/2)*sqrt(x**(2*n)*c + x**n*b + a)*b**4*c**6*h + 140900760000*x**((19*n)/2)
*sqrt(x**(2*n)*c + x**n*b + a)*a**2*b*c**7*h - 200990790000*x**((19*n)/2)*
sqrt(x**(2*n)*c + x**n*b + a)*a*b**3*c**6*h + 41441400000*x**((19*n)/2)*sq
rt(x**(2*n)*c + x**n*b + a)*b**5*c**5*h - 312330018000*x**((17*n)/2)*sqrt(
x**(2*n)*c + x**n*b + a)*a**3*c**7*h + 626263918644*x**((17*n)/2)*sqrt(x**
(2*n)*c + x**n*b + a)*a**2*b**2*c**6*h - 347580123072*x**((17*n)/2)*sqrt(x
**(2*n)*c + x**n*b + a)*a*b**4*c**5*h + 52633692384*x**((17*n)/2)*sqrt(x**
(2*n)*c + x**n*b + a)*b**6*c**4*h + 178474296000*x**((15*n)/2)*sqrt(x**(2*
n)*c + x**n*b + a)*a**3*b*c**6*h - 477030591408*x**((15*n)/2)*sqrt(x**(2*n)
)*c + x**n*b + a)*a**2*b**3*c**5*h + 367222720704*x**((15*n)/2)*sqrt(x**(2
*n)*c + x**n*b + a)*a*b**5*c**4*h - 64779929088*x**((15*n)/2)*sqrt(x**(2*n)
)*c + x**n*b + a)*b**7*c**3*h - 283936380000*x**((13*n)/2)*sqrt(x**(2*n)*c
+ x**n*b + a)*a**4*c**6*h + 843283916760*x**((13*n)/2)*sqrt(x**(2*n)*c +
x**n*b + a)*a**3*b**2*c**5*h - 806242031280*x**((13*n)/2)*sqrt(x**(2*n)...
```

3.16 $\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$

Optimal result	143
Mathematica [A] (verified)	143
Rubi [A] (verified)	144
Maple [A] (verified)	144
Fricas [A] (verification not implemented)	145
Sympy [B] (verification not implemented)	145
Maxima [A] (verification not implemented)	146
Giac [B] (verification not implemented)	146
Mupad [B] (verification not implemented)	147
Reduce [B] (verification not implemented)	147

Optimal result

Integrand size = 45, antiderivative size = 20

$$\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$$

$$= x(a + bx^n + cx^{2n})^{1+p}$$

output `x*(a+b*x^n+c*x^(2*n))^(p+1)`

Mathematica [A] (verified)

Time = 0.83 (sec) , antiderivative size = 19, normalized size of antiderivative = 0.95

$$\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$$

$$= x(a + x^n(b + cx^n))^{1+p}$$

input `Integrate[(a + b*x^n + c*x^(2*n))^p*(a + b*(1 + n + n*p)*x^n + c*(1 + 2*n*(1 + p))*x^(2*n)),x]`

output `x*(a + x^n*(b + c*x^n))^(1 + p)`

Rubi [A] (verified)

Time = 0.19 (sec) , antiderivative size = 20, normalized size of antiderivative = 1.00, number of steps used = 1, number of rules used = 1, $\frac{\text{number of rules}}{\text{integrand size}} = 0.022$, Rules used = {2309}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (a + bx^n + cx^{2n})^p (a + b(np + n + 1)x^n + c(2n(p + 1) + 1)x^{2n}) dx$$

$$\downarrow \text{2309}$$

$$x(a + bx^n + cx^{2n})^{p+1}$$

input

```
Int[(a + b*x^n + c*x^(2*n))^p*(a + b*(1 + n + n*p)*x^n + c*(1 + 2*n*(1 + p))
)*x^(2*n)], x]
```

output

```
x*(a + b*x^n + c*x^(2*n))^(1 + p)
```

Defintions of rubi rules used

rule 2309

```
Int[((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p_)*((d_) + (e_)*(x_)^(n_) + (f_)*(x_)^(n2_)), x_Symbol] :> Simp[d*x*((a + b*x^n + c*x^(2*n))^(p + 1)/a), x] /; FreeQ[{a, b, c, d, e, f, n, p}, x] && EqQ[n2, 2*n] && EqQ[a*e - b*d*(n*(p + 1) + 1), 0] && EqQ[a*f - c*d*(2*n*(p + 1) + 1), 0]
```

Maple [A] (verified)

Time = 2.71 (sec) , antiderivative size = 33, normalized size of antiderivative = 1.65

method	result	size
risch	$x(a + bx^n + cx^{2n})(a + bx^n + cx^{2n})^p$	33
parallelrisch	$\frac{xx^n(a+bx^n+cx^{2n})^pbc+xx^{2n}(a+bx^n+cx^{2n})^pc^2+x(a+bx^n+cx^{2n})^pac}{c}$	75

input `int((a+b*x^n+c*x^(2*n))^p*(a+b*(n*p+n+1)*x^n+c*(1+2*n*(p+1))*x^(2*n)),x,method=_RETURNVERBOSE)`

output `x*(a+b*x^n+c*(x^n)^2)*(a+b*x^n+c*(x^n)^2)^p`

Fricas [A] (verification not implemented)

Time = 0.07 (sec) , antiderivative size = 35, normalized size of antiderivative = 1.75

$$\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$$

$$= (cxx^{2n} + bxx^n + ax)(cx^{2n} + bx^n + a)^p$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(a+b*(n*p+n+1)*x^n+c*(1+2*n*(p+1))*x^(2*n)),x,algorithm="fricas")`

output `(c*x*x^(2*n) + b*x*x^n + a*x)*(c*x^(2*n) + b*x^n + a)^p`

Sympy [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 63 vs. 2(17) = 34.

Time = 27.64 (sec) , antiderivative size = 63, normalized size of antiderivative = 3.15

$$\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$$

$$= ax(a + bx^n + cx^{2n})^p + bxx^n(a + bx^n + cx^{2n})^p + cxx^{2n}(a + bx^n + cx^{2n})^p$$

input `integrate((a+b*x**n+c*x**(2*n))**p*(a+b*(n*p+n+1)*x**n+c*(1+2*n*(p+1))*x**(2*n)),x)`

output `a*x*(a + b*x**n + c*x**(2*n))**p + b*x*x**n*(a + b*x**n + c*x**(2*n))**p + c*x*x**(2*n)*(a + b*x**n + c*x**(2*n))**p`

Maxima [A] (verification not implemented)

Time = 0.09 (sec) , antiderivative size = 35, normalized size of antiderivative = 1.75

$$\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$$

$$= (cx^{2n} + bx^n + a)(cx^{2n} + bx^n + a)^p$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(a+b*(n*p+n+1)*x^n+c*(1+2*n*(p+1))*x^(2*n)),x, algorithm="maxima")`

output `(c*x*x^(2*n) + b*x*x^n + a*x)*(c*x^(2*n) + b*x^n + a)^p`

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 66 vs. 2(20) = 40.

Time = 0.18 (sec) , antiderivative size = 66, normalized size of antiderivative = 3.30

$$\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$$

$$= (cx^{2n} + bx^n + a)^p cxx^{2n} + (cx^{2n} + bx^n + a)^p bxx^n + (cx^{2n} + bx^n + a)^p ax$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(a+b*(n*p+n+1)*x^n+c*(1+2*n*(p+1))*x^(2*n)),x, algorithm="giac")`

output `(c*x^(2*n) + b*x^n + a)^p*c*x*x^(2*n) + (c*x^(2*n) + b*x^n + a)^p*b*x*x^n + (c*x^(2*n) + b*x^n + a)^p*a*x`

Mupad [B] (verification not implemented)

Time = 20.84 (sec) , antiderivative size = 35, normalized size of antiderivative = 1.75

$$\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$$

$$= (a + bx^n + cx^{2n})^p (ax + bxx^n + cxx^{2n})$$

input

```
int((a + b*x^n + c*x^(2*n))^p*(a + b*x^n*(n + n*p + 1) + c*x^(2*n)*(2*n*(p + 1) + 1)),x)
```

output

```
(a + b*x^n + c*x^(2*n))^p*(a*x + b*x*x^n + c*x*x^(2*n))
```

Reduce [B] (verification not implemented)

Time = 0.16 (sec) , antiderivative size = 32, normalized size of antiderivative = 1.60

$$\int (a + bx^n + cx^{2n})^p (a + b(1 + n + np)x^n + c(1 + 2n(1 + p))x^{2n}) dx$$

$$= (x^{2n}c + x^nb + a)^p x(x^{2n}c + x^nb + a)$$

input

```
int((a+b*x^n+c*x^(2*n))^p*(a+b*(n*p+n+1)*x^n+c*(1+2*n*(p+1))*x^(2*n)),x)
```

output

```
(x**(2*n)*c + x**n*b + a)**p*x*(x**(2*n)*c + x**n*b + a)
```

3.17 $\int \frac{A+Bx^n+Cx^{2n}}{a+bx^n+cx^{2n}} dx$

Optimal result	148
Mathematica [A] (verified)	149
Rubi [F]	149
Maple [F]	150
Fricas [F]	150
Sympy [F]	150
Maxima [F]	151
Giac [F]	151
Mupad [F(-1)]	151
Reduce [B] (verification not implemented)	152

Optimal result

Integrand size = 31, antiderivative size = 204

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx$$

$$= \frac{Cx}{c}$$

$$+ \frac{\left(Bc - bC - \frac{bBc - b^2C - 2c(Ac - aC)}{\sqrt{b^2 - 4ac}} \right) x \operatorname{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right)}{c(b - \sqrt{b^2 - 4ac})}$$

$$+ \frac{\left(Bc - bC + \frac{bBc - b^2C - 2c(Ac - aC)}{\sqrt{b^2 - 4ac}} \right) x \operatorname{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}} \right)}{c(b + \sqrt{b^2 - 4ac})}$$

output

```
C*x/c+(B*c-C*b-(b*B*c-b^2*C-2*c*(A*c-C*a))/(-4*a*c+b^2)^(1/2))*x*hypergeom
([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/c/(b-(-4*a*c+b^2)^(1/2))
)+(B*c-C*b+(b*B*c-b^2*C-2*c*(A*c-C*a))/(-4*a*c+b^2)^(1/2))*x*hypergeom([1,
1/n], [1+1/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c/(b+(-4*a*c+b^2)^(1/2))
```

Mathematica [A] (verified)

Time = 0.95 (sec) , antiderivative size = 195, normalized size of antiderivative = 0.96

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx$$

$$= \frac{x \left(C + \frac{\left(Bc - bC + \frac{-bBc + b^2C + 2c(Ac - aC)}{\sqrt{b^2 - 4ac}} \right) \text{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, \frac{2cx^n}{-b + \sqrt{b^2 - 4ac}} \right)}{b - \sqrt{b^2 - 4ac}} + \frac{\left(Bc - bC + \frac{bBc - b^2C + 2c(-Ac + aC)}{\sqrt{b^2 - 4ac}} \right) \text{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, \frac{2cx^n}{b + \sqrt{b^2 - 4ac}} \right)}{b + \sqrt{b^2 - 4ac}} \right)}{c}$$

input `Integrate[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n)),x]`output `(x*(C + ((B*c - b*C + (-b*B*c) + b^2*C + 2*c*(A*c - a*C))/Sqrt[b^2 - 4*a*c])*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])])/(b - Sqrt[b^2 - 4*a*c]) + ((B*c - b*C + (b*B*c - b^2*C + 2*c*(-(A*c) + a*C))/Sqrt[b^2 - 4*a*c])*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(b + Sqrt[b^2 - 4*a*c]))/c`**Rubi [F]**

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx$$

$$\downarrow \text{2329}$$

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx$$

input `Int[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n)),x]`output `$Aborted`

Definitions of rubi rules used

rule 2329 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^(p_.), x_Symbol] :=
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n)),x)`

output `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n)),x)`

Fricas [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx = \int \frac{Cx^{2n} + Bx^n + A}{cx^{2n} + bx^n + a} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n)),x, algorithm="fricas")`

output `integral((C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a), x)`

SymPy [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx = \int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx$$

input `integrate((A+B*x**n+C*x**(2*n))/(a+b*x**n+c*x**(2*n)),x)`

output `Integral((A + B*x**n + C*x**(2*n))/(a + b*x**n + c*x**(2*n)), x)`

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx = \int \frac{Cx^{2n} + Bx^n + A}{cx^{2n} + bx^n + a} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n)),x, algorithm="maxima")`

output `C*x/c + integrate(-(C*a - A*c + (C*b - B*c)*x^n)/(c^2*x^(2*n) + b*c*x^n + a*c), x)`

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx = \int \frac{Cx^{2n} + Bx^n + A}{cx^{2n} + bx^n + a} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n)),x, algorithm="giac")`

output `integrate((C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx = \int \frac{A + Cx^{2n} + Bx^n}{a + bx^n + cx^{2n}} dx$$

input `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n)),x)`

output `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n)), x)`

Reduce [B] (verification not implemented)

Time = 0.15 (sec) , antiderivative size = 1, normalized size of antiderivative = 0.00

$$\int \frac{A + Bx^n + Cx^{2n}}{a + bx^n + cx^{2n}} dx = x$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n)),x)`

output `x`

3.18 $\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^2} dx$

Optimal result	153
Mathematica [B] (warning: unable to verify)	154
Rubi [A] (verified)	155
Maple [F]	157
Fricas [F]	157
Sympy [F(-1)]	157
Maxima [F]	158
Giac [F]	158
Mupad [F(-1)]	158
Reduce [F]	159

Optimal result

Integrand size = 31, antiderivative size = 382

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx = \frac{x(A(b^2 - 2ac) - a(bB - 2aC) + (Abc - 2aBc + abC)x^n)}{a(b^2 - 4ac)n(a + bx^n + cx^{2n})} - \frac{\left((Abc - 2aBc + abC)(1 - n) - \frac{Ac(4ac(1-2n) - b^2(1-n)) - a(4acC - b^2C(1-n) - 2bBcn)}{\sqrt{b^2 - 4ac}} \right) x \operatorname{Hypergeometric2F1}\left(1, 1/n, [1+1/n], -2cx^n/(b - (-4ac + b^2)^{1/2})\right)}{a(b^2 - 4ac)(b - \sqrt{b^2 - 4ac})n} + \frac{\left((Abc - 2aBc + abC)(1 - n) + \frac{Ac(4ac(1-2n) - b^2(1-n)) - a(4acC - 2bBcn - b^2(C - Cn))}{\sqrt{b^2 - 4ac}} \right) x \operatorname{Hypergeometric2F1}\left(1, 1/n, [1+1/n], -2cx^n/(b + (-4ac + b^2)^{1/2})\right)}{a(b^2 - 4ac)(b + \sqrt{b^2 - 4ac})n}$$

output

```
x*(A*(-2*a*c+b^2)-a*(B*b-2*C*a)+(A*b*c-2*B*a*c+C*a*b)*x^n)/a/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))-((A*b*c-2*B*a*c+C*a*b)*(1-n)-(A*c*(4*a*c*(1-2*n)-b^2*(1-n))-a*(4*a*c*C-b^2*C*(1-n)-2*b*B*c*n))/(-4*a*c+b^2)^(1/2))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b-(-4*a*c+b^2)^(1/2))/n-((A*b*c-2*B*a*c+C*a*b)*(1-n)+(A*c*(4*a*c*(1-2*n)-b^2*(1-n))-a*(4*a*c*C-2*b*B*c*n-b^2*(-C*n+C)))/(-4*a*c+b^2)^(1/2))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a/(-4*a*c+b^2)/(b+(-4*a*c+b^2)^(1/2))/n
```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 4120 vs. 2(382) = 764.

Time = 7.33 (sec) , antiderivative size = 4120, normalized size of antiderivative = 10.79

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx = \text{Result too large to show}$$

input `Integrate[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n))^2,x]`

output

```
((-(A*b^2) + a*b*B + 2*a*A*c - 2*a^2*C + A*b^2*n - 4*a*A*c*n)*x)/(a^2*(-b^2 + 4*a*c)*n) + ((A*b^2 - a*b*B - 2*a*A*c + 2*a^2*C - A*b^2*n + 4*a*A*c*n)*x)/(a^2*(-b^2 + 4*a*c)*n) - (x*(A*b^2 - a*b*B - 2*a*A*c + 2*a^2*C + A*b*c*x^n - 2*a*B*c*x^n + a*b*C*x^n))/(a*(-b^2 + 4*a*c)*n*(a + b*x^n + c*x^(2*n))) - (A*b*c*x^(1 + n)*(x^n)^(n^(-1) - (1 + n)/n)*(-(Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, -1/2*(-b - Sqrt[b^2 - 4*a*c]])/(c*(-1/2*(-b - Sqrt[b^2 - 4*a*c]))/c + x^n)))/(Sqrt[b^2 - 4*a*c]*(x^n/(-1/2*(-b - Sqrt[b^2 - 4*a*c]))/c + x^n))^n^(-1))) + Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, -1/2*(-b + Sqrt[b^2 - 4*a*c]])/(c*(-1/2*(-b + Sqrt[b^2 - 4*a*c]))/c + x^n)]/(Sqrt[b^2 - 4*a*c]*(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c]))/c + x^n))^n^(-1))) + (2*B*c*x^(1 + n)*(x^n)^(n^(-1) - (1 + n)/n)*(-(Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, -1/2*(-b - Sqrt[b^2 - 4*a*c]])/(c*(-1/2*(-b - Sqrt[b^2 - 4*a*c]))/c + x^n)))/(Sqrt[b^2 - 4*a*c]*(x^n/(-1/2*(-b - Sqrt[b^2 - 4*a*c]))/c + x^n))^n^(-1))) + Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, -1/2*(-b + Sqrt[b^2 - 4*a*c]])/(c*(-1/2*(-b + Sqrt[b^2 - 4*a*c]))/c + x^n)]/(Sqrt[b^2 - 4*a*c]*(x^n/(-1/2*(-b + Sqrt[b^2 - 4*a*c]))/c + x^n))^n^(-1))) + Hypergeometric2F1[-n^(-1), -n^(-1), (-1 + n)/n, -1/2*(-b - Sqrt[b^2 - 4*a*c]])/(c*(-1/2*(-b - Sqrt[b^2 - 4*a*c]))/c + x^n)]/(Sqrt[b^2 - 4*a*c]*(x^n/(-1/2*(-b - Sqrt[b^2 - 4*a*c]))/c + x^n))^n^(-1))) + Hyper...
```

Rubi [A] (verified)

Time = 0.88 (sec) , antiderivative size = 368, normalized size of antiderivative = 0.96, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.097$, Rules used = {2327, 1752, 778}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx$$

↓ 2327

$$\int \frac{-((Abc-2aBc+abC)(1-n)x^n+abB-2a^2C+2aAc(1-2n)-Ab^2(1-n))}{bx^n+cx^{2n}+a} dx + \frac{x(A(b^2-2ac) + x^n(abC - 2aBc + Abc) - a(bB - 2aC))}{an(b^2-4ac)(a+bx^n+cx^{2n})}$$

↓ 1752

$$\frac{-\frac{1}{2}((1-n)(abC - 2aBc + Abc) - \frac{Ac(4ac(1-2n)-b^2(1-n))-a(4acC-(b^2(C-Cn))-2bBcn)}{\sqrt{b^2-4ac}}) \int \frac{1}{cx^n+\frac{1}{2}(b-\sqrt{b^2-4ac})} dx - \frac{1}{2} \frac{x(A(b^2-2ac) + x^n(abC - 2aBc + Abc) - a(bB - 2aC))}{an(b^2-4ac)(a+bx^n+cx^{2n})}}{an(b^2-4ac)(a+bx^n+cx^{2n})}$$

↓ 778

$$\frac{x \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) \left((1-n)(abC - 2aBc + Abc) - \frac{Ac(4ac(1-2n)-b^2(1-n))-a(4acC-(b^2(C-Cn))-2bBcn)}{\sqrt{b^2-4ac}}\right) - \frac{1}{2} \frac{x(A(b^2-2ac) + x^n(abC - 2aBc + Abc) - a(bB - 2aC))}{an(b^2-4ac)(a+bx^n+cx^{2n})}}{b-\sqrt{b^2-4ac}}}{an(b^2-4ac)(a+bx^n+cx^{2n})}$$

input `Int[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n))^2, x]`

output

```
(x*(A*(b^2 - 2*a*c) - a*(b*B - 2*a*C) + (A*b*c - 2*a*B*c + a*b*C)*x^n))/(a
*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))) + (-((((A*b*c - 2*a*B*c + a*b*C)
*(1 - n) - (A*c*(4*a*c*(1 - 2*n) - b^2*(1 - n)) - a*(4*a*c*C - 2*b*B*c*n -
b^2*(C - C*n)))/Sqrt[b^2 - 4*a*c])*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-
-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])]/(b - Sqrt[b^2 - 4*a*c])) - (((A*
b*c - 2*a*B*c + a*b*C)*(1 - n) + (A*c*(4*a*c*(1 - 2*n) - b^2*(1 - n)) - a*
(4*a*c*C - 2*b*B*c*n - b^2*(C - C*n)))/Sqrt[b^2 - 4*a*c])*x*Hypergeometric
2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]/(b + Sqrt[
b^2 - 4*a*c]))/(a*(b^2 - 4*a*c)*n)
```

Defintions of rubi rules used

rule 778

```
Int[((a_) + (b_.)*(x_)^(n_))^(p_), x_Symbol] := Simp[a^p*x*Hypergeometric2F
1[-p, 1/n, 1/n + 1, (-b)*(x^n/a)], x] /; FreeQ[{a, b, n, p}, x] && !IGtQ[p
, 0] && !IntegerQ[1/n] && !ILtQ[Simplify[1/n + p], 0] && (IntegerQ[p] ||
GtQ[a, 0])
```

rule 1752

```
Int[((d_) + (e_.)*(x_)^(n_))/((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_)), x
_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[(e/2 + (2*c*d - b*e)/(2*q))
Int[1/(b/2 - q/2 + c*x^n), x], x] + Simp[(e/2 - (2*c*d - b*e)/(2*q)) I
nt[1/(b/2 + q/2 + c*x^n), x], x]] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2
, 2*n] && NeQ[b^2 - 4*a*c, 0] && NeQ[c*d^2 - b*d*e + a*e^2, 0] && (PosQ[b^2
- 4*a*c] || !IGtQ[n/2, 0])
```

rule 2327

```
Int[(P2_)*((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := Wi
th[{d = Coeff[P2, x^n, 0], e = Coeff[P2, x^n, 1], f = Coeff[P2, x^n, 2]}, S
imp[(-x)*(b^2*d - 2*a*(c*d - a*f) - a*b*e + (b*(c*d + a*f) - 2*a*c*e)*x^n)*
((a + b*x^n + c*x^(2*n))^(p + 1)/(a*n*(p + 1)*(b^2 - 4*a*c))), x] - Simp[1/
(a*n*(p + 1)*(b^2 - 4*a*c)) Int[(a + b*x^n + c*x^(2*n))^(p + 1)*Simp[a*b*
e - b^2*d*(n + n*p + 1) - 2*a*(a*f - c*d*(2*n*(p + 1) + 1)) - (b*(c*d + a*f
)*(n*(2*p + 3) + 1) - 2*a*c*e*(n*(2*p + 3) + 1))*x^n, x], x]] /; FreeQ[
{a, b, c, n}, x] && EqQ[n2, 2*n] && PolyQ[P2, x^n, 2] && NeQ[b^2 - 4*a*c, 0
] && ILtQ[p, -1]
```

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^2,x)`

output `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^2,x)`

Fricas [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^2,x, algorithm="fricas")`

output `integral((C*x^(2*n) + B*x^n + A)/(c^2*x^(4*n) + b^2*x^(2*n) + 2*a*b*x^n + a^2 + 2*(b*c*x^n + a*c)*x^(2*n)), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx = \text{Timed out}$$

input `integrate((A+B*x**n+C*x**(2*n))/(a+b*x**n+c*x**(2*n))**2,x)`

output `Timed out`

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^2,x, algorithm="maxima")`

output `((C*a*b - 2*B*a*c + A*b*c)*x*x^n + (2*C*a^2 - B*a*b + (b^2 - 2*a*c)*A)*x)/
(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n) - integrate((2*C*a^2 - B*a*b + (2*a*c*(2*n - 1) - b^2*(n - 1))*A - (C*a*b*(n - 1) - 2*B*a*c*(n - 1) + A*b*c*(n - 1))*x^n)/(a^2*b^2*n - 4*a^3*c*n + (a*b^2*c*n - 4*a^2*c^2*n)*x^(2*n) + (a*b^3*n - 4*a^2*b*c*n)*x^n), x)`

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^2,x, algorithm="giac")`

output `integrate((C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a)^2, x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{A + Cx^{2n} + Bx^n}{(a + bx^n + cx^{2n})^2} dx$$

input `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^2,x)`

output `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^2, x)`

Reduce [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{1}{x^{2n}c + x^n b + a} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^2,x)`

output `int(1/(x**(2*n)*c + x**n*b + a),x)`

3.19 $\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^3} dx$

Optimal result	160
Mathematica [B] (warning: unable to verify)	161
Rubi [A] (verified)	162
Maple [F]	165
Fricas [F]	165
Sympy [F(-1)]	165
Maxima [F]	166
Giac [F]	166
Mupad [F(-1)]	167
Reduce [F]	167

Optimal result

Integrand size = 31, antiderivative size = 802

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx = \frac{x(A(b^2 - 2ac) - a(bB - 2aC) + (Abc - 2aBc + abC)x^n)}{2a(b^2 - 4ac)n(a + bx^n + cx^{2n})^2} + \frac{x((b^2 - 2ac)(a(bB - 2aC) + A(2ac(1 - 4n) - b^2(1 - 2n))) + ab(Abc - 2aBc + abC)(1 - 3n) + c(Ac(b^2 - 2ac) - ab(bB - 2aC) + a^2(2ac(1 - 4n) - b^2(1 - 2n))))}{2a^2(b^2 - 4ac)^2 n^2(a + bx^n + cx^{2n})} + \frac{c(A(b^4(1 - 3n + 2n^2) + b^3\sqrt{b^2 - 4ac}(1 - 3n + 2n^2) - 6ab^2c(1 - 4n + 3n^2) - 2abc\sqrt{b^2 - 4ac}(2 - 9n))}{2a^2} + \frac{c((1 - n)(Ab(2ac(2 - 7n) - b^2(1 - 2n)) + a(b^2B - 4aBc(1 - 3n) - 6abCn)) - \frac{a(8a^2cC(1 - 2n) + b^3B(1 - n))}{2a^2}}{2a^2}$$

output

```

1/2*x*(A*(-2*a*c+b^2)-a*(B*b-2*C*a)+(A*b*c-2*B*a*c+C*a*b)*x^n)/a/(-4*a*c+b
^2)/n/(a+b*x^n+c*x^(2*n))^2+1/2*x*((-2*a*c+b^2)*(a*(B*b-2*C*a)+A*(2*a*c*(1
-4*n)-b^2*(1-2*n)))+a*b*(A*b*c-2*B*a*c+C*a*b)*(1-3*n)+c*(A*b*(2*a*c*(2-7*n
)-b^2*(1-2*n))+a*(b^2*B-4*a*B*c*(1-3*n)-6*a*b*C*n))*x^n)/a^2/(-4*a*c+b^2)^
2/n^2/(a+b*x^n+c*x^(2*n))-1/2*c*(A*(b^4*(2*n^2-3*n+1)+b^3*(-4*a*c+b^2)^(1/
2))*(2*n^2-3*n+1)-6*a*b^2*c*(3*n^2-4*n+1)-2*a*b*c*(-4*a*c+b^2)^(1/2)*(7*n^2
-9*n+2)+8*a^2*c^2*(8*n^2-6*n+1))-a*(b^3*B*(1-n)-2*a*b*(3*(-4*a*c+b^2)^(1/2
))*C*(1-n)*n+2*B*c*(-3*n^2-n+1))+4*a*c*(2*a*C*(1-2*n)-B*(-4*a*c+b^2)^(1/2)*
(3*n^2-4*n+1))+b^2*(B*(-4*a*c+b^2)^(1/2)*(1-n)-2*a*C*(3*n^2-2*n+1))))*x*hy
pergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/a^2/(-4*a*c+b^2)
^2/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))/n^2-1/2*c*((1-n)*(A*b*(2*a*c*(2-7*n)-b
^2*(1-2*n))+a*(b^2*B-4*a*B*c*(1-3*n)-6*a*b*C*n))-(a*(8*a^2*c*C*(1-2*n)+b^3
*B*(1-n)-4*a*b*B*c*(-3*n^2-n+1)-2*a*b^2*C*(3*n^2-2*n+1))-A*(b^4*(2*n^2-3*n
+1)-6*a*b^2*c*(3*n^2-4*n+1)+8*a^2*c^2*(8*n^2-6*n+1)))/(-4*a*c+b^2)^(1/2))*
x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a^2/(-4*a*c+
b^2)^2/(b+(-4*a*c+b^2)^(1/2))/n^2

```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 10759 vs. $2(802) = 1604$.

Time = 8.40 (sec) , antiderivative size = 10759, normalized size of antiderivative = 13.42

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx = \text{Result too large to show}$$

input

```
Integrate[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n))^3,x]
```

output

```
Result too large to show
```

Rubi [A] (verified)

Time = 1.58 (sec) , antiderivative size = 752, normalized size of antiderivative = 0.94, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.161$, Rules used = {2327, 1760, 25, 1752, 778}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx$$

↓ 2327

$$\int \frac{-((Abc - 2aBc + abC)(1 - 3n)x^n + abB - 2a^2C + 2aAc(1 - 4n) - Ab^2(1 - 2n))}{(bx^n + cx^{2n} + a)^2} dx + \frac{x(A(b^2 - 2ac) + x^n(abC - 2aBc + Abc) - a(bB - 2aC))}{2an(b^2 - 4ac)(a + bx^n + cx^{2n})^2}$$

↓ 1760

$$\int \frac{-c(1-n)(A(2abc(2-7n) - b^3(1-2n)) + a(Bb^2 - 6aCnb - 4aBc(1-3n)))x^n + a(-B(1-n)b^3 + aC(n+1)b^2 + 2aBc(2-5n)b - 4a^2cC(1-2n)) + A((2n^2 - 3n + 1)b^4 - (2n^2 - 3n + 1)b^2 + a^2)}{(bx^n + cx^{2n} + a)^2}{an(b^2 - 4ac)}$$

$$\frac{x(A(b^2 - 2ac) + x^n(abC - 2aBc + Abc) - a(bB - 2aC))}{2an(b^2 - 4ac)(a + bx^n + cx^{2n})^2}$$

↓ 25

$$\int \frac{-c(1-n)(A(2abc(2-7n) - b^3(1-2n)) + a(Bb^2 - 6aCnb - 4aBc(1-3n)))x^n + a(-B(1-n)b^3 + aC(n+1)b^2 + 2aBc(2-5n)b - 4a^2cC(1-2n)) + A((2n^2 - 3n + 1)b^4 - (2n^2 - 3n + 1)b^2 + a^2)}{(bx^n + cx^{2n} + a)^2}{an(b^2 - 4ac)}$$

$$\frac{x(A(b^2 - 2ac) + x^n(abC - 2aBc + Abc) - a(bB - 2aC))}{2an(b^2 - 4ac)(a + bx^n + cx^{2n})^2}$$

↓ 1752

$$-\frac{1}{2}c \left(\frac{a(8a^2cC(1-2n) - 2ab^2C(3n^2 - 2n + 1) - 4abBc(-3n^2 - n + 1) + b^3B(1-n)) - A(8a^2c^2(8n^2 - 6n + 1) - 6ab^2c(3n^2 - 4n + 1) + b^4(2n^2 - 3n + 1))}{\sqrt{b^2 - 4ac}} \right) + (1-n)(A(2n^2 - 3n + 1)b^4 - (2n^2 - 3n + 1)b^2 + a^2)$$

$$\frac{x(A(b^2 - 2ac) + x^n(abC - 2aBc + Abc) - a(bB - 2aC))}{2an(b^2 - 4ac)(a + bx^n + cx^{2n})^2}$$

↓ 778

$$\frac{cx \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right) \left(\frac{a(8a^2cC(1-2n) - 2ab^2C(3n^2 - 2n + 1) - 4abBc(-3n^2 - n + 1) + b^3B(1-n)) - A(8a^2c^2(8n^2 - 6n + 1) - 6ab^2}{\sqrt{b^2 - 4ac}}\right)}{b - \sqrt{b^2 - 4ac}}$$

$$\frac{x(A(b^2 - 2ac) + x^n(abC - 2aBc + Abc) - a(bB - 2aC))}{2an(b^2 - 4ac)(a + bx^n + cx^{2n})^2}$$

input `Int[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n))^3,x]`

output

```
(x*(A*(b^2 - 2*a*c) - a*(b*B - 2*a*C) + (A*b*c - 2*a*B*c + a*b*C)*x^n))/(2
*a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))^2) + (-((x*(A*(4*a^2*c^2*(1 - 4
*n) - 5*a*b^2*c*(1 - 3*n) + b^4*(1 - 2*n)) - a*(b^3*B + 4*a^2*c*C - 2*a*b*
B*c*(2 - 3*n) - a*b^2*C*(1 + 3*n)) - c*(A*(2*a*b*c*(2 - 7*n) - b^3*(1 - 2*
n)) + a*(b^2*B - 4*a*B*c*(1 - 3*n) - 6*a*b*C*n))*x^n))/(a*(b^2 - 4*a*c)*n*
(a + b*x^n + c*x^(2*n)))) + (-((c*((1 - n)*(A*(2*a*b*c*(2 - 7*n) - b^3*(1
- 2*n)) + a*(b^2*B - 4*a*B*c*(1 - 3*n) - 6*a*b*C*n)) + (a*(8*a^2*c*C*(1 -
2*n) + b^3*B*(1 - n) - 4*a*b*B*c*(1 - n - 3*n^2) - 2*a*b^2*C*(1 - 2*n + 3*
n^2)) - A*(b^4*(1 - 3*n + 2*n^2) - 6*a*b^2*c*(1 - 4*n + 3*n^2) + 8*a^2*c^2
*(1 - 6*n + 8*n^2)))/Sqrt[b^2 - 4*a*c])*x*Hypergeometric2F1[1, n^(-1), 1 +
n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(b - Sqrt[b^2 - 4*a*c])) - (
c*((1 - n)*(A*(2*a*b*c*(2 - 7*n) - b^3*(1 - 2*n)) + a*(b^2*B - 4*a*B*c*(1
- 3*n) - 6*a*b*C*n)) - (a*(8*a^2*c*C*(1 - 2*n) + b^3*B*(1 - n) - 4*a*b*B*c
*(1 - n - 3*n^2) - 2*a*b^2*C*(1 - 2*n + 3*n^2)) - A*(b^4*(1 - 3*n + 2*n^2)
- 6*a*b^2*c*(1 - 4*n + 3*n^2) + 8*a^2*c^2*(1 - 6*n + 8*n^2)))/Sqrt[b^2 -
4*a*c])*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^
2 - 4*a*c])])/(b + Sqrt[b^2 - 4*a*c]))/(a*(b^2 - 4*a*c)*n)/(2*a*(b^2 - 4*
a*c)*n)
```

Definitions of rubi rules used

- rule 25 `Int[-(Fx_), x_Symbol] := Simp[Identity[-1] Int[Fx, x], x]`
- rule 778 `Int[((a_) + (b_.)*(x_)^(n_))^(p_), x_Symbol] := Simp[a^p*x*Hypergeometric2F1[-p, 1/n, 1/n + 1, (-b)*(x^n/a)], x] /; FreeQ[{a, b, n, p}, x] && !IGtQ[p, 0] && !IntegerQ[1/n] && !ILtQ[Simplify[1/n + p], 0] && (IntegerQ[p] || GtQ[a, 0])`
- rule 1752 `Int[((d_) + (e_.)*(x_)^(n_))/((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_)), x_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[(e/2 + (2*c*d - b*e)/(2*q)) Int[1/(b/2 - q/2 + c*x^n), x], x] + Simp[(e/2 - (2*c*d - b*e)/(2*q)) Int[1/(b/2 + q/2 + c*x^n), x], x]] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0] && NeQ[c*d^2 - b*d*e + a*e^2, 0] && (PosQ[b^2 - 4*a*c] || !IGtQ[n/2, 0])`
- rule 1760 `Int[((d_) + (e_.)*(x_)^(n_))*((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := Simp[(-x)*(d*b^2 - a*b*e - 2*a*c*d + (b*d - 2*a*e)*c*x^n)*((a + b*x^n + c*x^(2*n))^(p + 1)/(a*n*(p + 1)*(b^2 - 4*a*c))), x] + Simp[1/(a*n*(p + 1)*(b^2 - 4*a*c)) Int[Simp[(n*p + n + 1)*d*b^2 - a*b*e - 2*a*c*d*(2*n*p + 2*n + 1) + (2*n*p + 3*n + 1)*(d*b - 2*a*e)*c*x^n, x]*(a + b*x^n + c*x^(2*n))^(p + 1), x], x] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0] && ILtQ[p, -1]`
- rule 2327 `Int[(P2_)*((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := With[{d = Coeff[P2, x^n, 0], e = Coeff[P2, x^n, 1], f = Coeff[P2, x^n, 2]}, Simp[(-x)*(b^2*d - 2*a*(c*d - a*f) - a*b*e + (b*(c*d + a*f) - 2*a*c*e)*x^n)*((a + b*x^n + c*x^(2*n))^(p + 1)/(a*n*(p + 1)*(b^2 - 4*a*c))), x] - Simp[1/(a*n*(p + 1)*(b^2 - 4*a*c)) Int[(a + b*x^n + c*x^(2*n))^(p + 1)*Simp[a*b*e - b^2*d*(n + n*p + 1) - 2*a*(a*f - c*d*(2*n*(p + 1) + 1)) - (b*(c*d + a*f))*(n*(2*p + 3) + 1) - 2*a*c*e*(n*(2*p + 3) + 1))*x^n, x], x]] /; FreeQ[{a, b, c, n}, x] && EqQ[n2, 2*n] && PolyQ[P2, x^n, 2] && NeQ[b^2 - 4*a*c, 0] && ILtQ[p, -1]`

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^3,x)`

output `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^3,x)`

Fricas [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^3} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^3,x, algorithm="fricas")`

output `integral((C*x^(2*n) + B*x^n + A)/(c^3*x^(6*n) + b^3*x^(3*n) + 3*a*b^2*x^(2*n) + 3*a^2*b*x^n + a^3 + 3*(b*c^2*x^n + a*c^2)*x^(4*n) + 3*(b^2*c*x^(2*n) + 2*a*b*c*x^n + a^2*c)*x^(2*n)), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx = \text{Timed out}$$

input `integrate((A+B*x**n+C*x**(2*n))/(a+b*x**n+c*x**(2*n))**3,x)`

output `Timed out`

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^3} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^3,x, algorithm="maxima")`

output

```
-1/2*((6*C*a^2*b*c^2*n + (2*a*b*c^3*(7*n - 2) - b^3*c^2*(2*n - 1))*A - (4*
a^2*c^3*(3*n - 1) + a*b^2*c^2)*B)*x*x^(3*n) + ((a*b^2*c^2*(29*n - 9) - 4*a
^2*c^3*(4*n - 1) - 2*b^4*c*(2*n - 1))*A - 2*(a^2*b*c^2*(9*n - 4) + a*b^3*c
)*B + (a^2*b^2*c*(9*n + 1) - 4*a^3*c^2)*C)*x*x^(2*n) + ((4*a*b^3*c*(3*n -
1) - b^5*(2*n - 1) + 2*a^2*b*c^2*n)*A - (4*a^3*c^2*(5*n - 1) + a^2*b^2*c*(
4*n - 3) + a*b^4)*B + (2*a^3*b*c*(5*n - 2) + a^2*b^3*(2*n + 1))*C)*x*x^n +
((a^2*b^2*c*(21*n - 5) - 4*a^3*c^2*(6*n - 1) - a*b^4*(3*n - 1))*A - (2*a^
3*b*c*(5*n - 2) - a^2*b^3*(n - 1))*B + (4*a^4*c*(2*n - 1) + a^3*b^2*(n + 1
))*C)*x)/(a^4*b^4*n^2 - 8*a^5*b^2*c*n^2 + 16*a^6*c^2*n^2 + (a^2*b^4*c^2*n^
2 - 8*a^3*b^2*c^3*n^2 + 16*a^4*c^4*n^2)*x^(4*n) + 2*(a^2*b^5*c*n^2 - 8*a^3
*b^3*c^2*n^2 + 16*a^4*b*c^3*n^2)*x^(3*n) + (a^2*b^6*n^2 - 6*a^3*b^4*c*n^2
+ 32*a^5*c^3*n^2)*x^(2*n) + 2*(a^3*b^5*n^2 - 8*a^4*b^3*c*n^2 + 16*a^5*b*c^
2*n^2)*x^n) - integrate(-1/2*((2*n^2 - 3*n + 1)*b^4 - (16*n^2 - 21*n + 5)
*a*b^2*c + 4*(8*n^2 - 6*n + 1)*a^2*c^2)*A - (2*a^2*b*c*(5*n - 2) - a*b^3*(
n - 1))*B + (4*a^3*c*(2*n - 1) + a^2*b^2*(n + 1))*C - (6*(n^2 - n)*C*a^2*b
*c - ((2*n^2 - 3*n + 1)*b^3*c - 2*(7*n^2 - 9*n + 2)*a*b*c^2)*A - (4*(3*n^2
- 4*n + 1)*a^2*c^2 + a*b^2*c*(n - 1))*B)*x^n)/(a^3*b^4*n^2 - 8*a^4*b^2*c*
n^2 + 16*a^5*c^2*n^2 + (a^2*b^4*c*n^2 - 8*a^3*b^2*c^2*n^2 + 16*a^4*c^3*n^2
)*x^(2*n) + (a^2*b^5*n^2 - 8*a^3*b^3*c*n^2 + 16*a^4*b*c^2*n^2)*x^n), x)
```

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^3} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^3,x, algorithm="giac")`

output `integrate((C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a)^3, x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{A + Cx^{2n} + Bx^n}{(a + bx^n + cx^{2n})^3} dx$$

input `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^3,x)`

output `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^3, x)`

Reduce [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{1}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^na b + a^2} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^3,x)`

output `int(1/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2),x)`

3.20 $\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{a+bx^n+cx^{2n}} dx$

Optimal result	168
Mathematica [A] (verified)	169
Rubi [F]	169
Maple [F]	170
Fricas [F]	170
Sympy [F(-1)]	170
Maxima [F]	171
Giac [F]	171
Mupad [F(-1)]	172
Reduce [F]	172

Optimal result

Integrand size = 38, antiderivative size = 356

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx = \frac{(cC - bD)x}{c^2} + \frac{Dx^{1+n}}{c(1+n)}$$

$$+ \frac{(b^3D + bc(Bc + \sqrt{b^2 - 4ac}C - 3aD) - b^2(cC + \sqrt{b^2 - 4ac}D) - c(2Ac^2 + Bc\sqrt{b^2 - 4ac} - 2acC - a^2))}{c^2(b^2 - 4ac - b\sqrt{b^2 - 4ac})}$$

$$+ \frac{(b^3D + bc(Bc - \sqrt{b^2 - 4ac}C - 3aD) - b^2(cC - \sqrt{b^2 - 4ac}D) - c(2Ac^2 - Bc\sqrt{b^2 - 4ac} - 2acC + a^2))}{c^2(b^2 - 4ac + b\sqrt{b^2 - 4ac})}$$

output

```
(C*c-D*b)*x/c^2+D*x^(1+n)/c/(1+n)+(b^3*D+b*c*(B*c+(-4*a*c+b^2)^(1/2)*C-3*a
*D)-b^2*(C*c+(-4*a*c+b^2)^(1/2)*D)-c*(2*A*c^2+B*c*(-4*a*c+b^2)^(1/2)-2*a*c
*C-a*(-4*a*c+b^2)^(1/2)*D))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a
*c+b^2)^(1/2)))/c^2/(b^2-4*a*c-b*(-4*a*c+b^2)^(1/2))+(b^3*D+b*c*(B*c-(-4*a
*c+b^2)^(1/2)*C-3*a*D)-b^2*(C*c-(-4*a*c+b^2)^(1/2)*D)-c*(2*A*c^2-B*c*(-4*a
*c+b^2)^(1/2)-2*a*c*C+a*(-4*a*c+b^2)^(1/2)*D))*x*hypergeom([1, 1/n], [1+1/n
], -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c^2/(b*(-4*a*c+b^2)^(1/2)-4*a*c+b^2)
```

Mathematica [A] (verified)

Time = 2.68 (sec) , antiderivative size = 269, normalized size of antiderivative = 0.76

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx$$

$$= x \left(cC - bD + \frac{cDx^n}{1+n} + \frac{\left(Bc^2 - bcC + b^2D - acD + \frac{b^2cC + 2c^2(Ac - aC) - b^3D + bc(-Bc + 3aD)}{\sqrt{b^2 - 4ac}} \right)}{b - \sqrt{b^2 - 4ac}} \right) \text{Hypergeometric2F1} \left(1, \frac{1}{n}, 1 + \frac{1}{n}, \frac{2cx^n}{-b + \sqrt{b^2 - 4ac}} \right)$$

c^2

input `Integrate[(A + B*x^n + C*x^(2*n) + D*x^(3*n))/(a + b*x^n + c*x^(2*n)),x]`

output `(x*(c*C - b*D + (c*D*x^n)/(1 + n) + ((B*c^2 - b*c*C + b^2*D - a*c*D + (b^2*c*C + 2*c^2*(A*c - a*C) - b^3*D + b*c*(-(B*c) + 3*a*D))/Sqrt[b^2 - 4*a*c])*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])])/(b - Sqrt[b^2 - 4*a*c]) + ((B*c^2 - b*c*C + b^2*D - a*c*D + (-(b^2*c*C) + 2*c^2*(-(A*c) + a*C) + b^3*D + b*c*(B*c - 3*a*D))/Sqrt[b^2 - 4*a*c])*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(b + Sqrt[b^2 - 4*a*c])))/c^2`

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx$$

↓ 2329

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx$$

input `Int[(A + B*x^n + C*x^(2*n) + D*x^(3*n))/(a + b*x^n + c*x^(2*n)),x]`

output `$Aborted`

Definitions of rubi rules used

rule 2329 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_.), x_Symbol] :=
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx$$

input `int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n)),x)`

output `int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n)),x)`

Fricas [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{cx^{2n} + bx^n + a} dx$$

input `integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n)),x, algorithm="fricas")`

output `integral((D*x^(3*n) + C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a), x)`

SymPy [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx = \text{Timed out}$$

input `integrate((A+B*x**n+C*x**(2*n)+D*x**(3*n))/(a+b*x**n+c*x**(2*n)),x)`

output Timed out

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{cx^{2n} + bx^n + a} dx$$

input `integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n)),x, algorithm="maxima")`

output `(D*c*x*x^n - (D*b*(n + 1) - C*c*(n + 1))*x)/(c^2*(n + 1)) + integrate((D*a*b - C*a*c + A*c^2 - (C*b*c - B*c^2 - (b^2 - a*c)*D)*x^n)/(c^3*x^(2*n) + b*c^2*x^n + a*c^2), x)`

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{cx^{2n} + bx^n + a} dx$$

input `integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n)),x, algorithm="giac")`

output `integrate((D*x^(3*n) + C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx = \int \frac{A + Cx^{2n} + x^{3n}D + Bx^n}{a + bx^n + cx^{2n}} dx$$

input `int((A + C*x^(2*n) + x^(3*n)*D + B*x^n)/(a + b*x^n + c*x^(2*n)),x)`

output `int((A + C*x^(2*n) + x^(3*n)*D + B*x^n)/(a + b*x^n + c*x^(2*n)), x)`

Reduce [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{a + bx^n + cx^{2n}} dx$$

$$= \frac{x^n b dx + \left(\int \frac{x^{2n}}{x^{2n}c + x^n b + a} dx \right) acd n + \left(\int \frac{x^{2n}}{x^{2n}c + x^n b + a} dx \right) acd - \left(\int \frac{x^{2n}}{x^{2n}c + x^n b + a} dx \right) b^2 dn - \left(\int \frac{x^{2n}}{x^{2n}c + x^n b + a} dx \right) b^2 dn}{bc(n+1)}$$

input `int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n)),x)`

output `(x**n*b*d*x + int(x**(2*n)/(x**(2*n)*c + x**n*b + a),x)*a*c*d*n + int(x**(2*n)/(x**(2*n)*c + x**n*b + a),x)*a*c*d - int(x**(2*n)/(x**(2*n)*c + x**n*b + a),x)*b**2*d*n - int(x**(2*n)/(x**(2*n)*c + x**n*b + a),x)*b**2*d + int(1/(x**(2*n)*c + x**n*b + a),x)*a**2*d*n + int(1/(x**(2*n)*c + x**n*b + a),x)*a**2*d - a*d*n*x - a*d*x + b*c*n*x + b*c*x)/(b*c*(n + 1))`

3.21
$$\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{(a+bx^n+cx^{2n})^2} dx$$

Optimal result	173
Mathematica [B] (warning: unable to verify)	174
Rubi [A] (verified)	174
Maple [F]	176
Fricas [F]	176
Sympy [F(-1)]	177
Maxima [F]	177
Giac [F]	178
Mupad [F(-1)]	178
Reduce [F]	178

Optimal result

Integrand size = 38, antiderivative size = 486

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx$$

$$= \frac{x(Ac(b^2 - 2ac) - a(bBc - 2acC + abD) + (Abc^2 - a(2Bc^2 - bcC + b^2D - 2acD)) x^n)}{ac(b^2 - 4ac)n(a + bx^n + cx^{2n})}$$

$$- \frac{(c(Abc - 2aBc + abC)(1 - n) - aD(b^2 - 2ac(1 + n)) - \frac{Ac^2(4ac(1-2n) - b^2(1-n)) - a(4ac^2C + b^3D - b^2cC(1-n) - 2ac^2D)}{\sqrt{b^2 - 4ac}})}{ac(b^2 - 4ac)(b - \sqrt{b^2 - 4ac})n}$$

$$- \frac{(c(Abc - 2aBc + abC)(1 - n) - aD(b^2 - 2ac(1 + n)) + \frac{Ac^2(4ac(1-2n) - b^2(1-n)) - a(4ac^2C + b^3D - b^2cC(1-n) - 2ac^2D)}{\sqrt{b^2 - 4ac}})}{ac(b^2 - 4ac)(b + \sqrt{b^2 - 4ac})n}$$

output

```
x*(A*c*(-2*a*c+b^2)-a*(B*b*c-2*C*a*c+D*a*b)+(A*b*c^2-a*(2*B*c^2-C*b*c-2*D*
a*c+D*b^2))*x^n)/a/c/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))-(c*(A*b*c-2*B*a*c+
C*a*b)*(1-n)-a*D*(b^2-2*a*c*(1+n))-(A*c^2*(4*a*c*(1-2*n)-b^2*(1-n))-a*(4*a
*c^2*C+b^3*D-b^2*c*C*(1-n)-2*b*c*(B*c*n+a*D*(2+n))))/(-4*a*c+b^2)^(1/2))*x
*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))/a/c/(-4*a*c+b
^2)/(b-(-4*a*c+b^2)^(1/2))/n-(c*(A*b*c-2*B*a*c+C*a*b)*(1-n)-a*D*(b^2-2*a*c
*(1+n))+(A*c^2*(4*a*c*(1-2*n)-b^2*(1-n))-a*(4*a*c^2*C+b^3*D-b^2*c*C*(1-n)-
2*b*c*(B*c*n+a*D*(2+n))))/(-4*a*c+b^2)^(1/2))*x*hypergeom([1, 1/n], [1+1/n]
, -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a/c/(-4*a*c+b^2)/(b+(-4*a*c+b^2)^(1/2))/
n
```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 5439 vs. $2(486) = 972$.

Time = 8.98 (sec) , antiderivative size = 5439, normalized size of antiderivative = 11.19

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx = \text{Result too large to show}$$

input `Integrate[(A + B*x^n + C*x^(2*n) + D*x^(3*n))/(a + b*x^n + c*x^(2*n))^2,x]`

output `Result too large to show`

Rubi [A] (verified)

Time = 1.23 (sec) , antiderivative size = 477, normalized size of antiderivative = 0.98, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.079$, Rules used = {2326, 1752, 778}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx$$

↓ 2326

$$\int \frac{(aDb^2 - c(Ac + aC)(1-n)b + 2ac(Bc(1-n) - aD(n+1)))x^n + ab(Bc + aD) - 2ac(aC - Ac(1-2n)) - Ab^2c(1-n)}{bx^n + cx^{2n} + a} dx +$$

$$\frac{acn(b^2 - 4ac)}{acn(b^2 - 4ac)} \frac{x(x^n(bc(aC + Ac) - ab^2D - 2ac(Bc - aD)) + Ac(b^2 - 2ac) - a(abD - 2acC + bBc))}{acn(b^2 - 4ac)(a + bx^n + cx^{2n})}$$

↓ 1752

$$\frac{1}{2} \left(\frac{Ac^2(4ac(1-2n) - b^2(1-n)) - a(-2bc(aD(n+2) + Bcn) + 4ac^2C + b^3D - b^2cC(1-n))}{\sqrt{b^2 - 4ac}} - bc(1-n)(aC + Ac) + ab^2D + 2ac(Bc(1-n) - aD(n+1)) \right)$$

$$\frac{x(x^n(bc(aC + Ac) - ab^2D - 2ac(Bc - aD)) + Ac(b^2 - 2ac) - a(abD - 2acC + bBc))}{acn(b^2 - 4ac)(a + bx^n + cx^{2n})}$$

↓ 778

$$\frac{x^n (bc(aC + Ac) - ab^2D - 2ac(Bc - aD)) + Ac(b^2 - 2ac) - a(abD - 2acC + bBc)}{acn(b^2 - 4ac)(a + bx^n + cx^{2n})} +$$

$$x \operatorname{Hypergeometric2F1}\left(1, \frac{1}{n}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right) \left(\frac{Ac^2(4ac(1-2n) - b^2(1-n)) - a(-2bc(aD(n+2) + Bcn) + 4ac^2C + b^3D - b^2cC(1-n))}{\sqrt{b^2 - 4ac}} - bc(1-n)(aC + Ac) \right)$$

$$b - \sqrt{b^2 - 4ac}$$

input `Int[(A + B*x^n + C*x^(2*n) + D*x^(3*n))/(a + b*x^n + c*x^(2*n))^2,x]`

output `(x*(A*c*(b^2 - 2*a*c) - a*(b*B*c - 2*a*c*C + a*b*D) + (b*c*(A*c + a*C) - a*b^2*D - 2*a*c*(B*c - a*D))*x^n)/(a*c*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))) + (((a*b^2*D - b*c*(A*c + a*C)*(1 - n) + 2*a*c*(B*c*(1 - n) - a*D*(1 + n)) + (A*c^2*(4*a*c*(1 - 2*n) - b^2*(1 - n)) - a*(4*a*c^2*C + b^3*D - b^2*c*C*(1 - n) - 2*b*c*(B*c*n + a*D*(2 + n))))/Sqrt[b^2 - 4*a*c])*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])])/(b - Sqrt[b^2 - 4*a*c]) + ((a*b^2*D - b*c*(A*c + a*C)*(1 - n) + 2*a*c*(B*c*(1 - n) - a*D*(1 + n)) - (A*c^2*(4*a*c*(1 - 2*n) - b^2*(1 - n)) - a*(4*a*c^2*C + b^3*D - b^2*c*C*(1 - n) - 2*b*c*(B*c*n + a*D*(2 + n))))/Sqrt[b^2 - 4*a*c])*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(b + Sqrt[b^2 - 4*a*c])/(a*c*(b^2 - 4*a*c)*n)`

Defintions of rubi rules used

rule 778 `Int[((a_) + (b_.)*(x_)^(n_))^(p_), x_Symbol] := Simp[a^p*x*Hypergeometric2F1[-p, 1/n, 1/n + 1, (-b)*(x^n/a)], x] /; FreeQ[{a, b, n, p}, x] && !IGtQ[p, 0] && !IntegerQ[1/n] && !ILtQ[Simplify[1/n + p], 0] && (IntegerQ[p] || GtQ[a, 0])`

rule 1752 `Int[((d_) + (e_.)*(x_)^(n_))/((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_)), x_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[(e/2 + (2*c*d - b*e)/(2*q)) Int[1/(b/2 - q/2 + c*x^n), x], x] + Simp[(e/2 - (2*c*d - b*e)/(2*q)) Int[1/(b/2 + q/2 + c*x^n), x], x]] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0] && NeQ[c*d^2 - b*d*e + a*e^2, 0] && (PosQ[b^2 - 4*a*c] || !IGtQ[n/2, 0])`

rule 2326

```

Int[(P3_)*((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p_), x_Symbol] := With
th[{d = Coeff[P3, x^n, 0], e = Coeff[P3, x^n, 1], f = Coeff[P3, x^n, 2], g
= Coeff[P3, x^n, 3]}, Simp[(-x)*(b^2*c*d - 2*a*c*(c*d - a*f) - a*b*(c*e + a
*g) + (b*c*(c*d + a*f) - a*b^2*g - 2*a*c*(c*e - a*g))*x^n*((a + b*x^n + c*
x^(2*n))^(p + 1)/(a*c*n*(p + 1)*(b^2 - 4*a*c))), x] - Simp[1/(a*c*n*(p + 1)
*(b^2 - 4*a*c)) Int[(a + b*x^n + c*x^(2*n))^(p + 1)*Simp[a*b*(c*e + a*g)
- b^2*c*d*(n + n*p + 1) - 2*a*c*(a*f - c*d*(2*n*(p + 1) + 1)) + (a*b^2*g*(n
*(p + 2) + 1) - b*c*(c*d + a*f)*(n*(2*p + 3) + 1) - 2*a*c*(a*g*(n + 1) - c*
e*(n*(2*p + 3) + 1))*x^n, x], x], x]] /; FreeQ[{a, b, c, n}, x] && EqQ[n2,
2*n] && PolyQ[P3, x^n, 3] && NeQ[b^2 - 4*a*c, 0] && ILtQ[p, -1]

```

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx$$

input

```
int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^2,x)
```

output

```
int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^2,x)
```

Fricas [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^2} dx$$

input

```
integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^2,x, algorithm
="fricas")
```

output

```
integral((D*x^(3*n) + C*x^(2*n) + B*x^n + A)/(c^2*x^(4*n) + b^2*x^(2*n) +
2*a*b*x^n + a^2 + 2*(b*c*x^n + a*c)*x^(2*n)), x)
```

Sympy [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx = \text{Timed out}$$

input `integrate((A+B*x**n+C*x**(2*n)+D*x**(3*n))/(a+b*x**n+c*x**(2*n))**2,x)`

output Timed out

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^2,x, algorithm="maxima")`

output `((C*a*b*c - 2*B*a*c^2 + A*b*c^2 - (a*b^2 - 2*a^2*c)*D)*x*x^n - (D*a^2*b - 2*C*a^2*c + B*a*b*c - (b^2*c - 2*a*c^2)*A)*x)/(a^2*b^2*c*n - 4*a^3*c^2*n + (a*b^2*c^2*n - 4*a^2*c^3*n)*x^(2*n) + (a*b^3*c*n - 4*a^2*b*c^2*n)*x^n) - integrate(-(D*a^2*b - 2*C*a^2*c + B*a*b*c - (2*a*c^2*(2*n - 1) - b^2*c*(n - 1))*A + (C*a*b*c*(n - 1) - 2*B*a*c^2*(n - 1) + A*b*c^2*(n - 1) - (2*a^2*c*(n + 1) - a*b^2)*D)*x^n)/(a^2*b^2*c*n - 4*a^3*c^2*n + (a*b^2*c^2*n - 4*a^2*c^3*n)*x^(2*n) + (a*b^3*c*n - 4*a^2*b*c^2*n)*x^n), x)`

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^2} dx$$

input `integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^2,x, algorithm="giac")`

output `integrate((D*x^(3*n) + C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a)^2, x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx = \int \frac{A + Cx^{2n} + x^{3n}D + Bx^n}{(a + bx^n + cx^{2n})^2} dx$$

input `int((A + C*x^(2*n) + x^(3*n)*D + B*x^n)/(a + b*x^n + c*x^(2*n))^2,x)`

output `int((A + C*x^(2*n) + x^(3*n)*D + B*x^n)/(a + b*x^n + c*x^(2*n))^2, x)`

Reduce [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^2} dx = \text{too large to display}$$

input `int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^2,x)`

output

```
( - 2*x**(2*n)*int(x**(2*n)/(x**(4*n)*c**2*n**2 - 2*x**(4*n)*c**2*n + x**(4*n)*c**2 + 2*x**(3*n)*b*c*n**2 - 4*x**(3*n)*b*c*n + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c*n**2 - 4*x**(2*n)*a*c*n + 2*x**(2*n)*a*c + x**(2*n)*b**2*n**2 - 2*x**(2*n)*b**2*n + x**(2*n)*b**2 + 2*x**n*a*b*n**2 - 4*x**n*a*b*n + 2*x**n*a*b + a**2*n**2 - 2*a**2*n + a**2),x)*a*c**2*d*n**4 + 3*x**(2*n)*int(x**(2*n)/(x**(4*n)*c**2*n**2 - 2*x**(4*n)*c**2*n + x**(4*n)*c**2 + 2*x**(3*n)*b*c*n**2 - 4*x**(3*n)*b*c*n + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c*n**2 - 4*x**(2*n)*a*c*n + 2*x**(2*n)*a*c + x**(2*n)*b**2*n**2 - 2*x**(2*n)*b**2*n + x**(2*n)*b**2 + 2*x**n*a*b*n**2 - 4*x**n*a*b*n + 2*x**n*a*b + a**2*n**2 - 2*a**2*n + a**2),x)*a*c**2*d*n**3 + x**(2*n)*int(x**(2*n)/(x**(4*n)*c**2*n**2 - 2*x**(4*n)*c**2*n + x**(4*n)*c**2 + 2*x**(3*n)*b*c*n**2 - 4*x**(3*n)*b*c*n + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c*n**2 - 4*x**(2*n)*a*c*n + 2*x**(2*n)*a*c + x**(2*n)*b**2*n**2 - 2*x**(2*n)*b**2*n + x**(2*n)*b**2 + 2*x**n*a*b*n**2 - 4*x**n*a*b*n + 2*x**n*a*b + a**2*n**2 - 2*a**2*n + a**2),x)*a*c**2*d*n**2 - 3*x**(2*n)*int(x**(2*n)/(x**(4*n)*c**2*n**2 - 2*x**(4*n)*c**2*n + x**(4*n)*c**2 + 2*x**(3*n)*b*c*n**2 - 4*x**(3*n)*b*c*n + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c*n**2 - 4*x**(2*n)*a*c*n + 2*x**(2*n)*a*c + x**(2*n)*b**2*n**2 - 2*x**(2*n)*b**2*n + x**(2*n)*b**2 + 2*x**n*a*b*n**2 - 4*x**n*a*b*n + 2*x**n*a*b + a**2*n**2 - 2*a**2*n + a**2),x)*a*c**2*d*n + x**(2*n)*int(x**(2*n)/(x**(4*n)*c**2*n**2 - 2*x**(4*n)*c**2*n + x**(4*n)*c**2 + 2*...
```

3.22
$$\int \frac{A+Bx^n+Cx^{2n}+Dx^{3n}}{(a+bx^n+cx^{2n})^3} dx$$

Optimal result	180
Mathematica [B] (warning: unable to verify)	181
Rubi [A] (verified)	182
Maple [F]	184
Fricas [F]	184
Sympy [F(-1)]	185
Maxima [F]	185
Giac [F]	186
Mupad [F(-1)]	187
Reduce [F]	187

Optimal result

Integrand size = 38, antiderivative size = 933

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx$$

$$= \frac{x(Ac(b^2 - 2ac) - a(bBc - 2acC + abD) + (Abc^2 - a(2Bc^2 - bcC + b^2D - 2acD)) x^n)}{2ac(b^2 - 4ac)n(a + bx^n + cx^{2n})^2}$$

$$- \frac{x(Ac(4a^2c^2(1 - 4n) - 5ab^2c(1 - 3n) + b^4(1 - 2n)) - a(4a^2c^2C - ab^2cC(1 + 3n) - 2abc(Bc(2 - 3n) - (1 - n)(Abc(2ac(2 - 7n) - b^2(1 - 2n)) + a(b^2(Bc - aD(1 - 2n)) - 6abcCn - 4ac(Bc(1 - 3n) - a(1 - n)(Abc(2ac(2 - 7n) - b^2(1 - 2n)) + a(b^2(Bc - aD(1 - 2n)) - 6abcCn - 4ac(Bc(1 - 3n) - a$$

output

```

1/2*x*(A*c*(-2*a*c+b^2)-a*(B*b*c-2*C*a*c+D*a*b)+(A*b*c^2-a*(2*B*c^2-C*b*c-
2*D*a*c+D*b^2))*x^n)/a/c/(-4*a*c+b^2)/n/(a+b*x^n+c*x^(2*n))^2-1/2*x*(A*c*(
4*a^2*c^2*(1-4*n)-5*a*b^2*c*(1-3*n)+b^4*(1-2*n))-a*(4*a^2*c^2*C-a*b^2*c*C*
(1+3*n)-2*a*b*c*(B*c*(2-3*n)-a*D*n)+b^3*(D*a*n+B*c))-c*(A*b*c*(2*a*c*(2-7*
n)-b^2*(1-2*n))+a*(b^2*(B*c-a*D*(1-2*n))-6*a*b*c*C*n-4*a*c*(B*c*(1-3*n)-a*
D*(1+n))))*x^n)/a^2/c/(-4*a*c+b^2)^2/n^2/(a+b*x^n+c*x^(2*n))-1/2*((1-n)*(A
*b*c*(2*a*c*(2-7*n)-b^2*(1-2*n))+a*(b^2*(B*c-a*D*(1-2*n))-6*a*b*c*C*n-4*a*
c*(B*c*(1-3*n)-a*D*(1+n))))-(A*c*(b^4*(2*n^2-3*n+1)-6*a*b^2*c*(3*n^2-4*n+1
)+8*a^2*c^2*(8*n^2-6*n+1))-a*(8*a^2*c^2*C*(1-2*n)+b^3*(B*c+a*D*(1-2*n))*(1
-n)-2*a*b^2*c*C*(3*n^2-2*n+1)-4*a*b*c*(B*c*(-3*n^2-n+1)+a*D*(-n^2-3*n+1)))
)/(-4*a*c+b^2)^(1/2))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b-(-4*a*c+b^2
)^(1/2)))/a^2/(-4*a*c+b^2)^2/(b-(-4*a*c+b^2)^(1/2))/n^2-1/2*((1-n)*(A*b*c*
(2*a*c*(2-7*n)-b^2*(1-2*n))+a*(b^2*(B*c-a*D*(1-2*n))-6*a*b*c*C*n-4*a*c*(B*
c*(1-3*n)-a*D*(1+n))))+(A*c*(b^4*(2*n^2-3*n+1)-6*a*b^2*c*(3*n^2-4*n+1)+8*a
^2*c^2*(8*n^2-6*n+1))-a*(8*a^2*c^2*C*(1-2*n)+b^3*(B*c+a*D*(1-2*n))*(1-n)-2
*a*b^2*c*C*(3*n^2-2*n+1)-4*a*b*c*(B*c*(-3*n^2-n+1)+a*D*(-n^2-3*n+1)))/(-4
*a*c+b^2)^(1/2))*x*hypergeom([1, 1/n], [1+1/n], -2*c*x^n/(b+(-4*a*c+b^2)^(1/
2)))/a^2/(-4*a*c+b^2)^2/(b+(-4*a*c+b^2)^(1/2))/n^2

```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 12750 vs. 2(933) = 1866.

Time = 9.71 (sec) , antiderivative size = 12750, normalized size of antiderivative = 13.67

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx = \text{Result too large to show}$$

input

```
Integrate[(A + B*x^n + C*x^(2*n) + D*x^(3*n))/(a + b*x^n + c*x^(2*n))^3,x]
```

output

```
Result too large to show
```

Rubi [A] (verified)

Time = 1.98 (sec) , antiderivative size = 933, normalized size of antiderivative = 1.00, number of steps used = 4, number of rules used = 4, $\frac{\text{number of rules}}{\text{integrand size}} = 0.105$, Rules used = {2326, 1760, 1752, 778}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx$$

↓ 2326

$$\int \frac{-((-aD(1-n)b^2 + c(Ac + aC)(1-3n)b + 2ac(aD(n+1) - B(c-3cn)))x^n) + ab(Bc + aD) - 2ac(aC - Ac(1-4n)) - Ab^2c(1-2n)}{(bx^n + cx^{2n} + a)^2} dx +$$

$$\frac{x(x^n(bc(aC + Ac) - ab^2D - 2ac(Bc - aD)) + Ac(b^2 - 2ac) - a(abD - 2acC + bBc))}{2acn(b^2 - 4ac)(a + bx^n + cx^{2n})^2}$$

↓ 1760

$$\int \frac{c(1-n)(Abc(2ac(2-7n) - b^2(1-2n)) + a((Bc - aD(1-2n))b^2 - 6acCnb - 4ac(Bc(1-3n) - aD(n+1))))x^n + c(a((B - Bn)b^3 - aC(n+1)b^2 - 2a(Bc(2-5n) - 3aD))}{bx^n + cx^{2n} + a} dx +$$

$$\frac{x(x^n(bc(aC + Ac) - ab^2D - 2ac(Bc - aD)) + Ac(b^2 - 2ac) - a(abD - 2acC + bBc))}{2acn(b^2 - 4ac)(a + bx^n + cx^{2n})^2}$$

↓ 1752

$$\int \frac{x((-aDb^2 + c(Ac + aC)b - 2ac(Bc - aD))x^n + Ac(b^2 - 2ac) - a(bBc - 2aCc + abD))}{2ac(b^2 - 4ac)n(bx^n + cx^{2n} + a)^2} dx +$$

$$\frac{x(-c(Abc(2ac(2-7n) - b^2(1-2n)) + a((Bc - aD(1-2n))b^2 - 6acCnb - 4ac(Bc(1-3n) - aD(n+1))))x^n + Ac((1-2n)b^4 - 5ac(1-3n)b^2 + 4a^2c^2(1-2n))}{a(b^2 - 4ac)n(bx^n + cx^{2n} + a)}$$

↓ 778

$$\int \frac{x((-aDb^2 + c(Ac + aC)b - 2ac(Bc - aD))x^n + Ac(b^2 - 2ac) - a(bBc - 2aCc + abD))}{2ac(b^2 - 4ac)n(bx^n + cx^{2n} + a)^2} dx +$$

$$\frac{x(-c(Abc(2ac(2-7n) - b^2(1-2n)) + a((Bc - aD(1-2n))b^2 - 6acCnb - 4ac(Bc(1-3n) - aD(n+1))))x^n + Ac((1-2n)b^4 - 5ac(1-3n)b^2 + 4a^2c^2(1-2n))}{a(b^2 - 4ac)n(bx^n + cx^{2n} + a)}$$

input `Int[(A + B*x^n + C*x^(2*n) + D*x^(3*n))/(a + b*x^n + c*x^(2*n))^3,x]`

output `(x*(A*c*(b^2 - 2*a*c) - a*(b*B*c - 2*a*c*C + a*b*D) + (b*c*(A*c + a*C) - a*b^2*D - 2*a*c*(B*c - a*D))*x^n)/(2*a*c*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n))^2) + (-((x*(A*c*(4*a^2*c^2*(1 - 4*n) - 5*a*b^2*c*(1 - 3*n) + b^4*(1 - 2*n)) - a*(4*a^2*c^2*C - a*b^2*c*C*(1 + 3*n) - 2*a*b*c*(B*c*(2 - 3*n) - a*D*n) + b^3*(B*c + a*D*n)) - c*(A*b*c*(2*a*c*(2 - 7*n) - b^2*(1 - 2*n)) + a*(b^2*(B*c - a*D*(1 - 2*n)) - 6*a*b*c*C*n - 4*a*c*(B*c*(1 - 3*n) - a*D*(1 + n))))*x^n)/(a*(b^2 - 4*a*c)*n*(a + b*x^n + c*x^(2*n)))) - ((c*((1 - n)*(A*b*c*(2*a*c*(2 - 7*n) - b^2*(1 - 2*n)) + a*(b^2*(B*c - a*D*(1 - 2*n)) - 6*a*b*c*C*n - 4*a*c*(B*c*(1 - 3*n) - a*D*(1 + n)))) - (A*c*(b^4*(1 - 3*n + 2*n^2) - 6*a*b^2*c*(1 - 4*n + 3*n^2) + 8*a^2*c^2*(1 - 6*n + 8*n^2)) - a*(8*a^2*c^2*C*(1 - 2*n) + b^3*(B*c + a*D*(1 - 2*n))*(1 - n) - 2*a*b^2*c*C*(1 - 2*n + 3*n^2) - 4*a*b*c*(B*c*(1 - n - 3*n^2) + a*D*(1 - 3*n - n^2))))/Sqrt[b^2 - 4*a*c])*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])]/(b - Sqrt[b^2 - 4*a*c]) + (c*((1 - n)*(A*b*c*(2*a*c*(2 - 7*n) - b^2*(1 - 2*n)) + a*(b^2*(B*c - a*D*(1 - 2*n)) - 6*a*b*c*C*n - 4*a*c*(B*c*(1 - 3*n) - a*D*(1 + n)))) + (A*c*(b^4*(1 - 3*n + 2*n^2) - 6*a*b^2*c*(1 - 4*n + 3*n^2) + 8*a^2*c^2*(1 - 6*n + 8*n^2)) - a*(8*a^2*c^2*C*(1 - 2*n) + b^3*(B*c + a*D*(1 - 2*n))*(1 - n) - 2*a*b^2*c*C*(1 - 2*n + 3*n^2) - 4*a*b*c*(B*c*(1 - n - 3*n^2) + a*D*(1 - 3*n - n^2))))/Sqrt[b^2 - 4*a*c])*x*Hypergeometric2F1[1, n^(-1), 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[...`

Defintions of rubi rules used

rule 778 `Int[((a_) + (b_.)*(x_)^(n_))^(p_), x_Symbol] := Simp[a^p*x*Hypergeometric2F1[-p, 1/n, 1/n + 1, (-b)*(x^n/a)], x] /; FreeQ[{a, b, n, p}, x] && !IGtQ[p, 0] && !IntegerQ[1/n] && !ILtQ[Simplify[1/n + p], 0] && (IntegerQ[p] || GtQ[a, 0])`

rule 1752 `Int[((d_) + (e_.)*(x_)^(n_))/((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_)), x_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[(e/2 + (2*c*d - b*e)/(2*q)) Int[1/(b/2 - q/2 + c*x^n), x], x] + Simp[(e/2 - (2*c*d - b*e)/(2*q)) Int[1/(b/2 + q/2 + c*x^n), x], x]] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0] && NeQ[c*d^2 - b*d*e + a*e^2, 0] && (PosQ[b^2 - 4*a*c] || !IGtQ[n/2, 0])`

rule 1760

```
Int[((d_) + (e_)*(x_)^(n_))*((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p
_), x_Symbol] := Simp[(-x)*(d*b^2 - a*b*e - 2*a*c*d + (b*d - 2*a*e)*c*x^n)*
((a + b*x^n + c*x^(2*n))^(p + 1)/(a*n*(p + 1)*(b^2 - 4*a*c))), x] + Simp[1/
(a*n*(p + 1)*(b^2 - 4*a*c)) Int[Simp[(n*p + n + 1)*d*b^2 - a*b*e - 2*a*c*
d*(2*n*p + 2*n + 1) + (2*n*p + 3*n + 1)*(d*b - 2*a*e)*c*x^n, x]*(a + b*x^n
+ c*x^(2*n))^(p + 1), x], x] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n
] && NeQ[b^2 - 4*a*c, 0] && ILtQ[p, -1]
```

rule 2326

```
Int[(P3_)*((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p_), x_Symbol] := Wi
th[{d = Coeff[P3, x^n, 0], e = Coeff[P3, x^n, 1], f = Coeff[P3, x^n, 2], g
= Coeff[P3, x^n, 3]}, Simp[(-x)*(b^2*c*d - 2*a*c*(c*d - a*f) - a*b*(c*e + a
*g) + (b*c*(c*d + a*f) - a*b^2*g - 2*a*c*(c*e - a*g))*x^n)*((a + b*x^n + c*
x^(2*n))^(p + 1)/(a*c*n*(p + 1)*(b^2 - 4*a*c))), x] - Simp[1/(a*c*n*(p + 1)
*(b^2 - 4*a*c)) Int[(a + b*x^n + c*x^(2*n))^(p + 1)*Simp[a*b*(c*e + a*g)
- b^2*c*d*(n + n*p + 1) - 2*a*c*(a*f - c*d*(2*n*(p + 1) + 1)) + (a*b^2*g*(n
*(p + 2) + 1) - b*c*(c*d + a*f)*(n*(2*p + 3) + 1) - 2*a*c*(a*g*(n + 1) - c*
e*(n*(2*p + 3) + 1)))*x^n, x], x], x] /; FreeQ[{a, b, c, n}, x] && EqQ[n2,
2*n] && PolyQ[P3, x^n, 3] && NeQ[b^2 - 4*a*c, 0] && ILtQ[p, -1]
```

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx$$

input

```
int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^3,x)
```

output

```
int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^3,x)
```

Fricas [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^3} dx$$

input `integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^3,x, algorithm="fricas")`

output `integral((D*x^(3*n) + C*x^(2*n) + B*x^n + A)/(c^3*x^(6*n) + b^3*x^(3*n) + 3*a*b^2*x^(2*n) + 3*a^2*b*x^n + a^3 + 3*(b*c^2*x^n + a*c^2)*x^(4*n) + 3*(b^2*c*x^(2*n) + 2*a*b*c*x^n + a^2*c)*x^(2*n)), x)`

Sympy [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx = \text{Timed out}$$

input `integrate((A+B*x**n+C*x**(2*n)+D*x**(3*n))/(a+b*x**n+c*x**(2*n))**3,x)`

output `Timed out`

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^3} dx$$

input `integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^3,x, algorithm="maxima")`

output

```

-1/2*((6*C*a^2*b*c^2*n + (2*a*b*c^3*(7*n - 2) - b^3*c^2*(2*n - 1))*A - (4*
a^2*c^3*(3*n - 1) + a*b^2*c^2)*B - (a^2*b^2*c*(2*n - 1) + 4*a^3*c^2*(n + 1
))*D)*x*x^(3*n) + ((a*b^2*c^2*(29*n - 9) - 4*a^2*c^3*(4*n - 1) - 2*b^4*c*(
2*n - 1))*A - 2*(a^2*b*c^2*(9*n - 4) + a*b^3*c)*B + (a^2*b^2*c*(9*n + 1) -
4*a^3*c^2)*C - (2*a^3*b*c*(3*n + 2) + a^2*b^3*(3*n - 1))*D)*x*x^(2*n) + (
(4*a*b^3*c*(3*n - 1) - b^5*(2*n - 1) + 2*a^2*b*c^2*n)*A - (4*a^3*c^2*(5*n
- 1) + a^2*b^2*c*(4*n - 3) + a*b^4)*B + (2*a^3*b*c*(5*n - 2) + a^2*b^3*(2*
n + 1))*C - (a^3*b^2*(10*n - 1) - 4*a^4*c*(n - 1))*D)*x*x^n - (6*D*a^4*b*n
- (a^2*b^2*c*(21*n - 5) - 4*a^3*c^2*(6*n - 1) - a*b^4*(3*n - 1))*A + (2*a
^3*b*c*(5*n - 2) - a^2*b^3*(n - 1))*B - (4*a^4*c*(2*n - 1) + a^3*b^2*(n +
1))*C)*x)/(a^4*b^4*n^2 - 8*a^5*b^2*c*n^2 + 16*a^6*c^2*n^2 + (a^2*b^4*c^2*n
^2 - 8*a^3*b^2*c^3*n^2 + 16*a^4*c^4*n^2)*x^(4*n) + 2*(a^2*b^5*c*n^2 - 8*a^
3*b^3*c^2*n^2 + 16*a^4*b*c^3*n^2)*x^(3*n) + (a^2*b^6*n^2 - 6*a^3*b^4*c*n^2
+ 32*a^5*c^3*n^2)*x^(2*n) + 2*(a^3*b^5*n^2 - 8*a^4*b^3*c*n^2 + 16*a^5*b*c
^2*n^2)*x^n) - integrate(1/2*(6*D*a^3*b*n - ((2*n^2 - 3*n + 1)*b^4 - (16*n
^2 - 21*n + 5)*a*b^2*c + 4*(8*n^2 - 6*n + 1)*a^2*c^2)*A + (2*a^2*b*c*(5*n
- 2) - a*b^3*(n - 1))*B - (4*a^3*c*(2*n - 1) + a^2*b^2*(n + 1))*C + (6*(n^
2 - n)*C*a^2*b*c - ((2*n^2 - 3*n + 1)*b^3*c - 2*(7*n^2 - 9*n + 2)*a*b*c^2)
*A - (4*(3*n^2 - 4*n + 1)*a^2*c^2 + a*b^2*c*(n - 1))*B - ((2*n^2 - 3*n + 1
)*a^2*b^2 + 4*(n^2 - 1)*a^3*c)*D)*x^n)/(a^3*b^4*n^2 - 8*a^4*b^2*c*n^2 + ...

```

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{Dx^{3n} + Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^3} dx$$

input

```

integrate((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^3,x, algorithm
="giac")

```

output

```

integrate((D*x^(3*n) + C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a)^3, x
)

```

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx = \int \frac{A + Cx^{2n} + x^{3n}D + Bx^n}{(a + bx^n + cx^{2n})^3} dx$$

input `int((A + C*x^(2*n) + x^(3*n)*D + B*x^n)/(a + b*x^n + c*x^(2*n))^3,x)`

output `int((A + C*x^(2*n) + x^(3*n)*D + B*x^n)/(a + b*x^n + c*x^(2*n))^3, x)`

Reduce [F]

$$\int \frac{A + Bx^n + Cx^{2n} + Dx^{3n}}{(a + bx^n + cx^{2n})^3} dx = \text{too large to display}$$

input `int((A+B*x^n+C*x^(2*n)+D*x^(3*n))/(a+b*x^n+c*x^(2*n))^3,x)`

output

```
( - 24*x**(4*n)*int(x**(2*n)/(6*x**(6*n)*c**3*n**2 - 5*x**(6*n)*c**3*n + x
**(6*n)*c**3 + 18*x**(5*n)*b*c**2*n**2 - 15*x**(5*n)*b*c**2*n + 3*x**(5*n)
*b*c**2 + 18*x**(4*n)*a*c**2*n**2 - 15*x**(4*n)*a*c**2*n + 3*x**(4*n)*a*c*
*2 + 18*x**(4*n)*b**2*c*n**2 - 15*x**(4*n)*b**2*c*n + 3*x**(4*n)*b**2*c +
36*x**(3*n)*a*b*c*n**2 - 30*x**(3*n)*a*b*c*n + 6*x**(3*n)*a*b*c + 6*x**(3*
n)*b**3*n**2 - 5*x**(3*n)*b**3*n + x**(3*n)*b**3 + 18*x**(2*n)*a**2*c*n**2
- 15*x**(2*n)*a**2*c*n + 3*x**(2*n)*a**2*c + 18*x**(2*n)*a*b**2*n**2 - 15
*x**(2*n)*a*b**2*n + 3*x**(2*n)*a*b**2 + 18*x**n*a**2*b*n**2 - 15*x**n*a**
2*b*n + 3*x**n*a**2*b + 6*a**3*n**2 - 5*a**3*n + a**3),x)*a*c**3*d*n**4 +
2*x**(4*n)*int(x**(2*n)/(6*x**(6*n)*c**3*n**2 - 5*x**(6*n)*c**3*n + x**(6*
n)*c**3 + 18*x**(5*n)*b*c**2*n**2 - 15*x**(5*n)*b*c**2*n + 3*x**(5*n)*b*c*
*2 + 18*x**(4*n)*a*c**2*n**2 - 15*x**(4*n)*a*c**2*n + 3*x**(4*n)*a*c**2 +
18*x**(4*n)*b**2*c*n**2 - 15*x**(4*n)*b**2*c*n + 3*x**(4*n)*b**2*c + 36*x*
*(3*n)*a*b*c*n**2 - 30*x**(3*n)*a*b*c*n + 6*x**(3*n)*a*b*c + 6*x**(3*n)*b
*3*n**2 - 5*x**(3*n)*b**3*n + x**(3*n)*b**3 + 18*x**(2*n)*a**2*c*n**2 - 15
*x**(2*n)*a**2*c*n + 3*x**(2*n)*a**2*c + 18*x**(2*n)*a*b**2*n**2 - 15*x**
(2*n)*a*b**2*n + 3*x**(2*n)*a*b**2 + 18*x**n*a**2*b*n**2 - 15*x**n*a**2*b*n
+ 3*x**n*a**2*b + 6*a**3*n**2 - 5*a**3*n + a**3),x)*a*c**3*d*n**3 + 17*x*
*(4*n)*int(x**(2*n)/(6*x**(6*n)*c**3*n**2 - 5*x**(6*n)*c**3*n + x**(6*n)*c
**3 + 18*x**(5*n)*b*c**2*n**2 - 15*x**(5*n)*b*c**2*n + 3*x**(5*n)*b*c**...
```

3.23 $\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx$

Optimal result	189
Mathematica [B] (warning: unable to verify)	190
Rubi [F]	190
Maple [F]	191
Fricas [F(-2)]	191
Sympy [F]	192
Maxima [F]	192
Giac [F]	192
Mupad [F(-1)]	193
Reduce [F]	193

Optimal result

Integrand size = 33, antiderivative size = 378

$$\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx = \frac{Cx(a + bx^n + cx^{2n})^{5/2}}{c(1 + 5n)}$$

$$\frac{a(bC(2 + 5n) - 2B(c + 5cn))x^{1+n}\sqrt{a + bx^n + cx^{2n}} \operatorname{AppellF1}\left(1 + \frac{1}{n}, -\frac{3}{2}, -\frac{3}{2}, 2 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2c}{b + \sqrt{b^2 - 4ac}}\right)}{2c(1 + n)(1 + 5n)\sqrt{1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}}\sqrt{1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}}}$$

$$\frac{a(aC - A(c + 5cn))x\sqrt{a + bx^n + cx^{2n}} \operatorname{AppellF1}\left(\frac{1}{n}, -\frac{3}{2}, -\frac{3}{2}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)}{c(1 + 5n)\sqrt{1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}}\sqrt{1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}}}$$

output

```
C*x*(a+b*x^n+c*x^(2*n))^(5/2)/c/(1+5*n)-1/2*a*(b*C*(2+5*n)-2*B*(5*c*n+c))*
x^(1+n)*(a+b*x^n+c*x^(2*n))^(1/2)*AppellF1(1+1/n,-3/2,-3/2,2+1/n,-2*c*x^n/
(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c/(1+n)/(1+5*n)/(1
+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)/(1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^(
1/2)-a*(C*a-A*(5*c*n+c))*x*(a+b*x^n+c*x^(2*n))^(1/2)*AppellF1(1/n,-3/2,-3
/2,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/
c/(1+5*n)/(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)/(1+2*c*x^n/(b+(-4*a*c+b
^2)^(1/2)))^(1/2)
```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 19261 vs. $2(378) = 756$.

Time = 9.09 (sec) , antiderivative size = 19261, normalized size of antiderivative = 50.96

$$\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx = \text{Result too large to show}$$

input `Integrate[(a + b*x^n + c*x^(2*n))^(3/2)*(A + B*x^n + C*x^(2*n)),x]`

output `Result too large to show`

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx$$

↓ 2329

$$\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx$$

input `Int[(a + b*x^n + c*x^(2*n))^(3/2)*(A + B*x^n + C*x^(2*n)),x]`

output `$Aborted`

Defintions of rubi rules used

rule 2329

```
Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_.), x_Symbol] :>
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])
```

Maple [F]

$$\int (a + bx^n + cx^{2n})^{\frac{3}{2}} (A + Bx^n + Cx^{2n}) dx$$

input

```
int((a+b*x^n+c*x^(2*n))^(3/2)*(A+B*x^n+C*x^(2*n)),x)
```

output

```
int((a+b*x^n+c*x^(2*n))^(3/2)*(A+B*x^n+C*x^(2*n)),x)
```

Fricas [F(-2)]

Exception generated.

$$\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx = \text{Exception raised: TypeError}$$

input

```
integrate((a+b*x^n+c*x^(2*n))^(3/2)*(A+B*x^n+C*x^(2*n)),x, algorithm="fricas")
```

output

```
Exception raised: TypeError >> Error detected within library code: integrate: implementation incomplete (has polynomial part)
```


Sympy [F]

$$\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx = \int (A + Bx^n + Cx^{2n}) (a + bx^n + cx^{2n})^{3/2} dx$$

input `integrate((a+b*x**n+c*x**(2*n))**(3/2)*(A+B*x**n+C*x**(2*n)),x)`

output `Integral((A + B*x**n + C*x**(2*n))*(a + b*x**n + c*x**(2*n))**(3/2), x)`

Maxima [F]

$$\int (a+bx^n+cx^{2n})^{3/2} (A+Bx^n+Cx^{2n}) dx = \int (Cx^{2n} + Bx^n + A)(cx^{2n} + bx^n + a)^{3/2} dx$$

input `integrate((a+b*x^n+c*x^(2*n))^(3/2)*(A+B*x^n+C*x^(2*n)),x, algorithm="maxima")`

output `integrate((C*x^(2*n) + B*x^n + A)*(c*x^(2*n) + b*x^n + a)^(3/2), x)`

Giac [F]

$$\int (a+bx^n+cx^{2n})^{3/2} (A+Bx^n+Cx^{2n}) dx = \int (Cx^{2n} + Bx^n + A)(cx^{2n} + bx^n + a)^{3/2} dx$$

input `integrate((a+b*x^n+c*x^(2*n))^(3/2)*(A+B*x^n+C*x^(2*n)),x, algorithm="giac")`

output `integrate((C*x^(2*n) + B*x^n + A)*(c*x^(2*n) + b*x^n + a)^(3/2), x)`

Mupad [F(-1)]

Timed out.

$$\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx = \int (a + bx^n + cx^{2n})^{3/2} (A + Cx^{2n} + Bx^n) dx$$

input

```
int((a + b*x^n + c*x^(2*n))^(3/2)*(A + C*x^(2*n) + B*x^n), x)
```

output

```
int((a + b*x^n + c*x^(2*n))^(3/2)*(A + C*x^(2*n) + B*x^n), x)
```

Reduce [F]

$$\int (a + bx^n + cx^{2n})^{3/2} (A + Bx^n + Cx^{2n}) dx = \text{too large to display}$$

input

```
int((a+b*x^n+c*x^(2*n))^(3/2)*(A+B*x^n+C*x^(2*n)), x)
```

output

```
(384*x**(4*n)*sqrt(x**(2*n)*c + x**n*b + a)*c**3*n**4*x + 1184*x**(4*n)*sqrt(x**(2*n)*c + x**n*b + a)*c**3*n**3*x + 976*x**(4*n)*sqrt(x**(2*n)*c + x**n*b + a)*c**3*n**2*x + 304*x**(4*n)*sqrt(x**(2*n)*c + x**n*b + a)*c**3*n*x + 32*x**(4*n)*sqrt(x**(2*n)*c + x**n*b + a)*c**3*x + 1008*x**(3*n)*sqrt(x**(2*n)*c + x**n*b + a)*b*c**2*n**4*x + 3048*x**(3*n)*sqrt(x**(2*n)*c + x**n*b + a)*b*c**2*n**3*x + 2392*x**(3*n)*sqrt(x**(2*n)*c + x**n*b + a)*b*c**2*n**2*x + 688*x**(3*n)*sqrt(x**(2*n)*c + x**n*b + a)*b*c**2*n*x + 64*x**(3*n)*sqrt(x**(2*n)*c + x**n*b + a)*b*c**2*x + 1408*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*a*c**2*n**4*x + 4128*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*a*c**2*n**3*x + 2992*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*a*c**2*n**2*x + 768*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*a*c**2*n*x + 64*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*a*c**2*x + 744*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*b**2*c*n**4*x + 2164*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*b**2*c*n**3*x + 1536*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*b**2*c*n**2*x + 384*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*b**2*c*n*x + 32*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*b**2*c*x + 2488*x**n*sqrt(x**(2*n)*c + x**n*b + a)*a*b*c*n**4*x + 6728*x**n*sqrt(x**(2*n)*c + x**n*b + a)*a*b*c*n**3*x + 3912*x**n*sqrt(x**(2*n)*c + x**n*b + a)*a*b*c*n**2*x + 848*x**n*sqrt(x**(2*n)*c + x**n*b + a)*a*b*c*n*x + 64*x**n*sqrt(x**(2*n)*c + x**n*b + a)*a*b*c*x + 30*x**n*sqrt(x**(2*n)*c + x**n*b + a)*b**3*n**4*x + 60*x**n*sqrt(x**(...
```

3.24 $\int \sqrt{a + bx^n + cx^{2n}}(A + Bx^n + Cx^{2n}) dx$

Optimal result	195
Mathematica [A] (warning: unable to verify)	196
Rubi [F]	196
Maple [F]	197
Fricas [F(-2)]	197
Sympy [F]	198
Maxima [F]	198
Giac [F]	198
Mupad [F(-1)]	199
Reduce [F]	199

Optimal result

Integrand size = 33, antiderivative size = 376

$$\int \sqrt{a + bx^n + cx^{2n}}(A + Bx^n + Cx^{2n}) dx = \frac{Cx(a + bx^n + cx^{2n})^{3/2}}{c(1 + 3n)} - \frac{(bC(2 + 3n) - 2B(c + 3cn))x^{1+n}\sqrt{a + bx^n + cx^{2n}} \operatorname{AppellF1}\left(1 + \frac{1}{n}, -\frac{1}{2}, -\frac{1}{2}, 2 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)}{2c(1 + n)(1 + 3n)\sqrt{1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}}\sqrt{1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}}} - \frac{(aC - A(c + 3cn))x\sqrt{a + bx^n + cx^{2n}} \operatorname{AppellF1}\left(\frac{1}{n}, -\frac{1}{2}, -\frac{1}{2}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)}{c(1 + 3n)\sqrt{1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}}\sqrt{1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}}}$$

output

```
C*x*(a+b*x^n+c*x^(2*n))^(3/2)/c/(1+3*n)-1/2*(b*C*(2+3*n)-2*B*(3*c*n+c))*x^(1+n)*(a+b*x^n+c*x^(2*n))^(1/2)*AppellF1(1+1/n,-1/2,-1/2,2+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c/(1+n)/(1+3*n)/(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)/(1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^(1/2)-(C*a-A*(3*c*n+c))*x*(a+b*x^n+c*x^(2*n))^(1/2)*AppellF1(1/n,-1/2,-1/2,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c/(1+3*n)/(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)/(1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^(1/2))^(1/2)
```

Mathematica [A] (warning: unable to verify)

Time = 4.41 (sec) , antiderivative size = 576, normalized size of antiderivative = 1.53

$$\int \sqrt{a + bx^n + cx^{2n}} (A + Bx^n + Cx^{2n}) dx$$

$$= \frac{x \left(n(8aBc^2(1 + 4n + 3n^2) - 2b^2Bc(2 + 7n + 3n^2) + b^3C(4 + 8n + 3n^2) + 4bc(-aC(3 + 7n + 3n^2) + A \right)}{}$$

input `Integrate[Sqrt[a + b*x^n + c*x^(2*n)]*(A + B*x^n + C*x^(2*n)),x]`

output `(x*(n*(8*a*B*c^2*(1 + 4*n + 3*n^2) - 2*b^2*B*c*(2 + 7*n + 3*n^2) + b^3*C*(4 + 8*n + 3*n^2) + 4*b*c*(-(a*C*(3 + 7*n + 3*n^2)) + A*c*(1 + 5*n + 6*n^2)))*x^n*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])] * Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])] * AppellF1[1 + n^(-1), 1/2, 1/2, 2 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])] + 2*(1 + n)*((a + x^n*(b + c*x^n))*(-b^2*C*n*(2 + 3*n)) + 4*A*c^2*(1 + 5*n + 6*n^2) + 2*b*c*n*(B + 3*B*n + C*(1 + n)*x^n) + 4*c*(a*C*n*(1 + 2*n) + c*(1 + n)*x^n*(B + 3*B*n + C*(1 + 2*n)*x^n)) + a*n*(-2*b*B*c*(1 + 3*n) + b^2*C*(2 + 3*n) + 4*c*(1 + 2*n)*(-(a*C) + A*(c + 3*c*n)))*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c])] * Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])] * AppellF1[n^(-1), 1/2, 1/2, 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])])))/(8*c^2*(1 + n)^2*(1 + 5*n + 6*n^2)*Sqrt[a + x^n*(b + c*x^n)])]`

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \sqrt{a + bx^n + cx^{2n}} (A + Bx^n + Cx^{2n}) dx$$

$$\downarrow 2329$$

$$\int \sqrt{a + bx^n + cx^{2n}} (A + Bx^n + Cx^{2n}) dx$$

input `Int[Sqrt[a + b*x^n + c*x^(2*n)]*(A + B*x^n + C*x^(2*n)),x]`

output `$Aborted`

Defintions of rubi rules used

rule 2329 `Int[(Pq_)*((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p_), x_Symbol] :>
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int \sqrt{a + bx^n + cx^{2n}} (A + Bx^n + Cx^{2n}) dx$$

input `int((a+b*x^n+c*x^(2*n))^(1/2)*(A+B*x^n+C*x^(2*n)),x)`

output `int((a+b*x^n+c*x^(2*n))^(1/2)*(A+B*x^n+C*x^(2*n)),x)`

Fricas [F(-2)]

Exception generated.

$$\int \sqrt{a + bx^n + cx^{2n}} (A + Bx^n + Cx^{2n}) dx = \text{Exception raised: TypeError}$$

input `integrate((a+b*x^n+c*x^(2*n))^(1/2)*(A+B*x^n+C*x^(2*n)),x, algorithm="fricas")`

output `Exception raised: TypeError >> Error detected within library code: integrate: implementation incomplete (has polynomial part)`

Sympy [F]

$$\int \sqrt{a + bx^n + cx^{2n}}(A + Bx^n + Cx^{2n}) dx = \int (A + Bx^n + Cx^{2n}) \sqrt{a + bx^n + cx^{2n}} dx$$

input `integrate((a+b*x**n+c*x**(2*n))**(1/2)*(A+B*x**n+C*x**(2*n)),x)`

output `Integral((A + B*x**n + C*x**(2*n))*sqrt(a + b*x**n + c*x**(2*n)), x)`

Maxima [F]

$$\int \sqrt{a + bx^n + cx^{2n}}(A + Bx^n + Cx^{2n}) dx = \int (Cx^{2n} + Bx^n + A)\sqrt{cx^{2n} + bx^n + a} dx$$

input `integrate((a+b*x^n+c*x^(2*n))^(1/2)*(A+B*x^n+C*x^(2*n)),x, algorithm="maxima")`

output `integrate((C*x^(2*n) + B*x^n + A)*sqrt(c*x^(2*n) + b*x^n + a), x)`

Giac [F]

$$\int \sqrt{a + bx^n + cx^{2n}}(A + Bx^n + Cx^{2n}) dx = \int (Cx^{2n} + Bx^n + A)\sqrt{cx^{2n} + bx^n + a} dx$$

input `integrate((a+b*x^n+c*x^(2*n))^(1/2)*(A+B*x^n+C*x^(2*n)),x, algorithm="giac")`

output `integrate((C*x^(2*n) + B*x^n + A)*sqrt(c*x^(2*n) + b*x^n + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \sqrt{a + bx^n + cx^{2n}} (A + Bx^n + Cx^{2n}) dx = \int \sqrt{a + bx^n + cx^{2n}} (A + Cx^{2n} + Bx^n) dx$$

input `int((a + b*x^n + c*x^(2*n))^(1/2)*(A + C*x^(2*n) + B*x^n), x)`

output `int((a + b*x^n + c*x^(2*n))^(1/2)*(A + C*x^(2*n) + B*x^n), x)`

Reduce [F]

$$\int \sqrt{a + bx^n + cx^{2n}} (A + Bx^n + Cx^{2n}) dx = \text{too large to display}$$

input `int((a+b*x^n+c*x^(2*n))^(1/2)*(A+B*x^n+C*x^(2*n)), x)`

output

```

(8*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*c*n**2*x + 20*x**(2*n)*sqrt(x**(
2*n)*c + x**n*b + a)*c*n*x + 8*x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a)*c*x
+ 14*x**n*sqrt(x**(2*n)*c + x**n*b + a)*b*n**2*x + 32*x**n*sqrt(x**(2*n)*c
+ x**n*b + a)*b*n*x + 8*x**n*sqrt(x**(2*n)*c + x**n*b + a)*b*x + 68*sqrt(
x**(2*n)*c + x**n*b + a)*a*n**2*x + 44*sqrt(x**(2*n)*c + x**n*b + a)*a*n*x
+ 8*sqrt(x**(2*n)*c + x**n*b + a)*a*x + 144*int(sqrt(x**(2*n)*c + x**n*b
+ a)/(6*x**(2*n)*c*n**3 + 17*x**(2*n)*c*n**2 + 11*x**(2*n)*c*n + 2*x**(2*n
)*c + 6*x**n*b*n**3 + 17*x**n*b*n**2 + 11*x**n*b*n + 2*x**n*b + 6*a*n**3 +
17*a*n**2 + 11*a*n + 2*a),x)*a**2*n**6 + 408*int(sqrt(x**(2*n)*c + x**n*b
+ a)/(6*x**(2*n)*c*n**3 + 17*x**(2*n)*c*n**2 + 11*x**(2*n)*c*n + 2*x**(2*
n)*c + 6*x**n*b*n**3 + 17*x**n*b*n**2 + 11*x**n*b*n + 2*x**n*b + 6*a*n**3
+ 17*a*n**2 + 11*a*n + 2*a),x)*a**2*n**5 + 264*int(sqrt(x**(2*n)*c + x**n*
b + a)/(6*x**(2*n)*c*n**3 + 17*x**(2*n)*c*n**2 + 11*x**(2*n)*c*n + 2*x**(2
*n)*c + 6*x**n*b*n**3 + 17*x**n*b*n**2 + 11*x**n*b*n + 2*x**n*b + 6*a*n**3
+ 17*a*n**2 + 11*a*n + 2*a),x)*a**2*n**4 + 48*int(sqrt(x**(2*n)*c + x**n*
b + a)/(6*x**(2*n)*c*n**3 + 17*x**(2*n)*c*n**2 + 11*x**(2*n)*c*n + 2*x**(2
*n)*c + 6*x**n*b*n**3 + 17*x**n*b*n**2 + 11*x**n*b*n + 2*x**n*b + 6*a*n**3
+ 17*a*n**2 + 11*a*n + 2*a),x)*a**2*n**3 - 216*int((x**(2*n)*sqrt(x**(2*n
)*c + x**n*b + a))/(6*x**(2*n)*c*n**3 + 17*x**(2*n)*c*n**2 + 11*x**(2*n)*c
*n + 2*x**(2*n)*c + 6*x**n*b*n**3 + 17*x**n*b*n**2 + 11*x**n*b*n + 2*x**...

```

3.25 $\int \frac{A+Bx^n+Cx^{2n}}{\sqrt{a+bx^n+cx^{2n}}} dx$

Optimal result	201
Mathematica [A] (warning: unable to verify)	202
Rubi [F]	202
Maple [F]	203
Fricas [F(-2)]	203
Sympy [F]	204
Maxima [F]	204
Giac [F]	204
Mupad [F(-1)]	205
Reduce [F]	205

Optimal result

Integrand size = 33, antiderivative size = 360

$$\int \frac{A+Bx^n+Cx^{2n}}{\sqrt{a+bx^n+cx^{2n}}} dx = \frac{Cx\sqrt{a+bx^n+cx^{2n}}}{c(1+n)} + \frac{(2Bc(1+n) - bC(2+n))x^{1+n}\sqrt{1+\frac{2cx^n}{b-\sqrt{b^2-4ac}}}\sqrt{1+\frac{2cx^n}{b+\sqrt{b^2-4ac}}}\text{AppellF1}\left(1+\frac{1}{n}, \frac{1}{2}, \frac{1}{2}, 2+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right)}{2c(1+n)^2\sqrt{a+bx^n+cx^{2n}}} - \frac{(aC - Ac(1+n))x\sqrt{1+\frac{2cx^n}{b-\sqrt{b^2-4ac}}}\sqrt{1+\frac{2cx^n}{b+\sqrt{b^2-4ac}}}\text{AppellF1}\left(\frac{1}{n}, \frac{1}{2}, \frac{1}{2}, 1+\frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{c(1+n)\sqrt{a+bx^n+cx^{2n}}}$$

output

```
C*x*(a+b*x^n+c*x^(2*n))^(1/2)/c/(1+n)+1/2*(2*B*c*(1+n)-b*C*(2+n))*x^(1+n)*
(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))
)^(1/2)*AppellF1(1+1/n,1/2,1/2,2+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)),-2*c*
x^n/(b+(-4*a*c+b^2)^(1/2)))/c/(1+n)^2/(a+b*x^n+c*x^(2*n))^(1/2)-(C*a-A*c*(
1+n))*x*(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^n/(b+(-4*a*c+b^2
)^(1/2)))^(1/2)*AppellF1(1/n,1/2,1/2,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2))
,-2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c/(1+n)/(a+b*x^n+c*x^(2*n))^(1/2)
```

Mathematica [A] (warning: unable to verify)

Time = 1.68 (sec) , antiderivative size = 379, normalized size of antiderivative = 1.05

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx$$

$$= \frac{x \left(- \left((-2Bc(1+n) + bC(2+n))x^n \sqrt{\frac{b - \sqrt{b^2 - 4ac + 2cx^n}}{b - \sqrt{b^2 - 4ac}}} \sqrt{\frac{b + \sqrt{b^2 - 4ac + 2cx^n}}{b + \sqrt{b^2 - 4ac}}} \operatorname{AppellF1} \left(1 + \frac{1}{n}, \frac{1}{2}, \frac{1}{2}, 2 + \frac{1}{n}, -\frac{1}{b} \right) \right)}{\dots}$$

input `Integrate[(A + B*x^n + C*x^(2*n))/Sqrt[a + b*x^n + c*x^(2*n)],x]`output `(x*(-((-2*B*c*(1+n) + b*C*(2+n))*x^n*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[1 + n^(-1), 1/2, 1/2, 2 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])]) + 2*(1+n)*(C*(a + x^n*(b + c*x^n)) + (-a*C) + A*c*(1+n))*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[n^(-1), 1/2, 1/2, 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])])))/(2*c*(1+n)^2*Sqrt[a + x^n*(b + c*x^n)])`**Rubi [F]**

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx$$

$$\downarrow \text{2329}$$

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx$$

input `Int[(A + B*x^n + C*x^(2*n))/Sqrt[a + b*x^n + c*x^(2*n)],x]`output `$Aborted`

Defintions of rubi rules used

rule 2329 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^(p_.), x_Symbol] :>
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(1/2),x)`

output `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(1/2),x)`

Fricas [F(-2)]

Exception generated.

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx = \text{Exception raised: TypeError}$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(1/2),x, algorithm="fricas")`

output `Exception raised: TypeError >> Error detected within library code: integrate: implementation incomplete (has polynomial part)`

Sympy [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx = \int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx$$

input `integrate((A+B*x**n+C*x**(2*n))/(a+b*x**n+c*x**(2*n))**(1/2), x)`

output `Integral((A + B*x**n + C*x**(2*n))/sqrt(a + b*x**n + c*x**(2*n)), x)`

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx = \int \frac{Cx^{2n} + Bx^n + A}{\sqrt{cx^{2n} + bx^n + a}} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(1/2), x, algorithm="maxima")`

output `integrate((C*x^(2*n) + B*x^n + A)/sqrt(c*x^(2*n) + b*x^n + a), x)`

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx = \int \frac{Cx^{2n} + Bx^n + A}{\sqrt{cx^{2n} + bx^n + a}} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(1/2), x, algorithm="giac")`

output `integrate((C*x^(2*n) + B*x^n + A)/sqrt(c*x^(2*n) + b*x^n + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx = \int \frac{A + Cx^{2n} + Bx^n}{\sqrt{a + bx^n + cx^{2n}}} dx$$

input `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^(1/2), x)`

output `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^(1/2), x)`

Reduce [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{\sqrt{a + bx^n + cx^{2n}}} dx$$

$$= \frac{2\sqrt{x^{2n}c + x^nb + a}x + \left(\int \frac{\sqrt{x^{2n}c + x^nb + a}}{x^{2n}cn + 2x^{2n}c + x^nb + 2x^nb + an + 2a} dx\right)an^2 + 2\left(\int \frac{\sqrt{x^{2n}c + x^nb + a}}{x^{2n}cn + 2x^{2n}c + x^nb + 2x^nb + an + 2a} dx\right)an}{n + 2}$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(1/2), x)`

output `(2*sqrt(x**(2*n)*c + x**n*b + a)*x + int(sqrt(x**(2*n)*c + x**n*b + a)/(x**
*(2*n)*c*n + 2*x**(2*n)*c + x**n*b*n + 2*x**n*b + a*n + 2*a), x)*a*n**2 + 2
*int(sqrt(x**(2*n)*c + x**n*b + a)/(x**(2*n)*c*n + 2*x**(2*n)*c + x**n*b*n
+ 2*x**n*b + a*n + 2*a), x)*a*n - int((x**(2*n)*sqrt(x**(2*n)*c + x**n*b +
a))/(x**(2*n)*c*n + 2*x**(2*n)*c + x**n*b*n + 2*x**n*b + a*n + 2*a), x)*c*
n**2 - 2*int((x**(2*n)*sqrt(x**(2*n)*c + x**n*b + a))/(x**(2*n)*c*n + 2*x*
*(2*n)*c + x**n*b*n + 2*x**n*b + a*n + 2*a), x)*c*n)/(n + 2)`

3.26 $\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^{3/2}} dx$

Optimal result	206
Mathematica [A] (warning: unable to verify)	207
Rubi [F]	207
Maple [F]	208
Fricas [F(-2)]	208
Sympy [F(-1)]	209
Maxima [F]	209
Giac [F]	209
Mupad [F(-1)]	210
Reduce [F]	210

Optimal result

Integrand size = 33, antiderivative size = 383

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx = \frac{Cx}{c(1-n)\sqrt{a + bx^n + cx^{2n}}} + \frac{(2Bc(1-n) - bC(2-n))x^{1+n} \sqrt{1 + \frac{2cx^n}{b-\sqrt{b^2-4ac}}} \sqrt{1 + \frac{2cx^n}{b+\sqrt{b^2-4ac}}} \operatorname{AppellF1}\left(1 + \frac{1}{n}, \frac{3}{2}, \frac{3}{2}, 2 + \frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}\right) + (aC - Ac(1-n))x \sqrt{1 + \frac{2cx^n}{b-\sqrt{b^2-4ac}}} \sqrt{1 + \frac{2cx^n}{b+\sqrt{b^2-4ac}}} \operatorname{AppellF1}\left(\frac{1}{n}, \frac{3}{2}, \frac{3}{2}, 1 + \frac{1}{n}, -\frac{2cx^n}{b-\sqrt{b^2-4ac}}, -\frac{2cx^n}{b+\sqrt{b^2-4ac}}\right)}{2ac(1-n)(1+n)\sqrt{a + bx^n + cx^{2n}} - ac(1-n)\sqrt{a + bx^n + cx^{2n}}}$$

output

```
C*x/c/(1-n)/(a+b*x^n+c*x^(2*n))^(1/2)+1/2*(2*B*c*(1-n)-b*C*(2-n))*x^(1+n)*
(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))
)^(1/2)*AppellF1(1+1/n,3/2,3/2,2+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)),-2*c*
x^n/(b+(-4*a*c+b^2)^(1/2)))/a/c/(1-n)/(1+n)/(a+b*x^n+c*x^(2*n))^(1/2)-(C*a
-A*c*(1-n))*x*(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^n/(b+(-4*a
*c+b^2)^(1/2)))^(1/2)*AppellF1(1/n,3/2,3/2,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(
1/2)),-2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a/c/(1-n)/(a+b*x^n+c*x^(2*n))^(1/2
)
```

Mathematica [A] (warning: unable to verify)

Time = 3.24 (sec) , antiderivative size = 436, normalized size of antiderivative = 1.14

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx = \frac{x \left(2(ABC - 2aBc + abC)x^n \sqrt{\frac{b - \sqrt{b^2 - 4ac} + 2cx^n}{b - \sqrt{b^2 - 4ac}}} \sqrt{\frac{b + \sqrt{b^2 - 4ac} + 2cx^n}{b + \sqrt{b^2 - 4ac}}} \operatorname{AppellF1} \left(1 + \frac{1}{n} \right) \right)}{(a + bx^n + cx^{2n})^{3/2}}$$

input `Integrate[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n))^(3/2), x]`

output `(x*(2*(A*b*c - 2*a*B*c + a*b*C)*x^n*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[1 + n^(-1), 1/2, 1/2, 2 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])] - (1 + n)*(2*(A*(b^2 - 2*a*c + b*c*x^n) + a*(-(b*B) + 2*a*C - 2*B*c*x^n + b*C*x^n)) + (2*a*(b*B - 2*a*C) + A*b^2*(-2 + n) - 4*a*A*c*(-1 + n))*Sqrt[(b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]])*Sqrt[(b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]])*AppellF1[n^(-1), 1/2, 1/2, 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])])))/(a*(-b^2 + 4*a*c)*n*(1 + n)*Sqrt[a + x^n*(b + c*x^n)])`

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx$$

↓ 2329

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx$$

input `Int[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n))^(3/2), x]`

output `$Aborted`

Definitions of rubi rules used

rule 2329 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_.), x_Symbol] :=
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{\frac{3}{2}}} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(3/2),x)`

output `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(3/2),x)`

Fricas [F(-2)]

Exception generated.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx = \text{Exception raised: TypeError}$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(3/2),x, algorithm="fricas")`

output `Exception raised: TypeError >> Error detected within library code: integrate: implementation incomplete (constant residues)`

Sympy [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx = \text{Timed out}$$

input `integrate((A+B*x**n+C*x**(2*n))/(a+b*x**n+c*x**(2*n))**(3/2),x)`

output Timed out

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^{\frac{3}{2}}} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(3/2),x, algorithm="maxima")`

output `integrate((C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a)^(3/2), x)`

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^{\frac{3}{2}}} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(3/2),x, algorithm="giac")`

output `integrate((C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a)^(3/2), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx = \int \frac{A + Cx^{2n} + Bx^n}{(a + bx^n + cx^{2n})^{3/2}} dx$$

input `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^(3/2), x)`

output `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^(3/2), x)`

Reduce [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{3/2}} dx = \int \frac{\sqrt{x^{2n}c + x^nb + a}}{x^{2n}c + x^nb + a} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(3/2), x)`

output `int(sqrt(x**(2*n)*c + x**n*b + a)/(x**(2*n)*c + x**n*b + a), x)`

3.27 $\int \frac{A+Bx^n+Cx^{2n}}{(a+bx^n+cx^{2n})^{5/2}} dx$

Optimal result	211
Mathematica [B] (warning: unable to verify)	212
Rubi [F]	212
Maple [F]	213
Fricas [F(-2)]	213
Sympy [F(-1)]	214
Maxima [F]	214
Giac [F]	214
Mupad [F(-1)]	215
Reduce [F]	215

Optimal result

Integrand size = 33, antiderivative size = 383

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx = \frac{Cx}{c(1 - 3n)(a + bx^n + cx^{2n})^{3/2}} + \frac{(2Bc(1 - 3n) - bC(2 - 3n))x^{1+n} \sqrt{1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}} \sqrt{1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}} \operatorname{AppellF1}\left(1 + \frac{1}{n}, \frac{5}{2}, \frac{5}{2}, 2 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right) + (aC - Ac(1 - 3n))x \sqrt{1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}} \sqrt{1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}} \operatorname{AppellF1}\left(\frac{1}{n}, \frac{5}{2}, \frac{5}{2}, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)}{2a^2c(1 - 3n)(1 + n)\sqrt{a + bx^n + cx^{2n}} - a^2c(1 - 3n)\sqrt{a + bx^n + cx^{2n}}}$$

output

```
C*x/c/(1-3*n)/(a+b*x^n+c*x^(2*n))^(3/2)+1/2*(2*B*c*(1-3*n)-b*C*(2-3*n))*x^(1+n)*(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^(1/2)*AppellF1(1+1/n,5/2,5/2,2+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a^2/c/(1-3*n)/(1+n)/(a+b*x^n+c*x^(2*n))^(1/2)-(C*a-A*c*(1-3*n))*x*(1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^(1/2)*(1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^(1/2)*AppellF1(1/n,5/2,5/2,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/a^2/c/(1-3*n)/(a+b*x^n+c*x^(2*n))^(1/2)
```

Mathematica [B] (warning: unable to verify)

Leaf count is larger than twice the leaf count of optimal. 8396 vs. $2(383) = 766$.

Time = 8.76 (sec) , antiderivative size = 8396, normalized size of antiderivative = 21.92

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx = \text{Result too large to show}$$

input `Integrate[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n))^(5/2), x]`

output `Result too large to show`

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx$$

↓ 2329

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx$$

input `Int[(A + B*x^n + C*x^(2*n))/(a + b*x^n + c*x^(2*n))^(5/2), x]`

output `$Aborted`

Defintions of rubi rules used

rule 2329

```
Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_.), x_Symbol] :=
  Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
  && EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])
```

Maple [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{\frac{5}{2}}} dx$$

input

```
int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(5/2),x)
```

output

```
int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(5/2),x)
```

Fricas [F(-2)]

Exception generated.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx = \text{Exception raised: TypeError}$$

input

```
integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(5/2),x, algorithm="fricas")
```

output

```
Exception raised: TypeError >> Error detected within library code: integrate: implementation incomplete (constant residues)
```

Sympy [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx = \text{Timed out}$$

input `integrate((A+B*x**n+C*x**(2*n))/(a+b*x**n+c*x**(2*n))**(5/2), x)`

output Timed out

Maxima [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^{5/2}} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(5/2), x, algorithm="maxima")`

output `integrate((C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a)^(5/2), x)`

Giac [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx = \int \frac{Cx^{2n} + Bx^n + A}{(cx^{2n} + bx^n + a)^{5/2}} dx$$

input `integrate((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(5/2), x, algorithm="giac")`

output `integrate((C*x^(2*n) + B*x^n + A)/(c*x^(2*n) + b*x^n + a)^(5/2), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx = \int \frac{A + Cx^{2n} + Bx^n}{(a + bx^n + cx^{2n})^{5/2}} dx$$

input `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^(5/2), x)`

output `int((A + C*x^(2*n) + B*x^n)/(a + b*x^n + c*x^(2*n))^(5/2), x)`

Reduce [F]

$$\int \frac{A + Bx^n + Cx^{2n}}{(a + bx^n + cx^{2n})^{5/2}} dx = \int \frac{\sqrt{x^{2n}c + x^n b + a}}{x^{4n}c^2 + 2x^{3n}bc + 2x^{2n}ac + x^{2n}b^2 + 2x^nab + a^2} dx$$

input `int((A+B*x^n+C*x^(2*n))/(a+b*x^n+c*x^(2*n))^(5/2), x)`

output `int(sqrt(x**(2*n)*c + x**n*b + a)/(x**(4*n)*c**2 + 2*x**(3*n)*b*c + 2*x**(2*n)*a*c + x**(2*n)*b**2 + 2*x**n*a*b + a**2), x)`

3.28 $\int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx$

Optimal result	216
Mathematica [C] (warning: unable to verify)	217
Rubi [A] (verified)	218
Maple [F]	220
Fricas [F]	221
Sympy [F]	221
Maxima [F]	221
Giac [F]	222
Mupad [F(-1)]	222
Reduce [F]	222

Optimal result

Integrand size = 28, antiderivative size = 357

$$\int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx =$$

$$\frac{(2bcC(2+p)^2 + 2acD(3+2p) - b^2D(6+5p+p^2) - 2Bc^2(6+7p+2p^2))(a+bx+cx^2)^{1+p}}{4c^3(1+p)(2+p)(3+2p)}$$

$$+ \frac{(2cC(2+p) - bD(3+p))x(a+bx+cx^2)^{1+p}}{2c^2(2+p)(3+2p)} + \frac{Dx^2(a+bx+cx^2)^{1+p}}{2c(2+p)}$$

$$- \frac{2^{-1+p}(2b^2cC(2+p) - b^3D(3+p) - 4c^2(aC - Ac(3+2p)) + 2bc(3aD - Bc(3+2p))) \left(-\frac{b-\sqrt{b^2-4ac}+2}{\sqrt{b^2-4ac}} \right)}{c^3\sqrt{b^2-4ac}(1+p)(3+2p)}$$

output

```
-1/4*(2*b*c*C*(2+p)^2+2*a*c*D*(3+2*p)-b^2*D*(p^2+5*p+6)-2*B*c^2*(2*p^2+7*p+6))*(c*x^2+b*x+a)^(p+1)/c^3/(p+1)/(2+p)/(3+2*p)+1/2*(2*c*C*(2+p)-b*D*(3+p))*x*(c*x^2+b*x+a)^(p+1)/c^2/(2+p)/(3+2*p)+1/2*D*x^2*(c*x^2+b*x+a)^(p+1)/c/(2+p)-2^(-1+p)*(2*b^2*c*C*(2+p)-b^3*D*(3+p)-4*c^2*(C*a-A*c*(3+2*p))+2*b*c*(3*a*D-B*c*(3+2*p)))*(-b-(-4*a*c+b^2)^(1/2)+2*c*x)/(-4*a*c+b^2)^(1/2)^(-1-p)*(c*x^2+b*x+a)^(p+1)*hypergeom([-p, p+1], [2+p], 1/2*(b+(-4*a*c+b^2)^(1/2)+2*c*x)/(-4*a*c+b^2)^(1/2))/c^3/(-4*a*c+b^2)^(1/2)/(p+1)/(3+2*p)
```

Mathematica [C] (warning: unable to verify)

Result contains higher order function than in optimal. Order 6 vs. order 5 in optimal.

Time = 2.62 (sec) , antiderivative size = 550, normalized size of antiderivative = 1.54

$$\int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx = \frac{1}{12}(a + x(b + cx))^p \left(6Bx^2 \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx}{b + \sqrt{b^2 - 4ac}} \right)^{-p} \text{AppellF1} \left(2, -p, -p, 3, -\frac{2cx}{b + \sqrt{b^2 - 4ac}}, \frac{2cx}{-b + \sqrt{b^2 - 4ac}} \right) + 4Cx^3 \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx}{b + \sqrt{b^2 - 4ac}} \right)^{-p} \text{AppellF1} \left(3, -p, -p, 4, -\frac{2cx}{b + \sqrt{b^2 - 4ac}}, \frac{2cx}{-b + \sqrt{b^2 - 4ac}} \right) + 3Dx^4 \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx}{b + \sqrt{b^2 - 4ac}} \right)^{-p} \text{AppellF1} \left(4, -p, -p, 5, -\frac{2cx}{b + \sqrt{b^2 - 4ac}}, \frac{2cx}{-b + \sqrt{b^2 - 4ac}} \right) + \frac{3 \cdot 2^{1+p} A (b - \sqrt{b^2 - 4ac} + 2cx) \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx}{\sqrt{b^2 - 4ac}} \right)^{-p} \text{Hypergeometric2F1} \left(-p, 1 + p, 2 + p, \frac{-b + \sqrt{b^2 - 4ac}}{2\sqrt{b^2 - 4ac}} \right)}{c(1 + p)} \right)$$

input `Integrate[(a + b*x + c*x^2)^p*(A + B*x + C*x^2 + D*x^3),x]`

output

```
((a + x*(b + c*x))^p*((6*B*x^2*AppellF1[2, -p, -p, 3, (-2*c*x)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x)/(-b + Sqrt[b^2 - 4*a*c])])/(((b - Sqrt[b^2 - 4*a*c] + 2*c*x)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c] + 2*c*x)/(b + Sqrt[b^2 - 4*a*c]))^p) + (4*C*x^3*AppellF1[3, -p, -p, 4, (-2*c*x)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x)/(-b + Sqrt[b^2 - 4*a*c])])/(((b - Sqrt[b^2 - 4*a*c] + 2*c*x)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c] + 2*c*x)/(b + Sqrt[b^2 - 4*a*c]))^p) + (3*D*x^4*AppellF1[4, -p, -p, 5, (-2*c*x)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x)/(-b + Sqrt[b^2 - 4*a*c])])/(((b - Sqrt[b^2 - 4*a*c] + 2*c*x)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c] + 2*c*x)/(b + Sqrt[b^2 - 4*a*c]))^p) + (3*2^(1 + p)*A*(b - Sqrt[b^2 - 4*a*c] + 2*c*x)*Hypergeometric2F1[-p, 1 + p, 2 + p, (-b + Sqrt[b^2 - 4*a*c] - 2*c*x)/(2*Sqrt[b^2 - 4*a*c])])/(c*(1 + p)*((b + Sqrt[b^2 - 4*a*c] + 2*c*x)/Sqrt[b^2 - 4*a*c])^p))/12
```

Rubi [A] (verified)

Time = 0.68 (sec) , antiderivative size = 356, normalized size of antiderivative = 1.00, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.179$, Rules used = {2192, 2192, 25, 1160, 1096}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx \\
 & \quad \downarrow \text{2192} \\
 & \frac{\int (cx^2 + bx + a)^p ((2cC(p+2) - bD(p+3))x^2 - 2(aD - Bc(p+2))x + 2Ac(p+2)) dx}{2c(p+2)} + \\
 & \quad \frac{Dx^2(a + bx + cx^2)^{p+1}}{2c(p+2)} \\
 & \quad \downarrow \text{2192} \\
 & \frac{\int -((-2A(2p^2+7p+6)c^2+2aC(p+2)c-abD(p+3)+(-D(p^2+5p+6)b^2+2cC(p+2)^2b+2acD(2p+3)-2Bc^2(2p^2+7p+6))x)(cx^2+bx+a)^p dx}{c(2p+3)} + \\
 & \quad \frac{Dx^2(a + bx + cx^2)^{p+1}}{2c(p+2)}
 \end{aligned}$$

↓ 25

$$\frac{x(a+bx+cx^2)^{p+1}(2cC(p+2)-bD(p+3))}{c(2p+3)} - \frac{\int(-2A(2p^2+7p+6)c^2+2aC(p+2)c-abD(p+3)+(-D(p^2+5p+6)b^2+2cC(p+2)^2b+2acD(2p+3)-2c^2D(p+2)^2)c}{c(2p+3)} dx}{2c(p+2)}$$

$$\frac{Dx^2(a+bx+cx^2)^{p+1}}{2c(p+2)}$$

↓ 1160

$$\frac{x(a+bx+cx^2)^{p+1}(2cC(p+2)-bD(p+3))}{c(2p+3)} - \frac{(a+bx+cx^2)^{p+1}(2acD(2p+3)+b^2(-D)(p^2+5p+6)+2bcC(p+2)^2-2Bc^2(2p^2+7p+6))}{2c(p+1)} - \frac{(p+2)(-4c^2(aC-2c^2D(p+2)^2))}{c(2p+3)} dx}{2c(p+2)}$$

$$\frac{Dx^2(a+bx+cx^2)^{p+1}}{2c(p+2)}$$

↓ 1096

$$\frac{x(a+bx+cx^2)^{p+1}(2cC(p+2)-bD(p+3))}{c(2p+3)} - \frac{2^p(p+2)(a+bx+cx^2)^{p+1}\left(-\frac{\sqrt{b^2-4ac}+b+2cx}{\sqrt{b^2-4ac}}\right)^{-p-1} \text{Hypergeometric2F1}\left(-p, p+1, p+2, \frac{b+2cx+\sqrt{b^2-4ac}}{2\sqrt{b^2-4ac}}\right)}{c(p+1)\sqrt{b^2-4ac}} dx}{2c}$$

$$\frac{Dx^2(a+bx+cx^2)^{p+1}}{2c(p+2)}$$

input `Int[(a + b*x + c*x^2)^p*(A + B*x + C*x^2 + D*x^3), x]`

output `(D*x^2*(a + b*x + c*x^2)^(1 + p))/(2*c*(2 + p)) + (((2*c*C*(2 + p) - b*D*(3 + p))*x*(a + b*x + c*x^2)^(1 + p))/(c*(3 + 2*p)) - (((2*b*c*C*(2 + p)^2 + 2*a*c*D*(3 + 2*p) - b^2*D*(6 + 5*p + p^2) - 2*B*c^2*(6 + 7*p + 2*p^2))*(a + b*x + c*x^2)^(1 + p))/(2*c*(1 + p)) + (2^p*(2 + p)*(2*b^2*c*C*(2 + p) - b^3*D*(3 + p) - 4*c^2*(a*C - A*c*(3 + 2*p)) + 2*b*c*(3*a*D - B*c*(3 + 2*p))))*(-((b - Sqrt[b^2 - 4*a*c] + 2*c*x)/Sqrt[b^2 - 4*a*c]))^(-1 - p)*(a + b*x + c*x^2)^(1 + p)*Hypergeometric2F1[-p, 1 + p, 2 + p, (b + Sqrt[b^2 - 4*a*c] + 2*c*x)/(2*Sqrt[b^2 - 4*a*c])])/(c*Sqrt[b^2 - 4*a*c]*(1 + p)))/(c*(3 + 2*p)))/(2*c*(2 + p))`

Definitions of rubi rules used

rule 25 `Int[-(Fx_), x_Symbol] := Simp[Identity[-1] Int[Fx, x], x]`

rule 1096 `Int[((a_.) + (b_.)*(x_) + (c_.)*(x_)^2)^(p_), x_Symbol] := With[{q = Rt[b^2 - 4*a*c, 2]}, Simp[(-(a + b*x + c*x^2)^(p + 1)/(q*(p + 1)*((q - b - 2*c*x)/(2*q))^(p + 1)))*Hypergeometric2F1[-p, p + 1, p + 2, (b + q + 2*c*x)/(2*q)], x]] /; FreeQ[{a, b, c, p}, x] && !IntegerQ[4*p] && !IntegerQ[3*p]`

rule 1160 `Int[((d_.) + (e_.)*(x_))*((a_.) + (b_.)*(x_) + (c_.)*(x_)^2)^(p_), x_Symbol] := Simp[e*((a + b*x + c*x^2)^(p + 1)/(2*c*(p + 1))), x] + Simp[(2*c*d - b*e)/(2*c) Int[(a + b*x + c*x^2)^p, x], x] /; FreeQ[{a, b, c, d, e, p}, x] && NeQ[p, -1]`

rule 2192 `Int[(Pq_)*((a_.) + (b_.)*(x_) + (c_.)*(x_)^2)^(p_), x_Symbol] := With[{q = Expon[Pq, x], e = Coeff[Pq, x, Expon[Pq, x]]}, Simp[e*x^(q - 1)*((a + b*x + c*x^2)^(p + 1)/(c*(q + 2*p + 1))), x] + Simp[1/(c*(q + 2*p + 1)) Int[(a + b*x + c*x^2)^p*ExpandToSum[c*(q + 2*p + 1)*Pq - a*e*(q - 1)*x^(q - 2) - b*e*(q + p)*x^(q - 1) - c*e*(q + 2*p + 1)*x^q, x], x]] /; FreeQ[{a, b, c, p}, x] && PolyQ[Pq, x] && NeQ[b^2 - 4*a*c, 0] && !LeQ[p, -1]`

Maple [F]

$$\int (cx^2 + bx + a)^p (Dx^3 + Cx^2 + Bx + A) dx$$

input `int((c*x^2+b*x+a)^p*(D*x^3+C*x^2+B*x+A),x)`

output `int((c*x^2+b*x+a)^p*(D*x^3+C*x^2+B*x+A),x)`

Fricas [F]

$$\begin{aligned} & \int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx \\ &= \int (Dx^3 + Cx^2 + Bx + A)(cx^2 + bx + a)^p dx \end{aligned}$$

input `integrate((c*x^2+b*x+a)^p*(D*x^3+C*x^2+B*x+A),x, algorithm="fricas")`

output `integral((D*x^3 + C*x^2 + B*x + A)*(c*x^2 + b*x + a)^p, x)`

Sympy [F]

$$\begin{aligned} & \int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx \\ &= \int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx \end{aligned}$$

input `integrate((c*x**2+b*x+a)**p*(D*x**3+C*x**2+B*x+A),x)`

output `Integral((a + b*x + c*x**2)**p*(A + B*x + C*x**2 + D*x**3), x)`

Maxima [F]

$$\begin{aligned} & \int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx \\ &= \int (Dx^3 + Cx^2 + Bx + A)(cx^2 + bx + a)^p dx \end{aligned}$$

input `integrate((c*x^2+b*x+a)^p*(D*x^3+C*x^2+B*x+A),x, algorithm="maxima")`

output `integrate((D*x^3 + C*x^2 + B*x + A)*(c*x^2 + b*x + a)^p, x)`

Giac [F]

$$\begin{aligned} & \int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx \\ &= \int (Dx^3 + Cx^2 + Bx + A)(cx^2 + bx + a)^p dx \end{aligned}$$

input `integrate((c*x^2+b*x+a)^p*(D*x^3+C*x^2+B*x+A),x, algorithm="giac")`

output `integrate((D*x^3 + C*x^2 + B*x + A)*(c*x^2 + b*x + a)^p, x)`

Mupad [F(-1)]

Timed out.

$$\begin{aligned} & \int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx \\ &= \int (cx^2 + bx + a)^p (A + Bx + Cx^2 + x^3 D) dx \end{aligned}$$

input `int((a + b*x + c*x^2)^p*(A + B*x + C*x^2 + x^3*D),x)`

output `int((a + b*x + c*x^2)^p*(A + B*x + C*x^2 + x^3*D), x)`

Reduce [F]

$$\int (a + bx + cx^2)^p (A + Bx + Cx^2 + Dx^3) dx = \text{too large to display}$$

input `int((c*x^2+b*x+a)^p*(D*x^3+C*x^2+B*x+A),x)`

output

```
(4*(a + b*x + c*x**2)**p*a**2*b*c*d*p**2 + 20*(a + b*x + c*x**2)**p*a**2*b
*c*d*p + 18*(a + b*x + c*x**2)**p*a**2*b*c*d + 16*(a + b*x + c*x**2)**p*a*
*2*c**3*p**3 + 64*(a + b*x + c*x**2)**p*a**2*c**3*p**2 + 80*(a + b*x + c*x
**2)**p*a**2*c**3*p + 32*(a + b*x + c*x**2)**p*a**2*c**3 - (a + b*x + c*x*
*2)**p*a*b**3*d*p**2 - 5*(a + b*x + c*x**2)**p*a*b**3*d*p - 6*(a + b*x + c
*x**2)**p*a*b**3*d - 2*(a + b*x + c*x**2)**p*a*b**2*c**2*p**2 - 6*(a + b*x
+ c*x**2)**p*a*b**2*c**2*p - 4*(a + b*x + c*x**2)**p*a*b**2*c**2 - 4*(a +
b*x + c*x**2)**p*a*b**2*c*d*p**3*x - 20*(a + b*x + c*x**2)**p*a*b**2*c*d*
p**2*x - 18*(a + b*x + c*x**2)**p*a*b**2*c*d*p*x + 16*(a + b*x + c*x**2)**
p*a*b*c**3*p**3*x + 60*(a + b*x + c*x**2)**p*a*b*c**3*p**2*x + 68*(a + b*x
+ c*x**2)**p*a*b*c**3*p*x + 24*(a + b*x + c*x**2)**p*a*b*c**3*x + 8*(a +
b*x + c*x**2)**p*a*b*c**2*d*p**3*x**2 + 16*(a + b*x + c*x**2)**p*a*b*c**2*
d*p**2*x**2 + 6*(a + b*x + c*x**2)**p*a*b*c**2*d*p*x**2 + (a + b*x + c*x**
2)**p*b**4*d*p**3*x + 5*(a + b*x + c*x**2)**p*b**4*d*p**2*x + 6*(a + b*x +
c*x**2)**p*b**4*d*p*x + 2*(a + b*x + c*x**2)**p*b**3*c**2*p**3*x + 6*(a +
b*x + c*x**2)**p*b**3*c**2*p**2*x + 4*(a + b*x + c*x**2)**p*b**3*c**2*p*x
- 2*(a + b*x + c*x**2)**p*b**3*c*d*p**3*x**2 - 7*(a + b*x + c*x**2)**p*b*
*3*c*d*p**2*x**2 - 3*(a + b*x + c*x**2)**p*b**3*c*d*p*x**2 + 12*(a + b*x +
c*x**2)**p*b**2*c**3*p**3*x**2 + 42*(a + b*x + c*x**2)**p*b**2*c**3*p**2*
x**2 + 42*(a + b*x + c*x**2)**p*b**2*c**3*p*x**2 + 12*(a + b*x + c*x**2...
```


3.29 $\int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx$

Optimal result	224
Mathematica [A] (warning: unable to verify)	225
Rubi [A] (verified)	225
Maple [F]	228
Fricas [F]	228
Sympy [F(-1)]	228
Maxima [F]	229
Giac [F]	229
Mupad [F(-1)]	229
Reduce [F]	230

Optimal result

Integrand size = 32, antiderivative size = 484

$$\int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx$$

$$= -\frac{(bD(5 + 2p) - cC(7 + 4p))x(a + bx^2 + cx^4)^{1+p}}{c^2(5 + 4p)(7 + 4p)} + \frac{Dx^3(a + bx^2 + cx^4)^{1+p}}{c(7 + 4p)}$$

$$+ \frac{(Ac^2(35 + 48p + 16p^2) + a(bD(5 + 2p) - cC(7 + 4p)))x \left(1 + \frac{2cx^2}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^2}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^2 + cx^4)^p}{c^2(5 + 4p)(7 + 4p)}$$

$$- \frac{(3acD(5 + 4p) - b^2D(15 + 16p + 4p^2) + bcC(21 + 26p + 8p^2) - Bc^2(35 + 48p + 16p^2))x^3 \left(1 + \frac{2cx^2}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^2}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^2 + cx^4)^p}{3c^2(5 + 4p)(7 + 4p)}$$

output

```

-(b*D*(5+2*p)-c*C*(7+4*p))*x*(c*x^4+b*x^2+a)^(p+1)/c^2/(5+4*p)/(7+4*p)+D*x
^3*(c*x^4+b*x^2+a)^(p+1)/c/(7+4*p)+(A*c^2*(16*p^2+48*p+35)+a*(b*D*(5+2*p)-
c*C*(7+4*p)))*x*(c*x^4+b*x^2+a)^p*AppellF1(1/2,-p,-p,3/2,-2*c*x^2/(b-(-4*a
*c+b^2)^(1/2)), -2*c*x^2/(b+(-4*a*c+b^2)^(1/2)))/c^2/(5+4*p)/(7+4*p)/((1+2*
c*x^2/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^2/(b+(-4*a*c+b^2)^(1/2)))^p)-1/
3*(3*a*c*D*(5+4*p)-b^2*D*(4*p^2+16*p+15)+b*c*C*(8*p^2+26*p+21)-B*c^2*(16*p
^2+48*p+35))*x^3*(c*x^4+b*x^2+a)^p*AppellF1(3/2,-p,-p,5/2,-2*c*x^2/(b-(-4*
a*c+b^2)^(1/2)), -2*c*x^2/(b+(-4*a*c+b^2)^(1/2)))/c^2/(5+4*p)/(7+4*p)/((1+2
*c*x^2/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^2/(b+(-4*a*c+b^2)^(1/2)))^p)
    
```

Mathematica [A] (warning: unable to verify)

Time = 1.03 (sec) , antiderivative size = 363, normalized size of antiderivative = 0.75

$$\int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx$$

$$= \frac{1}{105} x \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx^2}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx^2}{b + \sqrt{b^2 - 4ac}} \right)^{-p} (a + bx^2$$

$$+ cx^4)^p \left(105A \operatorname{AppellF1} \left(\frac{1}{2}, -p, -p, \frac{3}{2}, -\frac{2cx^2}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^2}{-b + \sqrt{b^2 - 4ac}} \right) \right.$$

$$+ 35Bx^2 \operatorname{AppellF1} \left(\frac{3}{2}, -p, -p, \frac{5}{2}, -\frac{2cx^2}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^2}{-b + \sqrt{b^2 - 4ac}} \right)$$

$$+ 21Cx^4 \operatorname{AppellF1} \left(\frac{5}{2}, -p, -p, \frac{7}{2}, -\frac{2cx^2}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^2}{-b + \sqrt{b^2 - 4ac}} \right)$$

$$\left. + 15Dx^6 \operatorname{AppellF1} \left(\frac{7}{2}, -p, -p, \frac{9}{2}, -\frac{2cx^2}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^2}{-b + \sqrt{b^2 - 4ac}} \right) \right)$$

input `Integrate[(a + b*x^2 + c*x^4)^p*(A + B*x^2 + C*x^4 + D*x^6),x]`

output `(x*(a + b*x^2 + c*x^4)^p*(105*A*AppellF1[1/2, -p, -p, 3/2, (-2*c*x^2)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^2)/(-b + Sqrt[b^2 - 4*a*c])] + 35*B*x^2*AppellF1[3/2, -p, -p, 5/2, (-2*c*x^2)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^2)/(-b + Sqrt[b^2 - 4*a*c])] + 21*C*x^4*AppellF1[5/2, -p, -p, 7/2, (-2*c*x^2)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^2)/(-b + Sqrt[b^2 - 4*a*c])] + 15*D*x^6*AppellF1[7/2, -p, -p, 9/2, (-2*c*x^2)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^2)/(-b + Sqrt[b^2 - 4*a*c])]))/(105*((b - Sqrt[b^2 - 4*a*c] + 2*c*x^2)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c] + 2*c*x^2)/(b + Sqrt[b^2 - 4*a*c]))^p)`

Rubi [A] (verified)Time = 0.88 (sec) , antiderivative size = 466, normalized size of antiderivative = 0.96, number of steps used = 4, number of rules used = 4, $\frac{\text{number of rules}}{\text{integrand size}} = 0.125$, Rules used = {2207, 2207, 1515, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx$$

↓ 2207

$$\frac{\int (cx^4 + bx^2 + a)^p \left(-((bD(2p + 5) - cC(4p + 7))x^4) - (3aD - Bc(4p + 7))x^2 + Ac(4p + 7) \right) dx}{c(4p + 7)} + \frac{Dx^3(a + bx^2 + cx^4)^{p+1}}{c(4p + 7)}$$

↓ 2207

$$\frac{\int (A(16p^2 + 48p + 35)c^2 - aC(4p + 7)c - (-D(4p^2 + 16p + 15)b^2 + cC(8p^2 + 26p + 21)b + 3acD(4p + 5) - Bc^2(16p^2 + 48p + 35))x^2 + abD(2p + 5)(cx^4 + b)}{c(4p + 5)}$$

$$\frac{Dx^3(a + bx^2 + cx^4)^{p+1}}{c(4p + 7)} \quad c(4p + 7)$$

↓ 1515

$$\frac{\int \left((D(4p^2 + 16p + 15)b^2 - cC(8p^2 + 26p + 21)b - 3acD(4p + 5) + Bc^2(16p^2 + 48p + 35))x^2 (cx^4 + bx^2 + a)^p + abD(2p + 5) \left(\frac{c(4p + 7)(Ac(4p + 5) - aC)}{abD(2p + 5)} + 1 \right) \right)}{c(4p + 5)}$$

$$\frac{Dx^3(a + bx^2 + cx^4)^{p+1}}{c(4p + 7)} \quad c(4p + 7)$$

↓ 2009

$$x \left(\frac{2cx^2}{b - \sqrt{b^2 - 4ac}} + 1 \right)^{-p} \left(\frac{2cx^2}{\sqrt{b^2 - 4ac} + b} + 1 \right)^{-p} (a + bx^2 + cx^4)^p \operatorname{AppellF1} \left(\frac{1}{2}, -p, -p, \frac{3}{2}, -\frac{2cx^2}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^2}{b + \sqrt{b^2 - 4ac}} \right) (abD(2p + 5) - acC(4p + 7) + Ac^2)$$

$$\frac{Dx^3(a + bx^2 + cx^4)^{p+1}}{c(4p + 7)}$$

input `Int[(a + b*x^2 + c*x^4)^p*(A + B*x^2 + C*x^4 + D*x^6), x]`

output

```
(D*x^3*(a + b*x^2 + c*x^4)^(1 + p))/(c*(7 + 4*p)) + (-((b*D*(5 + 2*p) - c
*C*(7 + 4*p))*x*(a + b*x^2 + c*x^4)^(1 + p))/(c*(5 + 4*p))) + (((a*b*D*(5
+ 2*p) - a*c*C*(7 + 4*p) + A*c^2*(35 + 48*p + 16*p^2))*x*(a + b*x^2 + c*x^
4)^p*AppellF1[1/2, -p, -p, 3/2, (-2*c*x^2)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*
x^2)/(b + Sqrt[b^2 - 4*a*c])])/(1 + (2*c*x^2)/(b - Sqrt[b^2 - 4*a*c]))^p*
(1 + (2*c*x^2)/(b + Sqrt[b^2 - 4*a*c]))^p) - ((3*a*c*D*(5 + 4*p) - b^2*D*(
15 + 16*p + 4*p^2) + b*c*C*(21 + 26*p + 8*p^2) - B*c^2*(35 + 48*p + 16*p^2
))*x^3*(a + b*x^2 + c*x^4)^p*AppellF1[3/2, -p, -p, 5/2, (-2*c*x^2)/(b - Sq
rt[b^2 - 4*a*c]), (-2*c*x^2)/(b + Sqrt[b^2 - 4*a*c])])/(3*(1 + (2*c*x^2)/(
b - Sqrt[b^2 - 4*a*c]))^p*(1 + (2*c*x^2)/(b + Sqrt[b^2 - 4*a*c]))^p))/(c*(
5 + 4*p))/(c*(7 + 4*p))
```

Defintions of rubi rules used

rule 1515

```
Int[((d_) + (e_)*(x_)^2)*((a_) + (b_)*(x_)^2 + (c_)*(x_)^4)^(p_), x_Symbol]
:= Int[ExpandIntegrand[(d + e*x^2)*(a + b*x^2 + c*x^4)^p, x], x] /; Free
Q[{a, b, c, d, e}, x] && NeQ[b^2 - 4*a*c, 0] && NeQ[c*d^2 - b*d*e + a*e^2,
0]
```

rule 2009

```
Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]
```

rule 2207

```
Int[(Px_)*((a_) + (b_)*(x_)^2 + (c_)*(x_)^4)^(p_), x_Symbol] := With[{n =
Expon[Px, x^2], e = Coeff[Px, x^2, Expon[Px, x^2]]}, Simp[e*x^(2*n - 3)*((
a + b*x^2 + c*x^4)^(p + 1)/(c*(2*n + 4*p + 1))), x] + Simp[1/(c*(2*n + 4*p
+ 1)) Int[(a + b*x^2 + c*x^4)^p*ExpandToSum[c*(2*n + 4*p + 1)*Px - a*e*(2
*n - 3)*x^(2*n - 4) - b*e*(2*n + 2*p - 1)*x^(2*n - 2) - c*e*(2*n + 4*p + 1
)*x^(2*n), x], x], x] /; FreeQ[{a, b, c, p}, x] && PolyQ[Px, x^2] && Expon[
Px, x^2] > 1 && NeQ[b^2 - 4*a*c, 0] && !LtQ[p, -1]
```

Maple [F]

$$\int (cx^4 + bx^2 + a)^p (Dx^6 + Cx^4 + Bx^2 + A) dx$$

input `int((c*x^4+b*x^2+a)^p*(D*x^6+C*x^4+B*x^2+A),x)`

output `int((c*x^4+b*x^2+a)^p*(D*x^6+C*x^4+B*x^2+A),x)`

Fricas [F]

$$\begin{aligned} \int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx \\ = \int (Dx^6 + Cx^4 + Bx^2 + A)(cx^4 + bx^2 + a)^p dx \end{aligned}$$

input `integrate((c*x^4+b*x^2+a)^p*(D*x^6+C*x^4+B*x^2+A),x, algorithm="fricas")`

output `integral((D*x^6 + C*x^4 + B*x^2 + A)*(c*x^4 + b*x^2 + a)^p, x)`

Sympy [F(-1)]

Timed out.

$$\int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx = \text{Timed out}$$

input `integrate((c*x**4+b*x**2+a)**p*(D*x**6+C*x**4+B*x**2+A),x)`

output `Timed out`

Maxima [F]

$$\begin{aligned} & \int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx \\ &= \int (Dx^6 + Cx^4 + Bx^2 + A)(cx^4 + bx^2 + a)^p dx \end{aligned}$$

input `integrate((c*x^4+b*x^2+a)^p*(D*x^6+C*x^4+B*x^2+A),x, algorithm="maxima")`

output `integrate((D*x^6 + C*x^4 + B*x^2 + A)*(c*x^4 + b*x^2 + a)^p, x)`

Giac [F]

$$\begin{aligned} & \int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx \\ &= \int (Dx^6 + Cx^4 + Bx^2 + A)(cx^4 + bx^2 + a)^p dx \end{aligned}$$

input `integrate((c*x^4+b*x^2+a)^p*(D*x^6+C*x^4+B*x^2+A),x, algorithm="giac")`

output `integrate((D*x^6 + C*x^4 + B*x^2 + A)*(c*x^4 + b*x^2 + a)^p, x)`

Mupad [F(-1)]

Timed out.

$$\begin{aligned} & \int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx \\ &= \int (cx^4 + bx^2 + a)^p (A + Bx^2 + Cx^4 + x^6 D) dx \end{aligned}$$

input `int((a + b*x^2 + c*x^4)^p*(A + B*x^2 + C*x^4 + x^6*D),x)`

output `int((a + b*x^2 + c*x^4)^p*(A + B*x^2 + C*x^4 + x^6*D), x)`

Reduce [F]

$$\int (a + bx^2 + cx^4)^p (A + Bx^2 + Cx^4 + Dx^6) dx = \text{too large to display}$$

input `int((c*x^4+b*x^2+a)^p*(D*x^6+C*x^4+B*x^2+A),x)`

output `(- 32*(a + b*x**2 + c*x**4)**p*a*b*c*d*p**3*x - 128*(a + b*x**2 + c*x**4)**p*a*b*c*d*p**2*x - 90*(a + b*x**2 + c*x**4)**p*a*b*c*d*p*x + 128*(a + b*x**2 + c*x**4)**p*a*c**3*p**3*x + 400*(a + b*x**2 + c*x**4)**p*a*c**3*p**2*x + 368*(a + b*x**2 + c*x**4)**p*a*c**3*p*x + 105*(a + b*x**2 + c*x**4)**p*a*c**3*x + 64*(a + b*x**2 + c*x**4)**p*a*c**2*d*p**3*x**3 + 96*(a + b*x**2 + c*x**4)**p*a*c**2*d*p**2*x**3 + 20*(a + b*x**2 + c*x**4)**p*a*c**2*d*p*x**3 + 8*(a + b*x**2 + c*x**4)**p*b**3*d*p**3*x + 32*(a + b*x**2 + c*x**4)**p*b**3*d*p**2*x + 30*(a + b*x**2 + c*x**4)**p*b**3*d*p*x + 16*(a + b*x**2 + c*x**4)**p*b**2*c**2*p**3*x + 44*(a + b*x**2 + c*x**4)**p*b**2*c**2*p**2*x + 28*(a + b*x**2 + c*x**4)**p*b**2*c**2*p*x - 16*(a + b*x**2 + c*x**4)**p*b**2*c*d*p**3*x**3 - 44*(a + b*x**2 + c*x**4)**p*b**2*c*d*p**2*x**3 - 10*(a + b*x**2 + c*x**4)**p*b**2*c*d*p*x**3 + 96*(a + b*x**2 + c*x**4)**p*b*c**3*p**3*x**3 + 272*(a + b*x**2 + c*x**4)**p*b*c**3*p**2*x**3 + 202*(a + b*x**2 + c*x**4)**p*b*c**3*p*x**3 + 35*(a + b*x**2 + c*x**4)**p*b*c**3*x**3 + 32*(a + b*x**2 + c*x**4)**p*b*c**2*d*p**3*x**5 + 32*(a + b*x**2 + c*x**4)**p*b*c**2*d*p**2*x**5 + 6*(a + b*x**2 + c*x**4)**p*b*c**2*d*p*x**5 + 64*(a + b*x**2 + c*x**4)**p*c**4*p**3*x**5 + 176*(a + b*x**2 + c*x**4)**p*c**4*p**2*x**5 + 124*(a + b*x**2 + c*x**4)**p*c**4*p*x**5 + 21*(a + b*x**2 + c*x**4)**p*c**4*x**5 + 64*(a + b*x**2 + c*x**4)**p*c**3*d*p**3*x**7 + 144*(a + b*x**2 + c*x**4)**p*c**3*d*p**2*x**7 + 92*(a + b*x**2 + c*x...`

3.30 $\int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx$

Optimal result	231
Mathematica [A] (warning: unable to verify)	232
Rubi [F]	232
Maple [F]	233
Fricas [F]	233
Sympy [F(-1)]	234
Maxima [F]	234
Giac [F]	234
Mupad [F(-1)]	235
Reduce [F]	235

Optimal result

Integrand size = 32, antiderivative size = 497

$$\int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx$$

$$= \frac{(2cC(5 + 3p) - bD(7 + 3p))x(a + bx^3 + cx^6)^{1+p}}{2c^2(5 + 3p)(7 + 6p)} + \frac{Dx^4(a + bx^3 + cx^6)^{1+p}}{2c(5 + 3p)}$$

$$+ \frac{(2Ac^2(35 + 51p + 18p^2) - a(2cC(5 + 3p) - bD(7 + 3p)))x \left(1 + \frac{2cx^3}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^3 + cx^6)^p}{2c^2(5 + 3p)(7 + 6p)}$$

$$- \frac{(4acD(7 + 6p) + 2bcC(20 + 27p + 9p^2) - b^2D(28 + 33p + 9p^2) - 2Bc^2(35 + 51p + 18p^2))x^4 \left(1 + \frac{2cx^3}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^3}{b + \sqrt{b^2 - 4ac}}\right)^{-p}}{8c^2(5 + 3p)}$$

output

```
1/2*(2*c*C*(5+3*p)-b*D*(7+3*p))*x*(c*x^6+b*x^3+a)^(p+1)/c^2/(5+3*p)/(7+6*p)
)+1/2*D*x^4*(c*x^6+b*x^3+a)^(p+1)/c/(5+3*p)+1/2*(2*A*c^2*(18*p^2+51*p+35)-
a*(2*c*C*(5+3*p)-b*D*(7+3*p)))*x*(c*x^6+b*x^3+a)^p*AppellF1(1/3,-p,-p,4/3,
-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))/c^2/(5+3*
p)/(7+6*p)/((1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^3/(b+(-4*a*c+b
^2)^(1/2)))^p)-1/8*(4*a*c*D*(7+6*p)+2*b*c*C*(9*p^2+27*p+20)-b^2*D*(9*p^2+3
3*p+28)-2*B*c^2*(18*p^2+51*p+35))*x^4*(c*x^6+b*x^3+a)^p*AppellF1(4/3,-p,-p
,7/3,-2*c*x^3/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^3/(b+(-4*a*c+b^2)^(1/2)))/c^2/
(5+3*p)/(7+6*p)/((1+2*c*x^3/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^3/(b+(-4*
a*c+b^2)^(1/2)))^p)
```


Mathematica [A] (warning: unable to verify)

Time = 1.50 (sec) , antiderivative size = 363, normalized size of antiderivative = 0.73

$$\begin{aligned}
& \int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx \\
&= \frac{1}{140} x \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx^3}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx^3}{b + \sqrt{b^2 - 4ac}} \right)^{-p} (a + bx^3 \\
&\quad + cx^6)^p \left(140A \operatorname{AppellF1} \left(\frac{1}{3}, -p, -p, \frac{4}{3}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^3}{-b + \sqrt{b^2 - 4ac}} \right) \right. \\
&\quad + 35Bx^3 \operatorname{AppellF1} \left(\frac{4}{3}, -p, -p, \frac{7}{3}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^3}{-b + \sqrt{b^2 - 4ac}} \right) \\
&\quad + 20Cx^6 \operatorname{AppellF1} \left(\frac{7}{3}, -p, -p, \frac{10}{3}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^3}{-b + \sqrt{b^2 - 4ac}} \right) \\
&\quad \left. + 14Dx^9 \operatorname{AppellF1} \left(\frac{10}{3}, -p, -p, \frac{13}{3}, -\frac{2cx^3}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^3}{-b + \sqrt{b^2 - 4ac}} \right) \right)
\end{aligned}$$

input

```
Integrate[(a + b*x^3 + c*x^6)^p*(A + B*x^3 + C*x^6 + D*x^9),x]
```

output

```
(x*(a + b*x^3 + c*x^6)^p*(140*A*AppellF1[1/3, -p, -p, 4/3, (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])] + 35*B*x^3*AppellF1[4/3, -p, -p, 7/3, (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])] + 20*C*x^6*AppellF1[7/3, -p, -p, 10/3, (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])] + 14*D*x^9*AppellF1[10/3, -p, -p, 13/3, (-2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^3)/(-b + Sqrt[b^2 - 4*a*c])])/(140*((b - Sqrt[b^2 - 4*a*c]) + 2*c*x^3)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c]) + 2*c*x^3)/(b + Sqrt[b^2 - 4*a*c]))^p)
```

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx$$

↓ 2329

$$\int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx$$

input `Int[(a + b*x^3 + c*x^6)^p*(A + B*x^3 + C*x^6 + D*x^9),x]`

output `$Aborted`

Defintions of rubi rules used

rule 2329 `Int[(Pq_)*((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p_), x_Symbol] :=
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int (cx^6 + bx^3 + a)^p (Dx^9 + Cx^6 + Bx^3 + A) dx$$

input `int((c*x^6+b*x^3+a)^p*(D*x^9+C*x^6+B*x^3+A),x)`

output `int((c*x^6+b*x^3+a)^p*(D*x^9+C*x^6+B*x^3+A),x)`

Fricas [F]

$$\begin{aligned} & \int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx \\ &= \int (Dx^9 + Cx^6 + Bx^3 + A)(cx^6 + bx^3 + a)^p dx \end{aligned}$$

input `integrate((c*x^6+b*x^3+a)^p*(D*x^9+C*x^6+B*x^3+A),x, algorithm="fricas")`

output `integral((D*x^9 + C*x^6 + B*x^3 + A)*(c*x^6 + b*x^3 + a)^p, x)`

Sympy [F(-1)]

Timed out.

$$\int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx = \text{Timed out}$$

input `integrate((c*x**6+b*x**3+a)**p*(D*x**9+C*x**6+B*x**3+A),x)`

output `Timed out`

Maxima [F]

$$\begin{aligned} \int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx \\ = \int (Dx^9 + Cx^6 + Bx^3 + A)(cx^6 + bx^3 + a)^p dx \end{aligned}$$

input `integrate((c*x^6+b*x^3+a)^p*(D*x^9+C*x^6+B*x^3+A),x, algorithm="maxima")`

output `integrate((D*x^9 + C*x^6 + B*x^3 + A)*(c*x^6 + b*x^3 + a)^p, x)`

Giac [F]

$$\begin{aligned} \int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx \\ = \int (Dx^9 + Cx^6 + Bx^3 + A)(cx^6 + bx^3 + a)^p dx \end{aligned}$$

input `integrate((c*x^6+b*x^3+a)^p*(D*x^9+C*x^6+B*x^3+A),x, algorithm="giac")`

output `integrate((D*x^9 + C*x^6 + B*x^3 + A)*(c*x^6 + b*x^3 + a)^p, x)`

Mupad [F(-1)]

Timed out.

$$\begin{aligned} & \int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx \\ &= \int (cx^6 + bx^3 + a)^p (A + Bx^3 + Cx^6 + x^9D) dx \end{aligned}$$

input `int((a + b*x^3 + c*x^6)^p*(A + B*x^3 + C*x^6 + x^9*D), x)`

output `int((a + b*x^3 + c*x^6)^p*(A + B*x^3 + C*x^6 + x^9*D), x)`

Reduce [F]

$$\int (a + bx^3 + cx^6)^p (A + Bx^3 + Cx^6 + Dx^9) dx = \text{too large to display}$$

input `int((c*x^6+b*x^3+a)^p*(D*x^9+C*x^6+B*x^3+A), x)`

output

```
( - 108*(a + b*x**3 + c*x**6)**p*a*b*c*d*p**3*x - 396*(a + b*x**3 + c*x**6)
)**p*a*b*c*d*p**2*x - 252*(a + b*x**3 + c*x**6)**p*a*b*c*d*p*x + 432*(a +
b*x**3 + c*x**6)**p*a*c**3*p**3*x + 1260*(a + b*x**3 + c*x**6)**p*a*c**3*p
**2*x + 1068*(a + b*x**3 + c*x**6)**p*a*c**3*p*x + 280*(a + b*x**3 + c*x**
6)**p*a*c**3*x + 216*(a + b*x**3 + c*x**6)**p*a*c**2*d*p**3*x**4 + 288*(a
+ b*x**3 + c*x**6)**p*a*c**2*d*p**2*x**4 + 42*(a + b*x**3 + c*x**6)**p*a*c
**2*d*p*x**4 + 27*(a + b*x**3 + c*x**6)**p*b**3*d*p**3*x + 99*(a + b*x**3
+ c*x**6)**p*b**3*d*p**2*x + 84*(a + b*x**3 + c*x**6)**p*b**3*d*p*x + 54*(
a + b*x**3 + c*x**6)**p*b**2*c**2*p**3*x + 144*(a + b*x**3 + c*x**6)**p*b*
**2*c**2*p**2*x + 90*(a + b*x**3 + c*x**6)**p*b**2*c**2*p*x - 54*(a + b*x**
3 + c*x**6)**p*b**2*c*d*p**3*x**4 - 135*(a + b*x**3 + c*x**6)**p*b**2*c*d*
p**2*x**4 - 21*(a + b*x**3 + c*x**6)**p*b**2*c*d*p*x**4 + 324*(a + b*x**3
+ c*x**6)**p*b*c**3*p**3*x**4 + 846*(a + b*x**3 + c*x**6)**p*b*c**3*p**2*x
**4 + 552*(a + b*x**3 + c*x**6)**p*b*c**3*p*x**4 + 70*(a + b*x**3 + c*x**6
)**p*b*c**3*x**4 + 108*(a + b*x**3 + c*x**6)**p*b*c**2*d*p**3*x**7 + 90*(a
+ b*x**3 + c*x**6)**p*b*c**2*d*p**2*x**7 + 12*(a + b*x**3 + c*x**6)**p*b*
c**2*d*p*x**7 + 216*(a + b*x**3 + c*x**6)**p*c**4*p**3*x**7 + 540*(a + b*x
**3 + c*x**6)**p*c**4*p**2*x**7 + 324*(a + b*x**3 + c*x**6)**p*c**4*p*x**7
+ 40*(a + b*x**3 + c*x**6)**p*c**4*x**7 + 216*(a + b*x**3 + c*x**6)**p*c*
**3*d*p**3*x**10 + 432*(a + b*x**3 + c*x**6)**p*c**3*d*p**2*x**10 + 234*...
```

3.31 $\int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx$

Optimal result	237
Mathematica [A] (warning: unable to verify)	238
Rubi [F]	238
Maple [F]	239
Fricas [F]	239
Sympy [F(-1)]	240
Maxima [F]	240
Giac [F]	240
Mupad [F(-1)]	241
Reduce [F]	241

Optimal result

Integrand size = 32, antiderivative size = 484

$$\int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx$$

$$= -\frac{(bD(9 + 4p) - cC(13 + 8p))x(a + bx^4 + cx^8)^{1+p}}{c^2(9 + 8p)(13 + 8p)} + \frac{Dx^5(a + bx^4 + cx^8)^{1+p}}{c(13 + 8p)}$$

$$+ \frac{(Ac^2(117 + 176p + 64p^2) + a(bD(9 + 4p) - cC(13 + 8p)))x\left(1 + \frac{2cx^4}{b - \sqrt{b^2 - 4ac}}\right)^{-p}\left(1 + \frac{2cx^4}{b + \sqrt{b^2 - 4ac}}\right)^{-p}(a + bx^4 + cx^8)^p}{c^2(9 + 8p)(13 + 8p)}$$

$$- \frac{(5acD(9 + 8p) - b^2D(45 + 56p + 16p^2) + bcC(65 + 92p + 32p^2) - Bc^2(117 + 176p + 64p^2))x^5(1 + \frac{2cx^4}{b - \sqrt{b^2 - 4ac}})^{-p}(1 + \frac{2cx^4}{b + \sqrt{b^2 - 4ac}})^{-p}(a + bx^4 + cx^8)^p}{5c^2(9 + 8p)}$$

output

```

-(b*D*(9+4*p)-c*C*(13+8*p))*x*(c*x^8+b*x^4+a)^(p+1)/c^2/(9+8*p)/(13+8*p)+D
*x^5*(c*x^8+b*x^4+a)^(p+1)/c/(13+8*p)+(A*c^2*(64*p^2+176*p+117)+a*(b*D*(9+
4*p)-c*C*(13+8*p)))*x*(c*x^8+b*x^4+a)^p*AppellF1(1/4,-p,-p,5/4,-2*c*x^4/(b
-(-4*a*c+b^2)^(1/2)), -2*c*x^4/(b+(-4*a*c+b^2)^(1/2)))/c^2/(9+8*p)/(13+8*p)
/((1+2*c*x^4/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^4/(b+(-4*a*c+b^2)^(1/2))
)^p)-1/5*(5*a*c*D*(9+8*p)-b^2*D*(16*p^2+56*p+45)+b*c*C*(32*p^2+92*p+65)-B*
c^2*(64*p^2+176*p+117))*x^5*(c*x^8+b*x^4+a)^p*AppellF1(5/4,-p,-p,9/4,-2*c*
x^4/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^4/(b+(-4*a*c+b^2)^(1/2)))/c^2/(9+8*p)/(1
3+8*p)/((1+2*c*x^4/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^4/(b+(-4*a*c+b^2)^(
1/2)))^p)
    
```

Mathematica [A] (warning: unable to verify)

Time = 2.45 (sec) , antiderivative size = 363, normalized size of antiderivative = 0.75

$$\int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx$$

$$= \frac{1}{585} x \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx^4}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx^4}{b + \sqrt{b^2 - 4ac}} \right)^{-p} (a + bx^4$$

$$+ cx^8)^p \left(585A \operatorname{AppellF1} \left(\frac{1}{4}, -p, -p, \frac{5}{4}, -\frac{2cx^4}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^4}{-b + \sqrt{b^2 - 4ac}} \right) \right.$$

$$+ 117Bx^4 \operatorname{AppellF1} \left(\frac{5}{4}, -p, -p, \frac{9}{4}, -\frac{2cx^4}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^4}{-b + \sqrt{b^2 - 4ac}} \right)$$

$$+ 65Cx^8 \operatorname{AppellF1} \left(\frac{9}{4}, -p, -p, \frac{13}{4}, -\frac{2cx^4}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^4}{-b + \sqrt{b^2 - 4ac}} \right)$$

$$\left. + 45Dx^{12} \operatorname{AppellF1} \left(\frac{13}{4}, -p, -p, \frac{17}{4}, -\frac{2cx^4}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^4}{-b + \sqrt{b^2 - 4ac}} \right) \right)$$

input `Integrate[(a + b*x^4 + c*x^8)^p*(A + B*x^4 + C*x^8 + D*x^12),x]`

output `(x*(a + b*x^4 + c*x^8)^p*(585*A*AppellF1[1/4, -p, -p, 5/4, (-2*c*x^4)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^4)/(-b + Sqrt[b^2 - 4*a*c])] + 117*B*x^4*AppellF1[5/4, -p, -p, 9/4, (-2*c*x^4)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^4)/(-b + Sqrt[b^2 - 4*a*c])] + 65*C*x^8*AppellF1[9/4, -p, -p, 13/4, (-2*c*x^4)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^4)/(-b + Sqrt[b^2 - 4*a*c])] + 45*D*x^12*AppellF1[13/4, -p, -p, 17/4, (-2*c*x^4)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^4)/(-b + Sqrt[b^2 - 4*a*c])])/(585*((b - Sqrt[b^2 - 4*a*c]) + 2*c*x^4)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c]) + 2*c*x^4)/(b + Sqrt[b^2 - 4*a*c]))^p)`

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx$$

↓ 2329

$$\int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx$$

input `Int[(a + b*x^4 + c*x^8)^p*(A + B*x^4 + C*x^8 + D*x^12),x]`

output `$Aborted`

Defintions of rubi rules used

rule 2329 `Int[(Pq_)*((a_) + (b_)*(x_)^(n_) + (c_)*(x_)^(n2_))^(p_), x_Symbol] :=
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int (cx^8 + bx^4 + a)^p (Dx^{12} + Cx^8 + Bx^4 + A) dx$$

input `int((c*x^8+b*x^4+a)^p*(D*x^12+C*x^8+B*x^4+A),x)`

output `int((c*x^8+b*x^4+a)^p*(D*x^12+C*x^8+B*x^4+A),x)`

Fricas [F]

$$\begin{aligned} & \int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx \\ &= \int (Dx^{12} + Cx^8 + Bx^4 + A)(cx^8 + bx^4 + a)^p dx \end{aligned}$$

input `integrate((c*x^8+b*x^4+a)^p*(D*x^12+C*x^8+B*x^4+A),x, algorithm="fricas")`

output `integral((D*x^12 + C*x^8 + B*x^4 + A)*(c*x^8 + b*x^4 + a)^p, x)`

Sympy [F(-1)]

Timed out.

$$\int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx = \text{Timed out}$$

input `integrate((c*x**8+b*x**4+a)**p*(D*x**12+C*x**8+B*x**4+A), x)`

output `Timed out`

Maxima [F]

$$\begin{aligned} & \int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx \\ &= \int (Dx^{12} + Cx^8 + Bx^4 + A)(cx^8 + bx^4 + a)^p dx \end{aligned}$$

input `integrate((c*x^8+b*x^4+a)^p*(D*x^12+C*x^8+B*x^4+A),x, algorithm="maxima")`

output `integrate((D*x^12 + C*x^8 + B*x^4 + A)*(c*x^8 + b*x^4 + a)^p, x)`

Giac [F]

$$\begin{aligned} & \int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx \\ &= \int (Dx^{12} + Cx^8 + Bx^4 + A)(cx^8 + bx^4 + a)^p dx \end{aligned}$$

input `integrate((c*x^8+b*x^4+a)^p*(D*x^12+C*x^8+B*x^4+A),x, algorithm="giac")`

output `integrate((D*x^12 + C*x^8 + B*x^4 + A)*(c*x^8 + b*x^4 + a)^p, x)`

Mupad [F(-1)]

Timed out.

$$\begin{aligned} & \int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx \\ &= \int (cx^8 + bx^4 + a)^p (A + Bx^4 + Cx^8 + x^{12}D) dx \end{aligned}$$

input `int((a + b*x^4 + c*x^8)^p*(A + B*x^4 + C*x^8 + x^12*D), x)`

output `int((a + b*x^4 + c*x^8)^p*(A + B*x^4 + C*x^8 + x^12*D), x)`

Reduce [F]

$$\int (a + bx^4 + cx^8)^p (A + Bx^4 + Cx^8 + Dx^{12}) dx = \text{too large to display}$$

input `int((c*x^8+b*x^4+a)^p*(D*x^12+C*x^8+B*x^4+A), x)`

output

```
( - 256*(a + b*x**4 + c*x**8)**p*a*b*c*d*p**3*x - 896*(a + b*x**4 + c*x**8)
)**p*a*b*c*d*p**2*x - 540*(a + b*x**4 + c*x**8)**p*a*b*c*d*p*x + 1024*(a +
b*x**4 + c*x**8)**p*a*c**3*p**3*x + 2880*(a + b*x**4 + c*x**8)**p*a*c**3*
p**2*x + 2336*(a + b*x**4 + c*x**8)**p*a*c**3*p*x + 585*(a + b*x**4 + c*x*
*8)**p*a*c**3*x + 512*(a + b*x**4 + c*x**8)**p*a*c**2*d*p**3*x**5 + 640*(a
+ b*x**4 + c*x**8)**p*a*c**2*d*p**2*x**5 + 72*(a + b*x**4 + c*x**8)**p*a*
c**2*d*p*x**5 + 64*(a + b*x**4 + c*x**8)**p*b**3*d*p**3*x + 224*(a + b*x**
4 + c*x**8)**p*b**3*d*p**2*x + 180*(a + b*x**4 + c*x**8)**p*b**3*d*p*x + 1
28*(a + b*x**4 + c*x**8)**p*b**2*c**2*p**3*x + 336*(a + b*x**4 + c*x**8)**
p*b**2*c**2*p**2*x + 208*(a + b*x**4 + c*x**8)**p*b**2*c**2*p*x - 128*(a +
b*x**4 + c*x**8)**p*b**2*c*d*p**3*x**5 - 304*(a + b*x**4 + c*x**8)**p*b**
2*c*d*p**2*x**5 - 36*(a + b*x**4 + c*x**8)**p*b**2*c*d*p*x**5 + 768*(a + b
*x**4 + c*x**8)**p*b*c**3*p**3*x**5 + 1920*(a + b*x**4 + c*x**8)**p*b*c**3
*p**2*x**5 + 1164*(a + b*x**4 + c*x**8)**p*b*c**3*p*x**5 + 117*(a + b*x**4
+ c*x**8)**p*b*c**3*x**5 + 256*(a + b*x**4 + c*x**8)**p*b*c**2*d*p**3*x**
9 + 192*(a + b*x**4 + c*x**8)**p*b*c**2*d*p**2*x**9 + 20*(a + b*x**4 + c*x
**8)**p*b*c**2*d*p*x**9 + 512*(a + b*x**4 + c*x**8)**p*c**4*p**3*x**9 + 12
16*(a + b*x**4 + c*x**8)**p*c**4*p**2*x**9 + 664*(a + b*x**4 + c*x**8)**p*
c**4*p*x**9 + 65*(a + b*x**4 + c*x**8)**p*c**4*x**9 + 512*(a + b*x**4 + c*
x**8)**p*c**3*d*p**3*x**13 + 960*(a + b*x**4 + c*x**8)**p*c**3*d*p**2*x...
```

3.32 $\int (a + bx^n + cx^{2n})^p dx$

Optimal result	243
Mathematica [A] (verified)	243
Rubi [A] (verified)	244
Maple [F]	245
Fricas [F]	245
Sympy [F(-1)]	246
Maxima [F]	246
Giac [F]	246
Mupad [F(-1)]	247
Reduce [F]	247

Optimal result

Integrand size = 16, antiderivative size = 137

$$\int (a + bx^n + cx^{2n})^p dx = x \left(1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^n + cx^{2n})^p \operatorname{AppellF1}\left(\frac{1}{n}, -p, -p, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)$$

output

```
x*(a+b*x^n+c*x^(2*n))^p*AppellF1(1/n,-p,-p,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)
```

Mathematica [A] (verified)

Time = 0.27 (sec) , antiderivative size = 164, normalized size of antiderivative = 1.20

$$\int (a + bx^n + cx^{2n})^p dx = x \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^n + cx^{2n})^p \operatorname{AppellF1}\left(\frac{1}{n}, -p, -p, 1 + \frac{1}{n}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}, \frac{2cx^n}{-b + \sqrt{b^2 - 4ac}}\right)$$

input `Integrate[(a + b*x^n + c*x^(2*n))^p, x]`

output `(x*(a + x^n*(b + c*x^n))^p*AppellF1[n^(-1), -p, -p, 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])])/(((b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]))^p)`

Rubi [A] (verified)

Time = 0.29 (sec) , antiderivative size = 137, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.125$, Rules used = {1686, 936}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (a + bx^n + cx^{2n})^p dx$$

$$\downarrow 1686$$

$$\left(\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} + 1\right)^{-p} \left(\frac{2cx^n}{\sqrt{b^2 - 4ac} + b} + 1\right)^{-p} (a + bx^n + cx^{2n})^p \int \left(\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} + 1\right)^p \left(\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^p dx$$

$$\downarrow 936$$

$$x \left(\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} + 1\right)^{-p} \left(\frac{2cx^n}{\sqrt{b^2 - 4ac} + b} + 1\right)^{-p} (a + bx^n + cx^{2n})^p \text{AppellF1}\left(\frac{1}{n}, -p, -p, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)$$

input `Int[(a + b*x^n + c*x^(2*n))^p, x]`

output `(x*(a + b*x^n + c*x^(2*n))^p*AppellF1[n^(-1), -p, -p, 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])])/(((1 + (2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]))^p*(1 + (2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]))^p)`

Definitions of rubi rules used

rule 936 `Int[((a_) + (b_.)*(x_)^(n_))^(p_)*((c_) + (d_.)*(x_)^(n_))^(q_), x_Symbol]
:> Simp[a^p*c^q*x*AppellF1[1/n, -p, -q, 1 + 1/n, (-b)*(x^n/a), (-d)*(x^n/c)
], x] /; FreeQ[{a, b, c, d, n, p, q}, x] && NeQ[b*c - a*d, 0] && NeQ[n, -1]
&& (IntegerQ[p] || GtQ[a, 0]) && (IntegerQ[q] || GtQ[c, 0])`

rule 1686 `Int[((a_) + (c_.)*(x_)^(n2_.) + (b_.)*(x_)^(n_))^(p_), x_Symbol] :> Simp[a^
IntPart[p]*((a + b*x^n + c*x^(2*n))^FracPart[p]/((1 + 2*c*(x^n/(b + Rt[b^2
- 4*a*c, 2])))^FracPart[p]*(1 + 2*c*(x^n/(b - Rt[b^2 - 4*a*c, 2])))^FracPar
t[p])) Int[(1 + 2*c*(x^n/(b + Sqrt[b^2 - 4*a*c])))^p*(1 + 2*c*(x^n/(b - S
qrt[b^2 - 4*a*c])))^p, x], x] /; FreeQ[{a, b, c, n, p}, x] && EqQ[n2, 2*n]
&& NeQ[b^2 - 4*a*c, 0] && !IntegerQ[p]`

Maple [F]

$$\int (a + bx^n + cx^{2n})^p dx$$

input `int((a+b*x^n+c*x^(2*n))^p,x)`

output `int((a+b*x^n+c*x^(2*n))^p,x)`

Fricas [F]

$$\int (a + bx^n + cx^{2n})^p dx = \int (cx^{2n} + bx^n + a)^p dx$$

input `integrate((a+b*x^n+c*x^(2*n))^p,x, algorithm="fricas")`

output `integral((c*x^(2*n) + b*x^n + a)^p, x)`

Sympy [F(-1)]

Timed out.

$$\int (a + bx^n + cx^{2n})^p dx = \text{Timed out}$$

input `integrate((a+b*x**n+c*x**(2*n))**p,x)`

output `Timed out`

Maxima [F]

$$\int (a + bx^n + cx^{2n})^p dx = \int (cx^{2n} + bx^n + a)^p dx$$

input `integrate((a+b*x^n+c*x^(2*n))^p,x, algorithm="maxima")`

output `integrate((c*x^(2*n) + b*x^n + a)^p, x)`

Giac [F]

$$\int (a + bx^n + cx^{2n})^p dx = \int (cx^{2n} + bx^n + a)^p dx$$

input `integrate((a+b*x^n+c*x^(2*n))^p,x, algorithm="giac")`

output `integrate((c*x^(2*n) + b*x^n + a)^p, x)`

Mupad [F(-1)]

Timed out.

$$\int (a + bx^n + cx^{2n})^p dx = \int (a + bx^n + cx^{2n})^p dx$$

input `int((a + b*x^n + c*x^(2*n))^p,x)`output `int((a + b*x^n + c*x^(2*n))^p, x)`**Reduce [F]**

$$\int (a + bx^n + cx^{2n})^p dx$$

$$= \frac{(x^{2n}c + x^n b + a)^p x + \left(\int \frac{(x^{2n}c + x^n b + a)^p}{x^{2n}cnp + x^{2n}c + x^n bnp + x^n b + anp + a} dx \right) a n^2 p^2 + \left(\int \frac{(x^{2n}c + x^n b + a)^p}{x^{2n}cnp + x^{2n}c + x^n bnp + x^n b + anp + a} dx \right) a n}{np + 1}$$

input `int((a+b*x^n+c*x^(2*n))^p,x)`output `((x**(2*n)*c + x**n*b + a)**p*x + int((x**(2*n)*c + x**n*b + a)**p/(x**(2*n)*c*n*p + x**(2*n)*c + x**n*b*n*p + x**n*b + a*n*p + a),x)*a*n**2*p**2 + int((x**(2*n)*c + x**n*b + a)**p/(x**(2*n)*c*n*p + x**(2*n)*c + x**n*b*n*p + x**n*b + a*n*p + a),x)*a*n*p - int((x**(2*n)*(x**(2*n)*c + x**n*b + a)**p)/(x**(2*n)*c*n*p + x**(2*n)*c + x**n*b*n*p + x**n*b + a*n*p + a),x)*c*n**2*p**2 - int((x**(2*n)*(x**(2*n)*c + x**n*b + a)**p)/(x**(2*n)*c*n*p + x**(2*n)*c + x**n*b*n*p + x**n*b + a*n*p + a),x)*c*n*p)/(n*p + 1)`

3.33 $\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx$

Optimal result	248
Mathematica [A] (warning: unable to verify)	249
Rubi [A] (verified)	249
Maple [F]	250
Fricas [F]	251
Sympy [F(-1)]	251
Maxima [F]	251
Giac [F]	252
Mupad [F(-1)]	252
Reduce [F]	252

Optimal result

Integrand size = 24, antiderivative size = 288

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx$$

$$= \frac{Bx^{1+n} \left(1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^n + cx^{2n})^p \operatorname{AppellF1}\left(1 + \frac{1}{n}, -p, -p, 2 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)}{1 + n} + Ax \left(1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^n + cx^{2n})^p \operatorname{AppellF1}\left(\frac{1}{n}, -p, -p, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)$$

output

```
B*x^(1+n)*(a+b*x^n+c*x^(2*n))^p*AppellF1(1+1/n,-p,-p,2+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(1+n)/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)+A*x*(a+b*x^n+c*x^(2*n))^p*AppellF1(1/n,-p,-p,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)
```

Mathematica [A] (warning: unable to verify)

Time = 0.68 (sec) , antiderivative size = 243, normalized size of antiderivative = 0.84

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx$$

$$= \frac{x \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx^n}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx^n}{b + \sqrt{b^2 - 4ac}} \right)^{-p} (a + x^n(b + cx^n))^p \left(Bx^n \operatorname{AppellF1} \left(1 + \frac{1}{n}, -p, -p, 2 + \frac{1}{n}, -\frac{1}{b + \sqrt{b^2 - 4ac}} \right) \right)}{1 + n}$$

input

```
Integrate[(A + B*x^n)*(a + b*x^n + c*x^(2*n))^p,x]
```

output

```
(x*(a + x^n*(b + c*x^n))^p*(B*x^n*AppellF1[1 + n^(-1), -p, -p, 2 + n^(-1),
(-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])]) +
A*(1 + n)*AppellF1[n^(-1), -p, -p, 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 -
4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])]))/((1 + n)*((b - Sqrt[b^2 -
4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c] + 2*c
*x^n)/(b + Sqrt[b^2 - 4*a*c]))^p)
```

Rubi [A] (verified)Time = 0.48 (sec) , antiderivative size = 288, normalized size of antiderivative = 1.00, number of steps used = 2, number of rules used = 2, $\frac{\text{number of rules}}{\text{integrand size}} = 0.083$, Rules used = {1762, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx$$

$$\downarrow 1762$$

$$\int (A(a + bx^n + cx^{2n})^p + Bx^n(a + bx^n + cx^{2n})^p) dx$$

$$\downarrow 2009$$

$$\frac{Ax \left(\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} + 1 \right)^{-p} \left(\frac{2cx^n}{\sqrt{b^2 - 4ac} + b} + 1 \right)^{-p} (a + bx^n + cx^{2n})^p \operatorname{AppellF1} \left(\frac{1}{n}, -p, -p, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right) + Bx^{n+1} \left(\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} + 1 \right)^{-p} \left(\frac{2cx^n}{\sqrt{b^2 - 4ac} + b} + 1 \right)^{-p} (a + bx^n + cx^{2n})^p \operatorname{AppellF1} \left(1 + \frac{1}{n}, -p, -p, 2 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}} \right)}{n + 1}$$

input `Int[(A + B*x^n)*(a + b*x^n + c*x^(2*n))^p,x]`

output `(B*x^(1 + n)*(a + b*x^n + c*x^(2*n))^p*AppellF1[1 + n^(-1), -p, -p, 2 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]) / ((1 + n)*(1 + (2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]))^p*(1 + (2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]))^p) + (A*x*(a + b*x^n + c*x^(2*n))^p*AppellF1[n^(-1), -p, -p, 1 + n^(-1), (-2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c])]) / ((1 + (2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]))^p*(1 + (2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]))^p)`

Defintions of rubi rules used

rule 1762 `Int[((d_) + (e_.)*(x_)^(n_))*((a_) + (b_.)*(x_)^(n_) + (c_.)*(x_)^(n2_))^(p_), x_Symbol] := Int[ExpandIntegrand[(d + e*x^n)*(a + b*x^n + c*x^(2*n))^p, x], x] /; FreeQ[{a, b, c, d, e, n}, x] && EqQ[n2, 2*n] && NeQ[b^2 - 4*a*c, 0]`

rule 2009 `Int[u_, x_Symbol] := Simp[IntSum[u, x], x] /; SumQ[u]`

Maple **[F]**

$$\int (A + Bx^n)(a + bx^n + cx^{2n})^p dx$$

input `int((A+B*x^n)*(a+b*x^n+c*x^(2*n))^p,x)`

output `int((A+B*x^n)*(a+b*x^n+c*x^(2*n))^p,x)`

Fricas [F]

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx = \int (Bx^n + A)(cx^{2n} + bx^n + a)^p dx$$

input `integrate((A+B*x^n)*(a+b*x^n+c*x^(2*n))^p,x, algorithm="fricas")`

output `integral((B*x^n + A)*(c*x^(2*n) + b*x^n + a)^p, x)`

Sympy [F(-1)]

Timed out.

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx = \text{Timed out}$$

input `integrate((A+B*x**n)*(a+b*x**n+c*x**(2*n))**p,x)`

output `Timed out`

Maxima [F]

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx = \int (Bx^n + A)(cx^{2n} + bx^n + a)^p dx$$

input `integrate((A+B*x^n)*(a+b*x^n+c*x^(2*n))^p,x, algorithm="maxima")`

output `integrate((B*x^n + A)*(c*x^(2*n) + b*x^n + a)^p, x)`

Giac [F]

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx = \int (Bx^n + A)(cx^{2n} + bx^n + a)^p dx$$

input `integrate((A+B*x^n)*(a+b*x^n+c*x^(2*n))^p,x, algorithm="giac")`

output `integrate((B*x^n + A)*(c*x^(2*n) + b*x^n + a)^p, x)`

Mupad [F(-1)]

Timed out.

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx = \int (A + Bx^n) (a + bx^n + cx^{2n})^p dx$$

input `int((A + B*x^n)*(a + b*x^n + c*x^(2*n))^p,x)`

output `int((A + B*x^n)*(a + b*x^n + c*x^(2*n))^p, x)`

Reduce [F]

$$\int (A + Bx^n) (a + bx^n + cx^{2n})^p dx = \text{too large to display}$$

input `int((A+B*x^n)*(a+b*x^n+c*x^(2*n))^p,x)`

output

```

(x**n*(x**(2*n)*c + x**n*b + a)**p*b*n*p*x + x**n*(x**(2*n)*c + x**n*b + a)
)**p*b*x + 4*(x**(2*n)*c + x**n*b + a)**p*a*n*p*x + (x**(2*n)*c + x**n*b +
a)**p*a*n*x + (x**(2*n)*c + x**n*b + a)**p*a*x + 4*int((x**(2*n)*c + x**n
*b + a)**p/(2*x**(2*n)*c*n**2*p**2 + x**(2*n)*c*n**2*p + 3*x**(2*n)*c*n*p
+ x**(2*n)*c*n + x**(2*n)*c + 2*x**n*b*n**2*p**2 + x**n*b*n**2*p + 3*x**n*
b*n*p + x**n*b*n + x**n*b + 2*a*n**2*p**2 + a*n**2*p + 3*a*n*p + a*n + a),
x)*a**2*n**4*p**4 + 4*int((x**(2*n)*c + x**n*b + a)**p/(2*x**(2*n)*c*n**2*
p**2 + x**(2*n)*c*n**2*p + 3*x**(2*n)*c*n*p + x**(2*n)*c*n + x**(2*n)*c +
2*x**n*b*n**2*p**2 + x**n*b*n**2*p + 3*x**n*b*n*p + x**n*b*n + x**n*b + 2*
a*n**2*p**2 + a*n**2*p + 3*a*n*p + a*n + a),x)*a**2*n**4*p**3 + int((x**(2
*n)*c + x**n*b + a)**p/(2*x**(2*n)*c*n**2*p**2 + x**(2*n)*c*n**2*p + 3*x**
(2*n)*c*n*p + x**(2*n)*c*n + x**(2*n)*c + 2*x**n*b*n**2*p**2 + x**n*b*n**2
*p + 3*x**n*b*n*p + x**n*b*n + x**n*b + 2*a*n**2*p**2 + a*n**2*p + 3*a*n*p
+ a*n + a),x)*a**2*n**4*p**2 + 4*int((x**(2*n)*c + x**n*b + a)**p/(2*x**
(2*n)*c*n**2*p**2 + x**(2*n)*c*n**2*p + 3*x**(2*n)*c*n*p + x**(2*n)*c*n + x
**(2*n)*c + 2*x**n*b*n**2*p**2 + x**n*b*n**2*p + 3*x**n*b*n*p + x**n*b*n +
x**n*b + 2*a*n**2*p**2 + a*n**2*p + 3*a*n*p + a*n + a),x)*a**2*n**3*p**3
+ 4*int((x**(2*n)*c + x**n*b + a)**p/(2*x**(2*n)*c*n**2*p**2 + x**(2*n)*c
n**2*p + 3*x**(2*n)*c*n*p + x**(2*n)*c*n + x**(2*n)*c + 2*x**n*b*n**2*p**2
+ x**n*b*n**2*p + 3*x**n*b*n*p + x**n*b*n + x**n*b + 2*a*n**2*p**2 + a...

```

3.34 $\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx$

Optimal result	254
Mathematica [A] (warning: unable to verify)	255
Rubi [F]	255
Maple [F]	256
Fricas [F]	256
Sympy [F(-1)]	256
Maxima [F]	257
Giac [F(-2)]	257
Mupad [F(-1)]	257
Reduce [F]	258

Optimal result

Integrand size = 31, antiderivative size = 387

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx = \frac{Cx(a + bx^n + cx^{2n})^{1+p}}{c(1 + 2n + 2np)} - \frac{(bC(1 + n + np) - Bc(1 + 2n(1 + p)))x^{1+n} \left(1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^n + cx^{2n})^p A}{c(1 + n)(1 + 2n(1 + p))} - \frac{(aC - Ac(1 + 2n(1 + p)))x \left(1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^n + cx^{2n})^p \text{AppellF1}\left(\frac{1}{n}, -p, -p, 2 + \frac{1}{n}, -2cx^n/(b - \sqrt{b^2 - 4ac}), -2cx^n/(b + \sqrt{b^2 - 4ac})\right)}{c(1 + 2n(1 + p))}$$

output

```
C*x*(a+b*x^n+c*x^(2*n))^(p+1)/c/(2*n*p+2*n+1)-(b*C*(n*p+n+1)-B*c*(1+2*n*(p+1)))*x^(1+n)*(a+b*x^n+c*x^(2*n))^p*AppellF1(1+1/n,-p,-p,2+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c/(1+n)/(1+2*n*(p+1))/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)-(C*a-A*c*(1+2*n*(p+1)))*x*(a+b*x^n+c*x^(2*n))^p*AppellF1(1/n,-p,-p,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c/(1+2*n*(p+1))/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)
```

Mathematica [A] (warning: unable to verify)

Time = 1.01 (sec) , antiderivative size = 332, normalized size of antiderivative = 0.86

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx$$

$$= \frac{x \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx^n}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx^n}{b + \sqrt{b^2 - 4ac}} \right)^{-p} (a + x^n(b + cx^n))^p \left(B(1 + 2n)x^n \operatorname{AppellF1} \left(1 + \frac{1}{n}, -p, -p, 2 - \right. \right.$$

input `Integrate[(a + b*x^n + c*x^(2*n))^p*(A + B*x^n + C*x^(2*n)),x]`output

```
(x*(a + x^n*(b + c*x^n))^p*(B*(1 + 2*n)*x^n*AppellF1[1 + n^(-1), -p, -p, 2
+ n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 -
4*a*c])]) + (1 + n)*(C*x^(2*n)*AppellF1[2 + n^(-1), -p, -p, 3 + n^(-1), (-2
*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])]) + A*(
1 + 2*n)*AppellF1[n^(-1), -p, -p, 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4
*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])]))/((1 + n)*(1 + 2*n)*((b - Sq
rt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a
*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]))^p)
```

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (A + Bx^n + Cx^{2n}) (a + bx^n + cx^{2n})^p dx$$

$$\downarrow \text{2329}$$

$$\int (A + Bx^n + Cx^{2n}) (a + bx^n + cx^{2n})^p dx$$

input `Int[(a + b*x^n + c*x^(2*n))^p*(A + B*x^n + C*x^(2*n)),x]`output `$Aborted`

Definitions of rubi rules used

rule 2329

```
Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_.), x_Symbol] :=
  Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
  && EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])
```

Maple [F]

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx$$

input

```
int((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)),x)
```

output

```
int((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)),x)
```

Fricas [F]

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx = \int (Cx^{2n} + Bx^n + A)(cx^{2n} + bx^n + a)^p dx$$

input

```
integrate((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)),x, algorithm="fricas")
```

output

```
integral((C*x^(2*n) + B*x^n + A)*(c*x^(2*n) + b*x^n + a)^p, x)
```

SymPy [F(-1)]

Timed out.

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx = \text{Timed out}$$

input

```
integrate((a+b*x**n+c*x**(2*n))**p*(A+B*x**n+C*x**(2*n)),x)
```

output

```
Timed out
```

Maxima [F]

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx = \int (Cx^{2n} + Bx^n + A)(cx^{2n} + bx^n + a)^p dx$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)),x, algorithm="maxima")`

output `integrate((C*x^(2*n) + B*x^n + A)*(c*x^(2*n) + b*x^n + a)^p, x)`

Giac [F(-2)]

Exception generated.

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx = \text{Exception raised: TypeError}$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)),x, algorithm="giac")`

output `Exception raised: TypeError >> an error occurred running a Giac command:INPUT:sage2:=int(sage0,sageVARx)::OUTPUT:Unable to divide, perhaps due to rounding error%%{-128,[1,0,5,3,6,4,1,6,0,0,1]%%}+%%{256,[1,0,5,3,6,4,0,7,0,1,0]%%}`

Mupad [F(-1)]

Timed out.

$$\begin{aligned} \int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx \\ = \int (a + bx^n + cx^{2n})^p (A + Cx^{2n} + Bx^n) dx \end{aligned}$$

input `int((a + b*x^n + c*x^(2*n))^p*(A + C*x^(2*n) + B*x^n),x)`

output `int((a + b*x^n + c*x^(2*n))^p*(A + C*x^(2*n) + B*x^n), x)`

Reduce [F]

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n}) dx = \text{too large to display}$$

input `int((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)),x)`

output

```
(2*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*c*n**2*p**2*x + x**(2*n)*(x**(2*n)
)*c + x**n*b + a)**p*c*n**2*p*x + 3*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*
c*n*p*x + x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*c*n*x + x**(2*n)*(x**(2*n)
)*c + x**n*b + a)**p*c*x + 3*x**n*(x**(2*n)*c + x**n*b + a)**p*b*n**2*p**2*
x + 2*x**n*(x**(2*n)*c + x**n*b + a)**p*b*n**2*p*x + 4*x**n*(x**(2*n)*c +
x**n*b + a)**p*b*n*p*x + 2*x**n*(x**(2*n)*c + x**n*b + a)**p*b*n*x + x**n*
(x**(2*n)*c + x**n*b + a)**p*b*x + 8*(x**(2*n)*c + x**n*b + a)**p*a*n**2*p
**2*x + 9*(x**(2*n)*c + x**n*b + a)**p*a*n**2*p*x + 2*(x**(2*n)*c + x**n*b
+ a)**p*a*n**2*x + 5*(x**(2*n)*c + x**n*b + a)**p*a*n*p*x + 3*(x**(2*n)*c
+ x**n*b + a)**p*a*n*x + (x**(2*n)*c + x**n*b + a)**p*a*x + 16*int((x**(2
*n)*c + x**n*b + a)**p/(4*x**(2*n)*c*n**3*p**3 + 6*x**(2*n)*c*n**3*p**2 +
2*x**(2*n)*c*n**3*p + 8*x**(2*n)*c*n**2*p**2 + 9*x**(2*n)*c*n**2*p + 2*x**
(2*n)*c*n**2 + 5*x**(2*n)*c*n*p + 3*x**(2*n)*c*n + x**(2*n)*c + 4*x**n*b*n
**3*p**3 + 6*x**n*b*n**3*p**2 + 2*x**n*b*n**3*p + 8*x**n*b*n**2*p**2 + 9*x
**n*b*n**2*p + 2*x**n*b*n**2 + 5*x**n*b*n*p + 3*x**n*b*n + x**n*b + 4*a*n*
*3*p**3 + 6*a*n**3*p**2 + 2*a*n**3*p + 8*a*n**2*p**2 + 9*a*n**2*p + 2*a*n*
*2 + 5*a*n*p + 3*a*n + a),x)*a**2*n**6*p**6 + 48*int((x**(2*n)*c + x**n*b
+ a)**p/(4*x**(2*n)*c*n**3*p**3 + 6*x**(2*n)*c*n**3*p**2 + 2*x**(2*n)*c*n
**3*p + 8*x**(2*n)*c*n**2*p**2 + 9*x**(2*n)*c*n**2*p + 2*x**(2*n)*c*n**2 +
5*x**(2*n)*c*n*p + 3*x**(2*n)*c*n + x**(2*n)*c + 4*x**n*b*n**3*p**3 + 6...
```

3.35 $\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$

Optimal result	259
Mathematica [A] (warning: unable to verify)	260
Rubi [F]	261
Maple [F]	261
Fricas [F]	262
Sympy [F(-1)]	262
Maxima [F]	262
Giac [F(-2)]	263
Mupad [F(-1)]	263
Reduce [F]	264

Optimal result

Integrand size = 38, antiderivative size = 556

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$$

$$= -\frac{(bD(1 + n(2 + p)) - cC(1 + n(3 + 2p)))x(a + bx^n + cx^{2n})^{1+p}}{c^2(1 + 2n(1 + p))(1 + n(3 + 2p))}$$

$$+ \frac{Dx^{1+n}(a + bx^n + cx^{2n})^{1+p}}{c(1 + 3n + 2np)}$$

$$- \frac{(c(1 + 2n(1 + p))(aD(1 + n) - Bc(1 + n(3 + 2p))) - b(1 + n + np)(bD(1 + n(2 + p)) - cC(1 + n(3 + 2p))))}{c^2(1 + 2n(1 + p))(1 + n(3 + 2p))}$$

$$+ \frac{(Ac^2(1 + 2n(1 + p))(1 + n(3 + 2p)) + a(bD(1 + n(2 + p)) - cC(1 + n(3 + 2p))))x\left(1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-1}}{c^2(1 + 2n(1 + p))(1 + n(3 + 2p))}$$

output

```

-(b*D*(1+n*(2+p))-c*C*(1+n*(3+2*p)))*x*(a+b*x^n+c*x^(2*n))^(p+1)/c^2/(1+2*
n*(p+1))/(1+n*(3+2*p))+D*x^(1+n)*(a+b*x^n+c*x^(2*n))^(p+1)/c/(2*n*p+3*n+1)
-(c*(1+2*n*(p+1))*(a*D*(1+n)-B*c*(1+n*(3+2*p)))-b*(n*p+n+1)*(b*D*(1+n*(2+p)
))-c*C*(1+n*(3+2*p)))*x^(1+n)*(a+b*x^n+c*x^(2*n))^p*AppellF1(1+1/n,-p,-p,
2+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/c^2
/(1+n)/(1+2*n*(p+1))/(1+n*(3+2*p))/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p)/
((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)+(A*c^2*(1+2*n*(p+1))*(1+n*(3+2*p))+
a*(b*D*(1+n*(2+p))-c*C*(1+n*(3+2*p)))*x*(a+b*x^n+c*x^(2*n))^p*AppellF1(1/
n,-p,-p,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)), -2*c*x^n/(b+(-4*a*c+b^2)^(1/
2)))/c^2/(1+2*n*(p+1))/(1+n*(3+2*p))/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p
)/((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)

```

Mathematica [A] (warning: unable to verify)

Time = 1.55 (sec) , antiderivative size = 426, normalized size of antiderivative = 0.77

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$$

$$= \frac{x \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx^n}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx^n}{b + \sqrt{b^2 - 4ac}} \right)^{-p} (a + x^n(b + cx^n))^p \left(B(1 + 5n + 6n^2) x^n \operatorname{AppellF1} \left(1 + \frac{1}{n}, -p, \right. \right.$$

input

```
Integrate[(a + b*x^n + c*x^(2*n))^p*(A + B*x^n + C*x^(2*n) + D*x^(3*n)),x]
```

output

```

(x*(a + x^n*(b + c*x^n))^p*(B*(1 + 5*n + 6*n^2)*x^n*AppellF1[1 + n^(-1), -
p, -p, 2 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqr
t[b^2 - 4*a*c])]) + (1 + n)*(C*(1 + 3*n)*x^(2*n)*AppellF1[2 + n^(-1), -p, -
p, 3 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^
2 - 4*a*c])]) + (1 + 2*n)*(D*x^(3*n)*AppellF1[3 + n^(-1), -p, -p, 4 + n^(-1
), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])])
+ A*(1 + 3*n)*AppellF1[n^(-1), -p, -p, 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b
^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])]))/((1 + n)*(1 + 2*n)*(
1 + 3*n)*((b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]))^p*((b
+ Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]))^p)

```

Rubi [F]

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$$

↓ 2329

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$$

input

```
Int[(a + b*x^n + c*x^(2*n))^p*(A + B*x^n + C*x^(2*n) + D*x^(3*n)),x]
```

output

```
$Aborted
```

Defintions of rubi rules used

rule 2329

```
Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_.), x_Symbol] :>
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])
```

Maple [F]

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$$

input

```
int((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)+D*x^(3*n)),x)
```

output

```
int((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)+D*x^(3*n)),x)
```

Fricas [F]

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$$

$$= \int (Dx^{3n} + Cx^{2n} + Bx^n + A)(cx^{2n} + bx^n + a)^p dx$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)+D*x^(3*n)),x, algorithm="fricas")`

output `integral((D*x^(3*n) + C*x^(2*n) + B*x^n + A)*(c*x^(2*n) + b*x^n + a)^p, x)`

Sympy [F(-1)]

Timed out.

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx = \text{Timed out}$$

input `integrate((a+b*x**n+c*x**(2*n))**p*(A+B*x**n+C*x**(2*n)+D*x**(3*n)),x)`

output `Timed out`

Maxima [F]

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx$$

$$= \int (Dx^{3n} + Cx^{2n} + Bx^n + A)(cx^{2n} + bx^n + a)^p dx$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)+D*x^(3*n)),x, algorithm="maxima")`

output `integrate((D*x^(3*n) + C*x^(2*n) + B*x^n + A)*(c*x^(2*n) + b*x^n + a)^p, x)`

Giac [F(-2)]

Exception generated.

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx = \text{Exception raised: TypeError}$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)+D*x^(3*n)),x, algorithm="giac")`

output Exception raised: TypeError >> an error occurred running a Giac command:INPUT:sage2:=int(sage0,sageVARx):;OUTPUT:Unable to divide, perhaps due to rounding error%%{512,[1,0,7,4,9,5,1,8,0,0,0,1]}+%%{-1024,[1,0,7,4,9,5,0,9,0,0,1,

Mupad [F(-1)]

Timed out.

$$\begin{aligned} & \int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx \\ &= \int (a + bx^n + cx^{2n})^p (A + Cx^{2n} + x^{3n}D + Bx^n) dx \end{aligned}$$

input `int((a + b*x^n + c*x^(2*n))^p*(A + C*x^(2*n) + x^(3*n)*D + B*x^n),x)`

output `int((a + b*x^n + c*x^(2*n))^p*(A + C*x^(2*n) + x^(3*n)*D + B*x^n), x)`

Reduce [F]

$$\int (a + bx^n + cx^{2n})^p (A + Bx^n + Cx^{2n} + Dx^{3n}) dx = \text{too large to display}$$

input `int((a+b*x^n+c*x^(2*n))^p*(A+B*x^n+C*x^(2*n)+D*x^(3*n)),x)`

output

```
(4*x**(3*n)*(x**(2*n)*c + x**n*b + a)**p*b*c**2*d*n**3*p**3*x + 6*x**(3*n)
*(x**(2*n)*c + x**n*b + a)**p*b*c**2*d*n**3*p**2*x + 2*x**(3*n)*(x**(2*n)*
c + x**n*b + a)**p*b*c**2*d*n**3*p*x + 8*x**(3*n)*(x**(2*n)*c + x**n*b + a
)**p*b*c**2*d*n**2*p**2*x + 9*x**(3*n)*(x**(2*n)*c + x**n*b + a)**p*b*c**2
*d*n**2*p*x + 2*x**(3*n)*(x**(2*n)*c + x**n*b + a)**p*b*c**2*d*n**2*x + 5*
x**(3*n)*(x**(2*n)*c + x**n*b + a)**p*b*c**2*d*n*p*x + 3*x**(3*n)*(x**(2*n)
)*c + x**n*b + a)**p*b*c**2*d*n*x + x**(3*n)*(x**(2*n)*c + x**n*b + a)**p*
b*c**2*d*x + 2*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*b**2*c*d*n**3*p**3*x
+ x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*b**2*c*d*n**3*p**2*x + 3*x**(2*n)*
(x**(2*n)*c + x**n*b + a)**p*b**2*c*d*n**2*p**2*x + x**(2*n)*(x**(2*n)*c +
x**n*b + a)**p*b**2*c*d*n**2*p*x + x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*
b**2*c*d*n*p*x + 4*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*b*c**3*n**3*p**3*
x + 8*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*b*c**3*n**3*p**2*x + 3*x**(2*n)
)*(x**(2*n)*c + x**n*b + a)**p*b*c**3*n**3*p*x + 8*x**(2*n)*(x**(2*n)*c +
x**n*b + a)**p*b*c**3*n**2*p**2*x + 12*x**(2*n)*(x**(2*n)*c + x**n*b + a)*
*p*b*c**3*n**2*p*x + 3*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*b*c**3*n**2*x
+ 5*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*b*c**3*n*p*x + 4*x**(2*n)*(x**(
2*n)*c + x**n*b + a)**p*b*c**3*n*x + x**(2*n)*(x**(2*n)*c + x**n*b + a)**p
*b*c**3*x + 4*x**n*(x**(2*n)*c + x**n*b + a)**p*a*b*c*d*n**3*p**3*x + 4*x*
*n*(x**(2*n)*c + x**n*b + a)**p*a*b*c*d*n**3*p**2*x + 6*x**n*(x**(2*n)*...
```

3.36 $\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx$

Optimal result	265
Mathematica [A] (warning: unable to verify)	266
Rubi [F]	266
Maple [F]	267
Fricas [F]	267
Sympy [F(-1)]	267
Maxima [F]	268
Giac [F(-2)]	268
Mupad [F(-1)]	268
Reduce [F]	269

Optimal result

Integrand size = 26, antiderivative size = 292

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx$$

$$= \frac{Cx^{1+2n} \left(1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^n + cx^{2n})^p \operatorname{AppellF1}\left(2 + \frac{1}{n}, -p, -p, 3 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)}{1 + 2n}$$

$$+ Ax \left(1 + \frac{2cx^n}{b - \sqrt{b^2 - 4ac}}\right)^{-p} \left(1 + \frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)^{-p} (a + bx^n + cx^{2n})^p \operatorname{AppellF1}\left(\frac{1}{n}, -p, -p, 1 + \frac{1}{n}, -\frac{2cx^n}{b - \sqrt{b^2 - 4ac}}, -\frac{2cx^n}{b + \sqrt{b^2 - 4ac}}\right)$$

output

```
C*x^(1+2*n)*(a+b*x^n+c*x^(2*n))^p*AppellF1(2+1/n,-p,-p,3+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/(1+2*n)/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)+A*x*(a+b*x^n+c*x^(2*n))^p*AppellF1(1/n,-p,-p,1+1/n,-2*c*x^n/(b-(-4*a*c+b^2)^(1/2)),-2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))/((1+2*c*x^n/(b-(-4*a*c+b^2)^(1/2)))^p)/((1+2*c*x^n/(b+(-4*a*c+b^2)^(1/2)))^p)
```

Mathematica [A] (warning: unable to verify)

Time = 0.76 (sec) , antiderivative size = 249, normalized size of antiderivative = 0.85

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx$$

$$= \frac{x \left(\frac{b - \sqrt{b^2 - 4ac} + 2cx^n}{b - \sqrt{b^2 - 4ac}} \right)^{-p} \left(\frac{b + \sqrt{b^2 - 4ac} + 2cx^n}{b + \sqrt{b^2 - 4ac}} \right)^{-p} (a + x^n(b + cx^n))^p \left(Cx^{2n} \operatorname{AppellF1} \left(2 + \frac{1}{n}, -p, -p, 3 + \frac{1}{n}, -\frac{1}{b} \right) \right)}{1 + 2n}$$

input `Integrate[(a + b*x^n + c*x^(2*n))^p*(A + C*x^(2*n)),x]`output `(x*(a + x^n*(b + c*x^n))^p*(C*x^(2*n)*AppellF1[2 + n^(-1), -p, -p, 3 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])] + A*(1 + 2*n)*AppellF1[n^(-1), -p, -p, 1 + n^(-1), (-2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]), (2*c*x^n)/(-b + Sqrt[b^2 - 4*a*c])]))/((1 + 2*n)*((b - Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b - Sqrt[b^2 - 4*a*c]))^p*((b + Sqrt[b^2 - 4*a*c] + 2*c*x^n)/(b + Sqrt[b^2 - 4*a*c]))^p)`**Rubi [F]**

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int (A + Cx^{2n}) (a + bx^n + cx^{2n})^p dx$$

$$\downarrow \text{2329}$$

$$\int (A + Cx^{2n}) (a + bx^n + cx^{2n})^p dx$$

input `Int[(a + b*x^n + c*x^(2*n))^p*(A + C*x^(2*n)),x]`output `$Aborted`

Definitions of rubi rules used

rule 2329 `Int[(Pq_)*((a_) + (b_.)*(x_)^(n_.) + (c_.)*(x_)^(n2_.))^p_.), x_Symbol] :=
Unintegrable[Pq*(a + b*x^n + c*x^(2*n))^p, x] /; FreeQ[{a, b, c, n, p}, x]
&& EqQ[n2, 2*n] && (PolyQ[Pq, x] || PolyQ[Pq, x^n])`

Maple [F]

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx$$

input `int((a+b*x^n+c*x^(2*n))^p*(A+C*x^(2*n)),x)`

output `int((a+b*x^n+c*x^(2*n))^p*(A+C*x^(2*n)),x)`

Fricas [F]

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx = \int (Cx^{2n} + A)(cx^{2n} + bx^n + a)^p dx$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(A+C*x^(2*n)),x, algorithm="fricas")`

output `integral((C*x^(2*n) + A)*(c*x^(2*n) + b*x^n + a)^p, x)`

SymPy [F(-1)]

Timed out.

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx = \text{Timed out}$$

input `integrate((a+b*x**n+c*x**(2*n))**p*(A+C*x**(2*n)),x)`

output `Timed out`

Maxima [F]

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx = \int (Cx^{2n} + A)(cx^{2n} + bx^n + a)^p dx$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(A+C*x^(2*n)),x, algorithm="maxima")`

output `integrate((C*x^(2*n) + A)*(c*x^(2*n) + b*x^n + a)^p, x)`

Giac [F(-2)]

Exception generated.

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx = \text{Exception raised: TypeError}$$

input `integrate((a+b*x^n+c*x^(2*n))^p*(A+C*x^(2*n)),x, algorithm="giac")`

output `Exception raised: TypeError >> an error occurred running a Giac command:INPUT:sage2:=int(sage0,sageVARx):;OUTPUT:Unable to divide, perhaps due to rounding error%%{-128,[1,0,5,3,6,4,1,6,0,1]%%}+%%{-512,[1,0,5,3,6,3,1,6,0,1]%%}+%`

Mupad [F(-1)]

Timed out.

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx = \int (A + Cx^{2n}) (a + bx^n + cx^{2n})^p dx$$

input `int((A + C*x^(2*n))*(a + b*x^n + c*x^(2*n))^p,x)`

output `int((A + C*x^(2*n))*(a + b*x^n + c*x^(2*n))^p, x)`

Reduce [F]

$$\int (a + bx^n + cx^{2n})^p (A + Cx^{2n}) dx = \text{too large to display}$$

input `int((a+b*x^n+c*x^(2*n))^p*(A+C*x^(2*n)),x)`

output

```
(2*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*c*n**2*p**2*x + x**(2*n)*(x**(2*n)
)*c + x**n*b + a)**p*c*n**2*p*x + 3*x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*
c*n*p*x + x**(2*n)*(x**(2*n)*c + x**n*b + a)**p*c*n*x + x**(2*n)*(x**(2*n)
)*c + x**n*b + a)**p*c*x + x**n*(x**(2*n)*c + x**n*b + a)**p*b*n**2*p**2*x
+ x**n*(x**(2*n)*c + x**n*b + a)**p*b*n*p*x + 4*(x**(2*n)*c + x**n*b + a)*
*p*a*n**2*p**2*x + 5*(x**(2*n)*c + x**n*b + a)**p*a*n**2*p*x + 2*(x**(2*n)
)*c + x**n*b + a)**p*a*n**2*x + 3*(x**(2*n)*c + x**n*b + a)**p*a*n*p*x + 3*
(x**(2*n)*c + x**n*b + a)**p*a*n*x + (x**(2*n)*c + x**n*b + a)**p*a*x + 16
*int((x**(2*n)*c + x**n*b + a)**p/(4*x**(2*n)*c*n**3*p**3 + 6*x**(2*n)*c*n
**3*p**2 + 2*x**(2*n)*c*n**3*p + 8*x**(2*n)*c*n**2*p**2 + 9*x**(2*n)*c*n**
2*p + 2*x**(2*n)*c*n**2 + 5*x**(2*n)*c*n*p + 3*x**(2*n)*c*n + x**(2*n)*c +
4*x**n*b*n**3*p**3 + 6*x**n*b*n**3*p**2 + 2*x**n*b*n**3*p + 8*x**n*b*n**2
*p**2 + 9*x**n*b*n**2*p + 2*x**n*b*n**2 + 5*x**n*b*n*p + 3*x**n*b*n + x**n
*b + 4*a*n**3*p**3 + 6*a*n**3*p**2 + 2*a*n**3*p + 8*a*n**2*p**2 + 9*a*n**2
*p + 2*a*n**2 + 5*a*n*p + 3*a*n + a),x)*a**2*n**6*p**6 + 48*int((x**(2*n)*
c + x**n*b + a)**p/(4*x**(2*n)*c*n**3*p**3 + 6*x**(2*n)*c*n**3*p**2 + 2*x*
*(2*n)*c*n**3*p + 8*x**(2*n)*c*n**2*p**2 + 9*x**(2*n)*c*n**2*p + 2*x**(2*n)
)*c*n**2 + 5*x**(2*n)*c*n*p + 3*x**(2*n)*c*n + x**(2*n)*c + 4*x**n*b*n**3*
p**3 + 6*x**n*b*n**3*p**2 + 2*x**n*b*n**3*p + 8*x**n*b*n**2*p**2 + 9*x**n*
b*n**2*p + 2*x**n*b*n**2 + 5*x**n*b*n*p + 3*x**n*b*n + x**n*b + 4*a*n**...
```

CHAPTER 4

APPENDIX

4.1	Listing of Grading functions	270
4.2	Links to plain text integration problems used in this report for each CAS .	288

4.1 Listing of Grading functions

The following are the current version of the grading functions used for grading the quality of the antiderivative with reference to the optimal antiderivative included in the test suite.

There is a version for Maple and for Mathematica/Rubi. There is a version for grading Sympy and version for use with Sagemath.

The following are links to the current source code.

The following are the listings of source code of the grading functions.

Mathematica and Rubi grading function

```
(* Original version thanks to Albert Rich emailed on 03/21/2017 *)
(* ::Package:: *)

(* Nasser: April 7, 2022. add second output which gives reason for the grade *)
(*                               Small rewrite of logic in main function to make it*)
(*                               match Maple's logic. No change in functionality otherwise*)

(* ::Subsection:: *)
(*GradeAntiderivative[result,optimal]*)
```

```

(* ::Text:: *)
(*If result and optimal are mathematical expressions, *)
(*      GradeAntiderivative[result,optimal] returns*)
(* "F" if the result fails to integrate an expression that*)
(*      is integrable*)
(* "C" if result involves higher level functions than necessary*)
(* "B" if result is more than twice the size of the optimal*)
(*      antiderivative*)
(* "A" if result can be considered optimal*)

GradeAntiderivative[result_,optimal_] := Module[{expnResult,expnOptimal,leafCountResult,leafCountOptimal},
  expnResult = ExpnType[result];
  expnOptimal = ExpnType[optimal];
  leafCountResult = LeafCount[result];
  leafCountOptimal = LeafCount[optimal];

  (*Print["expnResult=",expnResult," expnOptimal=",expnOptimal];*)
  If[expnResult<=expnOptimal,
    If[Not[FreeQ[result,Complex]], (*result contains complex*)
      If[Not[FreeQ[optimal,Complex]], (*optimal contains complex*)
        If[leafCountResult<=2*leafCountOptimal,
          finalresult={"A",""}
          ,(*ELSE*)
          finalresult={"B","Both result and optimal contain complex but leaf count
          ]
        ,(*ELSE*)
          finalresult={"C","Result contains complex when optimal does not."}
        ]
      ,(*ELSE*)(*result does not contains complex*)
        If[leafCountResult<=2*leafCountOptimal,
          finalresult={"A",""}
          ,(*ELSE*)
          finalresult={"B","Leaf count is larger than twice the leaf count of optimal.
          ]
        ]
      ,(*ELSE*)(*expnResult>expnOptimal*)
        If[FreeQ[result,Integrate] && FreeQ[result,Int],
          finalresult={"C","Result contains higher order function than in optimal. Order "
          ,

```



```

        finalresult={"F","Contains unresolved integral."}
    ]
];

finalresult
]

(* ::Text:: *)
(*The following summarizes the type number assigned an *)
(*expression based on the functions it involves*)
(*1 = rational function*)
(*2 = algebraic function*)
(*3 = elementary function*)
(*4 = special function*)
(*5 = hyperpergeometric function*)
(*6 = appell function*)
(*7 = rootsum function*)
(*8 = integrate function*)
(*9 = unknown function*)

ExpnType[expn_] :=
  If[AtomQ[expn],
    1,
  If[ListQ[expn],
    Max[Map[ExpnType, expn]],
  If[Head[expn]===Power,
    If[IntegerQ[expn[[2]]],
      ExpnType[expn[[1]]],
    If[Head[expn[[2]]]===Rational,
      If[IntegerQ[expn[[1]]] || Head[expn[[1]]]===Rational,
        1,
        Max[ExpnType[expn[[1]], 2]],
      Max[ExpnType[expn[[1]], ExpnType[expn[[2]], 3]],
    If[Head[expn]===Plus || Head[expn]===Times,
      Max[ExpnType[First[expn]], ExpnType[Rest[expn]]],
    If[ElementaryFunctionQ[Head[expn]],
      Max[3, ExpnType[expn[[1]]]],
    If[SpecialFunctionQ[Head[expn]],
      Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 4]],
    If[HypergeometricFunctionQ[Head[expn]],

```


Maple grading function

```

# File: GradeAntiderivative.mpl
# Original version thanks to Albert Rich emailed on 03/21/2017

#Nasser 03/22/2017 Use Maple leaf count instead since buildin
#Nasser 03/23/2017 missing 'ln' for ElementaryFunctionQ added
#Nasser 03/24/2017 corrected the check for complex result
#Nasser 10/27/2017 check for leafsize and do not call ExpnType()
#
#                   if leaf size is "too large". Set at 500,000
#Nasser 12/22/2019 Added debug flag, added 'dilog' to special functions
#
#                   see problem 156, file Apostol_Problems
#Nasser 4/07/2022 add second output which gives reason for the grade

GradeAntiderivative := proc(result,optimal)
local leaf_count_result,
      leaf_count_optimal,
      ExpnType_result,
      ExpnType_optimal,
      debug:=false;

      leaf_count_result:=leafcount(result);
      #do NOT call ExpnType() if leaf size is too large. Recursion problem
      if leaf_count_result > 500000 then
          return "B","result has leaf size over 500,000. Avoiding possible recursion issue";
      fi;

      leaf_count_optimal := leafcount(optimal);
      ExpnType_result := ExpnType(result);
      ExpnType_optimal := ExpnType(optimal);

      if debug then
          print("ExpnType_result",ExpnType_result," ExpnType_optimal=",ExpnType_optimal);
      fi;

# If result and optimal are mathematical expressions,
# GradeAntiderivative[result,optimal] returns
# "F" if the result fails to integrate an expression that
# is integrable
# "C" if result involves higher level functions than necessary
# "B" if result is more than twice the size of the optimal

```

```

#   antiderivative
#   "A" if result can be considered optimal

#This check below actually is not needed, since I only
#call this grading only for passed integrals. i.e. I check
#for "F" before calling this. But no harm of keeping it here.
#just in case.

if not type(result,freeof('int')) then
    return "F","Result contains unresolved integral";
fi;

if ExpnType_result<=ExpnType_optimal then
    if debug then
        print("ExpnType_result<=ExpnType_optimal");
    fi;
    if is_contains_complex(result) then
        if is_contains_complex(optimal) then
            if debug then
                print("both result and optimal complex");
            fi;
            if leaf_count_result<=2*leaf_count_optimal then
                return "A"," ";
            else
                return "B",cat("Both result and optimal contain complex but leaf count of
                                convert(leaf_count_result,string)," vs. $2 (" ,
                                convert(leaf_count_optimal,string)," ) = ",convert(2*leaf

            end if
        else #result contains complex but optimal is not
            if debug then
                print("result contains complex but optimal is not");
            fi;
            return "C","Result contains complex when optimal does not.";
        fi;
    else # result do not contain complex
        # this assumes optimal do not as well. No check is needed here.
        if debug then
            print("result do not contain complex, this assumes optimal do not as well
        fi;

```

```

        if leaf_count_result<=2*leaf_count_optimal then
            if debug then
                print("leaf_count_result<=2*leaf_count_optimal");
            fi;
            return "A"," ";
        else
            if debug then
                print("leaf_count_result>2*leaf_count_optimal");
            fi;
            return "B",cat("Leaf count of result is larger than twice the leaf count of
                            convert(leaf_count_result,string)," $ vs. $2(",
                            convert(leaf_count_optimal,string),")=",convert(2*leaf_co
            fi;
        fi;
    else #ExpnType(result) > ExpnType(optimal)
        if debug then
            print("ExpnType(result) > ExpnType(optimal)");
        fi;
        return "C",cat("Result contains higher order function than in optimal. Order ",
                        convert(ExpnType_result,string)," vs. order ",
                        convert(ExpnType_optimal,string),".");
    fi;
end proc:

#
# is_contains_complex(result)
# takes expressions and returns true if it contains "I" else false
#
#Nasser 032417
is_contains_complex:= proc(expression)
    return (has(expression,I));
end proc:

# The following summarizes the type number assigned an expression
# based on the functions it involves
# 1 = rational function
# 2 = algebraic function
# 3 = elementary function
# 4 = special function
# 5 = hyperpergeometric function

```

```

# 6 = appell function
# 7 = rootsum function
# 8 = integrate function
# 9 = unknown function

ExpnType := proc(expn)
  if type(expn,'atomic') then
    1
  elif type(expn,'list') then
    apply(max,map(ExpnType,expn))
  elif type(expn,'sqrt') then
    if type(op(1,expn),'rational') then
      1
    else
      max(2,ExpnType(op(1,expn)))
    end if
  elif type(expn,'^^') then
    if type(op(2,expn),'integer') then
      ExpnType(op(1,expn))
    elif type(op(2,expn),'rational') then
      if type(op(1,expn),'rational') then
        1
      else
        max(2,ExpnType(op(1,expn)))
      end if
    else
      max(3,ExpnType(op(1,expn)),ExpnType(op(2,expn)))
    end if
  elif type(expn,'+'') or type(expn,'*') then
    max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
  elif ElementaryFunctionQ(op(0,expn)) then
    max(3,ExpnType(op(1,expn)))
  elif SpecialFunctionQ(op(0,expn)) then
    max(4,apply(max,map(ExpnType,[op(expn)])))
  elif HypergeometricFunctionQ(op(0,expn)) then
    max(5,apply(max,map(ExpnType,[op(expn)])))
  elif AppellFunctionQ(op(0,expn)) then
    max(6,apply(max,map(ExpnType,[op(expn)])))
  elif op(0,expn)='int' then
    max(8,apply(max,map(ExpnType,[op(expn)]))) else
  9

```

```

    end if
end proc:

ElementaryFunctionQ := proc(func)
  member(func, [
    exp, log, ln,
    sin, cos, tan, cot, sec, csc,
    arcsin, arccos, arctan, arccot, arcsec, arccsc,
    sinh, cosh, tanh, coth, sech, csch,
    arcsinh, arccosh, arctanh, arccoth, arcsech, arccsch])
end proc:

SpecialFunctionQ := proc(func)
  member(func, [
    erf, erfc, erfi,
    FresnelS, FresnelC,
    Ei, Ei, Li, Si, Ci, Shi, Chi,
    GAMMA, lnGAMMA, Psi, Zeta, polylog, dilog, LambertW,
    EllipticF, EllipticE, EllipticPi])
end proc:

HypergeometricFunctionQ := proc(func)
  member(func, [Hypergeometric1F1, hypergeom, HypergeometricPFQ])
end proc:

AppellFunctionQ := proc(func)
  member(func, [AppellF1])
end proc:

# u is a sum or product. rest(u) returns all but the
# first term or factor of u.
rest := proc(u) local v;
  if nops(u)=2 then
    op(2,u)
  else
    apply(op(0,u), op(2..nops(u),u))
  end if
end proc:

#leafcount(u) returns the number of nodes in u.

```

```
#Nasser 3/23/17 Replaced by build-in leafCount from package in Maple
leafcount := proc(u)
  MmaTranslator[Mma][LeafCount](u);
end proc;
```

Sympy grading function

```
#Dec 24, 2019. Nasser M. Abbasi:
#      Port of original Maple grading function by
#      Albert Rich to use with Sympy/Python
#Dec 27, 2019 Nasser. Added `RootSum`. See problem 177, Timofeev file
#      added 'exp_polar'
from sympy import *

def leaf_count(expr):
  #sympy do not have leaf count function. This is approximation
  return round(1.7*count_ops(expr))

def is_sqrt(expr):
  if isinstance(expr,Pow):
    if expr.args[1] == Rational(1,2):
      return True
    else:
      return False
  else:
    return False

def is_elementary_function(func):
  return func in [exp,log,ln,sin,cos,tan,cot,sec,csc,
    asin,acos,atan,acot,asec,acsc,sinh,cosh,tanh,coth,sech,csch,
    asinh,acosh,atanh,acoth,asech,acsch
  ]

def is_special_function(func):
  return func in [ erf,erfc,erfi,
    fresnels,fresnelc,Ei,Ei,Li,Si,Ci,Shi,Chi,
    gamma,loggamma,digamma,zeta,polylog,LambertW,
    elliptic_f,elliptic_e,elliptic_pi,exp_polar
  ]
```



```

def is_hypergeometric_function(func):
    return func in [hyper]

def is_appell_function(func):
    return func in [appellf1]

def is_atom(expn):
    try:
        if expn.isAtom or isinstance(expn,int) or isinstance(expn,float):
            return True
        else:
            return False

    except AttributeError as error:
        return False

def expnType(expn):
    debug=False
    if debug:
        print("expn=",expn,"type(expn)=",type(expn))

    if is_atom(expn):
        return 1
    elif isinstance(expn,list):
        return max(map(expnType, expn)) #apply(max,map(ExpnType,expn))
    elif is_sqrt(expn):
        if isinstance(expn.args[0],Rational): #type(op(1,expn),'rational')
            return 1
        else:
            return max(2,expnType(expn.args[0])) #max(2,ExpnType(op(1,expn)))
    elif isinstance(expn,Pow): #type(expn,'^')
        if isinstance(expn.args[1],Integer): #type(op(2,expn),'integer')
            return expnType(expn.args[0]) #ExpnType(op(1,expn))
        elif isinstance(expn.args[1],Rational): #type(op(2,expn),'rational')
            if isinstance(expn.args[0],Rational): #type(op(1,expn),'rational')
                return 1
            else:
                return max(2,expnType(expn.args[0])) #max(2,ExpnType(op(1,expn)))
        else:
            return max(3,expnType(expn.args[0]),expnType(expn.args[1])) #max(3,ExpnType(op(1,expn)),ExpnType(op(2,expn)))
    elif isinstance(expn,Add) or isinstance(expn,Mul): #type(expn,'+') or type(expn,'*')

```

```

    m1 = expnType(expn.args[0])
    m2 = expnType(list(expn.args[1:]))
    return max(m1,m2) #max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
elif is_elementary_function(expn.func): #ElementaryFunctionQ(op(0,expn))
    return max(3,expnType(expn.args[0])) #max(3,ExpnType(op(1,expn)))
elif is_special_function(expn.func): #SpecialFunctionQ(op(0,expn))
    m1 = max(map(expnType, list(expn.args)))
    return max(4,m1) #max(4,apply(max,map(ExpnType,[op(expn)])))
elif is_hypergeometric_function(expn.func): #HypergeometricFunctionQ(op(0,expn))
    m1 = max(map(expnType, list(expn.args)))
    return max(5,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
elif is_appell_function(expn.func):
    m1 = max(map(expnType, list(expn.args)))
    return max(6,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
elif isinstance(expn,RootSum):
    m1 = max(map(expnType, list(expn.args))) #Apply[Max,Append[Map[ExpnType,Apply[List,expn]],7]],
    return max(7,m1)
elif str(expn).find("Integral") != -1:
    m1 = max(map(expnType, list(expn.args)))
    return max(8,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
else:
    return 9

#main function
def grade_antiderivative(result,optimal):

    #print("Enter grade_antiderivative for sagemath")
    #print("Enter grade_antiderivative, result=",result," optimal=",optimal)

    leaf_count_result = leaf_count(result)
    leaf_count_optimal = leaf_count(optimal)

    #print("leaf_count_result=",leaf_count_result)
    #print("leaf_count_optimal=",leaf_count_optimal)

    expnType_result = expnType(result)
    expnType_optimal = expnType(optimal)

    if str(result).find("Integral") != -1:
        grade = "F"
        grade_annotation = ""

```

```

else:
    if expnType_result <= expnType_optimal:
        if result.has(I):
            if optimal.has(I): #both result and optimal complex
                if leaf_count_result <= 2*leaf_count_optimal:
                    grade = "A"
                    grade_annotation = ""
                else:
                    grade = "B"
                    grade_annotation = "Both result and optimal contain complex but leaf count of result is lar
            else: #result contains complex but optimal is not
                grade = "C"
                grade_annotation = "Result contains complex when optimal does not."
        else: # result do not contain complex, this assumes optimal do not as well
            if leaf_count_result <= 2*leaf_count_optimal:
                grade = "A"
                grade_annotation = ""
            else:
                grade = "B"
                grade_annotation = "Leaf count of result is larger than twice the leaf count of optimal. "+str(
        else:
            grade = "C"
            grade_annotation = "Result contains higher order function than in optimal. Order "+str(ExpnType

#print("Before returning. grade=",grade, " grade_annotation=",grade_annotation)

return grade, grade_annotation

```

SageMath grading function

```

#Dec 24, 2019. Nasser: Ported original Maple grading function by
#       Albert Rich to use with Sagemath. This is used to
#       grade Fricas, Giac and Maxima results.
#Dec 24, 2019. Nasser: Added 'exp_integral_e' and 'sng', 'sin_integral'
#       'arctan2', 'floor', 'abs', 'log_integral'
#June 4, 2022 Made default grade_annotation "none" instead of "" due
#       issue later when reading the file.
#July 14, 2022. Added ellipticF. This is until they fix sagemath, then remove it.

```

```

from sage.all import *
from sage.symbolic.operators import add_vararg, mul_vararg

debug=False;

def tree_size(expr):
    r"""
    Return the tree size of this expression.
    """
    #print("Enter tree_size, expr is ",expr)

    if expr not in SR:
        # deal with lists, tuples, vectors
        return 1 + sum(tree_size(a) for a in expr)
    expr = SR(expr)
    x, aa = expr.operator(), expr.operands()
    if x is None:
        return 1
    else:
        return 1 + sum(tree_size(a) for a in aa)

def is_sqrt(expr):
    if expr.operator() == operator.pow: #isinstance(expr,Pow):
        if expr.operands()[1]==1/2: #expr.args[1] == Rational(1,2):
            if debug: print ("expr is sqrt")
            return True
        else:
            return False
    else:
        return False

def is_elementary_function(func):
    #debug=False
    m = func.name() in ['exp','log','ln',
        'sin','cos','tan','cot','sec','csc',
        'arcsin','arccos','arctan','arccot','arcsec','arccsc',
        'sinh','cosh','tanh','coth','sech','csch',
        'arcsinh','arccosh','arctanh','arcoth','arcsech','arcsch','sgn',
        'arctan2','floor','abs'
    ]
    if debug:

```

```

    if m:
        print ("func ", func , " is elementary_function")
    else:
        print ("func ", func , " is NOT elementary_function")

    return m

def is_special_function(func):
    #debug=False
    if debug:
        print ("type(func)=", type(func))

    m= func.name() in ['erf','erfc','erfi','fresnel_sin','fresnel_cos','Ei',
        'Ei','Li','Si','sin_integral','Ci','cos_integral','Shi','sinh_integral',
        'Chi','cosh_integral','gamma','log_gamma','psi','zeta',
        'polylog','lambert_w','elliptic_f','elliptic_e','ellipticF',
        'elliptic_pi','exp_integral_e','log_integral',
        'weierstrassPInverse','weierstrass','weierstrassP','weierstrassZeta',
        'weierstrassPPrime','weierstrassSigma']

    if debug:
        print ("m=",m)
    if m:
        print ("func ", func , " is special_function")
    else:
        print ("func ", func , " is NOT special_function")

    return m

def is_hypergeometric_function(func):
    return func.name() in ['hypergeometric','hypergeometric_M','hypergeometric_U']

def is_appell_function(func):
    return func.name() in ['hypergeometric']  #[appellf1] can't find this in sagemath

def is_atom(expn):

    #debug=False

```

```

if debug:
    print ("Enter is_atom, expn=",expn)

if not hasattr(expn, 'parent'):
    return False

#thanks to answer at https://ask.sagemath.org/question/49179/what-is-sagemath-equivalent-to-atomic
try:
    if expn.parent() is SR:
        return expn.operator() is None
    if expn.parent() in (ZZ, QQ, AA, QQbar):
        return expn in expn.parent() # Should always return True
    if hasattr(expn.parent(),"base_ring") and hasattr(expn.parent(),"gens"):
        return expn in expn.parent().base_ring() or expn in expn.parent().gens()

    return False

except AttributeError as error:
    print ("Exception,AttributeError in is_atom")
    print ("caught exception" , type(error).__name__ )
    return False

def expnType(expn):

    if debug:
        print (">>>>>Enter expnType, expn=", expn)
        print (">>>>>is_atom(expn)=", is_atom(expn))

    if is_atom(expn):
        return 1
    elif type(expn)==list: #instance(expn,list):
        return max(map(expnType, expn)) #apply(max,map(ExpnType,expn))
    elif is_sqrt(expn):
        if type(expn.operands()[0])==Rational: #type(instance(expn.args[0],Rational):
            return 1
        else:
            return max(2,expnType(expn.operands()[0])) #max(2,expnType(expn.args[0]))
    elif expn.operator() == operator.pow: #instance(expn,Pow)
        if type(expn.operands()[1])==Integer: #instance(expn.args[1],Integer)

```

```

    return expnType(expn.operands()[0]) #expnType(expn.args[0])
elif type(expn.operands()[1])==Rational: #isinstance(expn.args[1],Rational)
    if type(expn.operands()[0])==Rational: #isinstance(expn.args[0],Rational)
        return 1
    else:
        return max(2,expnType(expn.operands()[0])) #max(2,expnType(expn.args[0]))
else:
    return max(3,expnType(expn.operands()[0]),expnType(expn.operands()[1])) #max(3,expnType(expn
elif expn.operator() == add_vararg or expn.operator() == mul_vararg: #isinstance(expn,Add) or isins
    m1 = expnType(expn.operands()[0]) #expnType(expn.args[0])
    m2 = expnType(expn.operands()[1:]) #expnType(list(expn.args[1:]))
    return max(m1,m2) #max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
elif is_elementary_function(expn.operator()): #is_elementary_function(expn.func)
    return max(3,expnType(expn.operands()[0]))
elif is_special_function(expn.operator()): #is_special_function(expn.func)
    m1 = max(map(expnType, expn.operands())) #max(map(expnType, list(expn.args)))
    return max(4,m1) #max(4,m1)
elif is_hypergeometric_function(expn.operator()): #is_hypergeometric_function(expn.func)
    m1 = max(map(expnType, expn.operands())) #max(map(expnType, list(expn.args)))
    return max(5,m1) #max(5,m1)
elif is_appell_function(expn.operator()):
    m1 = max(map(expnType, expn.operands())) #max(map(expnType, list(expn.args)))
    return max(6,m1) #max(6,m1)
elif str(expn).find("Integral") != -1: #this will never happen, since it
    #is checked before calling the grading function that is passed.
    #but kept it here.
    m1 = max(map(expnType, expn.operands())) #max(map(expnType, list(expn.args)))
    return max(8,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
else:
    return 9

#main function
def grade_antiderivative(result,optimal):

if debug:
    print ("Enter grade_antiderivative for sagemath")
    print ("Enter grade_antiderivative, result=",result)
    print ("Enter grade_antiderivative, optimal=",optimal)
    print ("type(anti)=", type(result))
    print ("type(optimal)=", type(optimal))

```

```

leaf_count_result = tree_size(result) #leaf_count(result)
leaf_count_optimal = tree_size(optimal) #leaf_count(optimal)

#if debug: print ("leaf_count_result=", leaf_count_result, "leaf_count_optimal=",leaf_count_optimal)

expnType_result = expnType(result)
expnType_optimal = expnType(optimal)

if debug: print ("expnType_result=", expnType_result, "expnType_optimal=",expnType_optimal)

if expnType_result <= expnType_optimal:
    if result.has(I):
        if optimal.has(I): #both result and optimal complex
            if leaf_count_result <= 2*leaf_count_optimal:
                grade = "A"
                grade_annotation = "none"
            else:
                grade = "B"
                grade_annotation = "Both result and optimal contain complex but leaf count of result is larger"
        else: #result contains complex but optimal is not
            grade = "C"
            grade_annotation = "Result contains complex when optimal does not."
    else: # result do not contain complex, this assumes optimal do not as well
        if leaf_count_result <= 2*leaf_count_optimal:
            grade = "A"
            grade_annotation = "none"
        else:
            grade = "B"
            grade_annotation = "Leaf count of result is larger than twice the leaf count of optimal. "+str(leaf_count_result - 2*leaf_count_optimal)
else:
    grade = "C"
    grade_annotation = "Result contains higher order function than in optimal. Order "+str(expnType_result - expnType_optimal)

print("Before returning. grade=",grade, " grade_annotation=",grade_annotation)

return grade, grade_annotation

```


4.2 Links to plain text integration problems used in this report for each CAS

1. Mathematica integration problems as .m file
2. Maple integration problems as .txt file
3. Sagemath integration problems as .sage file
4. Reduce integration problems as .txt file
5. Mupad integration problems as .txt file
6. Sympy integration problems as .py file