

Computer Algebra Independent Integration Tests

Summer 2024

4-Trig-functions/4.2-Cosine/212-4.2.8

Nasser M. Abbasi

May 18, 2024

Compiled on May 18, 2024 at 12:33 Noon

Contents

1	Introduction	3
1.1	Listing of CAS systems tested	4
1.2	Results	5
1.3	Time and leaf size Performance	9
1.4	Performance based on number of rules Rubi used	11
1.5	Performance based on number of steps Rubi used	12
1.6	Solved integrals histogram based on leaf size of result	13
1.7	Solved integrals histogram based on CPU time used	14
1.8	Leaf size vs. CPU time used	15
1.9	list of integrals with no known antiderivative	16
1.10	List of integrals solved by CAS but has no known antiderivative	16
1.11	list of integrals solved by CAS but failed verification	16
1.12	Timing	17
1.13	Verification	17
1.14	Important notes about some of the results	18
1.15	Current tree layout of integration tests	21
1.16	Design of the test system	22
2	detailed summary tables of results	23
2.1	List of integrals sorted by grade for each CAS	24
2.2	Detailed conclusion table per each integral for all CAS systems	28
2.3	Detailed conclusion table specific for Rubi results	34
3	Listing of integrals	35
3.1	$\int \frac{A+B \sin(x)}{a+b \cos(x)} dx$	36
3.2	$\int \frac{A+B \sin(x)}{1+\cos(x)} dx$	43
3.3	$\int \frac{A+B \sin(x)}{1-\cos(x)} dx$	48
3.4	$\int \frac{b+c+\sin(x)}{a+b \cos(x)} dx$	53
3.5	$\int \frac{b+c+\sin(x)}{a-b \cos(x)} dx$	60
3.6	$\int \frac{A+B \tan(x)}{a+b \cos(x)} dx$	67

3.7	$\int \frac{A+B \cot(x)}{a+b \cos(x)} dx$	73
3.8	$\int \frac{A+B \csc(x)}{a+b \cos(x)} dx$	80
3.9	$\int \frac{(c+d \sec(e+fx))^4}{a+b \cos(e+fx)} dx$	87
3.10	$\int \frac{(c+d \sec(e+fx))^3}{a+b \cos(e+fx)} dx$	97
3.11	$\int \frac{(c+d \sec(e+fx))^2}{a+b \cos(e+fx)} dx$	105
3.12	$\int \frac{c+d \sec(e+fx)}{a+b \cos(e+fx)} dx$	113
3.13	$\int \frac{1}{(a+b \cos(e+fx))(c+d \sec(e+fx))} dx$	121
3.14	$\int \frac{1}{(a+b \cos(e+fx))(c+d \sec(e+fx))^2} dx$	130
3.15	$\int \frac{1}{(a+b \cos(e+fx))(c+d \sec(e+fx))^3} dx$	140
3.16	$\int \frac{\sqrt{c+d \sec(e+fx)}}{a+b \cos(e+fx)} dx$	149
3.17	$\int \frac{1}{(a+b \cos(e+fx))\sqrt{c+d \sec(e+fx)}} dx$	156
3.18	$\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{a+b \cos(d+ex)} dx$	162
3.19	$\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^2} dx$	170
3.20	$\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^3} dx$	178
3.21	$\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^4} dx$	188
4	Appendix	200
4.1	Listing of Grading functions	200
4.2	Links to plain text integration problems used in this report for each CAS218	

CHAPTER 1

INTRODUCTION

1.1	Listing of CAS systems tested	4
1.2	Results	5
1.3	Time and leaf size Performance	9
1.4	Performance based on number of rules Rubi used	11
1.5	Performance based on number of steps Rubi used	12
1.6	Solved integrals histogram based on leaf size of result	13
1.7	Solved integrals histogram based on CPU time used	14
1.8	Leaf size vs. CPU time used	15
1.9	list of integrals with no known antiderivative	16
1.10	List of integrals solved by CAS but has no known antiderivative	16
1.11	list of integrals solved by CAS but failed verification	16
1.12	Timing	17
1.13	Verification	17
1.14	Important notes about some of the results	18
1.15	Current tree layout of integration tests	21
1.16	Design of the test system	22

This report gives the result of running the computer algebra independent integration test. The download section in on the main webpage contains links to download the problems in plain text format used for all CAS systems. The number of integrals in this report is [21]. This is test number [212].

1.1 Listing of CAS systems tested

The following are the CAS systems tested:

1. Mathematica 14 (January 9, 2024) on windows 10 pro.
2. Rubi 4.17.3 (Sept 25, 2023) on Mathematica 14 on windows 10m pro.
3. Maple 2024 (March 1, 2024) on windows 10 pro.
4. Maxima 5.47 (June 1, 2023) using Lisp SBCL 2.4.0 on Linux Manjaro 23.1.2 KDE via sagemath 10.3.
5. FriCAS 1.3.10 built with sbcl 2.3.11 (January 10, 2024) on Linux Manjaro 23.1.2 KDE via sagemath 10.3.
6. Giac/Xcas 1.9.0-99 on Linux via sagemath 10.3.
7. Sympy 1.12 using Python 3.11.6 (Nov 14 2023, 09:36:21) [GCC 13.2.1 20230801] on Linux Manjaro 23.1.2 KDE.
8. Mupad using Matlab 2021a with Symbolic Math Toolbox Version 8.7 on windows 10.
9. Reduce CSL rev 6687 (January 9, 2024) on Linux Manjaro 23.1.2 KDE.

Maxima and Fricas and Giac are called using Sagemath. This was done using Sagemath `integrate` command by changing the name of the algorithm to use the different CAS systems.

Sympy was run directly in Python not via sagemath.

Reduce was called directly.

1.2 Results

Important note: A number of problems in this test suite have no antiderivative in closed form. This means the antiderivative of these integrals can not be expressed in terms of elementary, special functions or Hypergeometric2F1 functions. RootSum and RootOf are not allowed. If a CAS returns the above integral unevaluated within the time limit, then the result is counted as passed and assigned an A grade.

However, if CAS times out, then it is assigned an F grade even if the integral is not integrable, as this implies CAS could not determine that the integral is not integrable in the time limit.

If a CAS returns an antiderivative to such an integral, it is assigned an A grade automatically and this special result is listed in the introduction section of each individual test report to make it easy to identify as this can be important result to investigate.

The results given in the table below reflects the above.

System	% solved	% Failed
Rubi	100.00 (21)	0.00 (0)
Mathematica	100.00 (21)	0.00 (0)
Maple	100.00 (21)	0.00 (0)
Mupad	90.48 (19)	9.52 (2)
Giac	90.48 (19)	9.52 (2)
Reduce	90.48 (19)	9.52 (2)
Fricas	85.71 (18)	14.29 (3)
Sympy	28.57 (6)	71.43 (15)
Maxima	9.52 (2)	90.48 (19)

Table 1.1: Percentage solved for each CAS

The table below gives additional break down of the grading of quality of the antiderivatives generated by each CAS. The grading is given using the letters A,B,C and F with A being the best quality. The grading is accomplished by comparing the antiderivative generated with the optimal antiderivatives included in the test suite. The following table describes the meaning of these grades.

grade	description
A	Integral was solved and antiderivative is optimal in quality and leaf size.
B	Integral was solved and antiderivative is optimal in quality but leaf size is larger than twice the optimal antiderivatives leaf size.
C	Integral was solved and antiderivative is non-optimal in quality. This can be due to one or more of the following reasons <ol style="list-style-type: none"> 1. antiderivative contains a hypergeometric function and the optimal antiderivative does not. 2. antiderivative contains a special function and the optimal antiderivative does not. 3. antiderivative contains the imaginary unit and the optimal antiderivative does not.
F	Integral was not solved. Either the integral was returned unevaluated within the time limit, or it timed out, or CAS hanged or crashed or an exception was raised.


Table 1.2: Description of grading applied to integration result

Grading is implemented for all CAS systems. Based on the above, the following table summarizes the grading for this test suite.


System	% A grade	% B grade	% C grade	% F grade
Rubi	100.000	0.000	0.000	0.000
Mathematica	95.238	4.762	0.000	0.000
Maple	85.714	14.286	0.000	0.000
Fricas	57.143	28.571	0.000	14.286
Giac	38.095	52.381	0.000	9.524
Maxima	9.524	0.000	0.000	90.476
Sympy	9.524	19.048	0.000	71.429
Mupad	0.000	90.476	0.000	9.524
Reduce	0.000	90.476	0.000	9.524

Table 1.3: Antiderivative Grade distribution of each CAS

The following is a Bar chart illustration of the data in the above table.

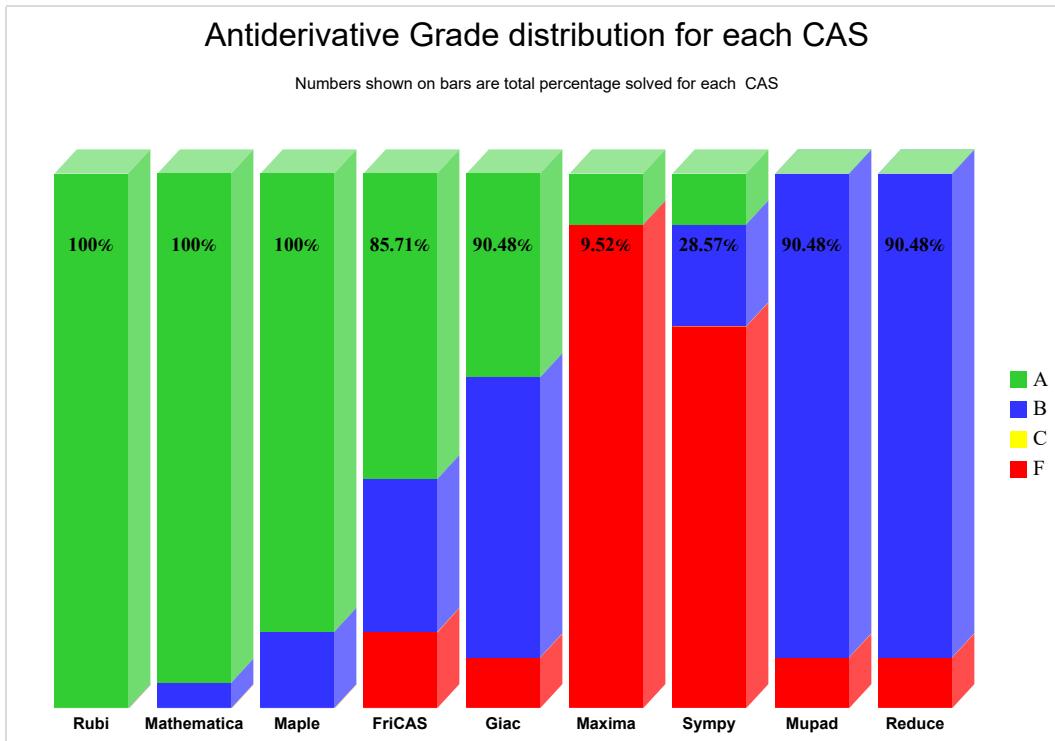

The figure below compares the grades of the CAS systems.

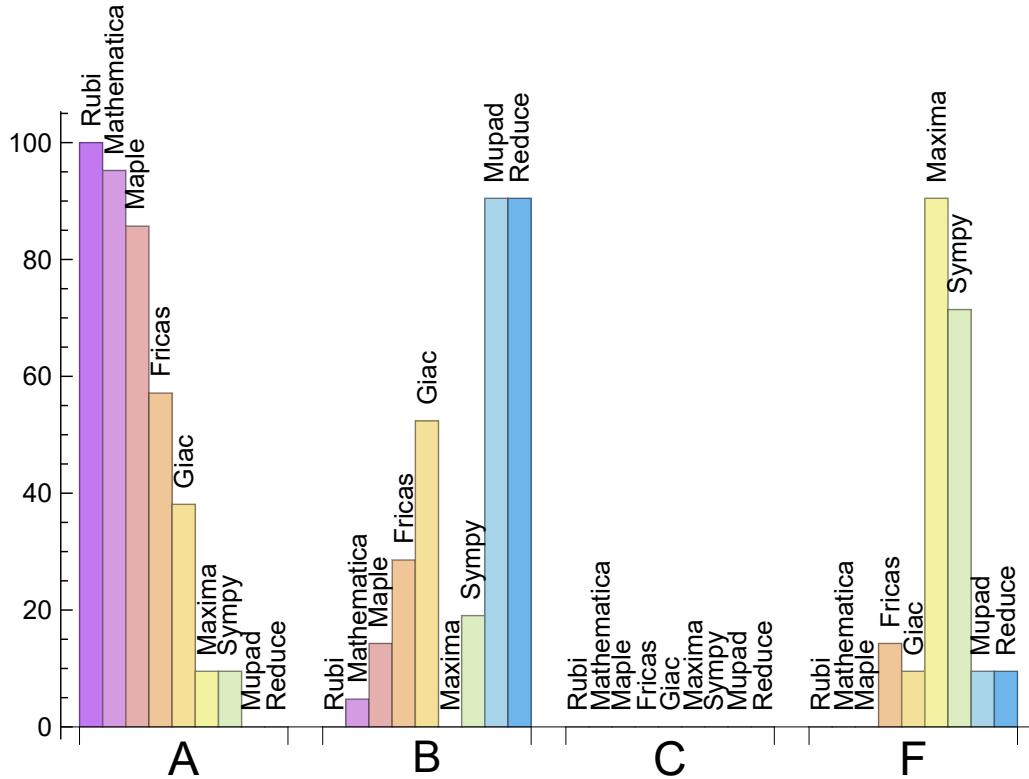

The following table shows the distribution of the different types of failures for each CAS. There are 3 types failures. The first is when CAS returns the input within the time limit, which means it could not solve it. This is the typical failure and given as **F**.

The second failure is due to time out. CAS could not solve the integral within the 3 minutes time limit which is assigned. This is assigned **F(-1)**.

The third is due to an exception generated, indicated as **F(-2)**. This most likely indicates an interface problem between sageMath and the CAS (applicable only to FriCAS, Maxima and Giac) or it could be an indication of an internal error in the CAS itself. This type of error requires more investigation to determine the cause.

System	Number failed	Percentage normal failure	Percentage time-out failure	Percentage exception failure
Rubi	0	0.00	0.00	0.00
Mathematica	0	0.00	0.00	0.00
Maple	0	0.00	0.00	0.00
Mupad	2	0.00	100.00	0.00
Giac	2	100.00	0.00	0.00
Reduce	2	100.00	0.00	0.00
Fricas	3	33.33	66.67	0.00
Sympy	15	80.00	20.00	0.00
Maxima	19	10.53	0.00	89.47

Table 1.4: Failure statistics for each CAS

1.3 Time and leaf size Performance

The table below summarizes the performance of each CAS system in terms of time used and leaf size of results.

Mean size is the average leaf size produced by the CAS (before any normalization). The Normalized mean is relative to the mean size of the optimal anti-derivative given in the input files.

For example, if CAS has **Normalized mean** of 3, then the mean size of its leaf size is 3 times as large as the mean size of the optimal leaf size.

Median size is value of leaf size where half the values are larger than this and half are smaller (before any normalization). i.e. The Middle value.

Similarly the **Normalized median** is relative to the median leaf size of the optimal.

For example, if a CAS has Normalized median of 1.2, then its median is 1.2 as large as the median leaf size of the optimal.

System	Mean time (sec)
Maxima	0.03
Giac	0.16
Reduce	0.18
Rubi	0.58
Maple	1.24
Mathematica	2.40
Mupad	4.04
Sympy	8.93
Fricas	12.13

Table 1.5: Time performance for each CAS

System	Mean size	Normalized mean	Median size	Normalized median
Maxima	19.00	0.91	19.00	0.91
Rubi	139.19	1.03	102.00	1.00
Mathematica	157.19	1.17	116.00	0.98
Maple	186.52	1.40	141.00	1.47
Giac	324.11	2.65	333.00	1.86
Sympy	492.67	8.10	680.00	9.90
Fricas	607.11	4.56	311.00	4.01
Reduce	754.26	3.83	179.00	2.54
Mupad	5601.79	27.31	1537.00	22.02

Table 1.6: Leaf size performance for each CAS

1.4 Performance based on number of rules Rubi used

This section shows how each CAS performed based on the number of rules Rubi needed to solve the same integral. One diagram is given for each CAS.

On the y axis is the percentage solved which Rubi itself needed the number of rules given the x axis. These plots show that as more rules are needed then most CAS system percentage of solving decreases which indicates the integral is becoming more complicated to solve.

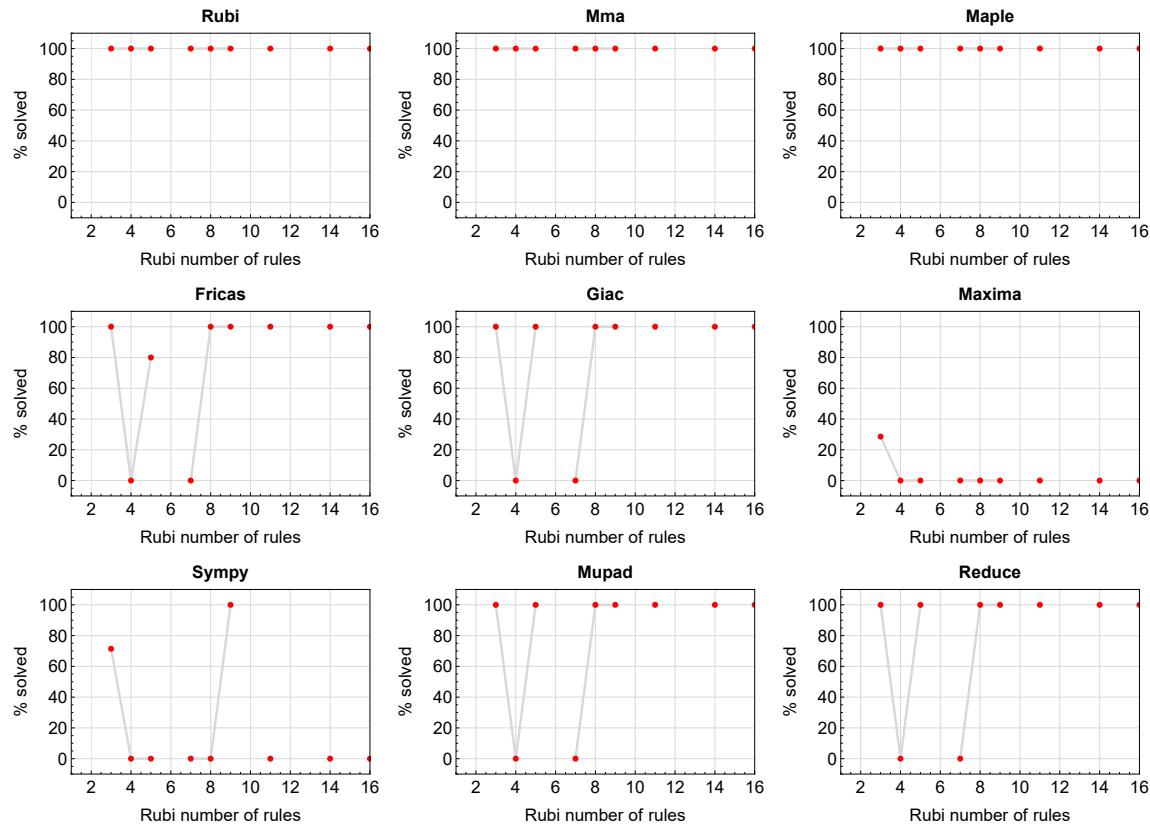


Figure 1.1: Solving statistics per number of Rubi rules used

1.5 Performance based on number of steps Rubi used

This section shows how each CAS performed based on the number of steps Rubi needed to solve the same integral. Note that the number of steps Rubi needed can be much higher than the number of rules, as the same rule could be used more than once.

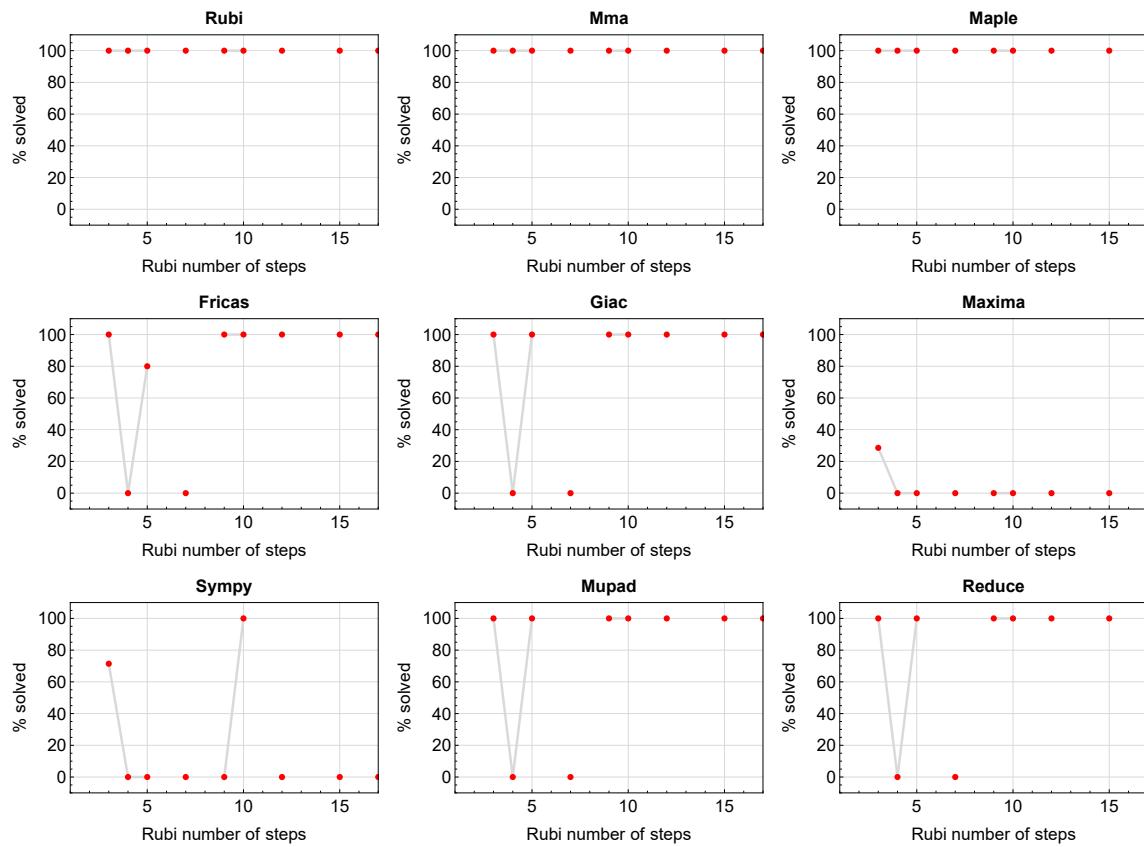


Figure 1.2: Solving statistics per number of Rubi steps used

The above diagram show that the precentage of solved intergals decreases for most CAS systems as the number of steps increases. As expected, for integrals that required less steps by Rubi, CAS systems had more success which indicates the integral was not as hard to solve. As Rubi needed more steps to solve the integral, the solved percentage decreased for most CAS systems which indicates the integral is becoming harder to solve.

1.6 Solved integrals histogram based on leaf size of result

The following shows the distribution of solved integrals for each CAS system based on leaf size of the antiderivatives produced by each CAS. It shows that most integrals solved produced leaf size less than about 100 to 150. The bin size used is 40.

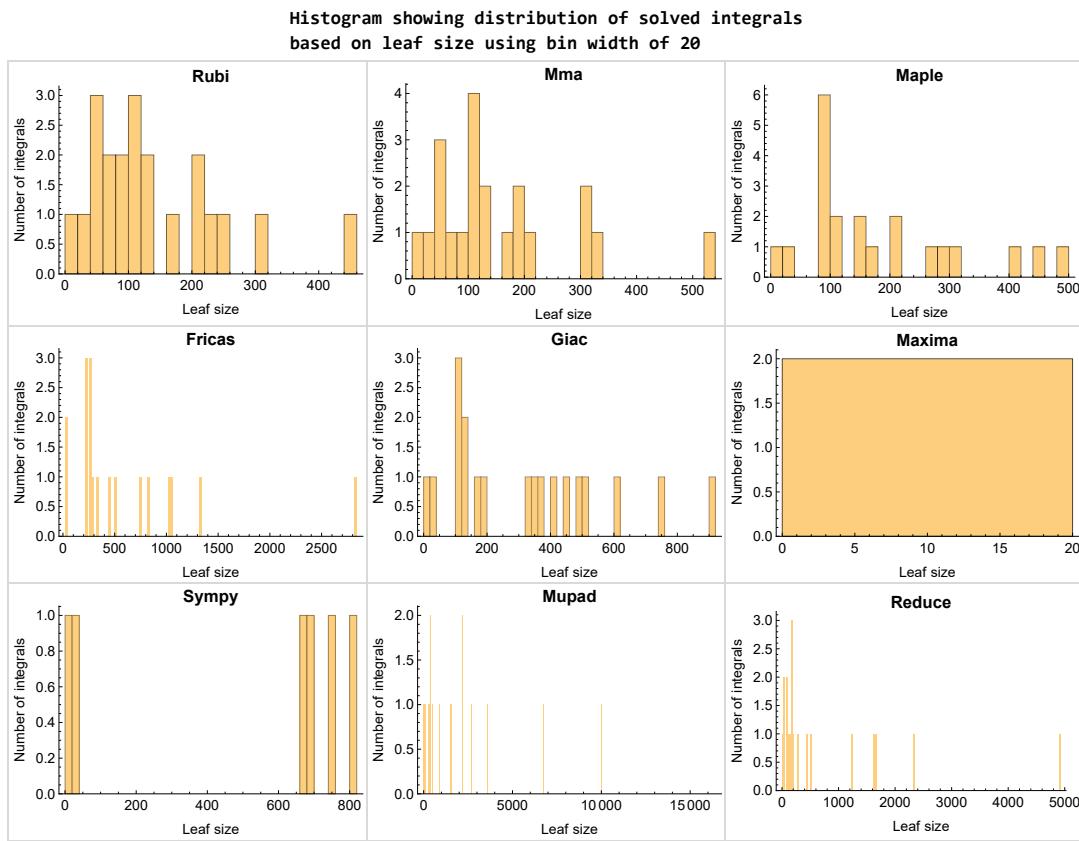


Figure 1.3: Solved integrals based on leaf size distribution

1.7 Solved integrals histogram based on CPU time used

The following shows the distribution of solved integrals for each CAS system based on CPU time used in seconds. The bin size used is 0.1 second.

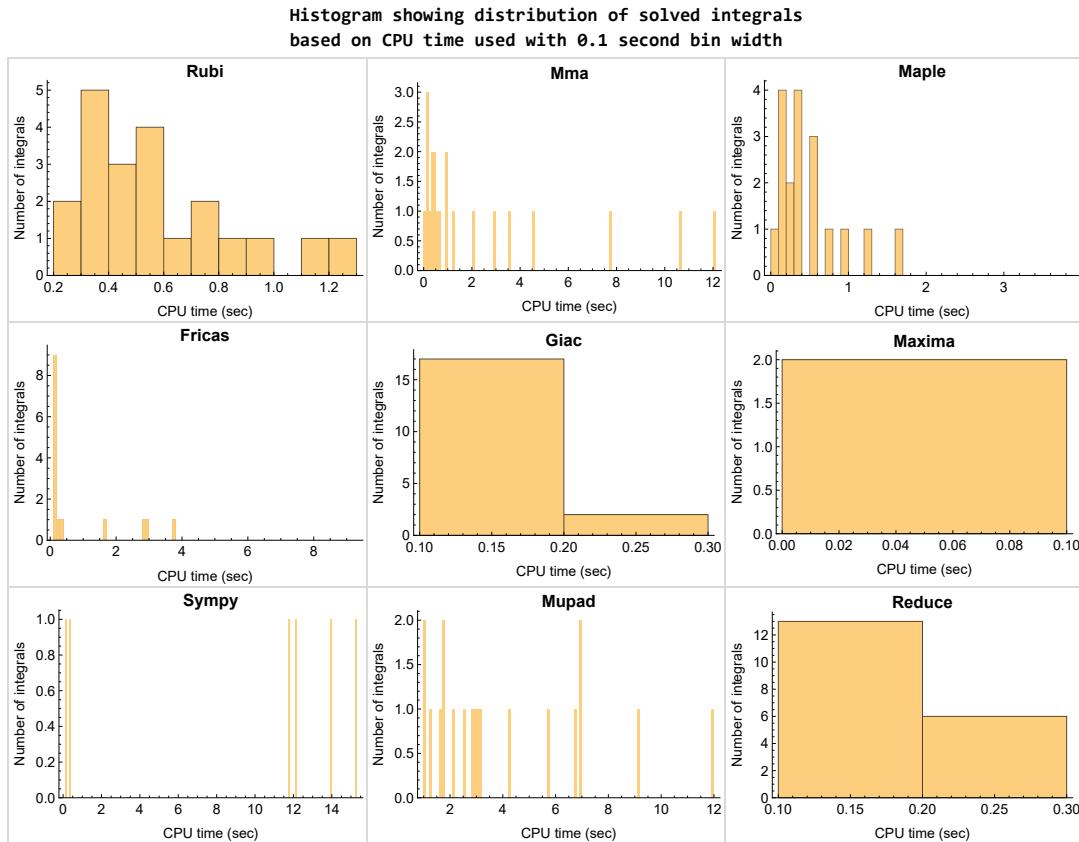


Figure 1.4: Solved integrals histogram based on CPU time used

1.8 Leaf size vs. CPU time used

The following shows the relation between the CPU time used to solve an integral and the leaf size of the antiderivative.

The result for Fricas, Maxima and Giac is shifted more to the right than the other CAS system due to the use of sagemath to call them, which causes an initial slight delay in the timing to start the integration due to overhead of starting a new process each time. This should also be taken into account when looking at the timing of these three CAS systems. Direct calls not using sagemath would result in faster timings, but current implementation uses sagemath as this makes testing much easier to do.

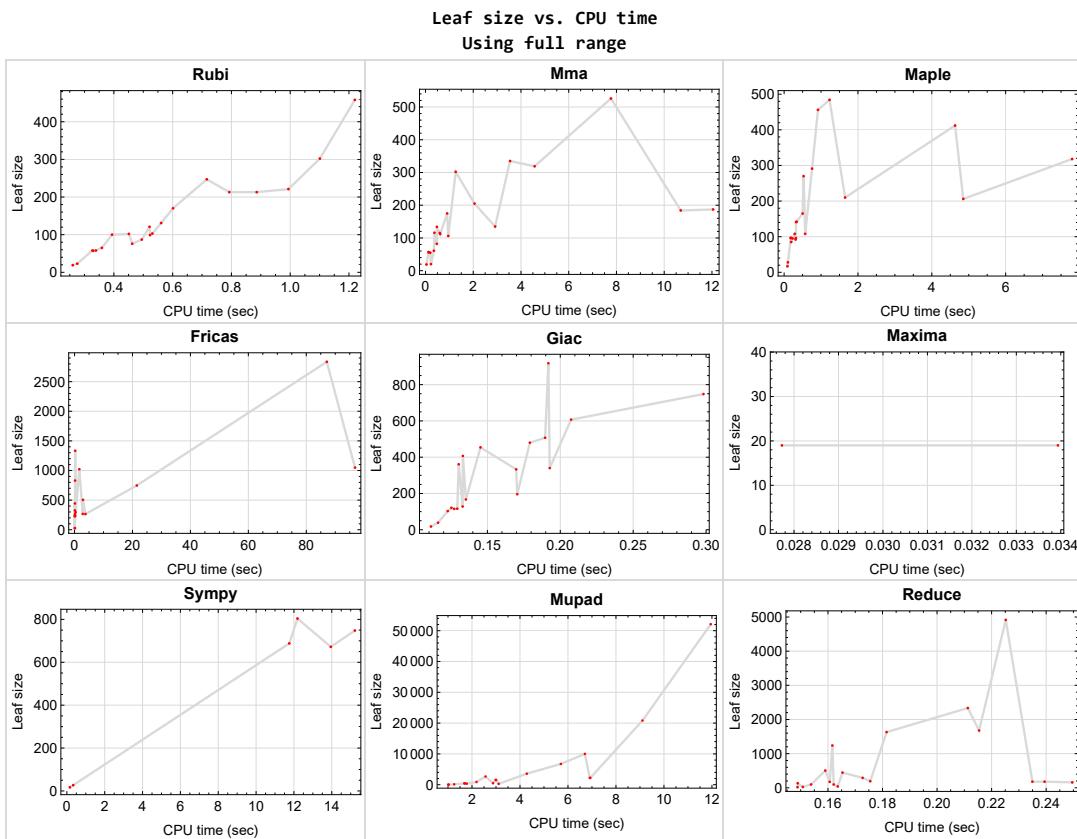


Figure 1.5: Leaf size vs. CPU time. Full range

1.9 list of integrals with no known antiderivative

{}

1.10 List of integrals solved by CAS but has no known antiderivative

Rubi {}

Mathematica {}

Maple {}

Maxima {}

Fricas {}

Sympy {}

Giac {}

Reduce {}

Mupad {}

1.11 list of integrals solved by CAS but failed verification

The following are integrals solved by CAS but the verification phase failed to verify the anti-derivative produced is correct. This does not necessarily mean that the anti-derivative is wrong as additional methods of verification might be needed, or more time is needed (3 minutes time limit was used). These integrals are listed here to make it possible to do further investigation to determine why the result could not be verified.

Rubi {}

Mathematica {17}

Maple {}

Maxima Verification phase not currently implemented.

Fricas Verification phase not currently implemented.

Sympy Verification phase not currently implemented.

Giac Verification phase not currently implemented.

Reduce Verification phase not currently implemented.

Mupad Verification phase not currently implemented.

1.12 Timing

The command `AbsoluteTiming[]` was used in Mathematica to obtain the elapsed time for each `integrate` call. In Maple, the command `Usage` was used as in the following example

```
cpu_time := Usage(assign ('result_of_int', int(expr,x)),output='realtime'
```

For all other CAS systems, the elapsed time to complete each integral was found by taking the difference between the time after the call completed from the time before the call was made. This was done using Python's `time.time()` call.

All elapsed times shown are in seconds. A `time limit` of 3 CPU minutes was used for each integral. If the `integrate` command did not complete within this time limit, the integral was aborted and considered to have failed and assigned an F grade. The time used by failed integrals due to time out was not counted in the final statistics.

1.13 Verification

A verification phase was applied on the result of integration for Rubi and Mathematica.

Future version of this report will implement verification for the other CAS systems. For the integrals whose result was not run through a verification phase, it is assumed that the antiderivative was correct.

Verification phase also had 3 minutes time out. An integral whose result was not verified could still be correct, but further investigation is needed on those integrals. These integrals were marked in the summary table below and also in each integral separate section so they are easy to identify and locate.

1.14 Important notes about some of the results

Important note about Maxima results

Since tests were run in a batch mode, and using an automated script, then any integral where Maxima needed an interactive response from the user to answer a question during the evaluation of the integral will fail.

The exception raised is `ValueError`. Therefore Maxima results is lower than what would result if Maxima was run directly and each question was answered correctly.

The percentage of such failures were not counted for each test file, but for an example, for the `Timofeev` test file, there were about 14 such integrals out of total 705, or about 2 percent. This percentage can be higher or lower depending on the specific input test file.

Such integrals can be identified by looking at the output of the integration in each section for Maxima. The exception message will indicate the cause of error.

Maxima integrate was run using SageMath with the following settings set by default

```
'besselexpand : true'  
'display2d : false'  
'domain : complex'  
'keepfloat : true'  
'load(to_poly_solve)'  
'load(simplify_sum)'  
'load(abs_integrate)' 'load(diag)'
```

SageMath automatic loading of Maxima `abs_integrate` was found to cause some problems. So the following code was added to disable this effect.

```
from sage.interfaces.maxima_lib import maxima_lib  
maxima_lib.set('extra_definite_integration_methods', '[]')  
maxima_lib.set('extra_integration_methods', '[]')
```

See <https://ask.sagemath.org/question/43088/integrate-results-that-are-different-from-using-maxima/> for reference.

Important note about FriCAS result

There were few integrals which failed due to SageMath interface and not because FriCAS system could not do the integration.

These will fail With error `Exception raised: NotImplementedError`.

The number of such cases seems to be very small. About 1 or 2 percent of all integrals. These can be identified by looking at the exception message given in the result.

Important note about finding leaf size of antiderivative

For Mathematica, Rubi, and Maple, the builtin system function `LeafSize` was used to find the leaf size of each antiderivative.

The other CAS systems (SageMath and Sympy) do not have special builtin function for this purpose at this time. Therefore the leaf size for Fricas and Sympy antiderivative was determined using the following function, thanks to user `slelievre` at https://ask.sagemath.org/question/57123/could-we-have-a-leaf_count-function-in-base-sagemath/

```
def tree_size(expr):
    """
    Return the tree size of this expression.
    """
    if expr not in SR:
        # deal with lists, tuples, vectors
        return 1 + sum(tree_size(a) for a in expr)
    expr = SR(expr)
    x, aa = expr.operator(), expr.operands()
    if x is None:
        return 1
    else:
        return 1 + sum(tree_size(a) for a in aa)
```

For Sympy, which was called directly from Python, the following code was used to obtain the leafsize of its result

```
try:  
    # 1.7 is a fudge factor since it is low side from actual leaf count  
    leafCount = round(1.7*count_ops(anti))  
  
except Exception as ee:  
    leafCount = 1
```

Important note about Mupad results

Matlab's symbolic toolbox does not have a leaf count function to measure the size of the antiderivative. Maple was used to determine the leaf size of Mupad output by post processing Mupad result.

Currently no grading of the antiderivative for Mupad is implemented. If it can integrate the problem, it was assigned a B grade automatically as a placeholder. In the future, when grading function is implemented for Mupad, the tests will be rerun again.

The following is an example of using Matlab's symbolic toolbox (Mupad) to solve an integral

```
integrand = evalin(symengine, 'cos(x)*sin(x)')  
the_variable = evalin(symengine, 'x')  
anti = int(integrand, the_variable)
```

Which gives $\sin(x)^2/2$

1.15 Current tree layout of integration tests

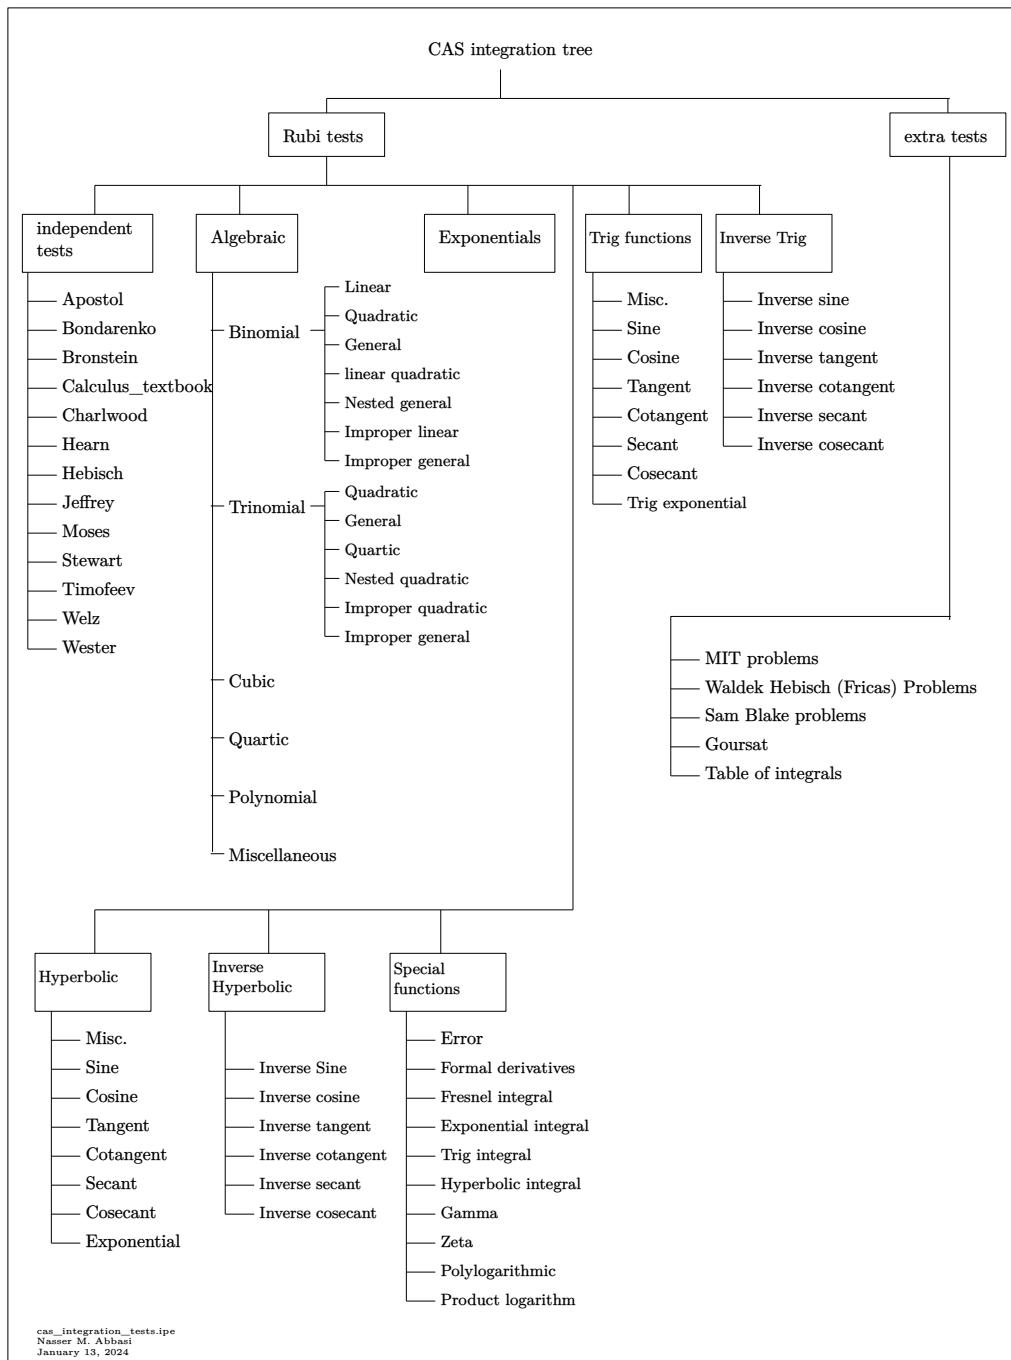


Figure 1.6: CAS integration tests tree

1.16 Design of the test system

The following diagram gives a high level view of the current test build system.



CHAPTER 2

DETAILED SUMMARY TABLES OF RESULTS

2.1	List of integrals sorted by grade for each CAS	24
2.2	Detailed conclusion table per each integral for all CAS systems	28
2.3	Detailed conclusion table specific for Rubi results	34

2.1 List of integrals sorted by grade for each CAS

Rubi	24
Mma	24
Maple	25
Fricas	25
Maxima	25
Giac	26
Mupad	26
Sympy	26
Reduce	27

Rubi

A grade { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 }

B grade { }

C grade { }

F normal fail { }

F(-1) timeout fail { }

F(-2) exception fail { }

Mma

A grade { 1, 2, 3, 4, 5, 6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 }

B grade { 9 }

C grade { }

F normal fail { }

F(-1) timeout fail { }

F(-2) exception fail { }

Maple**A grade** { 2, 3, 4, 5, 6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 18, 19, 20, 21 }**B grade** { 1, 9, 17 }**C grade** { }**F normal fail** { }**F(-1) timeout fail** { }**F(-2) exception fail** { }**Fricas****A grade** { 1, 2, 3, 4, 5, 6, 7, 8, 12, 13, 18, 19 }**B grade** { 9, 10, 11, 14, 20, 21 }**C grade** { }**F normal fail** { 16 }**F(-1) timeout fail** { 15, 17 }**F(-2) exception fail** { }**Maxima****A grade** { 2, 3 }**B grade** { }**C grade** { }**F normal fail** { 16, 17 }**F(-1) timeout fail** { }**F(-2) exception fail** { 1, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 18, 19, 20, 21 }

Giac**A grade** { 2, 3, 7, 8, 12, 14, 15, 19 }**B grade** { 1, 4, 5, 6, 9, 10, 11, 13, 18, 20, 21 }**C grade** { }**F normal fail** { 16, 17 }**F(-1) timeout fail** { }**F(-2) exception fail** { }**Mupad****A grade** { }**B grade** { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 18, 19, 20, 21 }**C grade** { }**F normal fail** { }**F(-1) timeout fail** { 16, 17 }**F(-2) exception fail** { }**Sympy****A grade** { 2, 3 }**B grade** { 1, 4, 5, 18 }**C grade** { }**F normal fail** { 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17 }**F(-1) timeout fail** { 19, 20, 21 }**F(-2) exception fail** { }

Reduce

A grade { }

B grade { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 18, 19, 20, 21 }

C grade { }

F normal fail { 16, 17 }

F(-1) timeout fail { }

F(-2) exception fail { }

2.2 Detailed conclusion table per each integral for all CAS systems

Detailed conclusion table per each integral is given by the table below. The elapsed time is in seconds. For failed result it is given as **F(-1)** if the failure was due to timeout. It is given as **F(-2)** if the failure was due to an exception being raised, which could indicate a bug in the system. If the failure was due to integral not being evaluated within the time limit, then it is given as **F**.

In this table, the column **N.S.** means **normalized size** and is defined as $\frac{\text{antiderivative leaf size}}{\text{optimal antiderivative leaf size}}$. To make the table fit the page, the name **Mathematica** was abbreviated to **MMA**.

Problem 1	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	B	F(-2)	A	B	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	57	57	56	96	0	227	688	361	132	1537
N.S.	1	1.00	0.98	1.68	0.00	3.98	12.07	6.33	2.32	26.96
time (sec)	N/A	0.329	0.132	0.178	0.000	0.126	11.756	0.130	0.149	2.988

Problem 2	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	A	A	A	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	19	19	19	17	19	28	17	18	18	18
N.S.	1	1.00	1.00	0.89	1.00	1.47	0.89	0.95	0.95	0.95
time (sec)	N/A	0.260	0.042	0.090	0.028	0.120	0.158	0.111	0.149	1.006

Problem 3	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	A	A	A	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	23	23	20	28	19	25	27	39	39	30
N.S.	1	1.00	0.87	1.22	0.83	1.09	1.17	1.70	1.70	1.30
time (sec)	N/A	0.275	0.229	0.103	0.034	0.107	0.336	0.116	0.164	1.034

Problem 4	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	B	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	58	58	57	97	0	231	804	407	179	2219
N.S.	1	1.00	0.98	1.67	0.00	3.98	13.86	7.02	3.09	38.26
time (sec)	N/A	0.327	0.129	0.183	0.000	0.156	12.188	0.133	0.235	6.932

Problem 5	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	B	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	58	58	55	85	0	235	748	103	179	2213
N.S.	1	1.00	0.95	1.47	0.00	4.05	12.90	1.78	3.09	38.16
time (sec)	N/A	0.339	0.200	0.192	0.000	0.150	15.220	0.123	0.239	6.908

Problem 6	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	F	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	65	65	61	108	0	263	0	121	159	1540
N.S.	1	1.00	0.94	1.66	0.00	4.05	0.00	1.86	2.45	23.69
time (sec)	N/A	0.359	0.352	0.288	0.000	0.155	0.000	0.125	0.250	3.006

Problem 7	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	F	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	100	100	134	96	0	266	0	116	97	419
N.S.	1	1.00	1.34	0.96	0.00	2.66	0.00	1.16	0.97	4.19
time (sec)	N/A	0.394	0.478	0.319	0.000	2.835	0.000	0.129	0.162	1.703

Problem 8	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	F	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	99	99	116	95	0	265	0	115	97	417
N.S.	1	1.00	1.17	0.96	0.00	2.68	0.00	1.16	0.98	4.21
time (sec)	N/A	0.523	0.375	0.229	0.000	3.774	0.000	0.127	0.154	1.678

Problem 9	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	B	B	F(-2)	B	F	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	247	247	526	484	0	1049	0	607	2335	9992
N.S.	1	1.00	2.13	1.96	0.00	4.25	0.00	2.46	9.45	40.45
time (sec)	N/A	0.716	7.770	1.230	0.000	96.820	0.000	0.207	0.211	6.705

Problem 10	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	B	F	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	170	170	335	291	0	747	0	340	1631	6735
N.S.	1	1.00	1.97	1.71	0.00	4.39	0.00	2.00	9.59	39.62
time (sec)	N/A	0.601	3.542	0.757	0.000	21.484	0.000	0.193	0.181	5.703

Problem 11	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	B	F	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	103	103	135	165	0	505	0	196	445	3577
N.S.	1	1.00	1.31	1.60	0.00	4.90	0.00	1.90	4.32	34.73
time (sec)	N/A	0.531	2.916	0.501	0.000	2.907	0.000	0.170	0.165	4.283

Problem 12	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	F	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	76	76	112	92	0	296	0	128	193	345
N.S.	1	1.00	1.47	1.21	0.00	3.89	0.00	1.68	2.54	4.54
time (sec)	N/A	0.462	0.615	0.310	0.000	0.381	0.000	0.133	0.176	1.781

Problem 13	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	F	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	121	121	106	108	0	1022	0	507	291	2665
N.S.	1	1.00	0.88	0.89	0.00	8.45	0.00	4.19	2.40	22.02
time (sec)	N/A	0.521	0.954	0.571	0.000	1.647	0.000	0.190	0.173	2.565

Problem 14	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	B	F	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	187	221	205	210	0	2835	0	333	1678	20827
N.S.	1	1.18	1.10	1.12	0.00	15.16	0.00	1.78	8.97	111.37
time (sec)	N/A	0.994	2.053	1.652	0.000	87.078	0.000	0.170	0.215	9.106

Problem 15	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	F(-1)	F	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	458	458	319	412	0	0	0	748	4916	52103
N.S.	1	1.00	0.70	0.90	0.00	0.00	0.00	1.63	10.73	113.76
time (sec)	N/A	1.220	4.573	4.630	0.000	0.000	0.000	0.298	0.225	11.950

Problem 16	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F	F	F	F	F	F(-1)
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	213	213	184	318	0	0	0	0	26	0
N.S.	1	1.00	0.86	1.49	0.00	0.00	0.00	0.00	0.12	0.00
time (sec)	N/A	0.886	10.692	7.799	0.000	0.000	0.000	0.000	0.163	0.000

Problem 17	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	B	F	F(-1)	F	F	F	F(-1)
verified	N/A	Yes	No	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	102	102	187	206	0	0	0	0	53	0
N.S.	1	1.00	1.83	2.02	0.00	0.00	0.00	0.00	0.52	0.00
time (sec)	N/A	0.451	12.048	4.852	0.000	0.000	0.000	0.000	0.167	0.000

Problem 18	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	B	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	87	87	82	142	0	326	672	454	26	886
N.S.	1	1.00	0.94	1.63	0.00	3.75	7.72	5.22	0.30	10.18
time (sec)	N/A	0.495	0.473	0.339	0.000	0.118	13.950	0.145	0.151	2.188

Problem 19	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	A	F(-1)	A	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	120	131	115	141	0	444	0	167	173	126
N.S.	1	1.09	0.96	1.18	0.00	3.70	0.00	1.39	1.44	1.05
time (sec)	N/A	0.561	0.598	0.324	0.000	0.119	0.000	0.135	0.161	1.257

Problem 20	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	B	F(-1)	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	187	213	175	270	0	830	0	480	504	283
N.S.	1	1.14	0.94	1.44	0.00	4.44	0.00	2.57	2.70	1.51
time (sec)	N/A	0.793	0.908	0.527	0.000	0.187	0.000	0.179	0.159	3.112

Problem 21	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Reduce	Mupad
grade	N/A	A	A	A	F(-2)	B	F(-1)	B	B	B
verified	N/A	Yes	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	260	302	302	456	0	1334	0	918	1239	502
N.S.	1	1.16	1.16	1.75	0.00	5.13	0.00	3.53	4.77	1.93
time (sec)	N/A	1.101	1.266	0.917	0.000	0.225	0.000	0.192	0.162	2.876

2.3 Detailed conclusion table specific for Rubi results

The following table is specific to Rubi only. It gives additional statistics for each integral. the column **steps** is the number of steps used by Rubi to obtain the antiderivative. The **rules** column is the number of unique rules used. The **integrand size** column is the leaf size of the integrand. Finally the ratio $\frac{\text{number of rules}}{\text{integrand size}}$ is also given. The larger this ratio is, the harder the integral is to solve. In this test file, problem number [21] had the largest ratio of [.51612899999999949]

Table 2.1: Rubi specific breakdown of results for each integral

#	grade	number of steps used	number of unique rules	normalized antiderivative leaf size	integrand leaf size	$\frac{\text{number of rules}}{\text{integrand leaf size}}$
1	A	3	3	1.00	15	0.200
2	A	3	3	1.00	13	0.231
3	A	3	3	1.00	15	0.200
4	A	3	3	1.00	14	0.214
5	A	3	3	1.00	15	0.200
6	A	3	3	1.00	15	0.200
7	A	3	3	1.00	15	0.200
8	A	5	5	1.00	15	0.333
9	A	5	5	1.00	25	0.200
10	A	5	5	1.00	25	0.200
11	A	5	5	1.00	25	0.200
12	A	9	8	1.00	23	0.348
13	A	9	8	1.00	25	0.320
14	A	12	11	1.18	25	0.440
15	A	5	5	1.00	25	0.200
16	A	7	7	1.00	27	0.259
17	A	4	4	1.00	27	0.148
18	A	10	9	1.00	31	0.290
19	A	12	11	1.09	31	0.355
20	A	15	14	1.14	31	0.452
21	A	17	16	1.16	31	0.516

CHAPTER 3

LISTING OF INTEGRALS

3.1	$\int \frac{A+B \sin(x)}{a+b \cos(x)} dx$	36
3.2	$\int \frac{A+B \sin(x)}{1+\cos(x)} dx$	43
3.3	$\int \frac{A+B \sin(x)}{1-\cos(x)} dx$	48
3.4	$\int \frac{b+c+\sin(x)}{a+b \cos(x)} dx$	53
3.5	$\int \frac{b+c+\sin(x)}{a-b \cos(x)} dx$	60
3.6	$\int \frac{A+B \tan(x)}{a+b \cos(x)} dx$	67
3.7	$\int \frac{A+B \cot(x)}{a+b \cos(x)} dx$	73
3.8	$\int \frac{A+B \csc(x)}{a+b \cos(x)} dx$	80
3.9	$\int \frac{(c+d \sec(e+fx))^4}{a+b \cos(e+fx)} dx$	87
3.10	$\int \frac{(c+d \sec(e+fx))^3}{a+b \cos(e+fx)} dx$	97
3.11	$\int \frac{(c+d \sec(e+fx))^2}{a+b \cos(e+fx)} dx$	105
3.12	$\int \frac{c+d \sec(e+fx)}{a+b \cos(e+fx)} dx$	113
3.13	$\int \frac{1}{(a+b \cos(e+fx))(c+d \sec(e+fx))} dx$	121
3.14	$\int \frac{1}{(a+b \cos(e+fx))(c+d \sec(e+fx))^2} dx$	130
3.15	$\int \frac{1}{(a+b \cos(e+fx))(c+d \sec(e+fx))^3} dx$	140
3.16	$\int \frac{\sqrt{c+d \sec(e+fx)}}{a+b \cos(e+fx)} dx$	149
3.17	$\int \frac{1}{(a+b \cos(e+fx))\sqrt{c+d \sec(e+fx)}} dx$	156
3.18	$\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{a+b \cos(d+ex)} dx$	162
3.19	$\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^2} dx$	170
3.20	$\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^3} dx$	178
3.21	$\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^4} dx$	188

3.1 $\int \frac{A+B \sin(x)}{a+b \cos(x)} dx$

Optimal result	36
Mathematica [A] (verified)	36
Rubi [A] (verified)	37
Maple [B] (verified)	38
Fricas [A] (verification not implemented)	38
Sympy [B] (verification not implemented)	39
Maxima [F(-2)]	40
Giac [B] (verification not implemented)	40
Mupad [B] (verification not implemented)	41
Reduce [B] (verification not implemented)	42

Optimal result

Integrand size = 15, antiderivative size = 57

$$\int \frac{A + B \sin(x)}{a + b \cos(x)} dx = \frac{2A \arctan\left(\frac{\sqrt{a-b} \tan(\frac{x}{2})}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}} - \frac{B \log(a + b \cos(x))}{b}$$

output
$$2*A*\arctan((a-b)^{(1/2)}*\tan(1/2*x)/(a+b)^{(1/2)})/(a-b)^{(1/2)}/(a+b)^{(1/2)}-B*1/n(a+b*cos(x))/b$$

Mathematica [A] (verified)

Time = 0.13 (sec) , antiderivative size = 56, normalized size of antiderivative = 0.98

$$\int \frac{A + B \sin(x)}{a + b \cos(x)} dx = -\frac{2A \operatorname{arctanh}\left(\frac{(a-b) \tan(\frac{x}{2})}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} - \frac{B \log(a + b \cos(x))}{b}$$

input
$$\text{Integrate}[(A + B \sin[x])/(a + b \cos[x]), x]$$

output
$$(-2*A*\operatorname{ArcTanh}[((a - b)*\operatorname{Tan}[x/2])/Sqrt[-a^2 + b^2]])/Sqrt[-a^2 + b^2] - (B*\operatorname{Log}[a + b*\cos[x]])/b$$

Rubi [A] (verified)

Time = 0.33 (sec) , antiderivative size = 57, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.200$, Rules used = {3042, 4901, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{A + B \sin(x)}{a + b \cos(x)} dx \\
 & \quad \downarrow \text{3042} \\
 & \int \frac{A + B \sin(x)}{a + b \cos(x)} dx \\
 & \quad \downarrow \text{4901} \\
 & \int \left(\frac{A}{a + b \cos(x)} + \frac{B \sin(x)}{a + b \cos(x)} \right) dx \\
 & \quad \downarrow \text{2009} \\
 & \frac{2A \arctan\left(\frac{\sqrt{a-b} \tan(\frac{x}{2})}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}} - \frac{B \log(a + b \cos(x))}{b}
 \end{aligned}$$

input `Int[(A + B*Sin[x])/(a + b*Cos[x]),x]`

output `(2*A*ArcTan[(Sqrt[a - b]*Tan[x/2])/Sqrt[a + b]])/(Sqrt[a - b]*Sqrt[a + b]) - (B*Log[a + b*Cos[x]])/b`

Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 4901 $\text{Int}[u_, x_Symbol] \rightarrow \text{With}[\{v = \text{ExpandTrig}[u, x]\}, \text{Int}[v, x] /; \text{SumQ}[v]\} /; \text{!InertTrigFreeQ}[u]$

Maple [B] (verified)

Leaf count of result is larger than twice the leaf count of optimal. 95 vs. $2(47) = 94$.

Time = 0.18 (sec), antiderivative size = 96, normalized size of antiderivative = 1.68

method	result
default	$\frac{\frac{2(-Ba+Bb) \ln \left(a \tan \left(\frac{x}{2}\right)^2-b \tan \left(\frac{x}{2}\right)^2+a+b\right)}{2 a-2 b}}{b}+\frac{2 A b \arctan \left(\frac{(a-b) \tan \left(\frac{x}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{\sqrt{(a-b)(a+b)}}+\frac{B \ln \left(1+\tan \left(\frac{x}{2}\right)^2\right)}{b}$
risch	$-\frac{i B x}{b}+\frac{2 i B x a^2 b}{b^2 a^2-b^4}-\frac{2 i B x b^3}{b^2 a^2-b^4}-\frac{\ln \left(e^{i x}+\frac{A a b-i \sqrt{-A^2 a^2 b^2+A^2 b^4}}{A b^2}\right) B a^2}{(a^2-b^2) b}+\frac{b \ln \left(e^{i x}+\frac{A a b-i \sqrt{-A^2 a^2 b^2+A^2 b^4}}{A b^2}\right) B}{a^2-b^2}+\frac{\ln \left(e^{i x}\right)}{b}$

input $\text{int}((A+B \sin(x))/(a+b \cos(x)), x, \text{method}=\text{_RETURNVERBOSE})$

output
$$\begin{aligned} & 2/b*(1/2*(-B*a+B*b)/(a-b)*\ln(a*\tan(1/2*x)^2-b*\tan(1/2*x)^2+a+b)+A*b/((a-b) \\ & *(a+b))^(1/2)*\arctan((a-b)*\tan(1/2*x)/((a-b)*(a+b))^(1/2)))+B/b*\ln(1+\tan(1 \\ & /2*x)^2) \end{aligned}$$

Fricas [A] (verification not implemented)

Time = 0.13 (sec), antiderivative size = 227, normalized size of antiderivative = 3.98

$$\begin{aligned} & \int \frac{A + B \sin(x)}{a + b \cos(x)} dx \\ &= \left[-\frac{\sqrt{-a^2 + b^2} Ab \log \left(\frac{2 ab \cos(x) + (2 a^2 - b^2) \cos(x)^2 + 2 \sqrt{-a^2 + b^2} (a \cos(x) + b) \sin(x) - a^2 + 2 b^2}{b^2 \cos(x)^2 + 2 ab \cos(x) + a^2} \right) + (Ba^2 - Bb^2) \log(b^2 \cos(x)^2 + 2 ab \cos(x) + a^2)}{2 (a^2 b - b^3)} \right] \end{aligned}$$

input $\text{integrate}((A+B \sin(x))/(a+b \cos(x)), x, \text{algorithm}=\text{"fricas"})$

output

```
[-1/2*(sqrt(-a^2 + b^2)*A*b*log((2*a*b*cos(x) + (2*a^2 - b^2)*cos(x)^2 + 2 *sqrt(-a^2 + b^2)*(a*cos(x) + b)*sin(x) - a^2 + 2*b^2)/(b^2*cos(x)^2 + 2*a *b*cos(x) + a^2)) + (B*a^2 - B*b^2)*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2))/(a^2*b - b^3), 1/2*(2*sqrt(a^2 - b^2)*A*b*arctan(-(a*cos(x) + b)/(sqrt(a ^2 - b^2)*sin(x))) - (B*a^2 - B*b^2)*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2))/(a^2*b - b^3)]
```

Sympy [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 688 vs. $2(48) = 96$.

Time = 11.76 (sec) , antiderivative size = 688, normalized size of antiderivative = 12.07

$$\int \frac{A + B \sin(x)}{a + b \cos(x)} dx = \text{Too large to display}$$

input

```
integrate((A+B*sin(x))/(a+b*cos(x)),x)
```

output

```
Piecewise((zoo*(-A*log(tan(x/2) - 1) + A*log(tan(x/2) + 1) - B*log(tan(x/2 ) - 1) - B*log(tan(x/2) + 1) + B*log(tan(x/2)**2 + 1)), Eq(a, 0) & Eq(b, 0 )), (A*tan(x/2)/b + B*log(tan(x/2)**2 + 1)/b, Eq(a, b)), (A/(b*tan(x/2)) + B*log(tan(x/2)**2 + 1)/b - 2*B*log(tan(x/2))/b, Eq(a, -b)), ((A*x - B*cos(x))/a, Eq(b, 0)), (A*b*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b *sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) - A*b*log(sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) - B*a*sqrt(-a/(a - b) - b/(a - b ))*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) - B*a*sqrt(-a/(a - b) - b/(a - b))*log(sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) + B*a*sqrt(-a/(a - b) - b/(a - b))*log(tan(x/2)**2 + 1)/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))), True))
```

Maxima [F(-2)]

Exception generated.

$$\int \frac{A + B \sin(x)}{a + b \cos(x)} dx = \text{Exception raised: ValueError}$$

input `integrate((A+B*sin(x))/(a+b*cos(x)),x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more de

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 361 vs. $2(47) = 94$.

Time = 0.13 (sec) , antiderivative size = 361, normalized size of antiderivative = 6.33

$$\begin{aligned} \int \frac{A + B \sin(x)}{a + b \cos(x)} dx = & -\frac{B(a + b)(a - b)^2 \log \left(\tan \left(\frac{1}{2}x \right)^2 + \frac{2a + \sqrt{-4(a+b)(a-b)+4a^2}}{2(a-b)} \right)}{(a^2 - 2ab + b^2)b^2 + (a^3 - 2a^2b + ab^2)|b|} \\ & + \frac{(\sqrt{a^2 - b^2}Ab|a - b| + \sqrt{a^2 - b^2}A|a - b||b|) \left(\pi \left\lfloor \frac{x}{2\pi} + \frac{1}{2} \right\rfloor + \arctan \left(\frac{2\sqrt{\frac{1}{2}} \tan(\frac{1}{2}x)}{\sqrt{\frac{2a + \sqrt{-4(a+b)(a-b)+4a^2}}{a-b}}} \right) \right)}{(a^2 - 2ab + b^2)b^2 + (a^3 - 2a^2b + ab^2)|b|} \\ & + \frac{(Ab - A|b|) \left(\pi \left\lfloor \frac{x}{2\pi} + \frac{1}{2} \right\rfloor + \arctan \left(\frac{2\sqrt{\frac{1}{2}} \tan(\frac{1}{2}x)}{\sqrt{\frac{2a - \sqrt{-4(a+b)(a-b)+4a^2}}{a-b}}} \right) \right)}{b^2 - a|b|} \\ & - \frac{(Ba - Bb) \log \left(\tan \left(\frac{1}{2}x \right)^2 + \frac{2a - \sqrt{-4(a+b)(a-b)+4a^2}}{2(a-b)} \right)}{b^2 - a|b|} \end{aligned}$$

input `integrate((A+B*sin(x))/(a+b*cos(x)),x, algorithm="giac")`

output

$$\begin{aligned} & -B*(a + b)*(a - b)^2*\log(\tan(1/2*x)^2 + 1/2*(2*a + \sqrt{-4*(a + b)*(a - b) + 4*a^2}))/((a^2 - 2*a*b + b^2)*b^2 + (a^3 - 2*a^2*b + a*b^2)*\text{abs}(b)) + (\sqrt{a^2 - b^2}*A*b*\text{abs}(a - b) + \sqrt{a^2 - b^2}*A*\text{abs}(a - b)*\text{abs}(b))*(\pi*\text{floor}(1/2*x/\pi + 1/2) + \arctan(2*\sqrt{1/2}*\tan(1/2*x)/\sqrt{(2*a + \sqrt{-4*(a + b)*(a - b) + 4*a^2})/(a - b)}))/((a^2 - 2*a*b + b^2)*b^2 + (a^3 - 2*a^2*b + a*b^2)*\text{abs}(b)) + (A*b - A*\text{abs}(b))*(\pi*\text{floor}(1/2*x/\pi + 1/2) + \arctan(2*\sqrt{1/2}*\tan(1/2*x)/\sqrt{(2*a - \sqrt{-4*(a + b)*(a - b) + 4*a^2})/(a - b)}))/((b^2 - a*\text{abs}(b)) - (B*a - B*b)*\log(\tan(1/2*x)^2 + 1/2*(2*a - \sqrt{-4*(a + b)*(a - b) + 4*a^2}))/((a - b)/(b^2 - a*\text{abs}(b))) \end{aligned}$$

Mupad [B] (verification not implemented)

Time = 2.99 (sec) , antiderivative size = 1537, normalized size of antiderivative = 26.96

$$\int \frac{A + B \sin(x)}{a + b \cos(x)} dx = \text{Too large to display}$$

input `int((A + B*sin(x))/(a + b*cos(x)),x)`

```

output (B*log(1/(cos(x) + 1)))/b - (log((a + b*cos(x))/(cos(x) + 1))*(2*B*b^3 - 2*B*a^2*b))/((2*(b^4 - a^2*b^2)) - (2*A*atan(((a^2 - b^2)*((A*(64*A*B*b^3 + ((2*B*b^3 - 2*B*a^2*b)*(32*A*b^4 + 32*A*a^2*b^2 - 64*A*a*b^3)))/(2*(b^4 - a^2*b^2)) - 128*A*B*a*b^2 + 64*A*B*a^2*b)))/(a^2 - b^2)^(1/2) + (A*(2*B*b^3 - 2*B*a^2*b)*(32*A*b^4 + 32*A*a^2*b^2 - 64*A*a*b^3))/(2*(b^4 - a^2*b^2)^(1/2)))*(A^2*b^2 - 4*B^2*a^2 + 4*B^2*b^2))/((32*A*a - 32*A*b)*(a - b)*(A^2*b^2 + 4*B^2*a^2 - 4*B^2*b^2)^2) - (tan(x/2)*(a^2 - b^2)^(3/2)*(((A^3*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(a^2 - b^2)^(3/2) + (((A*(64*B*b^4 + 64*B*a^2*b^2 - 128*B*a*b^3 - ((2*B*b^3 - 2*B*a^2*b)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))))/(a^2 - b^2)^(1/2) - (A*(2*B*b^3 - 2*B*a^2*b)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))^(1/2))*((2*B*b^3 - 2*B*a^2*b)/(2*(b^4 - a^2*b^2))) + (A*(32*A^2*b^3 + 64*B^2*a^3 - 32*A^2*a*b^2 + 64*B^2*a*b^2 - 128*B^2*a^2*b + ((2*B*b^3 - 2*B*a^2*b)*(64*B*b^4 + 64*B*a^2*b^2 - 128*B*a*b^3 - ((2*B*b^3 - 2*B*a^2*b)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2)))))/(2*(b^4 - a^2*b^2))^(1/2))*((A^2*b^2 - 4*B^2*a^2 + 4*B^2*b^2))/(((a^2 - b^2)^(1/2)*(a - b)*(A^2*b^2 + 4*B^2*a^2 - 4*B^2*b^2)^2) - (4*A*B*b*(64*B^3*a^2 + 64*B^3*b^2 - 32*A^2*B*b^2 + (A*((A*(64*B*b^4 + 64*B*a^2*b^2 - 128*B*a*b^3 - ((2*B*b^3 - 2*B*a^2*b)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))))/(2*(b^4 - a^2*b^2))^(1/2) - (A*(2*B*b^3 - 2*B*a^2*b)*(...
```

Reduce [B] (verification not implemented)

Time = 0.15 (sec) , antiderivative size = 132, normalized size of antiderivative = 2.32

$$\int \frac{A + B \sin(x)}{a + b \cos(x)} dx = \frac{2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan(\frac{x}{2})a - \tan(\frac{x}{2})b}{\sqrt{a^2 - b^2}}\right) a + \log\left(\tan\left(\frac{x}{2}\right)^2 + 1\right) a^2 - \log\left(\tan\left(\frac{x}{2}\right)^2 + 1\right) b^2 - \log\left(\tan\left(\frac{x}{2}\right)^2 a - \tan\left(\frac{x}{2}\right)^2 b\right) b^2}{a^2 - b^2}$$

input `int((A+B*sin(x))/(a+b*cos(x)),x)`

```

output (2*sqrt(a**2 - b**2)*atan((tan(x/2)*a - tan(x/2)*b)/sqrt(a**2 - b**2)))*a +
log(tan(x/2)**2 + 1)*a**2 - log(tan(x/2)**2 + 1)*b**2 - log(tan(x/2)**2*a -
tan(x/2)**2*b + a + b)*a**2 + log(tan(x/2)**2*a - tan(x/2)**2*b + a + b
)*b**2)/(a**2 - b**2)

```

3.2 $\int \frac{A+B \sin(x)}{1+\cos(x)} dx$

Optimal result	43
Mathematica [A] (verified)	43
Rubi [A] (verified)	44
Maple [A] (verified)	45
Fricas [A] (verification not implemented)	45
Sympy [A] (verification not implemented)	46
Maxima [A] (verification not implemented)	46
Giac [A] (verification not implemented)	46
Mupad [B] (verification not implemented)	47
Reduce [B] (verification not implemented)	47

Optimal result

Integrand size = 13, antiderivative size = 19

$$\int \frac{A + B \sin(x)}{1 + \cos(x)} dx = -B \log(1 + \cos(x)) + \frac{A \sin(x)}{1 + \cos(x)}$$

output -B*ln(1+cos(x))+A*sin(x)/(1+cos(x))

Mathematica [A] (verified)

Time = 0.04 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.00

$$\int \frac{A + B \sin(x)}{1 + \cos(x)} dx = -2B \log \left(\cos \left(\frac{x}{2} \right) \right) + A \tan \left(\frac{x}{2} \right)$$

input Integrate[(A + B*Sin[x])/(1 + Cos[x]),x]

output -2*B*Log[Cos[x/2]] + A*Tan[x/2]

Rubi [A] (verified)

Time = 0.26 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.231$, Rules used = {3042, 4901, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{A + B \sin(x)}{\cos(x) + 1} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{A + B \sin(x)}{\cos(x) + 1} dx \\
 & \quad \downarrow \textcolor{blue}{4901} \\
 & \int \left(\frac{A}{\cos(x) + 1} + \frac{B \sin(x)}{\cos(x) + 1} \right) dx \\
 & \quad \downarrow \textcolor{blue}{2009} \\
 & \frac{A \sin(x)}{\cos(x) + 1} - B \log(\cos(x) + 1)
 \end{aligned}$$

input `Int[(A + B*Sin[x])/(1 + Cos[x]),x]`

output `-(B*Log[1 + Cos[x]]) + (A*Sin[x])/(1 + Cos[x])`

Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 4901 $\text{Int}[u_, x_\text{Symbol}] \rightarrow \text{With}[\{v = \text{ExpandTrig}[u, x]\}, \text{Int}[v, x] /; \text{SumQ}[v]\} /;$
 $\text{!InertTrigFreeQ}[u]$

Maple [A] (verified)

Time = 0.09 (sec) , antiderivative size = 17, normalized size of antiderivative = 0.89

method	result	size
parallelisch	$A \tan\left(\frac{x}{2}\right) + B \ln\left(\sec\left(\frac{x}{2}\right)^2\right)$	17
default	$A \tan\left(\frac{x}{2}\right) + B \ln\left(1 + \tan\left(\frac{x}{2}\right)^2\right)$	19
norman	$A \tan\left(\frac{x}{2}\right) + B \ln\left(1 + \tan\left(\frac{x}{2}\right)^2\right)$	19
risch	$iBx + \frac{2iA}{e^{ix}+1} - 2B \ln(e^{ix} + 1)$	31

input `int((A+B*sin(x))/(1+cos(x)),x,method=_RETURNVERBOSE)`

output `A*tan(1/2*x)+B*ln(sec(1/2*x)^2)`

Fricas [A] (verification not implemented)

Time = 0.12 (sec) , antiderivative size = 28, normalized size of antiderivative = 1.47

$$\int \frac{A + B \sin(x)}{1 + \cos(x)} dx = -\frac{(B \cos(x) + B) \log\left(\frac{1}{2} \cos(x) + \frac{1}{2}\right) - A \sin(x)}{\cos(x) + 1}$$

input `integrate((A+B*sin(x))/(1+cos(x)),x, algorithm="fricas")`

output `-((B*cos(x) + B)*log(1/2*cos(x) + 1/2) - A*sin(x))/(cos(x) + 1)`

Sympy [A] (verification not implemented)

Time = 0.16 (sec) , antiderivative size = 17, normalized size of antiderivative = 0.89

$$\int \frac{A + B \sin(x)}{1 + \cos(x)} dx = A \tan\left(\frac{x}{2}\right) + B \log\left(\tan^2\left(\frac{x}{2}\right) + 1\right)$$

input `integrate((A+B*sin(x))/(1+cos(x)),x)`

output `A*tan(x/2) + B*log(tan(x/2)**2 + 1)`

Maxima [A] (verification not implemented)

Time = 0.03 (sec) , antiderivative size = 19, normalized size of antiderivative = 1.00

$$\int \frac{A + B \sin(x)}{1 + \cos(x)} dx = -B \log(\cos(x) + 1) + \frac{A \sin(x)}{\cos(x) + 1}$$

input `integrate((A+B*sin(x))/(1+cos(x)),x, algorithm="maxima")`

output `-B*log(cos(x) + 1) + A*sin(x)/(cos(x) + 1)`

Giac [A] (verification not implemented)

Time = 0.11 (sec) , antiderivative size = 18, normalized size of antiderivative = 0.95

$$\int \frac{A + B \sin(x)}{1 + \cos(x)} dx = B \log\left(\tan\left(\frac{1}{2}x\right)^2 + 1\right) + A \tan\left(\frac{1}{2}x\right)$$

input `integrate((A+B*sin(x))/(1+cos(x)),x, algorithm="giac")`

output `B*log(tan(1/2*x)^2 + 1) + A*tan(1/2*x)`

Mupad [B] (verification not implemented)

Time = 1.01 (sec) , antiderivative size = 18, normalized size of antiderivative = 0.95

$$\int \frac{A + B \sin(x)}{1 + \cos(x)} dx = B \ln \left(\tan \left(\frac{x}{2} \right)^2 + 1 \right) + A \tan \left(\frac{x}{2} \right)$$

input `int((A + B*sin(x))/(cos(x) + 1),x)`

output `B*log(tan(x/2)^2 + 1) + A*tan(x/2)`

Reduce [B] (verification not implemented)

Time = 0.15 (sec) , antiderivative size = 18, normalized size of antiderivative = 0.95

$$\int \frac{A + B \sin(x)}{1 + \cos(x)} dx = \log \left(\tan \left(\frac{x}{2} \right)^2 + 1 \right) b + \tan \left(\frac{x}{2} \right) a$$

input `int((A+B*sin(x))/(1+cos(x)),x)`

output `log(tan(x/2)**2 + 1)*b + tan(x/2)*a`

3.3 $\int \frac{A+B \sin(x)}{1-\cos(x)} dx$

Optimal result	48
Mathematica [A] (verified)	48
Rubi [A] (verified)	49
Maple [A] (verified)	50
Fricas [A] (verification not implemented)	50
Sympy [A] (verification not implemented)	51
Maxima [A] (verification not implemented)	51
Giac [A] (verification not implemented)	51
Mupad [B] (verification not implemented)	52
Reduce [B] (verification not implemented)	52

Optimal result

Integrand size = 15, antiderivative size = 23

$$\int \frac{A + B \sin(x)}{1 - \cos(x)} dx = B \log(1 - \cos(x)) - \frac{A \sin(x)}{1 - \cos(x)}$$

output B*ln(1-cos(x))-A*sin(x)/(1-cos(x))

Mathematica [A] (verified)

Time = 0.23 (sec) , antiderivative size = 20, normalized size of antiderivative = 0.87

$$\int \frac{A + B \sin(x)}{1 - \cos(x)} dx = -A \cot\left(\frac{x}{2}\right) + 2B \log\left(\sin\left(\frac{x}{2}\right)\right)$$

input Integrate[(A + B*Sin[x])/(1 - Cos[x]),x]

output -(A*Cot[x/2]) + 2*B*Log[Sin[x/2]]

Rubi [A] (verified)

Time = 0.28 (sec) , antiderivative size = 23, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.200$, Rules used = {3042, 4901, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{A + B \sin(x)}{1 - \cos(x)} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{A + B \sin(x)}{1 - \cos(x)} dx \\
 & \quad \downarrow \textcolor{blue}{4901} \\
 & \int \left(-\frac{A}{\cos(x) - 1} - \frac{B \sin(x)}{\cos(x) - 1} \right) dx \\
 & \quad \downarrow \textcolor{blue}{2009} \\
 & B \log(1 - \cos(x)) - \frac{A \sin(x)}{1 - \cos(x)}
 \end{aligned}$$

input `Int[(A + B*Sin[x])/(1 - Cos[x]),x]`

output `B*Log[1 - Cos[x]] - (A*Sin[x])/(1 - Cos[x])`

Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 4901 $\text{Int}[u_, x_\text{Symbol}] \rightarrow \text{With}[\{v = \text{ExpandTrig}[u, x]\}, \text{Int}[v, x] /; \text{SumQ}[v]\} /;$
 $\text{!InertTrigFreeQ}[u]$

Maple [A] (verified)

Time = 0.10 (sec) , antiderivative size = 28, normalized size of antiderivative = 1.22

method	result	size
parallelrisch	$B \left(2 \ln \left(\tan \left(\frac{x}{2} \right) \right) - \ln \left(\sec \left(\frac{x}{2} \right)^2 \right) \right) - \cot \left(\frac{x}{2} \right) A$	28
default	$-\frac{A}{\tan \left(\frac{x}{2} \right)} + 2B \ln \left(\tan \left(\frac{x}{2} \right) \right) - B \ln \left(1 + \tan \left(\frac{x}{2} \right)^2 \right)$	31
risch	$-iBx - \frac{2iA}{e^{ix}-1} + 2B \ln (e^{ix} - 1)$	31
norman	$\frac{-A - A \tan \left(\frac{x}{2} \right)^2}{\left(1 + \tan \left(\frac{x}{2} \right)^2 \right) \tan \left(\frac{x}{2} \right)} + 2B \ln \left(\tan \left(\frac{x}{2} \right) \right) - B \ln \left(1 + \tan \left(\frac{x}{2} \right)^2 \right)$	52

input $\text{int}((A+B \sin(x))/(1-\cos(x)), x, \text{method}=\text{_RETURNVERBOSE})$

output $B*(2*\ln(\tan(1/2*x))-ln(\sec(1/2*x)^2))-\cot(1/2*x)*A$

Fricas [A] (verification not implemented)

Time = 0.11 (sec) , antiderivative size = 25, normalized size of antiderivative = 1.09

$$\int \frac{A + B \sin(x)}{1 - \cos(x)} dx = \frac{B \log \left(-\frac{1}{2} \cos(x) + \frac{1}{2} \right) \sin(x) - A \cos(x) - A}{\sin(x)}$$

input $\text{integrate}((A+B \sin(x))/(1-\cos(x)), x, \text{algorithm}=\text{"fricas"})$

output $(B*\log(-1/2*cos(x) + 1/2)*sin(x) - A*cos(x) - A)/sin(x)$

Sympy [A] (verification not implemented)

Time = 0.34 (sec) , antiderivative size = 27, normalized size of antiderivative = 1.17

$$\int \frac{A + B \sin(x)}{1 - \cos(x)} dx = -\frac{A}{\tan(\frac{x}{2})} - B \log\left(\tan^2\left(\frac{x}{2}\right) + 1\right) + 2B \log\left(\tan\left(\frac{x}{2}\right)\right)$$

input `integrate((A+B*sin(x))/(1-cos(x)),x)`

output `-A/tan(x/2) - B*log(tan(x/2)**2 + 1) + 2*B*log(tan(x/2))`

Maxima [A] (verification not implemented)

Time = 0.03 (sec) , antiderivative size = 19, normalized size of antiderivative = 0.83

$$\int \frac{A + B \sin(x)}{1 - \cos(x)} dx = B \log(\cos(x) - 1) - \frac{A(\cos(x) + 1)}{\sin(x)}$$

input `integrate((A+B*sin(x))/(1-cos(x)),x, algorithm="maxima")`

output `B*log(cos(x) - 1) - A*(cos(x) + 1)/sin(x)`

Giac [A] (verification not implemented)

Time = 0.12 (sec) , antiderivative size = 39, normalized size of antiderivative = 1.70

$$\begin{aligned} \int \frac{A + B \sin(x)}{1 - \cos(x)} dx &= -B \log\left(\tan\left(\frac{1}{2}x\right)^2 + 1\right) \\ &\quad + 2B \log\left(\left|\tan\left(\frac{1}{2}x\right)\right|\right) - \frac{2B \tan\left(\frac{1}{2}x\right) + A}{\tan\left(\frac{1}{2}x\right)} \end{aligned}$$

input `integrate((A+B*sin(x))/(1-cos(x)),x, algorithm="giac")`

output `-B*log(tan(1/2*x)^2 + 1) + 2*B*log(abs(tan(1/2*x))) - (2*B*tan(1/2*x) + A)/tan(1/2*x)`

Mupad [B] (verification not implemented)

Time = 1.03 (sec) , antiderivative size = 30, normalized size of antiderivative = 1.30

$$\int \frac{A + B \sin(x)}{1 - \cos(x)} dx = 2 B \ln \left(\tan \left(\frac{x}{2} \right) \right) - \frac{A}{\tan \left(\frac{x}{2} \right)} - B \ln \left(\tan \left(\frac{x}{2} \right)^2 + 1 \right)$$

input `int(-(A + B*sin(x))/(cos(x) - 1),x)`

output `2*B*log(tan(x/2)) - A/tan(x/2) - B*log(tan(x/2)^2 + 1)`

Reduce [B] (verification not implemented)

Time = 0.16 (sec) , antiderivative size = 39, normalized size of antiderivative = 1.70

$$\int \frac{A + B \sin(x)}{1 - \cos(x)} dx = \frac{-\log \left(\tan \left(\frac{x}{2} \right)^2 + 1 \right) \tan \left(\frac{x}{2} \right) b + 2 \log \left(\tan \left(\frac{x}{2} \right) \right) \tan \left(\frac{x}{2} \right) b - a}{\tan \left(\frac{x}{2} \right)}$$

input `int((A+B*sin(x))/(1-cos(x)),x)`

output `(- log(tan(x/2)**2 + 1)*tan(x/2)*b + 2*log(tan(x/2))*tan(x/2)*b - a)/tan(x/2)`

3.4 $\int \frac{b+c+\sin(x)}{a+b\cos(x)} dx$

Optimal result	53
Mathematica [A] (verified)	53
Rubi [A] (verified)	54
Maple [A] (verified)	55
Fricas [A] (verification not implemented)	55
Sympy [B] (verification not implemented)	56
Maxima [F(-2)]	57
Giac [B] (verification not implemented)	57
Mupad [B] (verification not implemented)	58
Reduce [B] (verification not implemented)	59

Optimal result

Integrand size = 14, antiderivative size = 58

$$\int \frac{b+c+\sin(x)}{a+b\cos(x)} dx = \frac{2(b+c) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{x}{2})}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}} - \frac{\log(a+b\cos(x))}{b}$$

output
$$2*(b+c)*\operatorname{arctan}((a-b)^{(1/2)}*\tan(1/2*x)/(a+b)^{(1/2)})/(a-b)^{(1/2)}/(a+b)^{(1/2)} - \ln(a+b*\cos(x))/b$$

Mathematica [A] (verified)

Time = 0.13 (sec) , antiderivative size = 57, normalized size of antiderivative = 0.98

$$\int \frac{b+c+\sin(x)}{a+b\cos(x)} dx = -\frac{2(b+c)\operatorname{arctanh}\left(\frac{(a-b)\tan(\frac{x}{2})}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} - \frac{\log(a+b\cos(x))}{b}$$

input
$$\operatorname{Integrate}[(b + c + \operatorname{Sin}[x])/(a + b*\operatorname{Cos}[x]), x]$$

output
$$(-2*(b + c)*\operatorname{ArcTanh[((a - b)*\operatorname{Tan}[x/2])/Sqrt[-a^2 + b^2]])/Sqrt[-a^2 + b^2] - \operatorname{Log}[a + b*\operatorname{Cos}[x]]/b$$

Rubi [A] (verified)

Time = 0.33 (sec) , antiderivative size = 58, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.214$, Rules used = {3042, 4901, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{b + c + \sin(x)}{a + b \cos(x)} dx \\
 & \quad \downarrow \text{3042} \\
 & \int \frac{b + c + \sin(x)}{a + b \cos(x)} dx \\
 & \quad \downarrow \text{4901} \\
 & \int \left(\frac{b + c}{a + b \cos(x)} + \frac{\sin(x)}{a + b \cos(x)} \right) dx \\
 & \quad \downarrow \text{2009} \\
 & \frac{2(b + c) \arctan \left(\frac{\sqrt{a - b} \tan(\frac{x}{2})}{\sqrt{a + b}} \right)}{\sqrt{a - b} \sqrt{a + b}} - \frac{\log(a + b \cos(x))}{b}
 \end{aligned}$$

input `Int[(b + c + Sin[x])/(a + b*Cos[x]), x]`

output `(2*(b + c)*ArcTan[(Sqrt[a - b]*Tan[x/2])/Sqrt[a + b]])/(Sqrt[a - b]*Sqrt[a + b]) - Log[a + b*Cos[x]]/b`

Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 4901 $\text{Int}[u_, x_{\text{Symbol}}] \rightarrow \text{With}[\{v = \text{ExpandTrig}[u, x]\}, \text{Int}[v, x] /; \text{SumQ}[v]\} /;$
 $\text{!InertTrigFreeQ}[u]$

Maple [A] (verified)

Time = 0.18 (sec) , antiderivative size = 97, normalized size of antiderivative = 1.67

method	result
default	$\frac{\frac{2(-a+b) \ln \left(a \tan \left(\frac{x}{2}\right)^2-b \tan \left(\frac{x}{2}\right)^2+a+b\right)}{2 a-2 b}+\frac{2 \left(b^2+c b\right) \arctan \left(\frac{(a-b) \tan \left(\frac{x}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{\sqrt{(a-b)(a+b)}}+\frac{\ln \left(1+\tan \left(\frac{x}{2}\right)^2\right)}{b}}$
risch	$-\frac{i x}{b}+\frac{2 i x a^2 b}{b^2 a^2-b^4}-\frac{2 i x b^3}{b^2 a^2-b^4}-\frac{\ln \left(\frac{e^{i x}-a b^2-c a b+i \sqrt{-a^2 b^4-2 b^3 a^2 c-b^2 a^2 c^2+b^6+2 b^5 c+b^4 c^2}}{b^2 (b+c)}\right) a^2}{(a^2-b^2) b}+\frac{b \ln \left(\frac{e^{i x}-a b^2-c a b+i \sqrt{-a^2 b^4-2 b^3 a^2 c-b^2 a^2 c^2+b^6+2 b^5 c+b^4 c^2}}{b^2 (b+c)}\right)}{b}$

input $\text{int}((b+c+\sin(x))/(a+b*\cos(x)),x,\text{method}=\text{_RETURNVERBOSE})$

output
$$\frac{2/b*(1/2*(-a+b)/(a-b)*\ln(a*tan(1/2*x)^2-b*tan(1/2*x)^2+a+b)+(b^2+b*c)/((a-b)*(a+b))^(1/2)*\arctan((a-b)*\tan(1/2*x)/((a-b)*(a+b))^(1/2))+1/b*\ln(1+\tan(1/2*x)^2)}$$

Fricas [A] (verification not implemented)

Time = 0.16 (sec) , antiderivative size = 231, normalized size of antiderivative = 3.98

$$\begin{aligned} & \int \frac{b + c + \sin(x)}{a + b \cos(x)} dx \\ &= \left[-\frac{\sqrt{-a^2 + b^2} (b^2 + bc) \log \left(\frac{2 ab \cos(x) + (2 a^2 - b^2) \cos(x)^2 + 2 \sqrt{-a^2 + b^2} (a \cos(x) + b) \sin(x) - a^2 + 2 b^2}{b^2 \cos(x)^2 + 2 ab \cos(x) + a^2} \right) + (a^2 - b^2) \log(b^2 c)}{2 (a^2 b - b^3)} \right] \end{aligned}$$

input $\text{integrate}((b+c+\sin(x))/(a+b*\cos(x)),x, \text{algorithm}=\text{"fricas"})$

output

```
[-1/2*(sqrt(-a^2 + b^2)*(b^2 + b*c)*log((2*a*b*cos(x) + (2*a^2 - b^2)*cos(x)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(x) + b)*sin(x) - a^2 + 2*b^2)/(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2)) + (a^2 - b^2)*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2))/(a^2*b - b^3), 1/2*(2*sqrt(a^2 - b^2)*(b^2 + b*c)*arctan(-(a*cos(x) + b)/(sqrt(a^2 - b^2)*sin(x))) - (a^2 - b^2)*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2))/(a^2*b - b^3)]
```

Sympy [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 804 vs. $2(49) = 98$.

Time = 12.19 (sec) , antiderivative size = 804, normalized size of antiderivative = 13.86

$$\int \frac{b + c + \sin(x)}{a + b \cos(x)} dx = \text{Too large to display}$$

input

```
integrate((b+c+sin(x))/(a+b*cos(x)),x)
```

output

```
Piecewise((-c*log(tan(x/2) - 1) + c*log(tan(x/2) + 1) - log(tan(x/2) - 1) - log(tan(x/2) + 1) + log(tan(x/2)**2 + 1), Eq(a, 0) & Eq(b, 0)), (tan(x/2) + c*tan(x/2)/b + log(tan(x/2)**2 + 1)/b, Eq(a, b)), (1/tan(x/2) + c/(b*tan(x/2)) + log(tan(x/2)**2 + 1)/b - 2*log(tan(x/2))/b, Eq(a, -b)), ((c*x - cos(x))/a, Eq(b, 0)), (-a*sqrt(-a/(a - b) - b/(a - b)))*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) - a*sqrt(-a/(a - b) - b/(a - b))*log(sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b)) + a*sqrt(-a/(a - b) - b/(a - b))*log(tan(x/2)**2 + 1)/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) + b**2*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) - b**2*log(sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) + b*c*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) - b*c*log(sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) + b*sqrt(-a/(a - b) - b/(a - b))*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b))) + b*sqrt(-a/(a - b) - b/(a - b))*log(sqrt(-a/(a - b) - b/(a - b)) + tan(x/2))/(a*b*sqrt(-a/(a - b) - b/(a - b)) - b**2*sqrt(-a/(a - b) - b/(a - b)))
```

Maxima [F(-2)]

Exception generated.

$$\int \frac{b + c + \sin(x)}{a + b \cos(x)} dx = \text{Exception raised: ValueError}$$

input `integrate((b+c+sin(x))/(a+b*cos(x)),x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more de

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 407 vs. $2(48) = 96$.

Time = 0.13 (sec) , antiderivative size = 407, normalized size of antiderivative = 7.02

$$\begin{aligned} \int \frac{b + c + \sin(x)}{a + b \cos(x)} dx = & -\frac{(a + b)(a - b)^2 \log \left(\tan \left(\frac{1}{2} x \right)^2 + \frac{2a + \sqrt{-4(a+b)(a-b)+4a^2}}{2(a-b)} \right)}{(a^2 - 2ab + b^2)b^2 + (a^3 - 2a^2b + ab^2)|b|} \\ & + \frac{(\sqrt{a^2 - b^2}b^2|a - b| + \sqrt{a^2 - b^2}bc|a - b| + \sqrt{a^2 - b^2}b|a - b||b| + \sqrt{a^2 - b^2}c|a - b||b|) \left(\pi \left\lfloor \frac{x}{2\pi} + \frac{1}{2} \right\rfloor + \arctan \left(\frac{2\sqrt{\frac{1}{2}} \tan \left(\frac{1}{2} x \right)}{\sqrt{\frac{2a - \sqrt{-4(a+b)(a-b)+4a^2}}{a-b}}} \right) \right)}{(a^2 - 2ab + b^2)b^2 + (a^3 - 2a^2b + ab^2)|b|} \\ & + \frac{(b^2 + bc - b|b| - c|b|) \left(\pi \left\lfloor \frac{x}{2\pi} + \frac{1}{2} \right\rfloor + \arctan \left(\frac{2\sqrt{\frac{1}{2}} \tan \left(\frac{1}{2} x \right)}{\sqrt{\frac{2a - \sqrt{-4(a+b)(a-b)+4a^2}}{a-b}}} \right) \right)}{b^2 - a|b|} \\ & - \frac{(a - b) \log \left(\tan \left(\frac{1}{2} x \right)^2 + \frac{2a - \sqrt{-4(a+b)(a-b)+4a^2}}{2(a-b)} \right)}{b^2 - a|b|} \end{aligned}$$

input `integrate((b+c+sin(x))/(a+b*cos(x)),x, algorithm="giac")`

output

$$\begin{aligned} & -(a + b)*(a - b)^2*\log(\tan(1/2*x)^2 + 1/2*(2*a + \sqrt{-4*(a + b)*(a - b) + 4*a^2})/(a - b))/((a^2 - 2*a*b + b^2)*b^2 + (a^3 - 2*a^2*b + a*b^2)*\text{abs}(b)) + (\sqrt{a^2 - b^2})*b^2*\text{abs}(a - b) + \sqrt{a^2 - b^2})*b*c*\text{abs}(a - b) + \sqrt{a^2 - b^2})*b*\text{abs}(a - b)*\text{abs}(b) + \sqrt{a^2 - b^2})*c*\text{abs}(a - b)*\text{abs}(b))*(\pi*\text{floor}(1/2*x/\pi + 1/2) + \arctan(2*\sqrt{1/2}*\tan(1/2*x)/\sqrt{(2*a + \sqrt{-4*(a + b)*(a - b) + 4*a^2})/(a - b)}))/((a^2 - 2*a*b + b^2)*b^2 + (a^3 - 2*a^2*b + a*b^2)*\text{abs}(b)) + (b^2 + b*c - b*\text{abs}(b) - c*\text{abs}(b))*(\pi*\text{floor}(1/2*x/\pi + 1/2) + \arctan(2*\sqrt{1/2}*\tan(1/2*x)/\sqrt{(2*a - \sqrt{-4*(a + b)*(a - b) + 4*a^2})/(a - b)}))/((b^2 - a*\text{abs}(b)) - (a - b)*\log(\tan(1/2*x)^2 + 1/2*(2*a - \sqrt{-4*(a + b)*(a - b) + 4*a^2})/(a - b))/(b^2 - a*\text{abs}(b))) \end{aligned}$$

Mupad [B] (verification not implemented)

Time = 6.93 (sec), antiderivative size = 2219, normalized size of antiderivative = 38.26

$$\int \frac{b + c + \sin(x)}{a + b \cos(x)} dx = \text{Too large to display}$$

input `int((b + c + sin(x))/(a + b*cos(x)),x)`

output

```

log(tan(x/2)^2 + 1)/b - (2*atan((tan(x/2)*((4*b*(b + c)*(32*a*b^3 - 128*a*b - 64*b^3*c + 64*a^2 + 64*b^2 - 32*b^4 - 32*b^2*c^2 + ((b + c)*((b + c)*(64*b^4 - 128*a*b^3 + 64*a^2*b^2 + ((2*a^2*b - 2*b^3)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))))/(a^2 - b^2)^(1/2) + ((2*a^2*b - 2*b^3)*(b + c)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2)*(a^2 - b^2)^(1/2)))/(a^2 - b^2)^(1/2) + ((2*a^2*b - 2*b^3)*(64*a*b^2 - 128*a^2*b - 32*a*b^4 + 64*b^4*c + 64*a^3 + 32*b^5 + 32*b^3*c^2 - ((2*a^2*b - 2*b^3)*(64*b^4 - 128*a*b^3 + 64*a^2*b^2 + ((2*a^2*b - 2*b^3)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))))/(2*(b^4 - a^2*b^2)) - 32*a*b^2*c^2 - 64*a*b^3*c)/(2*(b^4 - a^2*b^2)) + 32*a*b*c^2 + 64*a*b^2*c + ((2*a^2*b - 2*b^3)*(b + c)^2*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2)*(a^2 - b^2))) /((a - b)*(2*b^3*c + 4*a^2 - 4*b^2 + b^4 + b^2*c^2)^2) - (((b + c)^3*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(a^2 - b^2)^(3/2) - ((2*a^2*b - 2*b^3)*(((b + c)*(64*b^4 - 128*a*b^3 + 64*a^2*b^2 + ((2*a^2*b - 2*b^3)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))))/(a^2 - b^2)^(1/2) + ((2*a^2*b - 2*b^3)*(b + c)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))) /((a^2 - b^2)^(1/2) + ((2*a^2*b - 2*b^3)*(b + c)*(64*a*b^2 - 128*a^2*b - 32*a*b^4 + 64*b^4*c + 64*a^3 + 32*b^5 + 32*b^3*c^2 - ((2*a^2*b - 2*b^3)*(64*b^4 - 128*a*b^3 + 64*a^2*b^2 + ((2*a^2*b - 2*b^3)*(64*a*b^4 - 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))))/(2*(b^4 - a^2*b^2))...

```

Reduce [B] (verification not implemented)

Time = 0.23 (sec), antiderivative size = 179, normalized size of antiderivative = 3.09

$$\begin{aligned}
 & \int \frac{b+c+\sin(x)}{a+b\cos(x)} dx \\
 &= \frac{2\sqrt{a^2-b^2} \operatorname{atan}\left(\frac{\tan(\frac{x}{2})a-\tan(\frac{x}{2})b}{\sqrt{a^2-b^2}}\right) b^2 + 2\sqrt{a^2-b^2} \operatorname{atan}\left(\frac{\tan(\frac{x}{2})a-\tan(\frac{x}{2})b}{\sqrt{a^2-b^2}}\right) bc + \log\left(\tan\left(\frac{x}{2}\right)^2 + 1\right) a^2 - \log\left(b(a^2-b^2)\right)}{a^2-b^2}
 \end{aligned}$$

input

```
int((b+c+sin(x))/(a+b*cos(x)),x)
```

output

```

(2*sqrt(a**2 - b**2)*atan((tan(x/2)*a - tan(x/2)*b)/sqrt(a**2 - b**2))*b**2 + 2*sqrt(a**2 - b**2)*atan((tan(x/2)*a - tan(x/2)*b)/sqrt(a**2 - b**2))*b*c + log(tan(x/2)**2 + 1)*a**2 - log(tan(x/2)**2 + 1)*b**2 - log(tan(x/2)**2*a - tan(x/2)**2*b + a + b)*a**2 + log(tan(x/2)**2*a - tan(x/2)**2*b + a + b)*b**2)/(b*(a**2 - b**2))

```

$$3.5 \quad \int \frac{b+c+\sin(x)}{a-b\cos(x)} dx$$

Optimal result	60
Mathematica [A] (verified)	60
Rubi [A] (verified)	61
Maple [A] (verified)	62
Fricas [A] (verification not implemented)	62
Sympy [B] (verification not implemented)	63
Maxima [F(-2)]	64
Giac [B] (verification not implemented)	64
Mupad [B] (verification not implemented)	65
Reduce [B] (verification not implemented)	65

Optimal result

Integrand size = 15, antiderivative size = 58

$$\int \frac{b+c+\sin(x)}{a-b\cos(x)} dx = \frac{2(b+c) \arctan\left(\frac{\sqrt{a+b}\tan(\frac{x}{2})}{\sqrt{a-b}}\right)}{\sqrt{a-b}\sqrt{a+b}} + \frac{\log(a-b\cos(x))}{b}$$

output
$$2*(b+c)*\operatorname{arctan}((a+b)^(1/2)*\tan(1/2*x)/(a-b)^(1/2))/(a-b)^(1/2)/(a+b)^(1/2) + \ln(a-b*\cos(x))/b$$

Mathematica [A] (verified)

Time = 0.20 (sec) , antiderivative size = 55, normalized size of antiderivative = 0.95

$$\int \frac{b+c+\sin(x)}{a-b\cos(x)} dx = -\frac{2(b+c)\operatorname{arctanh}\left(\frac{(a+b)\tan(\frac{x}{2})}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} + \frac{\log(a-b\cos(x))}{b}$$

input
$$\operatorname{Integrate}[(b+c+\operatorname{Sin}[x])/(a-b*\operatorname{Cos}[x]),x]$$

output
$$(-2*(b+c)*\operatorname{ArcTanh[((a+b)*\operatorname{Tan}[x/2])/Sqrt[-a^2+b^2]])/Sqrt[-a^2+b^2] + \operatorname{Log}[a-b*\operatorname{Cos}[x]]/b$$

Rubi [A] (verified)

Time = 0.34 (sec) , antiderivative size = 58, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.200$, Rules used = {3042, 4901, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{b + c + \sin(x)}{a - b \cos(x)} dx \\
 & \quad \downarrow \text{3042} \\
 & \int \frac{b + c + \sin(x)}{a - b \cos(x)} dx \\
 & \quad \downarrow \text{4901} \\
 & \int \left(\frac{-b - c}{b \cos(x) - a} + \frac{\sin(x)}{a - b \cos(x)} \right) dx \\
 & \quad \downarrow \text{2009} \\
 & \frac{2(b + c) \arctan \left(\frac{\sqrt{a+b} \tan(\frac{x}{2})}{\sqrt{a-b}} \right)}{\sqrt{a-b}\sqrt{a+b}} + \frac{\log(a - b \cos(x))}{b}
 \end{aligned}$$

input `Int[(b + c + Sin[x])/(a - b*Cos[x]), x]`

output `(2*(b + c)*ArcTan[(Sqrt[a + b]*Tan[x/2])/Sqrt[a - b]])/(Sqrt[a - b]*Sqrt[a + b]) + Log[a - b*Cos[x]]/b`

Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 4901 $\text{Int}[u_, \ x_\text{Symbol}] \rightarrow \text{With}[\{v = \text{ExpandTrig}[u, x]\}, \ \text{Int}[v, x] /; \ \text{SumQ}[v]\} /;$
 $\text{!InertTrigFreeQ}[u]$

Maple [A] (verified)

Time = 0.19 (sec) , antiderivative size = 85, normalized size of antiderivative = 1.47

method	result
default	$-\frac{\ln(1+\tan(\frac{x}{2})^2)}{b} + \frac{\ln(a\tan(\frac{x}{2})^2+b\tan(\frac{x}{2})^2+a-b)+\frac{2(b^2+cb)\arctan\left(\frac{(a+b)\tan(\frac{x}{2})}{\sqrt{(a-b)(a+b)}}\right)}{\sqrt{(a-b)(a+b)}}}{b}$
risch	$\frac{ix}{b} - \frac{2ix a^2 b}{b^2 a^2 - b^4} + \frac{2ix b^3}{b^2 a^2 - b^4} + \frac{\ln\left(\frac{e^{ix} + \frac{-a b^2 - cab + i\sqrt{-a^2 b^4 - 2b^3 a^2 c - b^2 a^2 c^2 + b^6 + 2b^5 c + b^4 c^2}}{b^2 (b+c)}}{a^2}\right) a^2 - b \ln\left(\frac{e^{ix} + \frac{-a b^2 - cab + i\sqrt{-a^2 b^4 - 2b^3 a^2 c - b^2 a^2 c^2 + b^6 + 2b^5 c + b^4 c^2}}{b^2 (b+c)}}{a^2 - b^2}\right) b}{(a^2 - b^2) b}$

input `int((b+c+sin(x))/(a-b*cos(x)),x,method=_RETURNVERBOSE)`

output
$$-1/b*\ln(1+\tan(1/2*x)^2)+2/b*(1/2*\ln(a*\tan(1/2*x)^2+b*\tan(1/2*x)^2+a-b)+(b^2+b*c)/((a-b)*(a+b))^(1/2)*\arctan((a+b)*\tan(1/2*x)/((a-b)*(a+b))^(1/2)))$$

Fricas [A] (verification not implemented)

Time = 0.15 (sec) , antiderivative size = 235, normalized size of antiderivative = 4.05

$$\begin{aligned} & \int \frac{b + c + \sin(x)}{a - b \cos(x)} dx \\ &= \left[-\frac{\sqrt{-a^2 + b^2} (b^2 + bc) \log \left(-\frac{2 ab \cos(x) - (2 a^2 - b^2) \cos(x)^2 - 2 \sqrt{-a^2 + b^2} (a \cos(x) - b) \sin(x) + a^2 - 2 b^2}{b^2 \cos(x)^2 - 2 ab \cos(x) + a^2} \right) - (a^2 - b^2) \log(b^2)}{2 (a^2 b - b^3)} \right] \end{aligned}$$

input `integrate((b+c+sin(x))/(a-b*cos(x)),x, algorithm="fricas")`

output

```
[-1/2*(sqrt(-a^2 + b^2)*(b^2 + b*c)*log(-(2*a*b*cos(x) - (2*a^2 - b^2)*cos(x)^2 - 2*sqrt(-a^2 + b^2)*(a*cos(x) - b)*sin(x) + a^2 - 2*b^2)/(b^2*cos(x)^2 - 2*a*b*cos(x) + a^2)) - (a^2 - b^2)*log(b^2*cos(x)^2 - 2*a*b*cos(x) + a^2))/(a^2*b - b^3), 1/2*(2*sqrt(a^2 - b^2)*(b^2 + b*c)*arctan(-(a*cos(x) - b)/(sqrt(a^2 - b^2)*sin(x))) + (a^2 - b^2)*log(b^2*cos(x)^2 - 2*a*b*cos(x) + a^2))/(a^2*b - b^3)]
```

Sympy [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 748 vs. $2(49) = 98$.

Time = 15.22 (sec) , antiderivative size = 748, normalized size of antiderivative = 12.90

$$\int \frac{b + c + \sin(x)}{a - b \cos(x)} dx = \text{Too large to display}$$

input

```
integrate((b+c+sin(x))/(a-b*cos(x)),x)
```

output

```
Piecewise((zoo*(-c*log(tan(x/2) - 1) + c*log(tan(x/2) + 1) - log(tan(x/2) - 1) - log(tan(x/2) + 1) + log(tan(x/2)**2 + 1)), Eq(a, 0) & Eq(b, 0)), (-tan(x/2) - c*tan(x/2)/b - log(tan(x/2)**2 + 1)/b, Eq(a, -b)), (-1/tan(x/2) - c/(b*tan(x/2)) - log(tan(x/2)**2 + 1)/b + 2*log(tan(x/2))/b, Eq(a, b)), ((c*x - cos(x))/a, Eq(b, 0)), (a*sqrt(-a/(a + b) + b/(a + b))*log(-sqrt(-a/(a + b) + b/(a + b)) + tan(x/2))/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b))) + a*sqrt(-a/(a + b) + b/(a + b))*log(sqrt(-a/(a + b) + b/(a + b)) + tan(x/2))/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b))) - a*sqrt(-a/(a + b) + b/(a + b))*log(tan(x/2)**2 + 1)/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b))) + b**2*log(-sqrt(-a/(a + b) + b/(a + b)) + tan(x/2))/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b))) - b**2*log(sqrt(-a/(a + b) + b/(a + b)) + tan(x/2))/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b))) + b*c*log(-sqrt(-a/(a + b) + b/(a + b)) + tan(x/2))/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b))) - b*c*log(sqrt(-a/(a + b) + b/(a + b)) + tan(x/2))/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b))) + b*sqrt(-a/(a + b) + b/(a + b))*log(-sqrt(-a/(a + b) + b/(a + b)) + tan(x/2))/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b))) + b*sqrt(-a/(a + b) + b/(a + b))*log(sqrt(-a/(a + b) + b/(a + b)) + tan(x/2))/(a*b*sqrt(-a/(a + b) + b/(a + b)) + b**2*sqrt(-a/(a + b) + b/(a + b)))
```

Maxima [F(-2)]

Exception generated.

$$\int \frac{b + c + \sin(x)}{a - b \cos(x)} dx = \text{Exception raised: ValueError}$$

input `integrate((b+c+sin(x))/(a-b*cos(x)),x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more de

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 103 vs. $2(48) = 96$.

Time = 0.12 (sec) , antiderivative size = 103, normalized size of antiderivative = 1.78

$$\begin{aligned} \int \frac{b + c + \sin(x)}{a - b \cos(x)} dx = & \frac{2 \left(\pi \left\lfloor \frac{x}{2\pi} + \frac{1}{2} \right\rfloor \operatorname{sgn}(2a + 2b) + \arctan \left(\frac{a \tan(\frac{1}{2}x) + b \tan(\frac{1}{2}x)}{\sqrt{a^2 - b^2}} \right) \right) (b + c)}{\sqrt{a^2 - b^2}} \\ & + \frac{\log \left(a \tan \left(\frac{1}{2}x \right)^2 + b \tan \left(\frac{1}{2}x \right)^2 + a - b \right)}{b} - \frac{\log \left(\tan \left(\frac{1}{2}x \right)^2 + 1 \right)}{b} \end{aligned}$$

input `integrate((b+c+sin(x))/(a-b*cos(x)),x, algorithm="giac")`

output `2*(pi*floor(1/2*x/pi + 1/2)*sgn(2*a + 2*b) + arctan((a*tan(1/2*x) + b*tan(1/2*x))/sqrt(a^2 - b^2)))*(b + c)/sqrt(a^2 - b^2) + log(a*tan(1/2*x)^2 + b*tan(1/2*x)^2 + a - b)/b - log(tan(1/2*x)^2 + 1)/b`

Mupad [B] (verification not implemented)

Time = 6.91 (sec) , antiderivative size = 2213, normalized size of antiderivative = 38.16

$$\int \frac{b + c + \sin(x)}{a - b \cos(x)} dx = \text{Too large to display}$$

input `int((b + c + sin(x))/(a - b*cos(x)),x)`

output

```
(2*atan((((b + c)*(128*a*b^3 + 64*b^3*c + 64*b^4 + 64*a^2*b^2 - ((2*a^2*b - 2*b^3)*(64*a*b^4 + 32*b^4*c + 32*b^5 + 32*a^2*b^3 + 32*a^2*b^2*c + 64*a*b^3*c))/(2*(b^4 - a^2*b^2)) + 128*a*b^2*c + 64*a^2*b*c))/(a^2 - b^2)^(1/2) - ((2*a^2*b - 2*b^3)*(b + c)*(64*a*b^4 + 32*b^4*c + 32*b^5 + 32*a^2*b^3 + 32*a^2*b^2*c + 64*a*b^3*c))/(2*(b^4 - a^2*b^2)*(a^2 - b^2)^(1/2)))*(a^2 - b^2)*(2*b^3*c - 4*a^2 + 4*b^2 + b^4 + b^2*c^2))/(a + b)*(32*a*b + 32*a*c + 32*b*c + 32*b^2)*(2*b^3*c + 4*a^2 - 4*b^2 + b^4 + b^2*c^2)^2 - (tan(x/2)*(a^2 - b^2)^(3/2)*((4*b*(b + c)*(32*a*b^3 - 128*a*b + 64*b^3*c - 64*a^2 - 64*b^2 + 32*b^4 + 32*b^2*c^2 - ((b + c)*(128*a*b^3 + 64*b^4 + 64*a^2*b^2 - ((2*a^2*b - 2*b^3)*(64*a*b^4 + 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))))/(a^2 - b^2)^(1/2) - ((2*a^2*b - 2*b^3)*(b + c)*(64*a*b^4 + 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2)*(a^2 - b^2)^(1/2)))/(a^2 - b^2)^(1/2) - ((2*a^2*b - 2*b^3)*(32*a*b^4 - 128*a^2*b - 64*a*b^2 + 64*b^4*c - 64*a^3 + 32*b^5 + 32*b^3*c^2 - ((2*a^2*b - 2*b^3)*(128*a*b^3 + 64*a^2*b^2 - ((2*a^2*b - 2*b^3)*(64*a*b^4 + 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2))))/(2*(b^4 - a^2*b^2) + 32*a*b^2*c^2 + 64*a*b^3*c))/(2*(b^4 - a^2*b^2)) + 32*a*b*c^2 + 64*a*b^2*c + ((2*a^2*b - 2*b^3)*(b + c)^2*(64*a*b^4 + 128*a^2*b^3 + 64*a^3*b^2))/(2*(b^4 - a^2*b^2)*(a^2 - b^2)))/((a + b)*(2*b^3*c + 4*a^2 - 4*b^2 + b^4 + b^2*c^2)^2) - (((b + c)^3*(64*a*b^4 + 128*a^2*b^3 + 64*a^3*b^2))/(a^2 - b^2)^(3/2) + ((2*a^2*b - ...
```

Reduce [B] (verification not implemented)

Time = 0.24 (sec) , antiderivative size = 179, normalized size of antiderivative = 3.09

$$\begin{aligned} & \int \frac{b + c + \sin(x)}{a - b \cos(x)} dx \\ &= \frac{2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan(\frac{x}{2})a + \tan(\frac{x}{2})b}{\sqrt{a^2 - b^2}}\right) b^2 + 2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan(\frac{x}{2})a + \tan(\frac{x}{2})b}{\sqrt{a^2 - b^2}}\right) bc - \log\left(\tan\left(\frac{x}{2}\right)^2 + 1\right) a^2 + \log\left(\frac{a^2 - b^2}{b(a^2 - b^2)}\right) a^2 b^2}{b(a^2 - b^2)} \end{aligned}$$

input `int((b+c+sin(x))/(a-b*cos(x)),x)`

output
$$\begin{aligned} & (2*\sqrt{a^2 - b^2})*\text{atan}((\tan(x/2)*a + \tan(x/2)*b)/\sqrt{a^2 - b^2})*b^2 \\ & + 2*\sqrt{a^2 - b^2}*\text{atan}((\tan(x/2)*a + \tan(x/2)*b)/\sqrt{a^2 - b^2})*b*c \\ & - \log(\tan(x/2)^2 + 1)*a^2 + \log(\tan(x/2)^2 + 1)*b^2 + \log(\tan(x/2)^2*a + \tan(x/2)^2*b + a - b)*b^2/(b*(a^2 - b^2)) \end{aligned}$$

3.6 $\int \frac{A+B \tan(x)}{a+b \cos(x)} dx$

Optimal result	67
Mathematica [A] (verified)	67
Rubi [A] (verified)	68
Maple [A] (verified)	69
Fricas [A] (verification not implemented)	69
Sympy [F]	70
Maxima [F(-2)]	70
Giac [B] (verification not implemented)	71
Mupad [B] (verification not implemented)	71
Reduce [B] (verification not implemented)	72

Optimal result

Integrand size = 15, antiderivative size = 65

$$\int \frac{A + B \tan(x)}{a + b \cos(x)} dx = \frac{2A \arctan\left(\frac{\sqrt{a-b} \tan(\frac{x}{2})}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}} - \frac{B \log(\cos(x))}{a} + \frac{B \log(a + b \cos(x))}{a}$$

output
$$2*A*\arctan((a-b)^(1/2)*\tan(1/2*x)/(a+b)^(1/2))/(a-b)^(1/2)/(a+b)^(1/2)-B*1/n(\cos(x))/a+B*ln(a+b*cos(x))/a$$

Mathematica [A] (verified)

Time = 0.35 (sec) , antiderivative size = 61, normalized size of antiderivative = 0.94

$$\int \frac{A + B \tan(x)}{a + b \cos(x)} dx = -\frac{2A \operatorname{arctanh}\left(\frac{(a-b) \tan(\frac{x}{2})}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} + \frac{B(-\log(\cos(x)) + \log(a + b \cos(x)))}{a}$$

input
$$\text{Integrate}[(A + B \operatorname{Tan}[x])/(a + b \operatorname{Cos}[x]), x]$$

output
$$(-2*A*\operatorname{ArcTanh}[((a - b)*\operatorname{Tan}[x/2])/Sqrt[-a^2 + b^2]])/Sqrt[-a^2 + b^2] + (B*(-Log[\operatorname{Cos}[x]] + Log[a + b*\operatorname{Cos}[x]]))/a$$

Rubi [A] (verified)

Time = 0.36 (sec), antiderivative size = 65, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}} = 0.200$, Rules used = {3042, 4901, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{A + B \tan(x)}{a + b \cos(x)} dx \\
 & \quad \downarrow \text{3042} \\
 & \int \frac{A + B \tan(x)}{a + b \cos(x)} dx \\
 & \quad \downarrow \text{4901} \\
 & \int \left(\frac{A}{a + b \cos(x)} + \frac{B \tan(x)}{a + b \cos(x)} \right) dx \\
 & \quad \downarrow \text{2009} \\
 & \frac{2A \arctan\left(\frac{\sqrt{a-b} \tan\left(\frac{x}{2}\right)}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}} + \frac{B \log(a + b \cos(x))}{a} - \frac{B \log(\cos(x))}{a}
 \end{aligned}$$

input `Int[(A + B*Tan[x])/(a + b*Cos[x]), x]`

output `(2*A*ArcTan[(Sqrt[a - b]*Tan[x/2])/Sqrt[a + b]])/(Sqrt[a - b]*Sqrt[a + b]) - (B*Log[Cos[x]])/a + (B*Log[a + b*Cos[x]])/a`

Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 4901 $\text{Int}[u_, \ x_\text{Symbol}] \rightarrow \text{With}[\{v = \text{ExpandTrig}[u, x]\}, \ \text{Int}[v, x] /; \ \text{SumQ}[v]\} /;$
 $\text{!InertTrigFreeQ}[u]$

Maple [A] (verified)

Time = 0.29 (sec) , antiderivative size = 108, normalized size of antiderivative = 1.66

method	result
default	$\frac{2(Ba-Bb) \ln \left(a \tan \left(\frac{x}{2}\right)^2-b \tan \left(\frac{x}{2}\right)^2+a+b\right)}{2 a-2 b}+\frac{2 A a \arctan \left(\frac{(a-b) \tan \left(\frac{x}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{\sqrt{(a-b)(a+b)}}-\frac{B \ln (\tan (\frac{x}{2})-1)}{a}-\frac{B \ln (\tan (\frac{x}{2})+1)}{a}$
risch	$-\frac{2 i x B a^3}{a^4-b^2 a^2}+\frac{2 i x B a b^2}{a^4-b^2 a^2}+\frac{2 i x B}{a}+\frac{a \ln \left(e^{i x}+\frac{A a^2-i \sqrt{-A^2 a^4+A^2 a^2 b^2}}{A a b}\right) B}{a^2-b^2}-\frac{\ln \left(e^{i x}+\frac{A a^2-i \sqrt{-A^2 a^4+A^2 a^2 b^2}}{A a b}\right) B b^2}{(a^2-b^2) a}+\frac{\ln \left(e^{i x}+\frac{A a^2-i \sqrt{-A^2 a^4+A^2 a^2 b^2}}{A a b}\right) B b^3}{(a^2-b^2) a^3}$

input $\text{int}((A+B \tan (x))/(a+b \cos (x)), x, \text{method}=\text{_RETURNVERBOSE})$

output
$$\frac{2}{a} \left(\frac{1}{2} (B a - B b) \right) \ln \left(a \tan \left(\frac{1}{2} x \right)^2 - b \tan \left(\frac{1}{2} x \right)^2 + a + b \right) + A a \left(\frac{1}{2} (a - b) \right) \left(a + b \right)^{\frac{1}{2}} \arctan \left(\frac{(a - b) \tan \left(\frac{1}{2} x \right)}{\left(a - b \right) \left(a + b \right)^{\frac{1}{2}}} \right) - B a \ln \left(\tan \left(\frac{1}{2} x \right) - 1 \right) - B a \ln \left(\tan \left(\frac{1}{2} x \right) + 1 \right)$$

Fricas [A] (verification not implemented)

Time = 0.16 (sec) , antiderivative size = 263, normalized size of antiderivative = 4.05

$$\begin{aligned} & \int \frac{A + B \tan(x)}{a + b \cos(x)} dx \\ &= \left[-\frac{\sqrt{-a^2 + b^2} A a \log \left(\frac{2 a b \cos(x) + (2 a^2 - b^2) \cos(x)^2 + 2 \sqrt{-a^2 + b^2} (a \cos(x) + b) \sin(x) - a^2 + 2 b^2}{b^2 \cos(x)^2 + 2 a b \cos(x) + a^2} \right) - (B a^2 - B b^2) \log(b^2 \cos(x)^2 + 2 a b \cos(x) + a^2)}{2 (a^3 - a b^2)} \right] \end{aligned}$$

input $\text{integrate}((A+B \tan(x))/(a+b \cos(x)), x, \text{algorithm}=\text{"fricas"})$

output

```
[-1/2*(sqrt(-a^2 + b^2)*A*a*log((2*a*b*cos(x) + (2*a^2 - b^2)*cos(x)^2 + 2 *sqrt(-a^2 + b^2)*(a*cos(x) + b)*sin(x) - a^2 + 2*b^2)/(b^2*cos(x)^2 + 2*a *b*cos(x) + a^2)) - (B*a^2 - B*b^2)*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2) + 2*(B*a^2 - B*b^2)*log(-cos(x)))/(a^3 - a*b^2), 1/2*(2*sqrt(a^2 - b^2)*A *a*arctan(-(a*cos(x) + b)/(sqrt(a^2 - b^2)*sin(x))) + (B*a^2 - B*b^2)*log( b^2*cos(x)^2 + 2*a*b*cos(x) + a^2) - 2*(B*a^2 - B*b^2)*log(-cos(x)))/(a^3 - a*b^2)]
```

Sympy [F]

$$\int \frac{A + B \tan(x)}{a + b \cos(x)} dx = \int \frac{A + B \tan(x)}{a + b \cos(x)} dx$$

input

```
integrate((A+B*tan(x))/(a+b*cos(x)),x)
```

output

```
Integral((A + B*tan(x))/(a + b*cos(x)), x)
```

Maxima [F(-2)]

Exception generated.

$$\int \frac{A + B \tan(x)}{a + b \cos(x)} dx = \text{Exception raised: ValueError}$$

input

```
integrate((A+B*tan(x))/(a+b*cos(x)),x, algorithm="maxima")
```

output

```
Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more details)
```

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 121 vs. $2(55) = 110$.

Time = 0.13 (sec) , antiderivative size = 121, normalized size of antiderivative = 1.86

$$\int \frac{A + B \tan(x)}{a + b \cos(x)} dx =$$

$$-\frac{2 \left(\pi \lfloor \frac{x}{2\pi} + \frac{1}{2} \rfloor \operatorname{sgn}(-2a + 2b) + \arctan\left(-\frac{a \tan(\frac{1}{2}x) - b \tan(\frac{1}{2}x)}{\sqrt{a^2 - b^2}}\right)\right) A}{\sqrt{a^2 - b^2}}$$

$$+ \frac{B \log\left(-a \tan\left(\frac{1}{2}x\right)^2 + b \tan\left(\frac{1}{2}x\right)^2 - a - b\right)}{a}$$

$$- \frac{B \log\left(|\tan\left(\frac{1}{2}x\right) + 1|\right)}{a} - \frac{B \log\left(|\tan\left(\frac{1}{2}x\right) - 1|\right)}{a}$$

input `integrate((A+B*tan(x))/(a+b*cos(x)),x, algorithm="giac")`

output `-2*(pi*floor(1/2*x/pi + 1/2)*sgn(-2*a + 2*b) + arctan(-(a*tan(1/2*x) - b*tan(1/2*x))/sqrt(a^2 - b^2)))*A/sqrt(a^2 - b^2) + B*log(-a*tan(1/2*x)^2 + b*tan(1/2*x)^2 - a - b)/a - B*log(abs(tan(1/2*x) + 1))/a - B*log(abs(tan(1/2*x) - 1))/a`

Mupad [B] (verification not implemented)

Time = 3.01 (sec) , antiderivative size = 1540, normalized size of antiderivative = 23.69

$$\int \frac{A + B \tan(x)}{a + b \cos(x)} dx = \text{Too large to display}$$

input `int((A + B*tan(x))/(a + b*cos(x)),x)`

output

```
(log((a + b*cos(x))/(cos(x) + 1))*(2*B*a^3 - 2*B*a*b^2))/(2*(a^4 - a^2*b^2))
)) + (2*A*atan(((a^2 - b^2)*((A*(64*A*B*a^3 + ((2*B*a^3 - 2*B*a*b^2)*(32*A
*a^4 + 32*A*a^2*b^2 - 64*A*a^3*b))/(2*(a^4 - a^2*b^2)) + 64*A*B*a*b^2 - 12
8*A*B*a^2*b)))/(a^2 - b^2)^(1/2) + (A*(2*B*a^3 - 2*B*a*b^2)*(32*A*a^4 + 32*
A*a^2*b^2 - 64*A*a^3*b))/(2*(a^4 - a^2*b^2)*(a^2 - b^2)^(1/2)))*(A^2*a^2 -
4*B^2*a^2 + 4*B^2*b^2))/((32*A*a - 32*A*b)*(a - b)*(A^2*a^2 + 4*B^2*a^2 -
4*B^2*b^2)^2) - (tan(x/2)*(a^2 - b^2)^(3/2)*((((2*B*a^3 - 2*B*a*b^2)*(A
*(64*B*a^4 + 64*B*a^2*b^2 - 128*B*a^3*b - ((2*B*a^3 - 2*B*a*b^2)*(64*a^4*b
+ 64*a^2*b^3 - 128*a^3*b^2))/(2*(a^4 - a^2*b^2))))/(a^2 - b^2)^(1/2) - (A
*(2*B*a^3 - 2*B*a*b^2)*(64*a^4*b + 64*a^2*b^3 - 128*a^3*b^2))/(2*(a^4 - a^
2*b^2)*(a^2 - b^2)^(1/2)))/(2*(a^4 - a^2*b^2)) + (A^3*(64*a^4*b + 64*a^2*
b^3 - 128*a^3*b^2))/(a^2 - b^2)^(3/2) + (A*(64*B^2*b^3 - 32*A^2*a^3 + 32*A
^2*a^2*b - 128*B^2*a*b^2 + 64*B^2*a^2*b + ((2*B*a^3 - 2*B*a*b^2)*(64*B*a^4
+ 64*B*a^2*b^2 - 128*B*a^3*b - ((2*B*a^3 - 2*B*a*b^2)*(64*a^4*b + 64*a^2*
b^3 - 128*a^3*b^2))/(2*(a^4 - a^2*b^2))))/(2*(a^4 - a^2*b^2)))/(a^2 - b^2
)^(1/2)*(A^2*a^2 - 4*B^2*a^2 + 4*B^2*b^2))/((a^2 - b^2)^(1/2)*(a - b)*(A^
2*a^2 + 4*B^2*a^2 - 4*B^2*b^2)^2) - (4*A*B*a*(64*B^3*a^2 + 64*B^3*b^2 + 32
*A^2*B*a^2 + (A*((A*(64*B*a^4 + 64*B*a^2*b^2 - 128*B*a^3*b - ((2*B*a^3 - 2
*B*a*b^2)*(64*a^4*b + 64*a^2*b^3 - 128*a^3*b^2))/(2*(a^4 - a^2*b^2))))/(a^
2 - b^2)^(1/2) - (A*(2*B*a^3 - 2*B*a*b^2)*(64*a^4*b + 64*a^2*b^3 - 128*...)
```

Reduce [B] (verification not implemented)

Time = 0.25 (sec), antiderivative size = 159, normalized size of antiderivative = 2.45

$$\int \frac{A + B \tan(x)}{a + b \cos(x)} dx$$

$$= \frac{2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan(\frac{x}{2})a - \tan(\frac{x}{2})b}{\sqrt{a^2 - b^2}}\right) a^2 - \log(\tan(\frac{x}{2}) - 1) a^2 b + \log(\tan(\frac{x}{2}) - 1) b^3 - \log(\tan(\frac{x}{2}) + 1) a^2 b^2}{a(a^2 - b^2)}$$

input

```
int((A+B*tan(x))/(a+b*cos(x)),x)
```

output

```
(2*sqrt(a**2 - b**2)*atan((tan(x/2)*a - tan(x/2)*b)/sqrt(a**2 - b**2))*a**2
- log(tan(x/2) - 1)*a**2*b + log(tan(x/2) - 1)*b**3 - log(tan(x/2) + 1)*
a**2*b + log(tan(x/2) + 1)*b**3 + log(tan(x/2)**2*a - tan(x/2)**2*b + a +
b)*a**2*b - log(tan(x/2)**2*a - tan(x/2)**2*b + a + b)*b**3)/(a*(a**2 - b*
**2))
```

$$3.7 \quad \int \frac{A+B \cot(x)}{a+b \cos(x)} dx$$

Optimal result	73
Mathematica [A] (verified)	73
Rubi [A] (verified)	74
Maple [A] (verified)	75
Fricas [A] (verification not implemented)	76
Sympy [F]	76
Maxima [F(-2)]	77
Giac [A] (verification not implemented)	77
Mupad [B] (verification not implemented)	78
Reduce [B] (verification not implemented)	78

Optimal result

Integrand size = 15, antiderivative size = 100

$$\begin{aligned} \int \frac{A + B \cot(x)}{a + b \cos(x)} dx = & \frac{2A \arctan\left(\frac{\sqrt{a-b} \tan\left(\frac{x}{2}\right)}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}} + \frac{B \log(1 - \cos(x))}{2(a+b)} \\ & + \frac{B \log(1 + \cos(x))}{2(a-b)} - \frac{aB \log(a + b \cos(x))}{a^2 - b^2} \end{aligned}$$

output

```
2*A*arctan((a-b)^(1/2)*tan(1/2*x)/(a+b)^(1/2))/(a-b)^(1/2)/(a+b)^(1/2)+B*1
n(1-cos(x))/(2*a+2*b)+B*ln(1+cos(x))/(2*a-2*b)-a*B*ln(a+b*cos(x))/(a^2-b^2
)
```

Mathematica [A] (verified)

Time = 0.48 (sec) , antiderivative size = 134, normalized size of antiderivative = 1.34

$$\begin{aligned} \int \frac{A + B \cot(x)}{a + b \cos(x)} dx \\ = \frac{(A + B \cot(x)) \left(-2A(a^2 - b^2) \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{x}{2}\right)}{\sqrt{-a^2+b^2}}\right) + \sqrt{-a^2 + b^2} B ((a+b) \log(\cos(\frac{x}{2})) - a \log(a+b) \right)}{(a-b)(a+b)\sqrt{-a^2+b^2}(B \cos(x) + A \sin(x))} \end{aligned}$$

input

```
Integrate[(A + B*Cot[x])/(a + b*Cos[x]),x]
```

output

$$\frac{((A + B \operatorname{Cot}[x]) * (-2 A (a^2 - b^2) \operatorname{ArcTanh}[(a - b) \operatorname{Tan}[x/2]] / \sqrt{-a^2 + b^2}) + \sqrt{-a^2 + b^2} B ((a + b) \operatorname{Log}[\operatorname{Cos}[x/2]] - a \operatorname{Log}[a + b \operatorname{Cos}[x]] + (a - b) \operatorname{Log}[\operatorname{Sin}[x/2]])) \operatorname{Sin}[x]) / ((a - b) (a + b) \sqrt{-a^2 + b^2} (B \operatorname{Cos}[x] + A \operatorname{Sin}[x]))}{}$$

Rubi [A] (verified)

Time = 0.39 (sec), antiderivative size = 100, normalized size of antiderivative = 1.00, number of steps used = 3, number of rules used = 3, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.200, Rules used = {3042, 4901, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int \frac{A + B \cot(x)}{a + b \cos(x)} dx \\ & \quad \downarrow \text{3042} \\ & \int \frac{A + B \cot(x)}{a + b \cos(x)} dx \\ & \quad \downarrow \text{4901} \\ & \int \left(\frac{A}{a + b \cos(x)} + \frac{B \cot(x)}{a + b \cos(x)} \right) dx \\ & \quad \downarrow \text{2009} \\ & \frac{b \operatorname{Barctanh}(\operatorname{cos}(x))}{a^2 - b^2} + \frac{a B \operatorname{log}(\operatorname{sin}(x))}{a^2 - b^2} - \frac{a B \operatorname{log}(a + b \cos(x))}{a^2 - b^2} + \frac{2 A \operatorname{arctan}\left(\frac{\sqrt{a-b} \tan\left(\frac{x}{2}\right)}{\sqrt{a+b}}\right)}{\sqrt{a-b} \sqrt{a+b}} \end{aligned}$$

input

$$\operatorname{Int}[(A + B \operatorname{Cot}[x]) / (a + b \operatorname{Cos}[x]), x]$$

output

$$\begin{aligned} & (2 A \operatorname{ArcTan}\left(\frac{\sqrt{a-b} \operatorname{Tan}[x/2]}{\sqrt{a+b}}\right) / (\sqrt{a-b} \sqrt{a+b})) / (\sqrt{a-b} \sqrt{a+b}) \\ & + (b B \operatorname{ArcTanh}[\operatorname{Cos}[x]]) / (a^2 - b^2) - (a B \operatorname{Log}[a + b \operatorname{Cos}[x]]) / (a^2 - b^2) \\ & + (a B \operatorname{Log}[\operatorname{Sin}[x]]) / (a^2 - b^2) \end{aligned}$$

Definitions of rubi rules used

rule 2009 $\text{Int}[u_, \ x_\text{Symbol}] \rightarrow \text{Simp}[\text{IntSum}[u, \ x], \ x] /; \ \text{SumQ}[u]$

rule 3042 $\text{Int}[u_, \ x_\text{Symbol}] \rightarrow \text{Int}[\text{DeactivateTrig}[u, \ x], \ x] /; \ \text{FunctionOfTrigOfLinearQ}[u, \ x]$

rule 4901 $\text{Int}[u_, \ x_\text{Symbol}] \rightarrow \text{With}[\{v = \text{ExpandTrig}[u, \ x]\}, \ \text{Int}[v, \ x] /; \ \text{SumQ}[v]] /; \ !\text{InertTrigFreeQ}[u]$

Maple [A] (verified)

Time = 0.32 (sec) , antiderivative size = 96, normalized size of antiderivative = 0.96

method	result
default	$-\frac{Ba \ln \left(a \tan \left(\frac{x}{2}\right)^2-b \tan \left(\frac{x}{2}\right)^2+a+b\right)}{a-b}+\frac{(2 A a+2 A b) \arctan \left(\frac{(a-b) \tan \left(\frac{x}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{\sqrt{(a-b)(a+b)}}+\frac{B \ln (\tan (\frac{x}{2}))}{a+b}$
risch	$\frac{2 i x B a^3}{a^4-2 b^2 a^2+b^4}-\frac{2 i x B a b^2}{a^4-2 b^2 a^2+b^4}-\frac{i x B}{a-b}-\frac{i x B}{a+b}-\frac{\ln \left(e^{i x}+\frac{A a-i \sqrt{-A^2 a^2+A^2 b^2}}{A b}\right) B a}{(a+b)(a-b)}+\frac{\ln \left(e^{i x}+\frac{A a-i \sqrt{-A^2 a^2+A^2 b^2}}{A b}\right) \sqrt{-A^2 a^2+A^2 b^2}}{(a+b)(a-b)}$

input $\text{int}((A+B*\cot(x))/(a+b*\cos(x)),x,\text{method}=_RETURNVERBOSE)$

output
$$\frac{1}{(a+b)*(-B*a/(a-b)*\ln(a*\tan(1/2*x)^2-b*\tan(1/2*x)^2+a+b)+(2*A*a+2*A*b)/((a-b)*(a+b))^(1/2)*\arctan((a-b)*\tan(1/2*x)/((a-b)*(a+b))^(1/2)))+1/(a+b)*B*\ln(\tan(1/2*x))}$$

Fricas [A] (verification not implemented)

Time = 2.84 (sec) , antiderivative size = 266, normalized size of antiderivative = 2.66

$$\int \frac{A + B \cot(x)}{a + b \cos(x)} dx$$

$$= \left[-\frac{Ba \log(b^2 \cos(x)^2 + 2ab \cos(x) + a^2) + \sqrt{-a^2 + b^2} A \log\left(\frac{2ab \cos(x) + (2a^2 - b^2) \cos(x)^2 + 2\sqrt{-a^2 + b^2}(a \cos(x) + b \sin(x))}{b^2 \cos(x)^2 + 2ab \cos(x) + a^2}\right)}{2(a^2 - b^2)} \right.$$

$$\left. - \frac{Ba \log(b^2 \cos(x)^2 + 2ab \cos(x) + a^2) - 2\sqrt{a^2 - b^2} A \arctan\left(-\frac{a \cos(x) + b \sin(x)}{\sqrt{a^2 - b^2}}\right) - (Ba + Bb) \log\left(\frac{1}{2} \cos(x) + \frac{a}{2}\right)}{2(a^2 - b^2)} \right]$$

input `integrate((A+B*cot(x))/(a+b*cos(x)),x, algorithm="fricas")`

output

$$[-1/2*(B*a*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2) + sqrt(-a^2 + b^2)*A*log((2*a*b*cos(x) + (2*a^2 - b^2)*cos(x)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(x) + b*sin(x) - a^2 + 2*b^2)/(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2)) - (B*a + B*b)*log(1/2*cos(x) + 1/2) - (B*a - B*b)*log(-1/2*cos(x) + 1/2))/(a^2 - b^2), -1/2*(B*a*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2) - 2*sqrt(a^2 - b^2)*A*atan(-(a*cos(x) + b)/(sqrt(a^2 - b^2)*sin(x))) - (B*a + B*b)*log(1/2*cos(x) + 1/2) - (B*a - B*b)*log(-1/2*cos(x) + 1/2))/(a^2 - b^2)]$$
Sympy [F]

$$\int \frac{A + B \cot(x)}{a + b \cos(x)} dx = \int \frac{A + B \cot(x)}{a + b \cos(x)} dx$$

input `integrate((A+B*cot(x))/(a+b*cos(x)),x)`

output `Integral((A + B*cot(x))/(a + b*cos(x)), x)`

Maxima [F(-2)]

Exception generated.

$$\int \frac{A + B \cot(x)}{a + b \cos(x)} dx = \text{Exception raised: ValueError}$$

input `integrate((A+B*cot(x))/(a+b*cos(x)),x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more de

Giac [A] (verification not implemented)

Time = 0.13 (sec) , antiderivative size = 116, normalized size of antiderivative = 1.16

$$\begin{aligned} & \int \frac{A + B \cot(x)}{a + b \cos(x)} dx \\ &= -\frac{B a \log \left(-a \tan \left(\frac{1}{2} x \right)^2 + b \tan \left(\frac{1}{2} x \right)^2 - a - b \right)}{a^2 - b^2} \\ & \quad - \frac{2 \left(\pi \lfloor \frac{x}{2\pi} + \frac{1}{2} \rfloor \operatorname{sgn}(-2a + 2b) + \arctan \left(-\frac{a \tan(\frac{1}{2}x) - b \tan(\frac{1}{2}x)}{\sqrt{a^2 - b^2}} \right) \right) A}{\sqrt{a^2 - b^2}} \\ & \quad + \frac{B \log \left(|\tan(\frac{1}{2}x)| \right)}{a + b} \end{aligned}$$

input `integrate((A+B*cot(x))/(a+b*cos(x)),x, algorithm="giac")`

output `-B*a*log(-a*tan(1/2*x)^2 + b*tan(1/2*x)^2 - a - b)/(a^2 - b^2) - 2*(pi*flo
or(1/2*x/pi + 1/2)*sgn(-2*a + 2*b) + arctan(-(a*tan(1/2*x) - b*tan(1/2*x))
/sqrt(a^2 - b^2)))*A/sqrt(a^2 - b^2) + B*log(abs(tan(1/2*x)))/(a + b)`

Mupad [B] (verification not implemented)

Time = 1.70 (sec) , antiderivative size = 419, normalized size of antiderivative = 4.19

$$\int \frac{A + B \cot(x)}{a + b \cos(x)} dx = \frac{B \ln(\tan(\frac{x}{2}))}{a + b} + \frac{\ln(3 B a^2 b^2 - B b^4 - 2 B a^4 + A a \sqrt{-(a+b)^3 (a-b)^3} + A b \sqrt{-(a+b)^3 (a-b)^3} + A a^4 \tan(\frac{x}{2}) + \dots)}{a + b} - \frac{\ln(2 B a^4 + B b^4 - 3 B a^2 b^2 + A a \sqrt{-(a+b)^3 (a-b)^3} + A b \sqrt{-(a+b)^3 (a-b)^3} - A a^4 \tan(\frac{x}{2}) - \dots)}{a + b}$$

input `int((A + B*cot(x))/(a + b*cos(x)),x)`

output

$$\begin{aligned} & \frac{(B*\log(\tan(x/2)))/(a + b) + (\log(3*B*a^2*b^2 - B*b^4 - 2*B*a^4 + A*a*(-(a + b)^3*(a - b)^3)^{(1/2)} + A*b*(-(a + b)^3*(a - b)^3)^{(1/2)} + A*a^4*tan(x/2) + A*b^4*tan(x/2) + B*a*b^3 - B*a^3*b - 2*A*a^2*b^2*tan(x/2) + 2*B*a*tan(x/2)*(-(a + b)^3*(a - b)^3)^{(1/2)} - B*b*tan(x/2)*(-(a + b)^3*(a - b)^3)^{(1/2)})*(A*(-(a + b)^3*(a - b)^3)^{(1/2)} - B*a^3 + B*a*b^2))/(a^4 + b^4 - 2*a^2*b^2) - (\log(2*B*a^4 + B*b^4 - 3*B*a^2*b^2 + A*a*(-(a + b)^3*(a - b)^3)^{(1/2)} + A*b*(-(a + b)^3*(a - b)^3)^{(1/2)} - A*a^4*tan(x/2) - A*b^4*tan(x/2) - B*a*b^3 + B*a^3*b + 2*A*a^2*b^2*tan(x/2) + 2*B*a*tan(x/2)*(-(a + b)^3*(a - b)^3)^{(1/2)} - B*b*tan(x/2)*(-(a + b)^3*(a - b)^3)^{(1/2)})*(B*a^3 + A*(-(a + b)^3*(a - b)^3)^{(1/2)} - B*a*b^2))/(a^4 + b^4 - 2*a^2*b^2)}{(a^4 + b^4 - 2*a^2*b^2)} \end{aligned}$$
Reduce [B] (verification not implemented)

Time = 0.16 (sec) , antiderivative size = 97, normalized size of antiderivative = 0.97

$$\begin{aligned} & \int \frac{A + B \cot(x)}{a + b \cos(x)} dx \\ &= \frac{2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan(\frac{x}{2})a - \tan(\frac{x}{2})b}{\sqrt{a^2 - b^2}}\right)a - \log\left(\tan\left(\frac{x}{2}\right)^2 a - \tan\left(\frac{x}{2}\right)^2 b + a + b\right)ab + \log\left(\tan\left(\frac{x}{2}\right)\right)ab - \log\left(\tan\left(\frac{x}{2}\right)^2 a - \tan\left(\frac{x}{2}\right)^2 b + a + b\right)a^2 - b^2}{a^2 - b^2} \end{aligned}$$

input `int((A+B*cot(x))/(a+b*cos(x)),x)`

```
output (2*sqrt(a**2 - b**2)*atan((tan(x/2)*a - tan(x/2)*b)/sqrt(a**2 - b**2))*a -  
log(tan(x/2)**2*a - tan(x/2)**2*b + a + b)*a*b + log(tan(x/2))*a*b - log(  
tan(x/2))*b**2)/(a**2 - b**2)
```

3.8 $\int \frac{A+B \csc(x)}{a+b \cos(x)} dx$

Optimal result	80
Mathematica [A] (verified)	80
Rubi [A] (verified)	81
Maple [A] (verified)	82
Fricas [A] (verification not implemented)	83
Sympy [F]	83
Maxima [F(-2)]	84
Giac [A] (verification not implemented)	84
Mupad [B] (verification not implemented)	85
Reduce [B] (verification not implemented)	85

Optimal result

Integrand size = 15, antiderivative size = 99

$$\int \frac{A + B \csc(x)}{a + b \cos(x)} dx = \frac{2A \arctan\left(\frac{\sqrt{a-b} \tan\left(\frac{x}{2}\right)}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}} + \frac{B \log(1 - \cos(x))}{2(a+b)} - \frac{B \log(1 + \cos(x))}{2(a-b)} + \frac{bB \log(a + b \cos(x))}{a^2 - b^2}$$

output

```
2*A*arctan((a-b)^(1/2)*tan(1/2*x)/(a+b)^(1/2))/(a-b)^(1/2)/(a+b)^(1/2)+B*1
n(1-cos(x))/(2*a+2*b)-B*ln(1+cos(x))/(2*a-2*b)+b*B*ln(a+b*cos(x))/(a^2-b^2
)
```

Mathematica [A] (verified)

Time = 0.37 (sec) , antiderivative size = 116, normalized size of antiderivative = 1.17

$$\int \frac{A + B \csc(x)}{a + b \cos(x)} dx = \frac{-2A(a^2 - b^2) \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{x}{2}\right)}{\sqrt{-a^2 + b^2}}\right) - \sqrt{-a^2 + b^2} B ((a+b) \log(\cos(\frac{x}{2})) - b \log(a + b \cos(x)) + (-a + b) \log(a + b \sin(x)))}{(a-b)(a+b)\sqrt{-a^2 + b^2}}$$

input

```
Integrate[(A + B*Csc[x])/(a + b*Cos[x]),x]
```

output
$$\frac{(-2A(a^2 - b^2) \operatorname{ArcTanh}[(a - b)\tan(x/2)]/\sqrt{-a^2 + b^2}) - \sqrt{-a^2 + b^2}B((a + b)\log[\cos(x/2)] - b\log[a + b\cos(x)] + (-a + b)\log[\sin(x/2)]))}{(a - b)(a + b)\sqrt{-a^2 + b^2}}$$

Rubi [A] (verified)

Time = 0.52 (sec), antiderivative size = 99, normalized size of antiderivative = 1.00, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.333$, Rules used = {3042, 4713, 3042, 4901, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{A + B \csc(x)}{a + b \cos(x)} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{A + B \csc(x)}{a + b \cos(x)} dx \\
 & \quad \downarrow \textcolor{blue}{4713} \\
 & \int \frac{\csc(x)(A \sin(x) + B)}{a + b \cos(x)} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{A \sin(x) + B}{\sin(x)(a + b \cos(x))} dx \\
 & \quad \downarrow \textcolor{blue}{4901} \\
 & \int \left(\frac{A}{a + b \cos(x)} + \frac{B \csc(x)}{a + b \cos(x)} \right) dx \\
 & \quad \downarrow \textcolor{blue}{2009} \\
 & \frac{bB \log(a + b \cos(x))}{a^2 - b^2} + \frac{2A \arctan\left(\frac{\sqrt{a-b}\tan(\frac{x}{2})}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}} + \frac{B \log(1 - \cos(x))}{2(a + b)} - \frac{B \log(\cos(x) + 1)}{2(a - b)}
 \end{aligned}$$

input
$$\operatorname{Int}[(A + B*\csc[x])/(a + b*\cos[x]), x]$$

output

$$(2*A*ArcTan[(\sqrt{a-b}*\tan(x/2))/\sqrt{a+b}])/\sqrt{a-b}*\sqrt{a+b}) + (B*\log[1 - \cos(x)])/(2*(a+b)) - (B*\log[1 + \cos(x)])/(2*(a-b)) + (b*B*\log[a + b*\cos(x)])/(a^2 - b^2)$$

Definitions of rubi rules used

rule 2009

$$\text{Int}[u_, x_Symbol] :> \text{Simp}[\text{IntSum}[u, x], x] /; \text{SumQ}[u]$$

rule 3042

$$\text{Int}[u_, x_Symbol] :> \text{Int}[\text{DeactivateTrig}[u, x], x] /; \text{FunctionOfTrigOfLinearQ}[u, x]$$

rule 4713

$$\text{Int}[(\csc[(a_.) + (b_.*)(x_.)]*(B_.) + (A_.)*(u_)), x_Symbol] :> \text{Int}[\text{ActivateTrig}[u]*((B + A*\sin[a + b*x])/(\sin[a + b*x])), x] /; \text{FreeQ}[\{a, b, A, B\}, x] \&& \text{KnownSineIntegrandQ}[u, x]$$

rule 4901

$$\text{Int}[u_, x_Symbol] :> \text{With}[\{v = \text{ExpandTrig}[u, x]\}, \text{Int}[v, x] /; \text{SumQ}[v]] /; \text{!InertTrigFreeQ}[u]$$

Maple [A] (verified)

Time = 0.23 (sec), antiderivative size = 95, normalized size of antiderivative = 0.96

method	result
default	$\frac{Bb \ln \left(a \tan \left(\frac{x}{2} \right)^2 - b \tan \left(\frac{x}{2} \right)^2 + a + b \right)}{a - b} + \frac{(2Aa + 2Ab) \arctan \left(\frac{(a-b) \tan \left(\frac{x}{2} \right)}{\sqrt{(a-b)(a+b)}} \right)}{\sqrt{(a-b)(a+b)}} + \frac{B \ln \left(\tan \left(\frac{x}{2} \right) \right)}{a + b}$
risch	$-\frac{2ixB a^2 b}{a^4 - 2b^2 a^2 + b^4} + \frac{2ixB b^3}{a^4 - 2b^2 a^2 + b^4} + \frac{ixB}{a - b} - \frac{ixB}{a + b} + \frac{\ln \left(e^{ix} + \frac{Aa - i\sqrt{-A^2 a^2 + A^2 b^2}}{Ab} \right) Bb}{(a + b)(a - b)} + \frac{\ln \left(e^{ix} + \frac{Aa - i\sqrt{-A^2 a^2 + A^2 b^2}}{Ab} \right) \sqrt{-A^2 a^2 + A^2 b^2}}{(a + b)(a - b)}$

input

$$\text{int}((A+B*\csc(x))/(a+b*\cos(x)), x, \text{method}=\text{_RETURNVERBOSE})$$

output
$$\frac{1}{(a+b)*(B*b/(a-b)*\ln(a*\tan(1/2*x)^2-b*\tan(1/2*x)^2+a+b)+(2*A*a+2*A*b)/((a-b)*(a+b))^{(1/2)}*\arctan((a-b)*\tan(1/2*x)/((a-b)*(a+b))^{(1/2)}))+1/(a+b)*B*\ln(\tan(1/2*x)))}$$

Fricas [A] (verification not implemented)

Time = 3.77 (sec) , antiderivative size = 265, normalized size of antiderivative = 2.68

$$\int \frac{A + B \csc(x)}{a + b \cos(x)} dx \\ = \left[\frac{B b \log(b^2 \cos(x)^2 + 2 a b \cos(x) + a^2) - \sqrt{-a^2 + b^2} A \log\left(\frac{2 a b \cos(x) + (2 a^2 - b^2) \cos(x)^2 + 2 \sqrt{-a^2 + b^2} (a \cos(x) + b) \sin(x)}{b^2 \cos(x)^2 + 2 a b \cos(x) + a^2}\right)}{2 (a^2 - b^2)} \right]$$

input `integrate((A+B*csc(x))/(a+b*cos(x)),x, algorithm="fricas")`

output
$$[1/2*(B*b*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2) - sqrt(-a^2 + b^2)*A*log((2*a*b*cos(x) + (2*a^2 - b^2)*cos(x)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(x) + b)*sin(x) - a^2 + 2*b^2)/(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2)) - (B*a + B*b)*log(1/2*cos(x) + 1/2) + (B*a - B*b)*log(-1/2*cos(x) + 1/2))/(a^2 - b^2), 1/2*(B*b*log(b^2*cos(x)^2 + 2*a*b*cos(x) + a^2) + 2*sqrt(a^2 - b^2)*A*arctan(-(a*cos(x) + b)/(sqrt(a^2 - b^2)*sin(x))) - (B*a + B*b)*log(1/2*cos(x) + 1/2) + (B*a - B*b)*log(-1/2*cos(x) + 1/2))/(a^2 - b^2)]$$

Sympy [F]

$$\int \frac{A + B \csc(x)}{a + b \cos(x)} dx = \int \frac{A + B \csc(x)}{a + b \cos(x)} dx$$

input `integrate((A+B*csc(x))/(a+b*cos(x)),x)`

output `Integral((A + B*csc(x))/(a + b*cos(x)), x)`

Maxima [F(-2)]

Exception generated.

$$\int \frac{A + B \csc(x)}{a + b \cos(x)} dx = \text{Exception raised: ValueError}$$

input `integrate((A+B*csc(x))/(a+b*cos(x)),x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more de

Giac [A] (verification not implemented)

Time = 0.13 (sec) , antiderivative size = 115, normalized size of antiderivative = 1.16

$$\begin{aligned} \int \frac{A + B \csc(x)}{a + b \cos(x)} dx = & \frac{B b \log \left(-a \tan \left(\frac{1}{2} x \right)^2 + b \tan \left(\frac{1}{2} x \right)^2 - a - b \right)}{a^2 - b^2} \\ & - \frac{2 \left(\pi \left\lfloor \frac{x}{2\pi} + \frac{1}{2} \right\rfloor \operatorname{sgn}(-2a + 2b) + \arctan \left(-\frac{a \tan(\frac{1}{2}x) - b \tan(\frac{1}{2}x)}{\sqrt{a^2 - b^2}} \right) \right) A}{\sqrt{a^2 - b^2}} \\ & + \frac{B \log \left(\left| \tan \left(\frac{1}{2} x \right) \right| \right)}{a + b} \end{aligned}$$

input `integrate((A+B*csc(x))/(a+b*cos(x)),x, algorithm="giac")`

output $B*b*log(-a*tan(1/2*x)^2 + b*tan(1/2*x)^2 - a - b)/(a^2 - b^2) - 2*(pi*floo r(1/2*x/pi + 1/2)*sgn(-2*a + 2*b) + arctan(-(a*tan(1/2*x) - b*tan(1/2*x))/sqrt(a^2 - b^2)))*A/sqrt(a^2 - b^2) + B*log(abs(tan(1/2*x)))/(a + b)$

Mupad [B] (verification not implemented)

Time = 1.68 (sec) , antiderivative size = 417, normalized size of antiderivative = 4.21

$$\int \frac{A + B \csc(x)}{a + b \cos(x)} dx = \frac{B \ln(\tan(\frac{x}{2}))}{a + b} \\ + \frac{\ln(3 B a^2 b^2 - 2 B b^4 - B a^4 + A a \sqrt{-(a+b)^3 (a-b)^3} + A b \sqrt{-(a+b)^3 (a-b)^3} + A a^4 \tan(\frac{x}{2}) + \dots)}{a + b} \\ - \frac{\ln(B a^4 + 2 B b^4 - 3 B a^2 b^2 + A a \sqrt{-(a+b)^3 (a-b)^3} + A b \sqrt{-(a+b)^3 (a-b)^3} - A a^4 \tan(\frac{x}{2}) - \dots)}{a + b}$$

input `int((A + B/sin(x))/(a + b*cos(x)),x)`

output
$$(B*\log(\tan(x/2)))/(a + b) + (\log(3*B*a^2*b^2 - 2*B*b^4 - B*a^4 + A*a*(-(a + b)^3*(a - b)^3)^{(1/2)} + A*b*(-(a + b)^3*(a - b)^3)^{(1/2)} + A*a^4*tan(x/2) + A*b^4*tan(x/2) - B*a*b^3 + B*a^3*b - 2*A*a^2*b^2*tan(x/2) + B*a*tan(x/2)*(-(a + b)^3*(a - b)^3)^{(1/2)} - 2*B*b*tan(x/2)*(-(a + b)^3*(a - b)^3)^{(1/2)})*(A*(-(a + b)^3*(a - b)^3)^{(1/2)} - B*b^3 + B*a^2*b))/(a^4 + b^4 - 2*a^2*b^2) - (\log(B*a^4 + 2*B*b^4 - 3*B*a^2*b^2 + A*a*(-(a + b)^3*(a - b)^3)^{(1/2)} + A*b*(-(a + b)^3*(a - b)^3)^{(1/2)} - A*a^4*tan(x/2) - A*b^4*tan(x/2) + B*a*b^3 - B*a^3*b + 2*A*a^2*b^2*tan(x/2) + B*a*tan(x/2)*(-(a + b)^3*(a - b)^3)^{(1/2)} - 2*B*b*tan(x/2)*(-(a + b)^3*(a - b)^3)^{(1/2)})*(B*b^3 + A*(-(a + b)^3*(a - b)^3)^{(1/2)} - B*a^2*b))/(a^4 + b^4 - 2*a^2*b^2)$$

Reduce [B] (verification not implemented)

Time = 0.15 (sec) , antiderivative size = 97, normalized size of antiderivative = 0.98

$$\int \frac{A + B \csc(x)}{a + b \cos(x)} dx \\ = \frac{2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan(\frac{x}{2})a - \tan(\frac{x}{2})b}{\sqrt{a^2 - b^2}}\right) a + \log\left(\tan\left(\frac{x}{2}\right)^2 a - \tan\left(\frac{x}{2}\right)^2 b + a + b\right) b^2 + \log\left(\tan\left(\frac{x}{2}\right)\right) ab - \log\left(\tan\left(\frac{x}{2}\right)\right) b^2}{a^2 - b^2}$$

input `int((A+B*csc(x))/(a+b*cos(x)),x)`

output
$$(2*\sqrt{a^2 - b^2})*\text{atan}\left(\frac{\tan(x/2)*a - \tan(x/2)*b}{\sqrt{a^2 - b^2}}\right)*a + \log\left(\frac{\tan(x/2)^2*a - \tan(x/2)^2*b + a + b}{b^2 + \log(\tan(x/2))*a*b - \log(\tan(x/2))*b^2}\right)/(a^2 - b^2)$$

3.9 $\int \frac{(c+d \sec(e+fx))^4}{a+b \cos(e+fx)} dx$

Optimal result	87
Mathematica [B] (verified)	88
Rubi [A] (verified)	88
Maple [B] (verified)	90
Fricas [B] (verification not implemented)	91
Sympy [F]	92
Maxima [F(-2)]	93
Giac [B] (verification not implemented)	93
Mupad [B] (verification not implemented)	94
Reduce [B] (verification not implemented)	95

Optimal result

Integrand size = 25, antiderivative size = 247

$$\begin{aligned} \int \frac{(c+d \sec(e+fx))^4}{a+b \cos(e+fx)} dx = & \frac{2(ac-bd)^4 \arctan\left(\frac{\sqrt{a-b} \tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{a^4 \sqrt{a-b} \sqrt{a+b} f} \\ & + \frac{d^3(4ac-bd) \operatorname{arctanh}(\sin(e+fx))}{2a^2 f} \\ & + \frac{d(2ac-bd)(2a^2 c^2 - 2abcd + b^2 d^2) \operatorname{arctanh}(\sin(e+fx))}{a^4 f} \\ & + \frac{d^4 \tan(e+fx)}{af} + \frac{d^2(6a^2 c^2 - 4abcd + b^2 d^2) \tan(e+fx)}{a^3 f} \\ & + \frac{d^3(4ac-bd) \sec(e+fx) \tan(e+fx)}{2a^2 f} + \frac{d^4 \tan^3(e+fx)}{3af} \end{aligned}$$

output

```
2*(a*c-b*d)^4*arctan((a-b)^(1/2)*tan(1/2*f*x+1/2*e)/(a+b)^(1/2))/a^4/(a-b)^(1/2)/(a+b)^(1/2)/f+1/2*d^3*(4*a*c-b*d)*arctanh(sin(f*x+e))/a^2/f+d*(2*a*c-b*d)*(2*a^2*c^2-2*a*b*c*d+b^2*d^2)*arctanh(sin(f*x+e))/a^4/f+d^4*tan(f*x+e)/a/f+d^2*(6*a^2*c^2-4*a*b*c*d+b^2*d^2)*tan(f*x+e)/a^3/f+1/2*d^3*(4*a*c-b*d)*sec(f*x+e)*tan(f*x+e)/a^2/f+1/3*d^4*tan(f*x+e)^3/a/f
```

Mathematica [B] (verified)

Leaf count is larger than twice the leaf count of optimal. 526 vs. $2(247) = 494$.

Time = 7.77 (sec), antiderivative size = 526, normalized size of antiderivative = 2.13

$$\begin{aligned} & \int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx \\ &= -\frac{24(ac-bd)^4 \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} - 6d(8ab^2cd^2 - 2b^3d^3 + 4a^3c(2c^2 + d^2) - a^2bd(12c^2 + d^2)) \log(\cos(e+fx)) \end{aligned}$$

input `Integrate[(c + d*Sec[e + f*x])^4/(a + b*Cos[e + f*x]), x]`

output
$$\begin{aligned} & \frac{((-24*(a*c - b*d)^4*\operatorname{ArcTanh}[(a - b)*\operatorname{Tan}[(e + f*x)/2])/Sqrt[-a^2 + b^2]))/ \\ & \quad Sqrt[-a^2 + b^2] - 6*d*(8*a*b^2*c*d^2 - 2*b^3*d^3 + 4*a^3*c*(2*c^2 + d^2) \\ & \quad - a^2*b*d*(12*c^2 + d^2))*\operatorname{Log}[\operatorname{Cos}[(e + f*x)/2] - \operatorname{Sin}[(e + f*x)/2]] - 6*d*(\\ & \quad -8*a*b^2*c*d^2 + 2*b^3*d^3 - 4*a^3*c*(2*c^2 + d^2) + a^2*b*d*(12*c^2 + d^2) \\ & \quad)*\operatorname{Log}[\operatorname{Cos}[(e + f*x)/2] + \operatorname{Sin}[(e + f*x)/2]] + (a^2*d^3*(-3*b*d + a*(12*c + d)))/(\operatorname{Cos}[(e + f*x)/2] - \operatorname{Sin}[(e + f*x)/2])^2 + (2*a^3*d^4*\operatorname{Sin}[(e + f*x)/2] \\ & \quad)/(\operatorname{Cos}[(e + f*x)/2] - \operatorname{Sin}[(e + f*x)/2])^3 + (4*a*d^2*(-12*a*b*c*d + 3*b^2*d^2 + 2*a^2*(9*c^2 + d^2))*\operatorname{Sin}[(e + f*x)/2])/(\operatorname{Cos}[(e + f*x)/2] - \operatorname{Sin}[(e + f*x)/2]) + (2*a^3*d^4*\operatorname{Sin}[(e + f*x)/2])/(\operatorname{Cos}[(e + f*x)/2] + \operatorname{Sin}[(e + f*x)/2])^3 - (a^2*d^3*(-3*b*d + a*(12*c + d)))/(\operatorname{Cos}[(e + f*x)/2] + \operatorname{Sin}[(e + f*x)/2])^2 + (4*a*d^2*(-12*a*b*c*d + 3*b^2*d^2 + 2*a^2*(9*c^2 + d^2))*\operatorname{Sin}[(e + f*x)/2])/(\operatorname{Cos}[(e + f*x)/2] + \operatorname{Sin}[(e + f*x)/2]))/(12*a^4*f) \end{aligned}$$

Rubi [A] (verified)

Time = 0.72 (sec), antiderivative size = 247, normalized size of antiderivative = 1.00, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.200$, Rules used = {3042, 3307, 3042, 3431, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{(c + d \csc(e + fx + \frac{\pi}{2}))^4}{a + b \sin(e + fx + \frac{\pi}{2})} dx \\
 & \quad \downarrow \textcolor{blue}{3307} \\
 & \int \frac{\sec^4(e + fx)(c \cos(e + fx) + d)^4}{a + b \cos(e + fx)} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{(c \sin(e + fx + \frac{\pi}{2}) + d)^4}{\sin(e + fx + \frac{\pi}{2})^4 (a + b \sin(e + fx + \frac{\pi}{2}))} dx \\
 & \quad \downarrow \textcolor{blue}{3431} \\
 & \int \left(\frac{(ac - bd)^4}{a^4(a + b \cos(e + fx))} + \frac{d^3(4ac - bd) \sec^3(e + fx)}{a^2} + \frac{d(2ac - bd)(2a^2c^2 - 2abcd + b^2d^2) \sec(e + fx)}{a^4} + \frac{d^2(6a^2c^2 - 4abcd + b^2d^2) \tan(e + fx)}{a^3f} + \frac{d^4 \tan^3(e + fx)}{3af} + \frac{d^4 \tan(e + fx)}{af} \right) dx \\
 & \quad \downarrow \textcolor{blue}{2009}
 \end{aligned}$$

input `Int[(c + d*Sec[e + f*x])^4/(a + b*Cos[e + f*x]),x]`

output

$$\begin{aligned}
 & \frac{(2*(a*c - b*d)^4 * \text{ArcTan}[(\sqrt{a - b} * \text{Tan}[(e + f*x)/2])/\sqrt{a + b}])/(a^4 * \sqrt{a - b} * \sqrt{a + b} * f) + (d^3 * (4*a*c - b*d) * \text{ArcTanh}[\sin(e + f*x)])/(2 * a^2 * f) + (d * (2*a*c - b*d) * (2*a^2*c^2 - 2*a*b*c*d + b^2*d^2) * \text{ArcTanh}[\sin(e + f*x)])/(a^4 * f) + (d^4 * \text{Tan}^3(e + f*x))/(3*a*f) + (d^4 * \text{Tan}(e + f*x))/(a*f) + (d^3 * (4*a*c - b*d) * \text{Sec}(e + f*x) * \text{Tan}(e + f*x))/(2*a^2*f) + (d^4 * \text{Tan}(e + f*x)^3)/(3*a*f)
 \end{aligned}$$

Definitions of rubi rules used

rule 2009 $\text{Int}[u_, x_Symbol] \rightarrow \text{Simp}[\text{IntSum}[u, x], x] /; \text{SumQ}[u]$

rule 3042 $\text{Int}[u_, x_Symbol] \rightarrow \text{Int}[\text{DeactivateTrig}[u, x], x] /; \text{FunctionOfTrigOfLinearQ}[u, x]$

rule 3307 $\text{Int}[(\csc[e_] + (f_*)*(x_))*(d_) + (c_)]^{(n_*)}((a_) + (b_*)*\sin[e_] + (f_*)*(x_))^{(m_)}, x_Symbol] \rightarrow \text{Int}[(a + b*\sin[e + f*x])^m*((d + c*\sin[e + f*x])^n/\sin[e + f*x]^n), x] /; \text{FreeQ}[\{a, b, c, d, e, f, m\}, x] \&& \text{IntegerQ}[n]$

rule 3431 $\text{Int}[((g_*)*\sin[e_] + (f_*)*(x_))]^{(p_*)}((a_) + (b_*)*\sin[e_] + (f_*)*(x_))^{(m_*)}((c_) + (d_*)*\sin[e_] + (f_*)*(x_))^{(n_)}, x_Symbol] \rightarrow \text{Int}[\text{ExpAndTrig}[(g*\sin[e + f*x])^p*(a + b*\sin[e + f*x])^m*(c + d*\sin[e + f*x])^n], x] /; \text{FreeQ}[\{a, b, c, d, e, f, g, n, p\}, x] \&& \text{NeQ}[b*c - a*d, 0] \&& (\text{IntegersQ}[m, n] \text{ || } \text{IntegersQ}[m, p] \text{ || } \text{IntegersQ}[n, p]) \&& \text{NeQ}[p, 2]$

Maple [B] (verified)

Leaf count of result is larger than twice the leaf count of optimal. 483 vs. $2(232) = 464$.

Time = 1.23 (sec) , antiderivative size = 484, normalized size of antiderivative = 1.96

method	result
derivativedivides	$\frac{2(a^4 c^4 - 4b a^3 c^3 d + 6b^2 a^2 c^2 d^2 - 4b^3 a c d^3 + b^4 d^4) \arctan\left(\frac{(a-b) \tan\left(\frac{f x}{2} + \frac{\epsilon}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{a^4 \sqrt{(a-b)(a+b)}} - \frac{d^4}{3a \left(\tan\left(\frac{f x}{2} + \frac{\epsilon}{2}\right) + 1\right)^3} + \frac{d(8a^3 c^3 + 4a^3 c d^2 - 12a^2 c^2 d^3)}{3}$
default	$\frac{2(a^4 c^4 - 4b a^3 c^3 d + 6b^2 a^2 c^2 d^2 - 4b^3 a c d^3 + b^4 d^4) \arctan\left(\frac{(a-b) \tan\left(\frac{f x}{2} + \frac{\epsilon}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{a^4 \sqrt{(a-b)(a+b)}} - \frac{d^4}{3a \left(\tan\left(\frac{f x}{2} + \frac{\epsilon}{2}\right) + 1\right)^3} + \frac{d(8a^3 c^3 + 4a^3 c d^2 - 12a^2 c^2 d^3)}{3}$
risch	Expression too large to display

input $\text{int}((c+d*\sec(f*x+e))^4/(a+b*\cos(f*x+e)), x, \text{method}=\text{_RETURNVERBOSE})$

output

$$\begin{aligned} & \frac{1/f*(2*(a^4*c^4-4*a^3*b*c^3*d+6*a^2*b^2*c^2*d^2-4*a*b^3*c*d^3+b^4*d^4)/a^4)}{((a-b)*(a+b))^{(1/2)}*\arctan((a-b)*\tan(1/2*f*x+1/2*e)/((a-b)*(a+b))^{(1/2)})-} \\ & -\frac{1/3*d^4/a/(\tan(1/2*f*x+1/2*e)+1)^3+1/2*d*(8*a^3*c^3+4*a^3*c*d^2-12*a^2*b*c^2*d-a^2*b*d^3+8*a*b^2*c*d^2-2*b^3*d^3)/a^4*\ln(\tan(1/2*f*x+1/2*e)+1)-1/2*d^2*(12*a^2*c^2-4*a^2*c*d+2*a^2*d^2-8*a*b*c*d+a*b*d^2+2*b^2*d^2)/a^3/(\tan(1/2*f*x+1/2*e)+1)-1/2*d^3*(4*a*c-a*d-b*d)/a^2/(\tan(1/2*f*x+1/2*e)+1)^2-1/3*d^4/a/(\tan(1/2*f*x+1/2*e)-1)^3-1/2*d*(8*a^3*c^3+4*a^3*c*d^2-12*a^2*b*c^2*d-a^2*b*d^3+8*a*b^2*c*d^2-2*b^3*d^3)/a^4*\ln(\tan(1/2*f*x+1/2*e)-1)-1/2*d^2*(12*a^2*c^2-4*a^2*c*d+2*a^2*d^2-8*a*b*c*d+a*b*d^2+2*b^2*d^2)/a^3/(\tan(1/2*f*x+1/2*e)-1)+1/2*d^3*(4*a*c-a*d-b*d)/a^2/(\tan(1/2*f*x+1/2*e)-1)^2) } \end{aligned}$$

Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 490 vs. $2(232) = 464$.

Time = 96.82 (sec) , antiderivative size = 1049, normalized size of antiderivative = 4.25

$$\int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx = \text{Too large to display}$$

input `integrate((c+d*sec(f*x+e))^4/(a+b*cos(f*x+e)),x, algorithm="fricas")`

output

$$\begin{aligned} & [-1/12*(6*(a^4*c^4 - 4*a^3*b*c^3*d + 6*a^2*b^2*c^2*d^2 - 4*a*b^3*c*d^3 + b^4*d^4)*sqrt(-a^2 + b^2)*cos(f*x + e)^3*log((2*a*b*cos(f*x + e) + (2*a^2 - b^2)*cos(f*x + e)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(f*x + e) + b)*sin(f*x + e) - a^2 + 2*b^2)/(b^2*cos(f*x + e)^2 + 2*a*b*cos(f*x + e) + a^2)) - 3*(8*(a^5 - a^3*b^2)*c^3*d - 12*(a^4*b - a^2*b^3)*c^2*d^2 + 4*(a^5 + a^3*b^2 - 2*a*b^4)*c*d^3 - (a^4*b + a^2*b^3 - 2*b^5)*d^4)*cos(f*x + e)^3*log(sin(f*x + e) + 1) + 3*(8*(a^5 - a^3*b^2)*c^3*d - 12*(a^4*b - a^2*b^3)*c^2*d^2 + 4*(a^5 + a^3*b^2 - 2*a*b^4)*c*d^3 - (a^4*b + a^2*b^3 - 2*b^5)*d^4)*cos(f*x + e)^3*log(-sin(f*x + e) + 1) - 2*(2*(a^5 - a^3*b^2)*d^4 + 2*(18*(a^5 - a^3*b^2)*c^2*d^2 - 12*(a^4*b - a^2*b^3)*c*d^3 + (2*a^5 + a^3*b^2 - 3*a*b^4)*d^4)*cos(f*x + e)^2 + 3*(4*(a^5 - a^3*b^2)*c*d^3 - (a^4*b - a^2*b^3)*d^4)*cos(f*x + e))*sin(f*x + e))/((a^6 - a^4*b^2)*f*cos(f*x + e)^3), 1/12*(12*(a^4*c^4 - 4*a^3*b*c^3*d + 6*a^2*b^2*c^2*d^2 - 4*a*b^3*c*d^3 + b^4*d^4)*sqrt(a^2 - b^2)*arctan(-(a*cos(f*x + e) + b)/(sqrt(a^2 - b^2)*sin(f*x + e)))*cos(f*x + e)^3 + 3*(8*(a^5 - a^3*b^2)*c^3*d - 12*(a^4*b - a^2*b^3)*c^2*d^2 + 4*(a^5 + a^3*b^2 - 2*a*b^4)*c*d^3 - (a^4*b + a^2*b^3 - 2*b^5)*d^4)*cos(f*x + e)^3*log(sin(f*x + e) + 1) - 3*(8*(a^5 - a^3*b^2)*c^3*d - 12*(a^4*b - a^2*b^3)*c^2*d^2 + 4*(a^5 + a^3*b^2 - 2*a*b^4)*c*d^3 - (a^4*b + a^2*b^3 - 2*b^5)*d^4)*cos(f*x + e)^3*log(-sin(f*x + e) + 1) + 2*(2*(a^5 - a^3*b^2)*d^4 + 2*(18*(a^5 - a^3*b^2)*c^2*d^2 - 12*(a^4*b - a^2*b^3)*c*d^3 + (2*a... \end{aligned}$$

Sympy [F]

$$\int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx = \int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx$$

input

```
integrate((c+d*sec(f*x+e))**4/(a+b*cos(f*x+e)),x)
```

output

```
Integral((c + d*sec(e + f*x))**4/(a + b*cos(e + f*x)), x)
```

Maxima [F(-2)]

Exception generated.

$$\int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx = \text{Exception raised: ValueError}$$

input `integrate((c+d*sec(f*x+e))^4/(a+b*cos(f*x+e)),x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` f or more de

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 607 vs. $2(232) = 464$.

Time = 0.21 (sec), antiderivative size = 607, normalized size of antiderivative = 2.46

$$\int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx = \text{Too large to display}$$

input `integrate((c+d*sec(f*x+e))^4/(a+b*cos(f*x+e)),x, algorithm="giac")`

output

```

1/6*(3*(8*a^3*c^3*d - 12*a^2*b*c^2*d^2 + 4*a^3*c*d^3 + 8*a*b^2*c*d^3 - a^2
*b*d^4 - 2*b^3*d^4)*log(abs(tan(1/2*f*x + 1/2*e) + 1))/a^4 - 3*(8*a^3*c^3*d
- 12*a^2*b*c^2*d^2 + 4*a^3*c*d^3 + 8*a*b^2*c*d^3 - a^2*b*d^4 - 2*b^3*d^4
)*log(abs(tan(1/2*f*x + 1/2*e) - 1))/a^4 - 12*(a^4*c^4 - 4*a^3*b*c^3*d + 6
*a^2*b^2*c^2*d^2 - 4*a*b^3*c*d^3 + b^4*d^4)*(pi*floor(1/2*(f*x + e)/pi + 1
/2)*sgn(-2*a + 2*b) + arctan(-(a*tan(1/2*f*x + 1/2*e) - b*tan(1/2*f*x + 1/
2*e))/sqrt(a^2 - b^2)))/(sqrt(a^2 - b^2)*a^4) - 2*(36*a^2*c^2*d^2*tan(1/2*
f*x + 1/2*e)^5 - 12*a^2*c*d^3*tan(1/2*f*x + 1/2*e)^5 - 24*a*b*c*d^3*tan(1/
2*f*x + 1/2*e)^5 + 6*a^2*d^4*tan(1/2*f*x + 1/2*e)^5 + 3*a*b*d^4*tan(1/2*f*
x + 1/2*e)^5 + 6*b^2*d^4*tan(1/2*f*x + 1/2*e)^5 - 72*a^2*c^2*d^2*tan(1/2*f*
*x + 1/2*e)^3 + 48*a*b*c*d^3*tan(1/2*f*x + 1/2*e)^3 - 4*a^2*d^4*tan(1/2*f*
x + 1/2*e)^3 - 12*b^2*d^4*tan(1/2*f*x + 1/2*e)^3 + 36*a^2*c^2*d^2*tan(1/2*
f*x + 1/2*e) + 12*a^2*c*d^3*tan(1/2*f*x + 1/2*e) - 24*a*b*c*d^3*tan(1/2*f*
x + 1/2*e) + 6*a^2*d^4*tan(1/2*f*x + 1/2*e) - 3*a*b*d^4*tan(1/2*f*x + 1/2*
e) + 6*b^2*d^4*tan(1/2*f*x + 1/2*e)))/((tan(1/2*f*x + 1/2*e)^2 - 1)^3*a^3))
/f

```

Mupad [B] (verification not implemented)

Time = 6.71 (sec), antiderivative size = 9992, normalized size of antiderivative = 40.45

$$\int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx = \text{Too large to display}$$

input

```
int((c + d/cos(e + f*x))^4/(a + b*cos(e + f*x)),x)
```

output

```
(atan((((((8*(4*a^13*c^4 - 8*a^12*b*c^4 - 2*a^12*b*d^4 + 8*a^13*c*d^3 + 1
6*a^13*c^3*d + 4*a^11*b^2*c^4 - 4*a^8*b^5*d^4 + 6*a^9*b^4*d^4 - 2*a^10*b^3
*d^4 + 2*a^11*b^2*d^4 + 16*a^9*b^4*c*d^3 - 24*a^10*b^3*c*d^3 + 8*a^11*b^2*
c*d^3 + 16*a^11*b^2*c^3*d - 24*a^12*b*c^2*d^2 - 24*a^10*b^3*c^2*d^2 + 48*a
^11*b^2*c^2*d^2 - 8*a^12*b*c*d^3 - 32*a^12*b*c^3*d))/a^9 - (8*tan(e/2 + (f
*x)/2)*(8*a^10*b + 8*a^8*b^3 - 16*a^9*b^2)*(a^2*((b*d^4)/2 + 6*b*c^2*d^2)
- a^3*(2*c*d^3 + 4*c^3*d) + b^3*d^4 - 4*a*b^2*c*d^3))/a^10)*(a^2*((b*d^4)/
2 + 6*b*c^2*d^2) - a^3*(2*c*d^3 + 4*c^3*d) + b^3*d^4 - 4*a*b^2*c*d^3)/a^4
- (8*tan(e/2 + (f*x)/2)*(4*a^9*c^8 - 8*b^9*d^8 - 4*a^8*b*c^8 + 16*a*b^8*d
^8 - 16*a^2*b^7*d^8 + 16*a^3*b^6*d^8 - 13*a^4*b^5*d^8 + 7*a^5*b^4*d^8 - 3*
a^6*b^3*d^8 + a^7*b^2*d^8 + 16*a^9*c^2*d^6 + 64*a^9*c^4*d^4 + 64*a^9*c^6*d
^2 - 128*a^2*b^7*c*d^7 + 128*a^3*b^6*c*d^7 - 128*a^4*b^5*c*d^7 + 104*a^5*b
^4*c*d^7 - 56*a^6*b^3*c*d^7 + 24*a^7*b^2*c*d^7 + 32*a^7*b^2*c^7*d - 48*a^8
*b*c^2*d^6 - 112*a^8*b*c^3*d^5 - 192*a^8*b*c^4*d^4 - 192*a^8*b*c^5*d^3 - 1
92*a^8*b*c^6*d^2 - 224*a^2*b^7*c^2*d^6 + 448*a^3*b^6*c^2*d^6 + 448*a^3*b^6
*c^3*d^5 - 424*a^4*b^5*c^2*d^6 - 896*a^4*b^5*c^3*d^5 - 552*a^4*b^5*c^4*d^4
+ 376*a^5*b^4*c^2*d^6 + 784*a^5*b^4*c^3*d^5 + 1096*a^5*b^4*c^4*d^4 + 416*
a^5*b^4*c^5*d^3 - 280*a^6*b^3*c^2*d^6 - 560*a^6*b^3*c^3*d^5 - 880*a^6*b^3*
c^4*d^4 - 800*a^6*b^3*c^5*d^3 - 176*a^6*b^3*c^6*d^2 + 136*a^7*b^2*c^2*d^6
+ 336*a^7*b^2*c^3*d^5 + 464*a^7*b^2*c^4*d^4 + 576*a^7*b^2*c^5*d^3 + 304...)
```

Reduce [B] (verification not implemented)

Time = 0.21 (sec) , antiderivative size = 2335, normalized size of antiderivative = 9.45

$$\int \frac{(c + d \sec(e + fx))^4}{a + b \cos(e + fx)} dx = \text{Too large to display}$$

input `int((c+d*sec(f*x+e))^4/(a+b*cos(f*x+e)),x)`

output

```
(12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*a**4*c**4 - 48*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*a**3*b*c**3*d + 72*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*a**2*b**2*c**2*d**2 - 48*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*a**2*b**4*d**4 - 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*b**4*d**4 - 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**4*c**4 + 48*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**3*b*c**3*d - 72*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**2*b**2*c**2*d**2 + 48*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**3*c*d**3 - 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*b**4*d**4 + 24*cos(e + f*x)**2*sin(e + f*x)*a**2*b**3*c*d**3 - 24*cos(e + f*x)*log(tan((e + f*x)/2) - 1)*sin(e + f*x)**2*a**5*c**3*d - 12*cos(e + f*x)*log(tan((e + f*x)/2) - 1)*sin(e + f*x)**2*a**5*c*d**3...)
```

$$3.10 \quad \int \frac{(c+d \sec(e+fx))^3}{a+b \cos(e+fx)} dx$$

Optimal result	97
Mathematica [A] (verified)	98
Rubi [A] (verified)	98
Maple [A] (verified)	100
Fricas [B] (verification not implemented)	101
Sympy [F]	101
Maxima [F(-2)]	102
Giac [B] (verification not implemented)	102
Mupad [B] (verification not implemented)	103
Reduce [B] (verification not implemented)	103

Optimal result

Integrand size = 25, antiderivative size = 170

$$\begin{aligned} \int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx &= \frac{2(ac - bd)^3 \arctan\left(\frac{\sqrt{a-b} \tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{a^3 \sqrt{a-b} \sqrt{a+b} f} \\ &\quad + \frac{d^3 \operatorname{arctanh}(\sin(e + fx))}{2af} \\ &\quad + \frac{d(3a^2c^2 - 3abcd + b^2d^2) \operatorname{arctanh}(\sin(e + fx))}{a^3 f} \\ &\quad + \frac{d^2(3ac - bd) \tan(e + fx)}{a^2 f} + \frac{d^3 \sec(e + fx) \tan(e + fx)}{2af} \end{aligned}$$

output

```
2*(a*c-b*d)^3*arctan((a-b)^(1/2)*tan(1/2*f*x+1/2*e)/(a+b)^(1/2))/a^3/(a-b)^(1/2)/(a+b)^(1/2)/f+1/2*d^3*arctanh(sin(f*x+e))/a/f+d*(3*a^2*c^2-3*a*b*c*d+b^2*d^2)*arctanh(sin(f*x+e))/a^3/f+d^2*(3*a*c-b*d)*tan(f*x+e)/a^2/f+1/2*d^3*sec(f*x+e)*tan(f*x+e)/a/f
```

Mathematica [A] (verified)

Time = 3.54 (sec) , antiderivative size = 335, normalized size of antiderivative = 1.97

$$\int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx$$

$$= -\frac{8(ac-bd)^3 \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} - 2d(-6abcd + 2b^2d^2 + a^2(6c^2 + d^2)) \log(\cos(\frac{1}{2}(e+fx))) - \sin(\frac{1}{2}(e+fx))$$

input `Integrate[(c + d*Sec[e + f*x])^3/(a + b*Cos[e + f*x]), x]`

output $((-8*(a*c - b*d)^3*\operatorname{ArcTanh}[((a - b)*\operatorname{Tan}[(e + f*x)/2])/Sqrt[-a^2 + b^2]])/Sqrt[-a^2 + b^2] - 2*d*(-6*a*b*c*d + 2*b^2*d^2 + a^2*(6*c^2 + d^2))*\operatorname{Log}[\operatorname{Cos}[(e + f*x)/2] - \operatorname{Sin}[(e + f*x)/2]] + 2*d*(-6*a*b*c*d + 2*b^2*d^2 + a^2*(6*c^2 + d^2))*\operatorname{Log}[\operatorname{Cos}[(e + f*x)/2] + \operatorname{Sin}[(e + f*x)/2]] + (a^2*d^3)/(\operatorname{Cos}[(e + f*x)/2] - \operatorname{Sin}[(e + f*x)/2])^2 + (4*a*d^2*(3*a*c - b*d)*\operatorname{Sin}[(e + f*x)/2])/(\operatorname{Cos}[(e + f*x)/2] - \operatorname{Sin}[(e + f*x)/2]) - (a^2*d^3)/(\operatorname{Cos}[(e + f*x)/2] + \operatorname{Sin}[(e + f*x)/2])^2 + (4*a*d^2*(3*a*c - b*d)*\operatorname{Sin}[(e + f*x)/2])/(\operatorname{Cos}[(e + f*x)/2] + \operatorname{Sin}[(e + f*x)/2]))/(4*a^3*f)$

Rubi [A] (verified)

Time = 0.60 (sec) , antiderivative size = 170, normalized size of antiderivative = 1.00, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.200$, Rules used = {3042, 3307, 3042, 3431, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx$$

↓ 3042

$$\int \frac{(c + d \csc(e + fx + \frac{\pi}{2}))^3}{a + b \sin(e + fx + \frac{\pi}{2})} dx$$

$$\begin{aligned}
 & \downarrow 3307 \\
 & \int \frac{\sec^3(e + fx)(c \cos(e + fx) + d)^3}{a + b \cos(e + fx)} dx \\
 & \quad \downarrow 3042 \\
 & \int \frac{(c \sin(e + fx + \frac{\pi}{2}) + d)^3}{\sin(e + fx + \frac{\pi}{2})^3 (a + b \sin(e + fx + \frac{\pi}{2}))} dx \\
 & \quad \downarrow 3431 \\
 & \int \left(\frac{(ac - bd)^3}{a^3(a + b \cos(e + fx))} + \frac{d^2(3ac - bd) \sec^2(e + fx)}{a^2} + \frac{d(3a^2c^2 - 3abcd + b^2d^2) \sec(e + fx)}{a^3} + \frac{d^3 \sec^3(e + fx)}{a} \right. \\
 & \quad \downarrow 2009 \\
 & \frac{2(ac - bd)^3 \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{a^3 f \sqrt{a-b} \sqrt{a+b}} + \frac{d^2(3ac - bd) \tan(e + fx)}{a^2 f} + \\
 & \frac{d(3a^2c^2 - 3abcd + b^2d^2) \operatorname{arctanh}(\sin(e + fx))}{a^3 f} + \frac{d^3 \operatorname{arctanh}(\sin(e + fx))}{2af} + \\
 & \left. \frac{d^3 \tan(e + fx) \sec(e + fx)}{2af} \right)
 \end{aligned}$$

input `Int[(c + d*Sec[e + f*x])^3/(a + b*Cos[e + f*x]), x]`

output `(2*(a*c - b*d)^3*ArcTan[(Sqrt[a - b]*Tan[(e + f*x)/2])/Sqrt[a + b]])/(a^3*Sqrt[a - b]*Sqrt[a + b]*f) + (d^3*ArcTanh[Sin[e + f*x]])/(2*a*f) + (d*(3*a^2*c^2 - 3*a*b*c*d + b^2*d^2)*ArcTanh[Sin[e + f*x]])/(a^3*f) + (d^2*(3*a*c - b*d)*Tan[e + f*x])/(a^2*f) + (d^3*Sec[e + f*x]*Tan[e + f*x])/(2*a*f)`

Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 3307

```
Int[(csc[(e_.) + (f_.)*(x_)]*(d_.) + (c_.))^n_*((a_) + (b_.)*sin[(e_.) + (f_.)*(x_.)])^m_, x_Symbol] :> Int[(a + b*Sin[e + f*x])^m*((d + c*Sin[e + f*x])^n/Sin[e + f*x]^n), x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IntegerQ[n]
```

rule 3431

```
Int[((g_.*sin[(e_.) + (f_.)*(x_.)])^(p_)*((a_) + (b_.)*sin[(e_.) + (f_.)*(x_.)])^m_*((c_) + (d_.)*sin[(e_.) + (f_.)*(x_.)])^n_, x_Symbol] :> Int[Exp andTrig[(g*Sin[e + f*x])^p*(a + b*Sin[e + f*x])^m*(c + d*Sin[e + f*x])^n, x], x] /; FreeQ[{a, b, c, d, e, f, g, n, p}, x] && NeQ[b*c - a*d, 0] && (IntegersQ[m, n] || IntegersQ[m, p] || IntegersQ[n, p]) && NeQ[p, 2]
```

Maple [A] (verified)

Time = 0.76 (sec) , antiderivative size = 291, normalized size of antiderivative = 1.71

method	result
derivativedivides	$\frac{2(a^3c^3-3a^2b\,c^2d+3a\,b^2c\,d^2-b^3d^3)\arctan\left(\frac{(a-b)\tan\left(\frac{fx}{2}+\frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{a^3\sqrt{(a-b)(a+b)}}-\frac{d^3}{2a\left(\tan\left(\frac{fx}{2}+\frac{e}{2}\right)+1\right)^2}+\frac{d(6a^2c^2+d^2a^2-6abcd+2b^2d^2)\ln(t)}{2a^3}$
default	$\frac{2(a^3c^3-3a^2b\,c^2d+3a\,b^2c\,d^2-b^3d^3)\arctan\left(\frac{(a-b)\tan\left(\frac{fx}{2}+\frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{a^3\sqrt{(a-b)(a+b)}}-\frac{d^3}{2a\left(\tan\left(\frac{fx}{2}+\frac{e}{2}\right)+1\right)^2}+\frac{d(6a^2c^2+d^2a^2-6abcd+2b^2d^2)\ln(t)}{2a^3}$
risch	$-\frac{id^2(ad e^{3i(fx+e)}-6ace^{2i(fx+e)}+2bd e^{2i(fx+e)}-de^{i(fx+e)}a-6ac+2bd)}{a^2f(e^{2i(fx+e)}+1)^2}-\frac{3d\ln(e^{i(fx+e)}-i)c^2}{af}-\frac{d^3\ln(e^{i(fx+e)}-i)c^2}{2af}$

input

```
int((c+d*sec(f*x+e))^3/(a+b*cos(f*x+e)),x,method=_RETURNVERBOSE)
```

output

```
1/f*(2*(a^3*c^3-3*a^2*b*c^2*d+3*a*b^2*c*d^2-b^3*d^3)/a^3/((a-b)*(a+b))^(1/2)*arctan((a-b)*tan(1/2*f*x+1/2*e)/((a-b)*(a+b))^(1/2))-1/2*d^3/a/(\tan(1/2*f*x+1/2*e)+1)^2+1/2*d*(6*a^2*c^2+a^2*d^2-6*a*b*c*d+2*b^2*d^2)/a^3*ln(\tan(1/2*f*x+1/2*e)+1)-1/2*d^2*(6*a*c-a*d-2*b*d)/a^2/(\tan(1/2*f*x+1/2*e)+1)+1/2*d^3/a/(\tan(1/2*f*x+1/2*e)-1)^2-1/2*d*(6*a^2*c^2+a^2*d^2-6*a*b*c*d+2*b^2*d^2)/a^3*ln(\tan(1/2*f*x+1/2*e)-1)-1/2*d^2*(6*a*c-a*d-2*b*d)/a^2/(\tan(1/2*f*x+1/2*e)-1))
```

Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 339 vs. $2(157) = 314$.

Time = 21.48 (sec) , antiderivative size = 747, normalized size of antiderivative = 4.39

$$\int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx = \text{Too large to display}$$

input `integrate((c+d*sec(f*x+e))^3/(a+b*cos(f*x+e)),x, algorithm="fricas")`

output
$$[1/4*(2*(a^3*c^3 - 3*a^2*b*c^2*d + 3*a*b^2*c*d^2 - b^3*d^3)*sqrt(-a^2 + b^2)*cos(f*x + e)^2*log((2*a*b*cos(f*x + e) + (2*a^2 - b^2)*cos(f*x + e)^2 - 2*sqrt(-a^2 + b^2)*(a*cos(f*x + e) + b)*sin(f*x + e) - a^2 + 2*b^2)/(b^2*cos(f*x + e)^2 + 2*a*b*cos(f*x + e) + a^2)) + (6*(a^4 - a^2*b^2)*c^2*d - 6*(a^3*b - a*b^3)*c*d^2 + (a^4 + a^2*b^2 - 2*b^4)*d^3)*cos(f*x + e)^2*log(sin(f*x + e) + 1) - (6*(a^4 - a^2*b^2)*c^2*d - 6*(a^3*b - a*b^3)*c*d^2 + (a^4 + a^2*b^2 - 2*b^4)*d^3)*cos(f*x + e)^2*log(-sin(f*x + e) + 1) + 2*((a^4 - a^2*b^2)*d^3 + 2*(3*(a^4 - a^2*b^2)*c*d^2 - (a^3*b - a*b^3)*d^3)*cos(f*x + e))*sin(f*x + e))/((a^5 - a^3*b^2)*f*cos(f*x + e)^2), 1/4*(4*(a^3*c^3 - 3*a^2*b*c^2*d + 3*a*b^2*c*d^2 - b^3*d^3)*sqrt(a^2 - b^2)*arctan(-(a*cos(f*x + e) + b)/(sqrt(a^2 - b^2)*sin(f*x + e)))*cos(f*x + e)^2 + (6*(a^4 - a^2*b^2)*c^2*d - 6*(a^3*b - a*b^3)*c*d^2 + (a^4 + a^2*b^2 - 2*b^4)*d^3)*cos(f*x + e)^2*log(sin(f*x + e) + 1) - (6*(a^4 - a^2*b^2)*c^2*d - 6*(a^3*b - a*b^3)*c*d^2 + (a^4 + a^2*b^2 - 2*b^4)*d^3)*cos(f*x + e)^2*log(-sin(f*x + e) + 1) + 2*((a^4 - a^2*b^2)*d^3 + 2*(3*(a^4 - a^2*b^2)*c*d^2 - (a^3*b - a*b^3)*d^3)*cos(f*x + e))*sin(f*x + e))/((a^5 - a^3*b^2)*f*cos(f*x + e)^2)]$$

Sympy [F]

$$\int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx = \int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx$$

input `integrate((c+d*sec(f*x+e))**3/(a+b*cos(f*x+e)),x)`

output `Integral((c + d*sec(e + f*x))**3/(a + b*cos(e + f*x)), x)`

Maxima [F(-2)]

Exception generated.

$$\int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx = \text{Exception raised: ValueError}$$

input `integrate((c+d*sec(f*x+e))^3/(a+b*cos(f*x+e)),x, algorithm="maxima")`

output `Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` f or more de`

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 340 vs. $2(157) = 314$.

Time = 0.19 (sec), antiderivative size = 340, normalized size of antiderivative = 2.00

$$\int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx = \frac{(6 a^2 c^2 d - 6 a b c d^2 + a^2 d^3 + 2 b^2 d^3) \log(|\tan(\frac{1}{2} f x + \frac{1}{2} e) + 1|)}{a^3} - \frac{(6 a^2 c^2 d - 6 a b c d^2 + a^2 d^3 + 2 b^2 d^3) \log(|\tan(\frac{1}{2} f x + \frac{1}{2} e) - 1|)}{a^3} - \frac{4 (a^3 c^3 - 3 a^2 b c^2 d^2)}{a^3}$$

input `integrate((c+d*sec(f*x+e))^3/(a+b*cos(f*x+e)),x, algorithm="giac")`

output `1/2*((6*a^2*c^2*d - 6*a*b*c*d^2 + a^2*d^3 + 2*b^2*d^3)*log(abs(tan(1/2*f*x + 1/2*e) + 1))/a^3 - (6*a^2*c^2*d - 6*a*b*c*d^2 + a^2*d^3 + 2*b^2*d^3)*log(abs(tan(1/2*f*x + 1/2*e) - 1))/a^3 - 4*(a^3*c^3 - 3*a^2*b*c^2*d + 3*a*b^2*c*d^2 - b^3*d^3)*(pi*floor(1/2*(f*x + e)/pi + 1/2)*sgn(-2*a + 2*b) + arc tan(-(a*tan(1/2*f*x + 1/2*e) - b*tan(1/2*f*x + 1/2*e))/sqrt(a^2 - b^2)))/(sqrt(a^2 - b^2)*a^3) - 2*(6*a*c*d^2*tan(1/2*f*x + 1/2*e)^3 - a*d^3*tan(1/2*f*x + 1/2*e)^3 - 2*b*d^3*tan(1/2*f*x + 1/2*e)^3 - 6*a*c*d^2*tan(1/2*f*x + 1/2*e) - a*d^3*tan(1/2*f*x + 1/2*e) + 2*b*d^3*tan(1/2*f*x + 1/2*e))/((tan(1/2*f*x + 1/2*e)^2 - 1)^2*a^2))/f`

Mupad [B] (verification not implemented)

Time = 5.70 (sec) , antiderivative size = 6735, normalized size of antiderivative = 39.62

$$\int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx = \text{Too large to display}$$

input `int((c + d/cos(e + f*x))^3/(a + b*cos(e + f*x)),x)`

output
$$\begin{aligned} & ((\tan(e/2 + (f*x)/2)*(a*d^3 - 2*b*d^3 + 6*a*c*d^2))/a^2 + (\tan(e/2 + (f*x)/2)^3*(a*d^3 + 2*b*d^3 - 6*a*c*d^2))/a^2)/(f*(\tan(e/2 + (f*x)/2)^4 - 2*\tan(e/2 + (f*x)/2)^2 + 1)) + (\text{atan}(((8*\tan(e/2 + (f*x)/2)*(4*a^7*c^6 + a^7*d^6 - 8*b^7*d^6 - 4*a^6*b^6*c^6 + 16*a^6*b^6*d^6 - 3*a^6*b^6*d^6 - 16*a^2*b^5*d^6 + 16*a^3*b^4*d^6 - 13*a^4*b^3*d^6 + 7*a^5*b^2*d^6 + 12*a^7*c^2*d^4 + 36*a^7*c^4*d^2 - 96*a^2*b^5*c*d^5 + 84*a^3*b^4*c*d^5 - 60*a^4*b^3*c*d^5 + 36*a^5*b^2*c*d^5 + 24*a^5*b^2*c^5*d - 36*a^6*b*c^2*d^4 - 72*a^6*b*c^3*d^3 - 108*a^6*b*c^4*d^2 - 120*a^2*b^5*c^2*d^4 + 240*a^3*b^4*c^2*d^4 + 152*a^3*b^4*c^3*d^3 - 192*a^4*b^3*c^2*d^4 - 296*a^4*b^3*c^3*d^3 - 96*a^4*b^3*c^4*d^2 + 96*a^5*b^2*c^2*d^4 + 216*a^5*b^2*c^3*d^3 + 168*a^5*b^2*c^4*d^2 + 48*a*b^6*c*d^5 - 12*a^6*b*c*d^5 - 24*a^6*b*c^5*d))/a^4 + ((8*(4*a^10*c^3 + 2*a^10*d^3 - 8*a^9*b*c^3 - 2*a^9*b*d^3 + 12*a^10*c^2*d + 4*a^8*b^2*c^3 + 4*a^6*b^4*d^3 - 6*a^7*b^3*d^3 + 2*a^8*b^2*d^3 - 12*a^7*b^3*c*d^2 + 24*a^8*b^2*c^2*d + 12*a^8*b^2*c^2*d - 12*a^9*b*c*d^2 - 24*a^9*b*c^2*d))/a^6 + (8*\tan(e/2 + (f*x)/2)*(8*a^8*b + 8*a^6*b^3 - 16*a^7*b^2)*(a^2*(3*c^2*d + d^3/2) + b^2*d^3 - 3*a*b*c*d^2))/a^7)*(a^2*(3*c^2*d + d^3/2) + b^2*d^3 - 3*a*b*c*d^2))/a^3)*(a^2*(3*c^2*d + d^3/2) + b^2*d^3 - 3*a*b*c*d^2)*1i)/a^3 + ((8*\tan(e/2 + (f*x)/2)*(4*a^7*c^6 + a^7*d^6 - 8*b^7*d^6 - 4*a^6*b^6*c^6 + 16*a^6*b^6*d^6 - 3*a^6*b^5*d^6 - 16*a^2*b^5*d^6 + 16*a^3*b^4*d^6 - 13*a^4*b^3*d^6 + 7*a^5*b^2*d^6 + 12*a^7*c^2*d^4 + 36*a^7*c^4*d^2 - 96*a^2*b^5*c*d^5 + 84*a^...)$$

Reduce [B] (verification not implemented)

Time = 0.18 (sec) , antiderivative size = 1631, normalized size of antiderivative = 9.59

$$\int \frac{(c + d \sec(e + fx))^3}{a + b \cos(e + fx)} dx = \text{Too large to display}$$

input `int((c+d*sec(f*x+e))^3/(a+b*cos(f*x+e)),x)`

output

```
(4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*a**3*c**3 - 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*a**2*b*c**2*d + 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)**2*a*b**2*c*d**2 - 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*a*b**2*c*d**2 + 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*sin(e + f*x)**2*b**3*d**3 - 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**3*c**3 + 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**2*b*c**2*d - 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a*b**2*c*d**2 + 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*b**3*d**3 + 2*cos(e + f*x)**2*sin(e + f*x)*a**3*b*d**3 - 2*cos(e + f*x)**2*sin(e + f*x)*a*b**3*d**3 - 6*cos(e + f*x)*log(tan((e + f*x)/2) - 1)*sin(e + f*x)**2*a**4*c**2*d - cos(e + f*x)*log(tan((e + f*x)/2) - 1)*sin(e + f*x)**2*a**2*a**4*d**3 + 6*cos(e + f*x)*log(tan((e + f*x)/2) - 1)*sin(e + f*x)**2*a**3*b*c*d**2 + 6*cos(e + f*x)*log(tan((e + f*x)/2) - 1)*sin(e + f*x)**2*a**2*b**2*c**2*d - cos(e + f*x)*log(tan((e + f*x)/2) - 1)*sin(e + f*x)**2*a**2*b**2*d**3 - 6*cos(e + f*x)*log(tan((e + f*x)/2) - 1)*sin(e + f*x)**2*a...)
```

3.11 $\int \frac{(c+d \sec(e+fx))^2}{a+b \cos(e+fx)} dx$

Optimal result	105
Mathematica [A] (verified)	105
Rubi [A] (verified)	106
Maple [A] (verified)	108
Fricas [B] (verification not implemented)	108
Sympy [F]	109
Maxima [F(-2)]	109
Giac [B] (verification not implemented)	110
Mupad [B] (verification not implemented)	110
Reduce [B] (verification not implemented)	111

Optimal result

Integrand size = 25, antiderivative size = 103

$$\int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx = \frac{2(ac - bd)^2 \arctan\left(\frac{\sqrt{a-b} \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{a+b}}\right)}{a^2 \sqrt{a-b} \sqrt{a+b} f} + \frac{d(2ac - bd) \operatorname{arctanh}(\sin(e + fx))}{a^2 f} + \frac{d^2 \tan(e + fx)}{af}$$

output $2*(a*c-b*d)^2*\arctan((a-b)^(1/2)*\tan(1/2*f*x+1/2*e)/(a+b)^(1/2))/a^2/(a-b)^(1/2)/(a+b)^(1/2)/f+d*(2*a*c-b*d)*\operatorname{arctanh}(\sin(f*x+e))/a^2/f+d^2*tan(f*x+e)/a/f$

Mathematica [A] (verified)

Time = 2.92 (sec), antiderivative size = 135, normalized size of antiderivative = 1.31

$$\begin{aligned} & \int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx \\ &= \frac{-\frac{2(ac-bd)^2 \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} + d\left(-((2ac - bd) (\log(\cos(\frac{1}{2}(e+fx))) - \sin(\frac{1}{2}(e+fx))) - \log(\cos(\frac{1}{2}(e+fx))) \sin(\frac{1}{2}(e+fx))) + ((2ac - bd) (\sin(\frac{1}{2}(e+fx)))^2 + \cos(\frac{1}{2}(e+fx))) \sin(\frac{1}{2}(e+fx))\right)}{a^2 f} \end{aligned}$$

input $\text{Integrate}[(c + d \sec(e + f x))^2 / (a + b \cos(e + f x)), x]$

output $((-2*(a*c - b*d)^2 * \text{ArcTanh[((a - b)*\text{Tan}[(e + f*x)/2])/\text{Sqrt}[-a^2 + b^2]]})/\text{Sqrt}[-a^2 + b^2] + d*(-((2*a*c - b*d)*(\text{Log}[\text{Cos}[(e + f*x)/2] - \text{Sin}[(e + f*x)/2]] - \text{Log}[\text{Cos}[(e + f*x)/2] + \text{Sin}[(e + f*x)/2]])) + a*d*\text{Tan}[e + f*x]))/(a^2*f)$

Rubi [A] (verified)

Time = 0.53 (sec), antiderivative size = 103, normalized size of antiderivative = 1.00, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.200$, Rules used = {3042, 3307, 3042, 3431, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{(c + d \sec(e + f x))^2}{a + b \cos(e + f x)} dx \\
 & \quad \downarrow 3042 \\
 & \int \frac{(c + d \csc(e + f x + \frac{\pi}{2}))^2}{a + b \sin(e + f x + \frac{\pi}{2})} dx \\
 & \quad \downarrow 3307 \\
 & \int \frac{\sec^2(e + f x)(c \cos(e + f x) + d)^2}{a + b \cos(e + f x)} dx \\
 & \quad \downarrow 3042 \\
 & \int \frac{(c \sin(e + f x + \frac{\pi}{2}) + d)^2}{\sin(e + f x + \frac{\pi}{2})^2 (a + b \sin(e + f x + \frac{\pi}{2}))} dx \\
 & \quad \downarrow 3431 \\
 & \int \left(\frac{(ac - bd)^2}{a^2(a + b \cos(e + f x))} + \frac{d(2ac - bd) \sec(e + f x)}{a^2} + \frac{d^2 \sec^2(e + f x)}{a} \right) dx \\
 & \quad \downarrow 2009
 \end{aligned}$$

$$\frac{2(ac - bd)^2 \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{a^2 f \sqrt{a-b} \sqrt{a+b}} + \frac{d(2ac - bd)\operatorname{arctanh}(\sin(e + fx))}{a^2 f} + \frac{d^2 \tan(e + fx)}{af}$$

input `Int[(c + d*Sec[e + f*x])^2/(a + b*Cos[e + f*x]), x]`

output
$$\frac{(2*(a*c - b*d)^2*\operatorname{ArcTan}[(\operatorname{Sqrt}[a - b]*\operatorname{Tan}[(e + f*x)/2])/(\operatorname{Sqrt}[a + b])]/(a^2*\operatorname{Sqrt}[a - b]*\operatorname{Sqrt}[a + b]*f) + (d*(2*a*c - b*d)*\operatorname{ArcTanh}[\operatorname{Sin}[e + f*x]])/(a^2*f) + (d^2*\operatorname{Tan}[e + f*x])/(a*f)}$$

Definitions of rubi rules used

rule 2009 `Int[u_, x_Symbol] :> Simp[IntSum[u, x], x] /; SumQ[u]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 3307 `Int[(csc[(e_.) + (f_.)*(x_)]*(d_.) + (c_.))^(n_.)*((a_) + (b_.))*sin[(e_.) + (f_.)*(x_.)]^(m_.), x_Symbol] :> Int[(a + b*Sin[e + f*x])^m*((d + c*Sin[e + f*x])^n/Sin[e + f*x]^n), x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IntegerQ[n]`

rule 3431 `Int[((g_.)*sin[(e_.) + (f_.)*(x_)])^(p_)*((a_) + (b_.))*sin[(e_.) + (f_.)*(x_.)]^(m_)*((c_) + (d_.))*sin[(e_.) + (f_.)*(x_.)]^(n_), x_Symbol] :> Int[Exp andTrig[(g*Sin[e + f*x])^p*(a + b*Sin[e + f*x])^m*(c + d*Sin[e + f*x])^n, x], x] /; FreeQ[{a, b, c, d, e, f, g, n, p}, x] && NeQ[b*c - a*d, 0] && (IntegersQ[m, n] || IntegersQ[m, p] || IntegersQ[n, p]) && NeQ[p, 2]`

Maple [A] (verified)

Time = 0.50 (sec) , antiderivative size = 165, normalized size of antiderivative = 1.60

method	result
derivativedivides	$\frac{2(a^2 c^2 - 2abcd + b^2 d^2) \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{a^2 \sqrt{(a-b)(a+b)}} - \frac{d^2}{a(\tan\left(\frac{fx}{2} + \frac{e}{2}\right) + 1)} + \frac{d(2ac-bd) \ln\left(\tan\left(\frac{fx}{2} + \frac{e}{2}\right) + 1\right)}{a^2} - \frac{d^2}{a(\tan\left(\frac{fx}{2} + \frac{e}{2}\right) - 1)}$
default	$\frac{2(a^2 c^2 - 2abcd + b^2 d^2) \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{a^2 \sqrt{(a-b)(a+b)}} - \frac{d^2}{a(\tan\left(\frac{fx}{2} + \frac{e}{2}\right) + 1)} + \frac{d(2ac-bd) \ln\left(\tan\left(\frac{fx}{2} + \frac{e}{2}\right) + 1\right)}{a^2} - \frac{d^2}{a(\tan\left(\frac{fx}{2} + \frac{e}{2}\right) - 1)}$
risch	$\frac{2id^2}{fa(e^{2i(fx+e)}+1)} - \frac{2d \ln(e^{i(fx+e)}-i)c}{af} + \frac{d^2 \ln(e^{i(fx+e)}-i)b}{a^2 f} - \frac{\ln\left(e^{i(fx+e)} + \frac{ia^2 - ib^2 + a\sqrt{-a^2 + b^2}}{b\sqrt{-a^2 + b^2}}\right)c^2}{\sqrt{-a^2 + b^2} f} + \frac{2 \ln\left(e^{i(fx+e)} + \frac{ia^2 - ib^2 + a\sqrt{-a^2 + b^2}}{b\sqrt{-a^2 + b^2}}\right)c^2}{\sqrt{-a^2 + b^2} f}$

input `int((c+d*sec(f*x+e))^2/(a+b*cos(f*x+e)),x,method=_RETURNVERBOSE)`

output
$$\frac{1/f*(2*(a^2*c^2-2*a*b*c*d+b^2*d^2)/a^2/((a-b)*(a+b))^(1/2)*\arctan((a-b)*\tan(1/2*f*x+1/2*e)/((a-b)*(a+b))^(1/2))-d^2/a/(\tan(1/2*f*x+1/2*e)+1)+d*(2*a*c-b*d)/a^2*\ln(\tan(1/2*f*x+1/2*e)+1)-d^2/a/(\tan(1/2*f*x+1/2*e)-1)-d*(2*a*c-b*d)/a^2*\ln(\tan(1/2*f*x+1/2*e)-1))}{}$$

Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 218 vs. $2(94) = 188$.

Time = 2.91 (sec) , antiderivative size = 505, normalized size of antiderivative = 4.90

$$\int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx \\ = \left[\frac{2(a^3 - ab^2)d^2 \sin(fx + e) - (a^2c^2 - 2abcd + b^2d^2)\sqrt{-a^2 + b^2} \cos(fx + e) \log\left(\frac{2ab \cos(fx+e) + (2a^2 - b^2) \cos(fx+e)}{b^2}\right)}{a^2(b^2 - a^2)} \right]$$

input `integrate((c+d*sec(f*x+e))^2/(a+b*cos(f*x+e)),x, algorithm="fricas")`

output

```
[1/2*(2*(a^3 - a*b^2)*d^2*sin(f*x + e) - (a^2*c^2 - 2*a*b*c*d + b^2*d^2)*s
qrt(-a^2 + b^2)*cos(f*x + e)*log((2*a*b*cos(f*x + e) + (2*a^2 - b^2)*cos(f
*x + e)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(f*x + e) + b)*sin(f*x + e) - a^2 + 2
*b^2)/(b^2*cos(f*x + e)^2 + 2*a*b*cos(f*x + e) + a^2)) + (2*(a^3 - a*b^2)*
c*d - (a^2*b - b^3)*d^2)*cos(f*x + e)*log(sin(f*x + e) + 1) - (2*(a^3 - a*
b^2)*c*d - (a^2*b - b^3)*d^2)*cos(f*x + e)*log(-sin(f*x + e) + 1))/((a^4 -
a^2*b^2)*f*cos(f*x + e)), 1/2*(2*(a^3 - a*b^2)*d^2*sin(f*x + e) + 2*(a^2*
c^2 - 2*a*b*c*d + b^2*d^2)*sqrt(a^2 - b^2)*arctan(-(a*cos(f*x + e) + b)/(s
qrt(a^2 - b^2)*sin(f*x + e)))*cos(f*x + e) + (2*(a^3 - a*b^2)*c*d - (a^2*b
- b^3)*d^2)*cos(f*x + e)*log(sin(f*x + e) + 1) - (2*(a^3 - a*b^2)*c*d - (
a^2*b - b^3)*d^2)*cos(f*x + e)*log(-sin(f*x + e) + 1))/((a^4 - a^2*b^2)*f*
cos(f*x + e))]
```

Sympy [F]

$$\int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx = \int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx$$

input

```
integrate((c+d*sec(f*x+e))**2/(a+b*cos(f*x+e)),x)
```

output

```
Integral((c + d*sec(e + fx))**2/(a + b*cos(e + fx)), x)
```

Maxima [F(-2)]

Exception generated.

$$\int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx = \text{Exception raised: ValueError}$$

input

```
integrate((c+d*sec(f*x+e))**2/(a+b*cos(f*x+e)),x, algorithm="maxima")
```

output

```
Exception raised: ValueError >> Computation failed since Maxima requested
additional constraints; using the 'assume' command before evaluation *may*
help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` f
or more de
```

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 196 vs. $2(94) = 188$.

Time = 0.17 (sec) , antiderivative size = 196, normalized size of antiderivative = 1.90

$$\int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx =$$

$$-\frac{\frac{2d^2 \tan(\frac{1}{2}fx + \frac{1}{2}e)}{(\tan(\frac{1}{2}fx + \frac{1}{2}e)^2 - 1)a} - \frac{(2acd - bd^2) \log(|\tan(\frac{1}{2}fx + \frac{1}{2}e) + 1|)}{a^2} + \frac{(2acd - bd^2) \log(|\tan(\frac{1}{2}fx + \frac{1}{2}e) - 1|)}{a^2} + \frac{2(a^2c^2 - 2abcd + b^2d^2)\pi}{f}}{f}$$

input `integrate((c+d*sec(f*x+e))^2/(a+b*cos(f*x+e)),x, algorithm="giac")`

output $-(2*d^2*tan(1/2*f*x + 1/2*e))/((tan(1/2*f*x + 1/2*e)^2 - 1)*a) - (2*a*c*d - b*d^2)*log(abs(tan(1/2*f*x + 1/2*e) + 1))/a^2 + (2*a*c*d - b*d^2)*log(abs(tan(1/2*f*x + 1/2*e) - 1))/a^2 + 2*(a^2*c^2 - 2*a*b*c*d + b^2*d^2)*(pi*f1*oer(1/2*(f*x + e)/pi + 1/2)*sgn(-2*a + 2*b) + arctan(-(a*tan(1/2*f*x + 1/2*e) - b*tan(1/2*f*x + 1/2*e))/sqrt(a^2 - b^2)))/(sqrt(a^2 - b^2)*a^2)/f$

Mupad [B] (verification not implemented)

Time = 4.28 (sec) , antiderivative size = 3577, normalized size of antiderivative = 34.73

$$\int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx = \text{Too large to display}$$

input `int((c + d/cos(e + f*x))^2/(a + b*cos(e + f*x)),x)`

output

```
(atan(((-(a + b)*(a - b))^(1/2)*((32*tan(e/2 + (f*x)/2)*(a^5*c^4 - 2*b^5*d^4 - a^4*b*c^4 + 4*a*b^4*d^4 - 3*a^2*b^3*d^4 + a^3*b^2*d^4 + 4*a^5*c^2*d^2 - 16*a^2*b^3*c*d^3 + 12*a^3*b^2*c*d^3 + 4*a^3*b^2*c^3*d - 12*a^4*b*c^2*d^2 - 10*a^2*b^3*c^2*d^2 + 18*a^3*b^2*c^2*d^2 + 8*a*b^4*c*d^3 - 4*a^4*b*c*d^3 - 4*a^4*b*c^3*d))/a^2 + ((-(a + b)*(a - b))^(1/2)*((32*(a^7*c^2 - 2*a^6*b*c^2 - a^6*b*d^2 + a^5*b^2*c^2 - a^4*b^3*d^2 + 2*a^5*b^2*d^2 + 2*a^7*c*d^2 - 4*a^6*b*c*d + 2*a^5*b^2*c*d))/a^3 + (32*tan(e/2 + (f*x)/2)*(-(a + b)*(a - b))^(1/2)*(a*c - b*d)^2*(2*a^6*b + 2*a^4*b^3 - 4*a^5*b^2))/(a^2*(a^4 - a^2*b^2))*(a*c - b*d)^2*(a*c - b*d)^2*i)/(a^4 - a^2*b^2) + ((-(a + b)*(a - b))^(1/2)*((32*tan(e/2 + (f*x)/2)*(a^5*c^4 - 2*b^5*d^4 - a^4*b*c^4 + 4*a*b^4*d^4 - 3*a^2*b^3*d^4 + a^3*b^2*d^4 + 4*a^5*c^2*d^2 - 16*a^2*b^3*c*d^3 + 12*a^3*b^2*c*d^3 + 4*a^3*b^2*c^3*d - 12*a^4*b*c^2*d^2 - 10*a^2*b^3*c^2*d^2 + 18*a^3*b^2*c^2*d^2 + 8*a*b^4*c*d^3 - 4*a^4*b*c*d^3 - 4*a^4*b*c^3*d))/a^2 - ((-(a + b)*(a - b))^(1/2)*((32*(a^7*c^2 - 2*a^6*b*c^2 - a^6*b*d^2 + a^5*b^2*c^2 - a^4*b^3*d^2 + 2*a^5*b^2*d^2 + 2*a^7*c*d^2 - 4*a^6*b*c*d + 2*a^5*b^2*c*d))/a^3 - (32*tan(e/2 + (f*x)/2)*(-(a + b)*(a - b))^(1/2)*(a*c - b*d)^2*(2*a^6*b + 2*a^4*b^3 - 4*a^5*b^2))/(a^2*(a^4 - a^2*b^2))*(a*c - b*d)^2*(a*c - b*d)^2*i)/(a^4 - a^2*b^2))/((64*(a*b^4*d^6 - b^5*d^6 - 2*a^5*c^5*d + 4*a^5*c^4*d^2 - a*b^4*c^2*d^4 - 6*a^2*b^3*c*d^5 - 12*a^4*b*c^3*d^3 + a^4*b*c^4*d^2 - 12*a^2*b^3*c^2*d...
```

Reduce [B] (verification not implemented)

Time = 0.17 (sec) , antiderivative size = 445, normalized size of antiderivative = 4.32

$$\int \frac{(c + d \sec(e + fx))^2}{a + b \cos(e + fx)} dx \\ = \frac{2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan\left(\frac{fx}{2} + \frac{e}{2}\right)a - \tan\left(\frac{fx}{2} + \frac{e}{2}\right)b}{\sqrt{a^2 - b^2}}\right) \cos(fx + e) a^2 c^2 - 4\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan\left(\frac{fx}{2} + \frac{e}{2}\right)a - \tan\left(\frac{fx}{2} + \frac{e}{2}\right)b}{\sqrt{a^2 - b^2}}\right) c^2}{}$$

input

```
int((c+d*sec(f*x+e))^2/(a+b*cos(f*x+e)),x)
```

output

```
(2*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**2*c**2 - 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a*b*c*d + 2*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*b**2*d**2 - 2*cos(e + f*x)*log(tan((e + f*x)/2) - 1)*a**2*b*d**2 + 2*cos(e + f*x)*log(tan((e + f*x)/2) - 1)*a*b**2*c*d - cos(e + f*x)*log(tan((e + f*x)/2) - 1)*b**3*d**2 + 2*cos(e + f*x)*log(tan((e + f*x)/2) + 1)*a**3*c*d - cos(e + f*x)*log(tan((e + f*x)/2) + 1)*a*b**2*c*d + cos(e + f*x)*log(tan((e + f*x)/2) + 1)*b**3*d**2 + sin(e + f*x)*a**3*d**2 - sin(e + f*x)*a*b**2*d**2)/(cos(e + f*x)*a**2*f*(a**2 - b**2))
```

3.12 $\int \frac{c+d \sec(e+fx)}{a+b \cos(e+fx)} dx$

Optimal result	113
Mathematica [A] (verified)	113
Rubi [A] (verified)	114
Maple [A] (verified)	116
Fricas [A] (verification not implemented)	117
Sympy [F]	117
Maxima [F(-2)]	118
Giac [A] (verification not implemented)	118
Mupad [B] (verification not implemented)	119
Reduce [B] (verification not implemented)	119

Optimal result

Integrand size = 23, antiderivative size = 76

$$\int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx = \frac{2(ac - bd) \arctan\left(\frac{\sqrt{a-b} \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{a+b}}\right)}{a\sqrt{a-b}\sqrt{a+b}f} + \frac{d \operatorname{arctanh}(\sin(e+fx))}{af}$$

output
$$2*(a*c-b*d)*\operatorname{arctan}((a-b)^(1/2)*\tan(1/2*f*x+1/2*e)/(a+b)^(1/2))/a/(a-b)^(1/2)/(a+b)^(1/2)/f+d*\operatorname{arctanh}(\sin(f*x+e))/a/f$$

Mathematica [A] (verified)

Time = 0.62 (sec) , antiderivative size = 112, normalized size of antiderivative = 1.47

$$\begin{aligned} & \int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx \\ &= \frac{(-2ac+2bd)\operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} + d(-\log(\cos(\frac{1}{2}(e+fx)) - \sin(\frac{1}{2}(e+fx))) + \log(\cos(\frac{1}{2}(e+fx)) + \sin(\frac{1}{2}(e+fx))))/af \end{aligned}$$

input
$$\operatorname{Integrate}[(c + d \operatorname{Sec}[e + f x])/(a + b \operatorname{Cos}[e + f x]), x]$$

output

$$\frac{((-2*a*c + 2*b*d)*\text{ArcTanh}[((a - b)*\text{Tan}[(e + f*x)/2])/(\sqrt{-a^2 + b^2})])/\sqrt{-a^2 + b^2} + d*(-\text{Log}[\cos[(e + f*x)/2] - \sin[(e + f*x)/2]] + \text{Log}[\cos[(e + f*x)/2] + \sin[(e + f*x)/2]]))}{(a*f)}$$

Rubi [A] (verified)

Time = 0.46 (sec), antiderivative size = 76, normalized size of antiderivative = 1.00, number of steps used = 9, number of rules used = 8, $\frac{\text{number of rules}}{\text{integrand size}} = 0.348$, Rules used = {3042, 3307, 3042, 3480, 3042, 3138, 218, 4257}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx \\
 & \quad \downarrow \text{3042} \\
 & \int \frac{c + d \csc(e + fx + \frac{\pi}{2})}{a + b \sin(e + fx + \frac{\pi}{2})} dx \\
 & \quad \downarrow \text{3307} \\
 & \int \frac{\sec(e + fx)(c \cos(e + fx) + d)}{a + b \cos(e + fx)} dx \\
 & \quad \downarrow \text{3042} \\
 & \int \frac{c \sin(e + fx + \frac{\pi}{2}) + d}{\sin(e + fx + \frac{\pi}{2})(a + b \sin(e + fx + \frac{\pi}{2}))} dx \\
 & \quad \downarrow \text{3480} \\
 & \frac{(ac - bd) \int \frac{1}{a+b \cos(e+fx)} dx}{a} + \frac{d \int \sec(e+fx) dx}{a} \\
 & \quad \downarrow \text{3042} \\
 & \frac{(ac - bd) \int \frac{1}{a+b \sin(e+fx+\frac{\pi}{2})} dx}{a} + \frac{d \int \csc(e+fx+\frac{\pi}{2}) dx}{a} \\
 & \quad \downarrow \text{3138} \\
 & \frac{2(ac - bd) \int \frac{1}{(a-b)\tan^2(\frac{1}{2}(e+fx))+a+b} d \tan(\frac{1}{2}(e+fx))}{af} + \frac{d \int \csc(e+fx+\frac{\pi}{2}) dx}{a}
 \end{aligned}$$

$$\frac{d \int \csc(e + fx + \frac{\pi}{2}) dx}{a} + \frac{2(ac - bd) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{af\sqrt{a-b}\sqrt{a+b}}$$

↓ 218

$$\frac{2(ac - bd) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{af\sqrt{a-b}\sqrt{a+b}} + \frac{darctanh(\sin(e + fx))}{af}$$

↓ 4257

input `Int[(c + d*Sec[e + f*x])/(a + b*Cos[e + f*x]), x]`

output `(2*(a*c - b*d)*ArcTan[(Sqrt[a - b]*Tan[(e + f*x)/2])/Sqrt[a + b]])/(a*Sqrt[a - b]*Sqrt[a + b]*f) + (d*ArcTanh[Sin[e + f*x]])/(a*f)`

Definitions of rubi rules used

rule 218 `Int[((a_) + (b_.)*(x_)^2)^(-1), x_Symbol] :> Simp[(Rt[a/b, 2]/a)*ArcTan[x/Rt[a/b, 2]], x] /; FreeQ[{a, b}, x] && PosQ[a/b]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 3138 `Int[((a_) + (b_.)*sin[Pi/2 + (c_.) + (d_.)*(x_)])^(-1), x_Symbol] :> With[{e = FreeFactors[Tan[(c + d*x)/2], x]}, Simp[2*(e/d) Subst[Int[1/(a + b + (a - b)*e^2*x^2), x], x, Tan[(c + d*x)/2]/e], x]] /; FreeQ[{a, b, c, d}, x] && NeQ[a^2 - b^2, 0]`

rule 3307 `Int[(csc[(e_.) + (f_.)*(x_)]*(d_.) + (c_.))^(n_.)*((a_) + (b_.)*sin[(e_.) + (f_.)*(x_)])^(m_), x_Symbol] :> Int[(a + b*Sin[e + f*x])^m*((d + c*Sin[e + f*x])^n/Sin[e + f*x]^n), x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IntegerQ[n]`

rule 3480 $\text{Int}[(A_{\cdot}) + (B_{\cdot}) \sin[(e_{\cdot}) + (f_{\cdot})x_{\cdot}]) / ((a_{\cdot}) + (b_{\cdot}) \sin[(e_{\cdot}) + (f_{\cdot})x_{\cdot}]) * ((c_{\cdot}) + (d_{\cdot}) \sin[(e_{\cdot}) + (f_{\cdot})x_{\cdot}])], x_{\text{Symbol}} :> \text{Simp}[(A*b - a*B) / (b*c - a*d) \text{Int}[1/(a + b*\sin[e + f*x]), x], x] + \text{Simp}[(B*c - A*d) / (b*c - a*d) \text{Int}[1/(c + d*\sin[e + f*x]), x], x]; \text{FreeQ}[\{a, b, c, d, e, f, A, B\}, x] \&& \text{NeQ}[b*c - a*d, 0] \&& \text{NeQ}[a^2 - b^2, 0] \&& \text{NeQ}[c^2 - d^2, 0]$

rule 4257 $\text{Int}[\csc[(c_{\cdot}) + (d_{\cdot})x_{\cdot}], x_{\text{Symbol}} :> \text{Simp}[-\text{ArcTanh}[\cos[c + d*x]]/d, x]; \text{FreeQ}[\{c, d\}, x]$

Maple [A] (verified)

Time = 0.31 (sec), antiderivative size = 92, normalized size of antiderivative = 1.21

method	result
derivativedivides	$\frac{\frac{2(ac-bd) \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2}+\frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{a\sqrt{(a-b)(a+b)}} + \frac{d \ln\left(\tan\left(\frac{fx}{2}+\frac{e}{2}\right)+1\right)}{a} - \frac{d \ln\left(\tan\left(\frac{fx}{2}+\frac{e}{2}\right)-1\right)}{a}}{f}$
default	$\frac{\frac{2(ac-bd) \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2}+\frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{a\sqrt{(a-b)(a+b)}} + \frac{d \ln\left(\tan\left(\frac{fx}{2}+\frac{e}{2}\right)+1\right)}{a} - \frac{d \ln\left(\tan\left(\frac{fx}{2}+\frac{e}{2}\right)-1\right)}{a}}{f}$
risch	$-\frac{\ln\left(e^{i(fx+e)} + \frac{ia^2 - ib^2 + a\sqrt{-a^2 + b^2}}{b\sqrt{-a^2 + b^2}}\right)c}{\sqrt{-a^2 + b^2}f} + \frac{\ln\left(e^{i(fx+e)} + \frac{ia^2 - ib^2 + a\sqrt{-a^2 + b^2}}{b\sqrt{-a^2 + b^2}}\right)bd}{\sqrt{-a^2 + b^2}fa} + \frac{\ln\left(e^{i(fx+e)} - \frac{ia^2 - ib^2 - a\sqrt{-a^2 + b^2}}{b\sqrt{-a^2 + b^2}}\right)}{\sqrt{-a^2 + b^2}f}$

input $\text{int}((c+d*\sec(f*x+e))/(a+b*\cos(f*x+e)), x, \text{method}=\text{RETURNVERBOSE})$

output $1/f*(2*(a*c-b*d)/a/((a-b)*(a+b))^{(1/2)}*\arctan((a-b)*\tan(1/2*f*x+1/2*e)/((a-b)*(a+b))^{(1/2)})+d/a*\ln(\tan(1/2*f*x+1/2*e)+1)-d/a*\ln(\tan(1/2*f*x+1/2*e)-1))$

Fricas [A] (verification not implemented)

Time = 0.38 (sec) , antiderivative size = 296, normalized size of antiderivative = 3.89

$$\int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx$$

$$= \left[\frac{(a^2 - b^2)d \log(\sin(fx + e) + 1) - (a^2 - b^2)d \log(-\sin(fx + e) + 1) + \sqrt{-a^2 + b^2}(ac - bd) \log\left(\frac{2abcc}{2(a^3 - ab^2)f}\right)}{2(a^3 - ab^2)f} \right]$$

input `integrate((c+d*sec(f*x+e))/(a+b*cos(f*x+e)),x, algorithm="fricas")`

output $[1/2*((a^2 - b^2)*d*log(\sin(f*x + e) + 1) - (a^2 - b^2)*d*log(-\sin(f*x + e) + 1) + \sqrt{-a^2 + b^2}*(a*c - b*d)*log((2*a*b*cos(f*x + e) + (2*a^2 - b^2)*cos(f*x + e)^2 - 2*sqrt(-a^2 + b^2)*(a*cos(f*x + e) + b)*sin(f*x + e) - a^2 + 2*b^2)/(b^2*cos(f*x + e)^2 + 2*a*b*cos(f*x + e) + a^2)))/((a^3 - a*b^2)*f), 1/2*((a^2 - b^2)*d*log(\sin(f*x + e) + 1) - (a^2 - b^2)*d*log(-\sin(f*x + e) + 1) + 2*sqrt(a^2 - b^2)*(a*c - b*d)*arctan(-(a*cos(f*x + e) + b)/(sqrt(a^2 - b^2)*sin(f*x + e))))/((a^3 - a*b^2)*f)]$

Sympy [F]

$$\int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx = \int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx$$

input `integrate((c+d*sec(f*x+e))/(a+b*cos(f*x+e)),x)`

output `Integral((c + d*sec(e + f*x))/ (a + b*cos(e + f*x)), x)`

Maxima [F(-2)]

Exception generated.

$$\int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx = \text{Exception raised: ValueError}$$

input `integrate((c+d*sec(f*x+e))/(a+b*cos(f*x+e)),x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` f or more de

Giac [A] (verification not implemented)

Time = 0.13 (sec) , antiderivative size = 128, normalized size of antiderivative = 1.68

$$\int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx = \frac{\frac{d \log(|\tan(\frac{1}{2}fx + \frac{1}{2}e) + 1|)}{a} - \frac{d \log(|\tan(\frac{1}{2}fx + \frac{1}{2}e) - 1|)}{a} - \frac{2 \left(\pi \left\lfloor \frac{fx+e}{2\pi} + \frac{1}{2} \right\rfloor \operatorname{sgn}(-2a+2b) + \arctan \left(-\frac{a \tan(\frac{1}{2}fx + \frac{1}{2}e) - b \tan(\frac{1}{2}fx + \frac{1}{2}e)}{\sqrt{a^2 - b^2}} \right) \right)}{\sqrt{a^2 - b^2}a}}{f}$$

input `integrate((c+d*sec(f*x+e))/(a+b*cos(f*x+e)),x, algorithm="giac")`

output `(d*log(abs(tan(1/2*f*x + 1/2*e) + 1))/a - d*log(abs(tan(1/2*f*x + 1/2*e) - 1))/a - 2*(pi*floor(1/2*(f*x + e)/pi + 1/2)*sgn(-2*a + 2*b) + arctan(-(a*tan(1/2*f*x + 1/2*e) - b*tan(1/2*f*x + 1/2*e))/sqrt(a^2 - b^2)))*(a*c - b*d)/(sqrt(a^2 - b^2)*a))/f`

Mupad [B] (verification not implemented)

Time = 1.78 (sec) , antiderivative size = 345, normalized size of antiderivative = 4.54

$$\int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx = \frac{2 d \operatorname{atanh} \left(\frac{\sin \left(\frac{e}{2} + \frac{fx}{2} \right)}{\cos \left(\frac{e}{2} + \frac{fx}{2} \right)} \right)}{a f} - b \left(d \ln \left(\frac{a \cos \left(\frac{e}{2} + \frac{fx}{2} \right) + b \cos \left(\frac{e}{2} + \frac{fx}{2} \right) - \sin \left(\frac{e}{2} + \frac{fx}{2} \right) \sqrt{b^2 - a^2}}{\cos \left(\frac{e}{2} + \frac{fx}{2} \right)} \right) \sqrt{-(a + b)(a - b)} - d \ln \left(\frac{b \sin \left(\frac{e}{2} + \frac{fx}{2} \right) - a \sin \left(\frac{e}{2} + \frac{fx}{2} \right)}{\cos \left(\frac{e}{2} + \frac{fx}{2} \right)} \right) \sqrt{a^2 - b^2} \right)$$

input `int((c + d/cos(e + f*x))/(a + b*cos(e + f*x)),x)`

output
$$(2*d*\operatorname{atanh}(\sin(e/2 + (f*x)/2)/\cos(e/2 + (f*x)/2)))/(a*f) - (b*(d*log((a*cos(e/2 + (f*x)/2) + b*cos(e/2 + (f*x)/2) - \sin(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2))/\cos(e/2 + (f*x)/2))*(-(a + b)*(a - b))^(1/2) - d*log((b*sin(e/2 + (f*x)/2) - a*sin(e/2 + (f*x)/2) + \cos(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2))/\cos(e/2 + (f*x)/2))*(b^2 - a^2)^(1/2)) + a*c*log((b*sin(e/2 + (f*x)/2) - a*sin(e/2 + (f*x)/2) + \cos(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2))/\cos(e/2 + (f*x)/2))*(b^2 - a^2)^(1/2) - a*c*log((a*cos(e/2 + (f*x)/2) + b*cos(e/2 + (f*x)/2) - \sin(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2))/\cos(e/2 + (f*x)/2))*(-(a + b)*(a - b))^(1/2))/(a*f*(a^2 - b^2))$$

Reduce [B] (verification not implemented)

Time = 0.18 (sec) , antiderivative size = 193, normalized size of antiderivative = 2.54

$$\int \frac{c + d \sec(e + fx)}{a + b \cos(e + fx)} dx = \frac{2 \sqrt{a^2 - b^2} \operatorname{atan} \left(\frac{\tan \left(\frac{fx}{2} + \frac{e}{2} \right) a - \tan \left(\frac{fx}{2} + \frac{e}{2} \right) b}{\sqrt{a^2 - b^2}} \right) ac - 2 \sqrt{a^2 - b^2} \operatorname{atan} \left(\frac{\tan \left(\frac{fx}{2} + \frac{e}{2} \right) a - \tan \left(\frac{fx}{2} + \frac{e}{2} \right) b}{\sqrt{a^2 - b^2}} \right) bd - \log \left(\tan \left(\frac{fx}{2} + \frac{e}{2} \right) \right) af}{a f (a^2 - b^2)}$$

input `int((c+d*sec(f*x+e))/(a+b*cos(f*x+e)),x)`

output

```
(2*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*a*c - 2*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*b*d - log(tan((e + f*x)/2) - 1)*a**2*d + log(tan((e + f*x)/2) - 1)*b**2*d + log(tan((e + f*x)/2) + 1)*a**2*d - log(tan((e + f*x)/2) + 1)*b**2*d)/(a*f*(a**2 - b**2))
```

3.13 $\int \frac{1}{(a+b\cos(e+fx))(c+d\sec(e+fx))} dx$

Optimal result	121
Mathematica [A] (verified)	121
Rubi [A] (verified)	122
Maple [A] (verified)	124
Fricas [A] (verification not implemented)	125
Sympy [F]	125
Maxima [F(-2)]	126
Giac [B] (verification not implemented)	126
Mupad [B] (verification not implemented)	127
Reduce [B] (verification not implemented)	128

Optimal result

Integrand size = 25, antiderivative size = 121

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx \\ &= \frac{2a \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}(ac-bd)f} - \frac{2d \operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{\sqrt{c-d}\sqrt{c+d}(ac-bd)f} \end{aligned}$$

output
$$2*a*\arctan((a-b)^(1/2)*\tan(1/2*f*x+1/2*e)/(a+b)^(1/2))/(a-b)^(1/2)/(a+b)^(1/2)/(a*c-b*d)/f-2*d*\operatorname{arctanh}((c-d)^(1/2)*\tan(1/2*f*x+1/2*e)/(c+d)^(1/2))/(c-d)^(1/2)/(c+d)^(1/2)/(a*c-b*d)/f$$

Mathematica [A] (verified)

Time = 0.95 (sec) , antiderivative size = 106, normalized size of antiderivative = 0.88

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx \\ &= \frac{-\frac{2a \operatorname{arctanh}\left(\frac{(a-b)\tan(\frac{1}{2}(e+fx))}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} + \frac{2d \operatorname{arctanh}\left(\frac{(-c+d)\tan(\frac{1}{2}(e+fx))}{\sqrt{c^2-d^2}}\right)}{\sqrt{c^2-d^2}}}{acf - bdf} \end{aligned}$$

input $\text{Integrate}[1/((a + b \cos[e + f x])*(c + d \sec[e + f x])), x]$

output $((-2*a*\text{ArcTanh}[((a - b)*\tan[(e + f*x)/2])/Sqrt[-a^2 + b^2]])/Sqrt[-a^2 + b^2] + (2*d*\text{ArcTanh}[((-c + d)*\tan[(e + f*x)/2])/Sqrt[c^2 - d^2]])/Sqrt[c^2 - d^2])/(a*c*f - b*d*f)$

Rubi [A] (verified)

Time = 0.52 (sec), antiderivative size = 121, normalized size of antiderivative = 1.00, number of steps used = 9, number of rules used = 8, $\frac{\text{number of rules}}{\text{integrand size}} = 0.320$, Rules used = {3042, 3307, 3042, 3480, 3042, 3138, 218, 221}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{1}{(a + b \cos(e + f x))(c + d \sec(e + f x))} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{1}{(a + b \sin(e + f x + \frac{\pi}{2})) (c + d \csc(e + f x + \frac{\pi}{2}))} dx \\
 & \quad \downarrow \textcolor{blue}{3307} \\
 & \int \frac{\cos(e + f x)}{(a + b \cos(e + f x))(c \cos(e + f x) + d)} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{\sin(e + f x + \frac{\pi}{2})}{(a + b \sin(e + f x + \frac{\pi}{2})) (c \sin(e + f x + \frac{\pi}{2}) + d)} dx \\
 & \quad \downarrow \textcolor{blue}{3480} \\
 & \frac{a \int \frac{1}{a+b \cos(e+f x)} dx}{ac - bd} - \frac{d \int \frac{1}{d+c \cos(e+f x)} dx}{ac - bd} \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \frac{a \int \frac{1}{a+b \sin(e+f x+\frac{\pi}{2})} dx}{ac - bd} - \frac{d \int \frac{1}{d+c \sin(e+f x+\frac{\pi}{2})} dx}{ac - bd} \\
 & \quad \downarrow \textcolor{blue}{3138}
 \end{aligned}$$

$$\begin{aligned}
 & \frac{2a \int \frac{1}{(a-b) \tan^2(\frac{1}{2}(e+fx)) + a+b} d \tan\left(\frac{1}{2}(e+fx)\right)}{f(ac-bd)} - \\
 & \frac{2d \int \frac{1}{-(c-d) \tan^2(\frac{1}{2}(e+fx)) + c+d} d \tan\left(\frac{1}{2}(e+fx)\right)}{f(ac-bd)} \\
 & \quad \downarrow \text{218} \\
 & \frac{2a \arctan\left(\frac{\sqrt{a-b} \tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{f \sqrt{a-b} \sqrt{a+b} (ac-bd)} - \frac{2d \int \frac{1}{-(c-d) \tan^2(\frac{1}{2}(e+fx)) + c+d} d \tan\left(\frac{1}{2}(e+fx)\right)}{f(ac-bd)} \\
 & \quad \downarrow \text{221} \\
 & \frac{2a \arctan\left(\frac{\sqrt{a-b} \tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{f \sqrt{a-b} \sqrt{a+b} (ac-bd)} - \frac{2d \operatorname{arctanh}\left(\frac{\sqrt{c-d} \tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{f \sqrt{c-d} \sqrt{c+d} (ac-bd)}
 \end{aligned}$$

input `Int[1/((a + b*Cos[e + f*x])*(c + d*Sec[e + f*x])), x]`

output `(2*a*ArcTan[(Sqrt[a - b]*Tan[(e + f*x)/2])/Sqrt[a + b]])/(Sqrt[a - b]*Sqrt[a + b]*(a*c - b*d)*f) - (2*d*ArcTanh[(Sqrt[c - d]*Tan[(e + f*x)/2])/Sqrt[c + d]])/(Sqrt[c - d]*Sqrt[c + d]*(a*c - b*d)*f)`

Definitions of rubi rules used

rule 218 `Int[((a_) + (b_.)*(x_)^2)^(-1), x_Symbol] :> Simp[(Rt[a/b, 2]/a)*ArcTan[x/Rt[a/b, 2]], x] /; FreeQ[{a, b}, x] && PosQ[a/b]`

rule 221 `Int[((a_) + (b_.)*(x_)^2)^(-1), x_Symbol] :> Simp[(Rt[-a/b, 2]/a)*ArcTanh[x/Rt[-a/b, 2]], x] /; FreeQ[{a, b}, x] && NegQ[a/b]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 3138

```
Int[((a_) + (b_)*sin[Pi/2 + (c_.) + (d_)*(x_)])^(-1), x_Symbol] :> With[{  
e = FreeFactors[Tan[(c + d*x)/2], x]}, Simp[2*(e/d) Subst[Int[1/(a + b +  
(a - b)*e^2*x^2), x], x, Tan[(c + d*x)/2]/e], x]] /; FreeQ[{a, b, c, d}, x]  
&& NeQ[a^2 - b^2, 0]
```

rule 3307

```
Int[(csc[(e_.) + (f_)*(x_)]*(d_.) + (c_))^(n_)*((a_) + (b_)*sin[(e_.) +  
(f_)*(x_)])^m, x_Symbol] :> Int[(a + b*Sin[e + f*x])^m*((d + c*Sin[e +  
f*x])^n/Sin[e + f*x]^n), x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IntegerQ  
[n]
```

rule 3480

```
Int[((A_.) + (B_)*sin[(e_.) + (f_)*(x_)])/(((a_) + (b_)*sin[(e_.) + (f_*)  
.)*(x_)]*((c_.) + (d_)*sin[(e_.) + (f_)*(x_)])), x_Symbol] :> Simp[(A*b  
- a*B)/(b*c - a*d) Int[1/(a + b*Sin[e + f*x]), x], x] + Simp[(B*c - A*d)/  
(b*c - a*d) Int[1/(c + d*Sin[e + f*x]), x], x] /; FreeQ[{a, b, c, d, e, f  
, A, B}, x] && NeQ[b*c - a*d, 0] && NeQ[a^2 - b^2, 0] && NeQ[c^2 - d^2, 0]
```

Maple [A] (verified)

Time = 0.57 (sec) , antiderivative size = 108, normalized size of antiderivative = 0.89

method	result
derivativedivides	$\frac{2a \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2}+\frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right) - 2d \operatorname{arctanh}\left(\frac{(c-d) \tan\left(\frac{fx}{2}+\frac{e}{2}\right)}{\sqrt{(c+d)(c-d)}}\right)}{f}$
default	$\frac{2a \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2}+\frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right) - 2d \operatorname{arctanh}\left(\frac{(c-d) \tan\left(\frac{fx}{2}+\frac{e}{2}\right)}{\sqrt{(c+d)(c-d)}}\right)}{f}$
risch	$-\frac{a \ln\left(\frac{e^{i(fx+e)}+ia^2-ib^2+a\sqrt{-a^2+b^2}}{b\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}(ac-bd)f} + \frac{a \ln\left(\frac{e^{i(fx+e)}-ia^2-ib^2-a\sqrt{-a^2+b^2}}{\sqrt{-a^2+b^2}b}\right)}{\sqrt{-a^2+b^2}(ac-bd)f} + \frac{d \ln\left(\frac{e^{i(fx+e)}+\frac{-ic^2+id^2+d\sqrt{c^2-d^2}}{\sqrt{c^2-d^2}c}}{c}\right)}{\sqrt{c^2-d^2}(ac-bd)f}$

input `int(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e)), x, method=_RETURNVERBOSE)`

output

```
1/f*(2*a/(a*c-b*d)/((a-b)*(a+b))^(1/2)*arctan((a-b)*tan(1/2*f*x+1/2*e)/((a  
-b)*(a+b))^(1/2))-2*d/(a*c-b*d)/((c+d)*(c-d))^(1/2)*arctanh((c-d)*tan(1/2*  
f*x+1/2*e)/((c+d)*(c-d))^(1/2)))
```

Fricas [A] (verification not implemented)

Time = 1.65 (sec) , antiderivative size = 1022, normalized size of antiderivative = 8.45

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx = \text{Too large to display}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e)),x, algorithm="fricas")`

output

```

[-1/2*((a^2 - b^2)*sqrt(c^2 - d^2)*d*log((2*c*d*cos(f*x + e) - (c^2 - 2*d^2)*cos(f*x + e)^2 + 2*sqrt(c^2 - d^2)*(d*cos(f*x + e) + c)*sin(f*x + e) + 2*c^2 - d^2)/(c^2*2*cos(f*x + e)^2 + 2*c*d*cos(f*x + e) + d^2)) - (a*c^2 - a*d^2)*sqrt(-a^2 + b^2)*log((2*a*b*cos(f*x + e) + (2*a^2 - b^2)*cos(f*x + e)^2 - 2*sqrt(-a^2 + b^2)*(a*cos(f*x + e) + b)*sin(f*x + e) - a^2 + 2*b^2)/(b^2*2*cos(f*x + e)^2 + 2*a*b*cos(f*x + e) + a^2)))/(((a^3 - a*b^2)*c^3 - (a^2*b - b^3)*c^2*d - (a^3 - a*b^2)*c*d^2 + (a^2*b - b^3)*d^3)*f), -1/2*(2*(a^2 - b^2)*sqrt(-c^2 + d^2)*d*arctan(-sqrt(-c^2 + d^2)*(d*cos(f*x + e) + c))/((c^2 - d^2)*sin(f*x + e))) - (a*c^2 - a*d^2)*sqrt(-a^2 + b^2)*log((2*a*b*cos(f*x + e) + (2*a^2 - b^2)*cos(f*x + e)^2 - 2*sqrt(-a^2 + b^2)*(a*cos(f*x + e) + b)*sin(f*x + e) - a^2 + 2*b^2)/(b^2*2*cos(f*x + e)^2 + 2*a*b*cos(f*x + e) + a^2)))/(((a^3 - a*b^2)*c^3 - (a^2*b - b^3)*c^2*d - (a^3 - a*b^2)*c*d^2 + (a^2*b - b^3)*d^3)*f), -1/2*((a^2 - b^2)*sqrt(c^2 - d^2)*d*log((2*c*d*cos(f*x + e) - (c^2 - 2*d^2)*cos(f*x + e)^2 + 2*sqrt(c^2 - d^2)*(d*cos(f*x + e) + c)*sin(f*x + e) + 2*c^2 - d^2)/(c^2*2*cos(f*x + e)^2 + 2*c*d*cos(f*x + e) + d^2)) - 2*(a*c^2 - a*d^2)*sqrt(a^2 - b^2)*arctan(-(a*cos(f*x + e) + b)/(sqrt(a^2 - b^2)*sin(f*x + e)))))/(((a^3 - a*b^2)*c^3 - (a^2*b - b^3)*c^2*d - (a^3 - a*b^2)*c*d^2 + (a^2*b - b^3)*d^3)*f), -((a^2 - b^2)*sqrt(-c^2 + d^2)*d*arctan(-sqrt(-c^2 + d^2)*(d*cos(f*x + e) + c))/((c^2 - d^2)*sin(f*x + e))) - (a*c^2 - a*d^2)*sqrt(a^2 - b^2)*arctan(-(a*cos(f*x + e) + b)/(sqrt(a^2 - b^2)*sin(f*x + e)))) - ((a^2 - b^2)*sqrt(c^2 - d^2)*d*arctan(-(a*cos(f*x + e) + c)/(sqrt(c^2 - d^2)*sin(f*x + e)))))/(((a^3 - a*b^2)*c^3 - (a^2*b - b^3)*c^2*d - (a^3 - a*b^2)*c*d^2 + (a^2*b - b^3)*d^3)*f)

```

Sympy [F]

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx = \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e)),x)`

output `Integral(1/((a + b*cos(e + f*x))*(c + d*sec(e + f*x))), x)`

Maxima [F(-2)]

Exception generated.

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx = \text{Exception raised: ValueError}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e)),x, algorithm="maxima")`

output `Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*c^2-4*d^2>0)', see `assume?` for more details)`

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 507 vs. $2(103) = 206$.

Time = 0.19 (sec), antiderivative size = 507, normalized size of antiderivative = 4.19

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx \\ &= \frac{\left(\sqrt{a^2 - b^2} ac|a - b| - \sqrt{a^2 - b^2}(2a - b)d|a - b| + \sqrt{a^2 - b^2}|ac - bd||a - b|\right) \left(\pi \left\lfloor \frac{fx + e}{2\pi} + \frac{1}{2} \right\rfloor + \arctan \left(\frac{\tan \left(\frac{1}{2}fx + \frac{1}{2}e \right)}{\sqrt{\frac{bc - ad + \sqrt{(ac + bc + ad + bd)(ac - bc - ad + bd)}(bc - ad)^2}{ac - bc - ad + bd}}} \right)\right)}{(a^2 - 2ab + b^2)(ac - bd)^2 + (a^2b - 2ab^2 + b^3)c|ac - bd| - (a^3 - 2a^2b + ab^2)d|ac - bd|} \end{aligned}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e)),x, algorithm="giac")`

output

```
((sqrt(a^2 - b^2)*a*c*abs(a - b) - sqrt(a^2 - b^2)*(2*a - b)*d*abs(a - b)
+ sqrt(a^2 - b^2)*abs(a*c - b*d)*abs(a - b))*(pi*floor(1/2*(f*x + e)/pi +
1/2) + arctan(tan(1/2*f*x + 1/2*e)/sqrt((b*c - a*d + sqrt((a*c + b*c + a*d
+ b*d)*(a*c - b*c - a*d + b*d) + (b*c - a*d)^2))/(a*c - b*c - a*d + b*d)))
))/((a^2 - 2*a*b + b^2)*(a*c - b*d)^2 + (a^2*b - 2*a*b^2 + b^3)*c*abs(a*c
- b*d) - (a^3 - 2*a^2*b + a*b^2)*d*abs(a*c - b*d)) + (sqrt(-c^2 + d^2)*a*(c
- 2*d)*abs(-c + d) + sqrt(-c^2 + d^2)*b*d*abs(-c + d) - sqrt(-c^2 + d^2)
*abs(a*c - b*d)*abs(-c + d))*(pi*floor(1/2*(f*x + e)/pi + 1/2) + arctan(ta
n(1/2*f*x + 1/2*e)/sqrt((b*c - a*d - sqrt((a*c + b*c + a*d + b*d)*(a*c - b
*c - a*d + b*d) + (b*c - a*d)^2))/(a*c - b*c - a*d + b*d)))))/((a*c - b*d)^
2*(c^2 - 2*c*d + d^2) + (c^2*d - 2*c*d^2 + d^3)*a*abs(a*c - b*d) - (c^3 -
2*c^2*d + c*d^2)*b*abs(a*c - b*d))/f
```

Mupad [B] (verification not implemented)

Time = 2.56 (sec) , antiderivative size = 2665, normalized size of antiderivative = 22.02

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx = \text{Too large to display}$$

input

```
int(1/((c + d/cos(e + f*x))*(a + b*cos(e + f*x))),x)
```

output

```
(a*c^2*atan((a^5*c^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i + a^3*d^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(3/2)*2i + a^5*d^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*2i - b^5*d^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i - a^2*b^3*c^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i - a^3*b^2*c^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i + a^2*b^3*d^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i - a^3*c*d*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(3/2)*2i - a^5*c*d*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*2i + a^2*b*c^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(3/2)*2i + a^4*b*c^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i + a*b^4*d^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*2i + a^3*b^2*c*d*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*2i - a^2*b*c*d*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(3/2)*2i - a^4*b*c*d*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*2i)/(a^6*c^2 - b^6*d^2 + a^2*b^4*c^2 - 2*a^4*b^2*c^2 + 2*a^2*b^4*d^2 - a^4*b^2*d^2)*(b^2 - a^2)^(1/2)*2i)/(f*(a^3*c^3 - b^3*d^3 - a*b^2*c^3 + a^2*b*d^3 - a^3*c*d^2 + b^3*c^2*d + a*b^2*c*d^2 - a^2*b*c^2*d)) - (a*d^2*atan((a^5*c^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i + a^3*d^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(3/2)*2i + a^5*d^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i - a^2*b^3*c^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i - a^3*b^2*c^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i + a^2*b^3*d^2*tan(e/2 + (f*x)/2)*(b^2 - a^2)^(1/2)*1i - a...)
```

Reduce [B] (verification not implemented)

Time = 0.17 (sec) , antiderivative size = 291, normalized size of antiderivative = 2.40

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))} dx \\ = \frac{2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan\left(\frac{fx}{2} + \frac{e}{2}\right)a - \tan\left(\frac{fx}{2} + \frac{e}{2}\right)b}{\sqrt{a^2 - b^2}}\right) a c^2 - 2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan\left(\frac{fx}{2} + \frac{e}{2}\right)a - \tan\left(\frac{fx}{2} + \frac{e}{2}\right)b}{\sqrt{a^2 - b^2}}\right) a d^2 - 2\sqrt{-c^2}}{f (a^3 c^3 - a^3 c d^2 - a^2 b c^2 d + a^2 b d^3 - a b^2 c^3)}$$

input

```
int(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e)),x)
```

output

$$\begin{aligned} & \frac{(2*(\sqrt{a^2 - b^2})*\text{atan}((\tan((e + f*x)/2)*a - \tan((e + f*x)/2)*b)/\sqrt{a^2 - b^2})*a*c^2 - \sqrt{a^2 - b^2}*\text{atan}((\tan((e + f*x)/2)*a - \tan((e + f*x)/2)*b)/\sqrt{a^2 - b^2})*a*d^2 - \sqrt{-c^2 + d^2}*\text{atan}((\tan((e + f*x)/2)*c - \tan((e + f*x)/2)*d)/\sqrt{-c^2 + d^2})*a^{*2}*d + \sqrt{-c^2 + d^2}*\text{atan}((\tan((e + f*x)/2)*c - \tan((e + f*x)/2)*d)/\sqrt{-c^2 + d^2})*b^{*2}*d)}{(f*(a^{*3}*c^3 - a^{*3}*c*d^2 - a^{*2}*b*c^2*d + a^{*2}*b*d^2 - a*b^{*2}*c^3 + a*b^{*2}*c*d^2 + b^{*3}*c^2*d - b^{*3}*d^3))} \end{aligned}$$

3.14 $\int \frac{1}{(a+b\cos(e+fx))(c+d\sec(e+fx))^2} dx$

Optimal result	130
Mathematica [A] (verified)	131
Rubi [A] (verified)	131
Maple [A] (verified)	135
Fricas [B] (verification not implemented)	135
Sympy [F]	136
Maxima [F(-2)]	137
Giac [A] (verification not implemented)	137
Mupad [B] (verification not implemented)	138
Reduce [B] (verification not implemented)	138

Optimal result

Integrand size = 25, antiderivative size = 187

$$\begin{aligned} & \int \frac{1}{(a+b\cos(e+fx))(c+d\sec(e+fx))^2} dx \\ &= \frac{2a^2 \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}(ac-bd)^2 f} - \frac{2d(2ac^2 - bcd - ad^2) \operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{(c-d)^{3/2}(c+d)^{3/2}(ac-bd)^2 f} \\ &+ \frac{d^2 \sin(e+fx)}{(ac-bd)(c^2-d^2)f(d+c\cos(e+fx))} \end{aligned}$$

output

```
2*a^2*arctan((a-b)^(1/2)*tan(1/2*f*x+1/2*e)/(a+b)^(1/2))/(a-b)^(1/2)/(a+b)
^(1/2)/(a*c-b*d)^2/f-2*d*(2*a*c^2-a*d^2-b*c*d)*arctanh((c-d)^(1/2)*tan(1/2
*f*x+1/2*e)/(c+d)^(1/2))/(c-d)^(3/2)/(c+d)^(3/2)/(a*c-b*d)^2/f+d^2*sin(f*x
+e)/(a*c-b*d)/(c^2-d^2)/f/(d+c*cos(f*x+e))
```

Mathematica [A] (verified)

Time = 2.05 (sec) , antiderivative size = 205, normalized size of antiderivative = 1.10

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx$$

$$= \frac{(d + c \cos(e + fx)) \sec^2(e + fx) \left(-\frac{2a^2 \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{-a^2+b^2}}\right) (d+c \cos(e+fx))}{\sqrt{-a^2+b^2}} - \frac{2d(bcd+a(-2c^2+d^2)) \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{-a^2+b^2}}\right) (d+c \cos(e+fx))}{\sqrt{-a^2+b^2}} \right)}{(ac - bd)^2 f (c + d \sec(e + fx))^2}$$

input `Integrate[1/((a + b*Cos[e + f*x])*(c + d*Sec[e + f*x])^2), x]`

output
$$\frac{((d + c \cos(e + fx)) \sec(e + fx)^2 ((-2a^2 \operatorname{ArcTanh}[(a - b) \operatorname{Tan}[(e + fx)/2]) / \operatorname{Sqrt}[-a^2 + b^2]) * (d + c \cos(e + fx)) / \operatorname{Sqrt}[-a^2 + b^2] - (2d(b*c*d + a*(-2*c^2 + d^2)) \operatorname{ArcTanh}[((-c + d) \operatorname{Tan}[(e + fx)/2]) / \operatorname{Sqrt}[c^2 - d^2]] * (d + c \cos(e + fx)) / (c^2 - d^2)^{(3/2}) + (d^2*(a*c - b*d) \operatorname{Sin}[e + fx]) / ((c - d)*(c + d)))) / ((a*c - b*d)^2 f (c + d \sec(e + fx))^2)}$$

Rubi [A] (verified)

Time = 0.99 (sec) , antiderivative size = 221, normalized size of antiderivative = 1.18, number of steps used = 12, number of rules used = 11, $\frac{\text{number of rules}}{\text{integrand size}} = 0.440$, Rules used = {3042, 3307, 3042, 3535, 25, 3042, 3480, 3042, 3138, 218, 221}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx$$

$$\downarrow \text{3042}$$

$$\int \frac{1}{(a + b \sin(e + fx + \frac{\pi}{2})) (c + d \csc(e + fx + \frac{\pi}{2}))^2} dx$$

$$\downarrow \text{3307}$$

$$\begin{aligned}
& \int \frac{\cos^2(e+fx)}{(a+b\cos(e+fx))(c\cos(e+fx)+d)^2} dx \\
& \quad \downarrow \text{3042} \\
& \int \frac{\sin(e+fx+\frac{\pi}{2})^2}{(a+b\sin(e+fx+\frac{\pi}{2}))(c\sin(e+fx+\frac{\pi}{2})+d)^2} dx \\
& \quad \downarrow \text{3535} \\
& \frac{\int -\frac{acd+(bcd-a(c^2-d^2))\cos(e+fx)}{(a+b\cos(e+fx))(d+c\cos(e+fx))} dx}{(c^2-d^2)(ac-bd)} + \frac{d^2\sin(e+fx)}{f(c^2-d^2)(ac-bd)(c\cos(e+fx)+d)} \\
& \quad \downarrow \text{25} \\
& \frac{d^2\sin(e+fx)}{f(c^2-d^2)(ac-bd)(c\cos(e+fx)+d)} - \frac{\int \frac{acd+(bcd-a(c^2-d^2))\cos(e+fx)}{(a+b\cos(e+fx))(d+c\cos(e+fx))} dx}{(c^2-d^2)(ac-bd)} \\
& \quad \downarrow \text{3042} \\
& \frac{d^2\sin(e+fx)}{f(c^2-d^2)(ac-bd)(c\cos(e+fx)+d)} - \frac{\int \frac{acd+(bcd-a(c^2-d^2))\sin(e+fx+\frac{\pi}{2})}{(a+b\sin(e+fx+\frac{\pi}{2}))(d+c\sin(e+fx+\frac{\pi}{2}))} dx}{(c^2-d^2)(ac-bd)} \\
& \quad \downarrow \text{3480} \\
& \frac{d^2\sin(e+fx)}{\frac{f(c^2-d^2)(ac-bd)(c\cos(e+fx)+d)}{ac-bd} - \frac{a^2(c^2-d^2)\int \frac{1}{a+b\cos(e+fx)} dx}{ac-bd} - \frac{d(bcd-a(2c^2-d^2))\int \frac{1}{d+c\cos(e+fx)} dx}{ac-bd}} \\
& \quad \downarrow \text{3042} \\
& \frac{d^2\sin(e+fx)}{\frac{f(c^2-d^2)(ac-bd)(c\cos(e+fx)+d)}{ac-bd} - \frac{a^2(c^2-d^2)\int \frac{1}{a+b\sin(e+fx+\frac{\pi}{2})} dx}{ac-bd} - \frac{d(bcd-a(2c^2-d^2))\int \frac{1}{d+c\sin(e+fx+\frac{\pi}{2})} dx}{ac-bd}} \\
& \quad \downarrow \text{3138} \\
& \frac{d^2\sin(e+fx)}{\frac{f(c^2-d^2)(ac-bd)(c\cos(e+fx)+d)}{f(ac-bd)} - \frac{2a^2(c^2-d^2)\int \frac{1}{(a-b)\tan^2(\frac{1}{2}(e+fx))+a+b} d\tan(\frac{1}{2}(e+fx))}{f(ac-bd)} - \frac{2d(bcd-a(2c^2-d^2))\int \frac{1}{-(c-d)\tan^2(\frac{1}{2}(e+fx))+c+d} d\tan(\frac{1}{2}(e+fx))}{f(ac-bd)}} \\
& \quad \downarrow \text{218}
\end{aligned}$$

$$\begin{aligned}
 & \frac{d^2 \sin(e + fx)}{f(c^2 - d^2)(ac - bd)(c \cos(e + fx) + d)} - \\
 & - \frac{2d(bcd - a(2c^2 - d^2)) \int \frac{1}{-(c-d)\tan^2(\frac{1}{2}(e+fx))} + c+d d \tan(\frac{1}{2}(e+fx))}{f(ac-bd)} - \frac{2a^2(c^2 - d^2) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{f\sqrt{a-b}\sqrt{a+b}(ac-bd)} \\
 & \frac{(c^2 - d^2)(ac - bd)}{\downarrow 221} \\
 & \frac{d^2 \sin(e + fx)}{f(c^2 - d^2)(ac - bd)(c \cos(e + fx) + d)} - \\
 & - \frac{2a^2(c^2 - d^2) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{f\sqrt{a-b}\sqrt{a+b}(ac-bd)} - \frac{2d(bcd - a(2c^2 - d^2)) \operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{f\sqrt{c-d}\sqrt{c+d}(ac-bd)}
 \end{aligned}$$

input `Int[1/((a + b*Cos[e + f*x])*(c + d*Sec[e + f*x])^2), x]`

output `-(((-2*a^2*(c^2 - d^2)*ArcTan[(Sqrt[a - b]*Tan[(e + f*x)/2])/Sqrt[a + b]])/(Sqrt[a - b]*Sqrt[a + b]*(a*c - b*d)*f) - (2*d*(b*c*d - a*(2*c^2 - d^2))*ArcTanh[(Sqrt[c - d]*Tan[(e + f*x)/2])/Sqrt[c + d]])/(Sqrt[c - d]*Sqrt[c + d]*(a*c - b*d))/((a*c - b*d)*(c^2 - d^2))) + (d^2*Sin[e + f*x])/((a*c - b*d)*(c^2 - d^2)*f*(d + c*Cos[e + f*x]))`

Definitions of rubi rules used

rule 25 `Int[-(Fx_), x_Symbol] :> Simp[Identity[-1] Int[Fx, x], x]`

rule 218 `Int[((a_) + (b_.)*(x_)^2)^(-1), x_Symbol] :> Simp[(Rt[a/b, 2]/a)*ArcTan[x/Rt[a/b, 2]], x] /; FreeQ[{a, b}, x] && PosQ[a/b]`

rule 221 `Int[((a_) + (b_.)*(x_)^2)^(-1), x_Symbol] :> Simp[(Rt[-a/b, 2]/a)*ArcTanh[x/Rt[-a/b, 2]], x] /; FreeQ[{a, b}, x] && NegQ[a/b]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 3138 $\text{Int}[(a_ + b_)*\sin[\pi/2 + (c_ + d_)*(x_)]^{(-1)}, x_{\text{Symbol}}] \Rightarrow \text{With}[\{e = \text{FreeFactors}[\tan[(c + d*x)/2], x]\}, \text{Simp}[2*(e/d) \text{Subst}[\text{Int}[1/(a + b + (a - b)*e^2*x^2), x], x, \tan[(c + d*x)/2]/e], x]] /; \text{FreeQ}[\{a, b, c, d\}, x] \&& \text{NeQ}[a^2 - b^2, 0]$

rule 3307 $\text{Int}[(\csc[(e_ + f_)*(x_)]*(d_ + (c_))^{(n_)}*((a_ + b_)*\sin[(e_ + f_)*(x_)]^{(m_)}), x_{\text{Symbol}}] \Rightarrow \text{Int}[(a + b*\sin[e + f*x])^m*((d + c*\sin[e + f*x])^n/\sin[e + f*x]^n), x] /; \text{FreeQ}[\{a, b, c, d, e, f, m\}, x] \&& \text{IntegerQ}[n]$

rule 3480 $\text{Int}[((A_ + B_)*\sin[(e_ + f_)*(x_)])/(((a_ + b_)*\sin[(e_ + f_)*(x_)]*(c_ + (d_)*\sin[(e_ + f_)*(x_)])), x_{\text{Symbol}}] \Rightarrow \text{Simp}[(A*b - a*B)/(b*c - a*d) \text{Int}[1/(a + b*\sin[e + f*x]), x], x] + \text{Simp}[(B*c - A*d)/(b*c - a*d) \text{Int}[1/(c + d*\sin[e + f*x]), x], x] /; \text{FreeQ}[\{a, b, c, d, e, f, A, B\}, x] \&& \text{NeQ}[b*c - a*d, 0] \&& \text{NeQ}[a^2 - b^2, 0] \&& \text{NeQ}[c^2 - d^2, 0]$

rule 3535 $\text{Int}[((a_ + b_)*\sin[(e_ + f_)*(x_)]^{(m_)}*((c_ + (d_)*\sin[(e_ + f_)*(x_)]^{(n_)}*((A_ + C_)*\sin[(e_ + f_)*(x_)]^{(2)}), x_{\text{Symbol}}] \Rightarrow \text{Simp}[(-(A*b^2 + a^2*C))*\cos[e + f*x]*(a + b*\sin[e + f*x])^{(m + 1)}*((c + d*\sin[e + f*x])^{(n + 1)}/(f*(m + 1)*(b*c - a*d)*(a^2 - b^2))), x] + \text{Simp}[1/((m + 1)*(b*c - a*d)*(a^2 - b^2)) \text{Int}[(a + b*\sin[e + f*x])^{(m + 1)}*(c + d*\sin[e + f*x])^{(n + 1)}*\text{Simp}[a*(m + 1)*(b*c - a*d)*(A + C) + d*(A*b^2 + a^2*C)*(m + n + 2) - (c*(A*b^2 + a^2*C) + b*(m + 1)*(b*c - a*d)*(A + C))*\sin[e + f*x] - d*(A*b^2 + a^2*C)*(m + n + 3)*\sin[e + f*x]^2, x], x] /; \text{FreeQ}[\{a, b, c, d, e, f, A, C, n\}, x] \&& \text{NeQ}[b*c - a*d, 0] \&& \text{NeQ}[a^2 - b^2, 0] \&& \text{NeQ}[c^2 - d^2, 0] \&& \text{LtQ}[m, -1] \&& ((\text{EqQ}[a, 0] \&& \text{IntegerQ}[m] \&& !\text{IntegerQ}[n]) || (\text{IntegerQ}[2*n] \&& \text{LtQ}[n, -1] \&& ((\text{IntegerQ}[n] \&& !\text{IntegerQ}[m]) \&& \text{EqQ}[a, 0])))$

Maple [A] (verified)

Time = 1.65 (sec) , antiderivative size = 210, normalized size of antiderivative = 1.12

method	result
derivativedivides	$\frac{2a^2 \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{(ac-bd)^2 \sqrt{(a-b)(a+b)}} + \frac{2d \left(-\frac{d(ac-bd) \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{(c^2-d^2) \left(\tan\left(\frac{fx}{2} + \frac{e}{2}\right)^2 c - \tan\left(\frac{fx}{2} + \frac{e}{2}\right)^2 d - c - d\right)} - \frac{(2a c^2 - a d^2 - bcd) \operatorname{arctanh}\left(\frac{(c-d)}{\sqrt{(c+d)(c-d)}}\right)}{(c+d)(c-d) \sqrt{(c+d)(c-d)}} \right)}{(ac-bd)^2 f}$
default	$\frac{2a^2 \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{(ac-bd)^2 \sqrt{(a-b)(a+b)}} + \frac{2d \left(-\frac{d(ac-bd) \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{(c^2-d^2) \left(\tan\left(\frac{fx}{2} + \frac{e}{2}\right)^2 c - \tan\left(\frac{fx}{2} + \frac{e}{2}\right)^2 d - c - d\right)} - \frac{(2a c^2 - a d^2 - bcd) \operatorname{arctanh}\left(\frac{(c-d)}{\sqrt{(c+d)(c-d)}}\right)}{(c+d)(c-d) \sqrt{(c+d)(c-d)}} \right)}{(ac-bd)^2 f}$
risch	$\frac{\frac{2id^2(de^{i(fx+e)}+c)}{c(c^2-d^2)(ac-bd)f} + \frac{2d \ln\left(e^{i(fx+e)} - \frac{ic^2 - id^2 - d\sqrt{c^2-d^2}}{\sqrt{c^2-d^2} c}\right)ac^2}{\sqrt{c^2-d^2}(ac-bd)^2(c+d)(c-d)f} - \frac{d^3 \ln\left(e^{i(fx+e)} - \frac{ic^2 - id^2 - d\sqrt{c^2-d^2}}{\sqrt{c^2-d^2} c}\right)}{\sqrt{c^2-d^2}(ac-bd)^3(c+d)^2(c-d)^2}}$

input `int(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^2,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & 1/f*(2*a^2/(a*c-b*d)^2/((a-b)*(a+b))^(1/2)*\operatorname{arctan}((a-b)*\tan(1/2*f*x+1/2*e)) \\ & /((a-b)*(a+b))^(1/2)+2*d/(a*c-b*d)^2*(-d*(a*c-b*d)/(c^2-d^2)*\tan(1/2*f*x+1/2*e))/(\tan(1/2*f*x+1/2*e)^2*c-\tan(1/2*f*x+1/2*e)^2*d-c-d)-(2*a*c^2-a*d^2-b*c*d)/(c+d)/(c-d)/((c+d)*(c-d))^(1/2)*\operatorname{arctanh}((c-d)*\tan(1/2*f*x+1/2*e))/((c+d)*(c-d))^(1/2))) \end{aligned}$$

Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 645 vs. $2(169) = 338$.

Time = 87.08 (sec) , antiderivative size = 2835, normalized size of antiderivative = 15.16

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx = \text{Too large to display}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^2,x, algorithm="fricas")`

output

$$\begin{aligned} & [-1/2*((a^2*c^4*d - 2*a^2*c^2*d^3 + a^2*d^5 + (a^2*c^5 - 2*a^2*c^3*d^2 + a^2*c*d^4)*cos(f*x + e))*sqrt(-a^2 + b^2)*log((2*a*b*cos(f*x + e) + (2*a^2 - b^2)*cos(f*x + e)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(f*x + e) + b)*sin(f*x + e) - a^2 + 2*b^2)/(b^2*cos(f*x + e)^2 + 2*a*b*cos(f*x + e) + a^2)) - (2*(a^3 - a*b^2)*c^2*d^2 - (a^2*b - b^3)*c*d^3 - (a^3 - a*b^2)*d^4 + (2*(a^3 - a*b^2)*c^3*d - (a^2*b - b^3)*c^2*d^2 - (a^3 - a*b^2)*c*d^3)*cos(f*x + e))*sqrt(c^2 - d^2)*log((2*c*d*cos(f*x + e) - (c^2 - 2*d^2)*cos(f*x + e)^2 - 2*sqrt(c^2 - d^2)*(d*cos(f*x + e) + c)*sin(f*x + e) + 2*c^2 - d^2)/(c^2*cos(f*x + e)^2 + 2*c*d*cos(f*x + e) + d^2)) - 2*((a^3 - a*b^2)*c^3*d^2 - (a^2*b - b^3)*c^2*d^3 - (a^3 - a*b^2)*c*d^4 + (a^2*b - b^3)*d^5)*sin(f*x + e))/(((a^4 - a^2*b^2)*c^7 - 2*(a^3*b - a*b^3)*c^6*d - (2*a^4 - 3*a^2*b^2 + b^4)*c^5*d^2 + 4*(a^3*b - a*b^3)*c^4*d^3 + (a^4 - 3*a^2*b^2 + 2*b^4)*c^3*d^4 - 2*(a^3*b - a*b^3)*c^2*d^5 + (a^2*b^2 - b^4)*c*d^6)*f*cos(f*x + e) + ((a^4 - a^2*b^2)*c^6*d - 2*(a^3*b - a*b^3)*c^5*d^2 - (2*a^4 - 3*a^2*b^2 + b^4)*c^4*d^3 + 4*(a^3*b - a*b^3)*c^3*d^4 + (a^4 - 3*a^2*b^2 + 2*b^4)*c^2*d^5 - 2*(a^3*b - a*b^3)*c*d^6 + (a^2*b^2 - b^4)*d^7)*f), -1/2*(2*(2*(a^3 - a*b^2)*c^2*d^2 - (a^2*b - b^3)*c*d^3 - (a^3 - a*b^2)*d^4 + (2*(a^3 - a*b^2)*c^3*d - (a^2*b - b^3)*c^2*d^2 - (a^3 - a*b^2)*c*d^3)*cos(f*x + e))*sqrt(-c^2 + d^2)*arctan(-sqrt(-c^2 + d^2)*(d*cos(f*x + e) + c)/((c^2 - d^2)*sin(f*x + e))) + (a^2*c^4*d - 2*a^2*c^2*d^3 + a^2*d^5 + (a^2*c^5 - 2*a^2*c^3*...)) \end{aligned}$$

Sympy [F]

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx \\ &= \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx \end{aligned}$$

input

```
integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))**2,x)
```

output

```
Integral(1/((a + b*cos(e + f*x))*(c + d*sec(e + f*x))**2), x)
```

Maxima [F(-2)]

Exception generated.

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx = \text{Exception raised: ValueError}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^2,x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` f or more de

Giac [A] (verification not implemented)

Time = 0.17 (sec) , antiderivative size = 333, normalized size of antiderivative = 1.78

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx \\ &= \frac{2 \left(\frac{\left(\pi \left[\frac{fx+e}{2\pi} + \frac{1}{2} \right] \operatorname{sgn}(2a - 2b) + \arctan \left(\frac{a \tan(\frac{1}{2}fx + \frac{1}{2}e) - b \tan(\frac{1}{2}fx + \frac{1}{2}e)}{\sqrt{a^2 - b^2}} \right) \right) a^2}{(a^2 c^2 - 2abcd + b^2 d^2) \sqrt{a^2 - b^2}} - \frac{d^2 \tan(\frac{1}{2}fx + \frac{1}{2}e)}{(ac^3 - bc^2 d - acd^2 + bd^3) \left(c \tan(\frac{1}{2}fx + \frac{1}{2}e)^2 - d \tan(\frac{1}{2}fx + \frac{1}{2}e) \right)} \right) f \end{aligned}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^2,x, algorithm="giac")`

output `2*((pi*floor(1/2*(f*x + e)/pi + 1/2)*sgn(2*a - 2*b) + arctan((a*tan(1/2*f*x + 1/2*e) - b*tan(1/2*f*x + 1/2*e))/sqrt(a^2 - b^2)))*a^2/((a^2*c^2 - 2*a*b*c*d + b^2*d^2)*sqrt(a^2 - b^2)) - d^2*tan(1/2*f*x + 1/2*e)/((a*c^3 - b*c^2*d - a*c*d^2 + b*d^3)*(c*tan(1/2*f*x + 1/2*e)^2 - d*tan(1/2*f*x + 1/2*e)^2 - c - d)) - (2*a*c^2*d - b*c*d^2 - a*d^3)*(pi*floor(1/2*(f*x + e)/pi + 1/2)*sgn(-2*c + 2*d) + arctan(-(c*tan(1/2*f*x + 1/2*e) - d*tan(1/2*f*x + 1/2*e))/sqrt(-c^2 + d^2)))/((a^2*c^4 - 2*a*b*c^3*d - a^2*c^2*d^2 + b^2*c^2*d^2 + 2*a*b*c*d^3 - b^2*d^4)*sqrt(-c^2 + d^2))/f`

Mupad [B] (verification not implemented)

Time = 9.11 (sec) , antiderivative size = 20827, normalized size of antiderivative = 111.37

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx = \text{Too large to display}$$

input `int(1/((c + d/cos(e + f*x))^(2*(a + b*cos(e + f*x)))),x)`

output
$$(a^2*\operatorname{atan}(((a^2*(b^2 - a^2))^{(1/2)}*((32*\tan(e/2 + (f*x)/2)*(a^5*c^6 + 2*a^5*d^6 - a^4*b*c^6 - 4*a^4*b*d^6 - 2*a^5*c*d^5 - 2*a^5*c^5*d - a^2*b^3*d^6 + 3*a^3*b^2*d^6 - 5*a^5*c^2*d^4 + 4*a^5*c^3*d^3 + 3*a^5*c^4*d^2 - b^5*c^2*d^4 + 3*a*b^4*c^2*d^4 + 4*a*b^4*c^3*d^3 + 6*a^2*b^3*c*d^5 - 6*a^3*b^2*c*d^5 + 13*a^4*b*c^2*d^4 - 8*a^4*b*c^3*d^3 - 11*a^4*b*c^4*d^2 + a^2*b^3*c^2*d^4 - 12*a^2*b^3*c^3*d^3 - 4*a^2*b^3*c^4*d^2 - 11*a^3*b^2*c^2*d^4 + 12*a^3*b^2*c^3*d^3 + 12*a^3*b^2*c^4*d^2 - 2*a*b^4*c*d^5 + 4*a^4*b*c*d^5 + 2*a^4*b*c^5*d))/((a^2*c^5 - b^2*d^5 + a^2*c^4*d - b^2*c*d^4 - a^2*c^2*d^3 - a^2*c^3*d^2 + b^2*c^2*d^3 + b^2*c^3*d^2 + 2*a*b*c*d^4 - 2*a*b*c^4*d + 2*a*b*c^2*d^3 - 2*a*b*c^3*d^2) + (a^2*(b^2 - a^2))^{(1/2)}*((32*(2*a^6*b*c^9 - a^7*c^9 + a*b^6*d^9 + 2*a^7*c^8*d + b^7*c*d^8 - a^5*b^2*c^9 - 2*a^2*b^5*d^9 + a^3*b^4*d^9 + a^7*c^4*d^5 - 3*a^7*c^6*d^3 + a^7*c^7*d^2 - b^7*c^2*d^7 - b^7*c^3*d^6 + b^7*c^4*d^5 - 5*a^6*b^6*c^2*d^7 + 7*a^6*b^6*c^3*d^6 + 4*a^6*b^6*c^4*d^5 - 5*a^6*b^6*c^5*d^4 - 3*a^2*b^5*c*d^8 + 8*a^3*b^4*c*d^8 - 4*a^4*b^3*c*d^8 + 5*a^4*b^3*c^8*d - 8*a^5*b^2*c^8*d - 4*a^6*b*c^3*d^6 - 2*a^6*b*c^4*d^5 + 13*a^6*b*c^5*d^4 + a^6*b*c^6*d^3 - 11*a^6*b*c^7*d^2 + 13*a^2*b^5*c^2*d^7 + 7*a^2*b^5*c^3*d^6 - 21*a^2*b^5*c^4*d^5 - 4*a^2*b^5*c^5*d^4 + 10*a^2*b^5*c^6*d^3 - a^3*b^4*c^2*d^7 - 31*a^3*b^4*c^3*d^6 + 4*a^3*b^4*c^4*d^5 + 33*a^3*b^4*c^5*d^4 - 4*a^3*b^4*c^6*d^3 - 10*a^3*b^4*c^7*d^2 - 12*a^4*b^3*c^2*d^7 + 14*a^4*b^3*c^3*d^6 + 34*a^4*b^3*c^4*d^5 - 21*a^4*b^3*c^5*d^4 - 27*a^4*b^...$$

Reduce [B] (verification not implemented)

Time = 0.22 (sec) , antiderivative size = 1678, normalized size of antiderivative = 8.97

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^2} dx = \text{Too large to display}$$

input `int(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^2,x)`

output

```
(2*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**2*c**5 - 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**2*c**3*d**2 + 2*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**2*c**4*d - 4*sqrt(a**2 - b**2)*cos(e + f*x)*a**2*c*d**4 + 2*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*a**2*c**4*d - 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*a**2*c**2*d**3 + 2*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*a**2*c**5 - 4*sqrt(- c**2 + d**2)*atan((tan((e + f*x)/2)*c - tan((e + f*x)/2)*d)/sqrt(- c**2 + d**2))*cos(e + f*x)*a**3*c**3*d + 2*sqrt(- c**2 + d**2)*atan((tan((e + f*x)/2)*c - tan((e + f*x)/2)*d)/sqrt(- c**2 + d**2))*cos(e + f*x)*a**3*c*d**3 + 2*sqrt(- c**2 + d**2)*atan((tan((e + f*x)/2)*c - tan((e + f*x)/2)*d)/sqrt(- c**2 + d**2))*cos(e + f*x)*a**2*b*c**2*d**2 + 4*sqrt(- c**2 + d**2)*atan((tan((e + f*x)/2)*c - tan((e + f*x)/2)*d)/sqrt(- c**2 + d**2))*cos(e + f*x)*a*b**2*c*d**3 - 2*sqrt(- c**2 + d**2)*atan((tan((e + f*x)/2)*c - tan((e + f*x)/2)*d)/sqrt(- c**2 + d**2))*cos(e + f*x)*b**3*c**2*d**2 - 4*sqrt(- c**2 + d**2)*atan((tan((e + f*x)/2)*c - tan((e + f*x)/2)*d)/sqrt(- c**2 + d**2))*a**3*c**2*d**2 + ...
```

3.15	$\int \frac{1}{(a+b\cos(e+fx))(c+d\sec(e+fx))^3} dx$	
Optimal result	140	
Mathematica [A] (verified)	141	
Rubi [A] (verified)	142	
Maple [A] (verified)	144	
Fricas [F(-1)]	144	
Sympy [F]	145	
Maxima [F(-2)]	145	
Giac [A] (verification not implemented)	146	
Mupad [B] (verification not implemented)	146	
Reduce [B] (verification not implemented)	147	

Optimal result

Integrand size = 25, antiderivative size = 458

$$\begin{aligned}
 & \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx \\
 &= \frac{2a^3 \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{\sqrt{a-b}\sqrt{a+b}(ac-bd)^3f} - \frac{2d^3(3ac-2bd)\operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{c^2(c-d)^{3/2}(c+d)^{3/2}(ac-bd)^2f} \\
 &\quad - \frac{d^3(c^2+2d^2)\operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{c^2(c-d)^{5/2}(c+d)^{5/2}(ac-bd)f} \\
 &\quad - \frac{2d(3a^2c^2-3abcd+b^2d^2)\operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{c^2\sqrt{c-d}\sqrt{c+d}(ac-bd)^3f} \\
 &\quad - \frac{d^3 \sin(e+fx)}{2c(ac-bd)(c^2-d^2)f(d+c\cos(e+fx))^2} \\
 &\quad + \frac{3d^4 \sin(e+fx)}{2c(ac-bd)(c^2-d^2)^2f(d+c\cos(e+fx))} \\
 &\quad + \frac{d^2(3ac-2bd)\sin(e+fx)}{c(ac-bd)^2(c^2-d^2)f(d+c\cos(e+fx))}
 \end{aligned}$$

output

```
2*a^3*arctan((a-b)^(1/2)*tan(1/2*f*x+1/2*e)/(a+b)^(1/2))/(a-b)^(1/2)/(a+b)^(1/2)/(a*c-b*d)^3/f-2*d^3*(3*a*c-2*b*d)*arctanh((c-d)^(1/2)*tan(1/2*f*x+1/2*e)/(c+d)^(1/2))/c^2/(c-d)^(3/2)/(c+d)^(3/2)/(a*c-b*d)^2/f-d^3*(c^2+2*d^2)*arctanh((c-d)^(1/2)*tan(1/2*f*x+1/2*e)/(c+d)^(1/2))/c^2/(c-d)^(5/2)/(c+d)^(5/2)/(a*c-b*d)/f-2*d*(3*a^2*c^2-3*a*b*c*d+b^2*d^2)*arctanh((c-d)^(1/2)*tan(1/2*f*x+1/2*e)/(c+d)^(1/2))/c^2/(c-d)^(1/2)/(c+d)^(1/2)/(a*c-b*d)^3/f-1/2*d^3*sin(f*x+e)/c/(a*c-b*d)/(c^2-d^2)/f/(d+c*cos(f*x+e))^2+3/2*d^4*sin(f*x+e)/c/(a*c-b*d)/(c^2-d^2)^2/f/(d+c*cos(f*x+e))+d^2*(3*a*c-2*b*d)*sin(f*x+e)/c/(a*c-b*d)^2/(c^2-d^2)/f/(d+c*cos(f*x+e))
```

Mathematica [A] (verified)

Time = 4.57 (sec) , antiderivative size = 319, normalized size of antiderivative = 0.70

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx \\ = \frac{(d + c \cos(e + fx)) \sec^3(e + fx) \left(-\frac{4a^3 \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(e+fx)\right)}{\sqrt{-a^2+b^2}}\right) (d+c \cos(e+fx))^2}{\sqrt{-a^2+b^2}} + \frac{2d(-6abc^3d+b^2d^2(2c^2+d^2)+a^2c^2d^3)}{2(ac)}$$

input

```
Integrate[1/((a + b*Cos[e + f*x])*(c + d*Sec[e + f*x])^3), x]
```

output

```
((d + c*Cos[e + f*x])*Sec[e + f*x]^3*((-4*a^3*ArcTanh[((a - b)*Tan[(e + f*x)/2])/Sqrt[-a^2 + b^2]]*(d + c*Cos[e + f*x])^2)/Sqrt[-a^2 + b^2] + (2*d*(-6*a*b*c^3*d + b^2*d^2*(2*c^2 + d^2) + a^2*(6*c^4 - 5*c^2*d^2 + 2*d^4))*ArcTanh[((-c + d)*Tan[(e + f*x)/2])/Sqrt[c^2 - d^2]]*(d + c*Cos[e + f*x])^2)/(c^2 - d^2)^(5/2) - (d^3*(a*c - b*d)^2*Sin[e + f*x])/((c*(c - d)*(c + d)) + (d^2*(a*c - b*d)*(6*a*c^3 - 4*b*c^2*d - 3*a*c*d^2 + b*d^3)*(d + c*Cos[e + f*x])*Sin[e + f*x])/((c*(c - d)^2*(c + d)^2)))/(2*(a*c - b*d)^3*f*(c + d)*Sec[e + f*x])^3)
```

Rubi [A] (verified)

Time = 1.22 (sec) , antiderivative size = 458, normalized size of antiderivative = 1.00, number of steps used = 5, number of rules used = 5, $\frac{\text{number of rules}}{\text{integrand size}} = 0.200$, Rules used = {3042, 3307, 3042, 3431, 2009}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{1}{(a + b \sin(e + fx + \frac{\pi}{2})) (c + d \csc(e + fx + \frac{\pi}{2}))^3} dx \\
 & \quad \downarrow \textcolor{blue}{3307} \\
 & \int \frac{\cos^3(e + fx)}{(a + b \cos(e + fx))(c \cos(e + fx) + d)^3} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{\sin(e + fx + \frac{\pi}{2})^3}{(a + b \sin(e + fx + \frac{\pi}{2})) (c \sin(e + fx + \frac{\pi}{2}) + d)^3} dx \\
 & \quad \downarrow \textcolor{blue}{3431} \\
 & \int \left(\frac{a^3}{(ac - bd)^3(a + b \cos(e + fx))} - \frac{d(3a^2c^2 - 3abcd + b^2d^2)}{c^2(ac - bd)^3(c \cos(e + fx) + d)} - \frac{d^3}{c^2(ac - bd)(c \cos(e + fx) + d)^3} + \frac{d^3}{c^2(ac - bd)^3(c \cos(e + fx) + d)^3} \right. \\
 & \quad \downarrow \textcolor{blue}{2009} \\
 & \frac{2a^3 \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(e+fx))}{\sqrt{a+b}}\right)}{f\sqrt{a-b}\sqrt{a+b}(ac-bd)^3} - \frac{2d(3a^2c^2 - 3abcd + b^2d^2) \operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{c^2f\sqrt{c-d}\sqrt{c+d}(ac-bd)^3} - \\
 & \frac{2d^3(3ac - 2bd)\operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)}{d^3(c^2 + 2d^2) \operatorname{arctanh}\left(\frac{\sqrt{c-d}\tan(\frac{1}{2}(e+fx))}{\sqrt{c+d}}\right)} + \\
 & \frac{c^2f(c-d)^{3/2}(c+d)^{3/2}(ac-bd)^2}{d^2(3ac - 2bd) \sin(e + fx)} - \frac{c^2f(c-d)^{5/2}(c+d)^{5/2}(ac-bd)}{3d^4 \sin(e + fx)} + \\
 & \frac{cf(c^2 - d^2)(ac - bd)^2(c \cos(e + fx) + d)}{d^3 \sin(e + fx)} + \frac{2cf(c^2 - d^2)^2 (ac - bd)(c \cos(e + fx) + d)}{2cf(c^2 - d^2)^2 (ac - bd)(c \cos(e + fx) + d)} - \\
 & \frac{2cf(c^2 - d^2)(ac - bd)(c \cos(e + fx) + d)^2}{2cf(c^2 - d^2)(ac - bd)(c \cos(e + fx) + d)^2}
 \end{aligned}$$

input $\text{Int}[1/((a + b*\cos[e + f*x])*(c + d*\sec[e + f*x])^3), x]$

output
$$\begin{aligned} & \frac{(2*a^3*\text{ArcTan}[(\sqrt{a - b})*\tan[(e + f*x)/2])/(\sqrt{a - b})*\sqrt{a + b}*(a*c - b*d)^3*f) - (2*d^3*(3*a*c - 2*b*d)*\text{ArcTanh}[(\sqrt{c - d})*\tan[(e + f*x)/2])/(\sqrt{c + d})*(c^2*(c - d)^{(3/2)}*(c + d)^{(3/2)}*(a*c - b*d)^2*f) - (d^3*(c^2 + 2*d^2)*\text{ArcTanh}[(\sqrt{c - d})*\tan[(e + f*x)/2])/(\sqrt{c + d})*(c^2*(c - d)^{(5/2)}*(c + d)^{(5/2)}*(a*c - b*d)*f) - (2*d*(3*a^2*c^2 - 3*a*b*c*d + b^2*d^2)*\text{ArcTanh}[(\sqrt{c - d})*\tan[(e + f*x)/2])/(\sqrt{c + d})*(c^2*\sqrt{c - d}*\sqrt{c + d}*(a*c - b*d)^3*f) - (d^3*\sin[e + f*x])/((2*c*(a*c - b*d)*(c^2 - d^2)*f*(d + c*\cos[e + f*x])^2) + (3*d^4*\sin[e + f*x])/((2*c*(a*c - b*d)*(c^2 - d^2)^2*f*(d + c*\cos[e + f*x]))) + (d^2*(3*a*c - 2*b*d)*\sin[e + f*x])/((c*(a*c - b*d)^2*(c^2 - d^2)*f*(d + c*\cos[e + f*x]))) \end{aligned}$$

Definitions of rubi rules used

rule 2009 $\text{Int}[u_, x_Symbol] :> \text{Simp}[\text{IntSum}[u, x], x] /; \text{SumQ}[u]$

rule 3042 $\text{Int}[u_, x_Symbol] :> \text{Int}[\text{DeactivateTrig}[u, x], x] /; \text{FunctionOfTrigOfLinearQ}[u, x]$

rule 3307 $\text{Int}[(\csc[(e_.) + (f_.)*(x_.)]*(d_.) + (c_.))^{(n_.)}*((a_.) + (b_.))*\sin[(e_.) + (f_.)*(x_.)]^{(m_.)}, x_Symbol] :> \text{Int}[(a + b*\sin[e + f*x])^m*((d + c*\sin[e + f*x])^n/\sin[e + f*x]^n), x] /; \text{FreeQ}[\{a, b, c, d, e, f, m\}, x] \&& \text{IntegerQ}[n]$

rule 3431 $\text{Int}[((g_.)*\sin[(e_.) + (f_.)*(x_.)])^{(p_.)}*((a_.) + (b_.))*\sin[(e_.) + (f_.)*(x_.)]^{(m_.)}*((c_.) + (d_.))*\sin[(e_.) + (f_.)*(x_.)]^{(n_.)}, x_Symbol] :> \text{Int}[\text{ExpAndTrig}[(g*\sin[e + f*x])^p*(a + b*\sin[e + f*x])^m*(c + d*\sin[e + f*x])^n], x] /; \text{FreeQ}[\{a, b, c, d, e, f, g, n, p\}, x] \&& \text{NeQ}[b*c - a*d, 0] \&& (\text{IntegersQ}[m, n] \mid\mid \text{IntegersQ}[m, p] \mid\mid \text{IntegersQ}[n, p]) \&& \text{NeQ}[p, 2]$

Maple [A] (verified)

Time = 4.63 (sec) , antiderivative size = 412, normalized size of antiderivative = 0.90

method	result
derivativedivides	$\frac{2a^3 \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{(ac-bd)^3 \sqrt{(a-b)(a+b)}} + \frac{2d \left(-\frac{(6a^2 c^3 + a^2 c^2 d - 2a^2 c d^2 - 10ab c^2 d - 2abc d^2 + 2ab d^3 + 4b^2 c d^2 + b^2 d^3) d \tan\left(\frac{fx}{2} + \frac{e}{2}\right)^3}{2(c-d)(c^2 + 2cd + d^2)} + \left(\tan\left(\frac{fx}{2} + \frac{e}{2}\right)^2 c - \tan\left(\frac{fx}{2} + \frac{e}{2}\right)^2 d\right) \frac{(6a^2 c^3 + a^2 c^2 d - 2a^2 c d^2 - 10ab c^2 d - 2abc d^2 + 2ab d^3 + 4b^2 c d^2 + b^2 d^3) d \tan\left(\frac{fx}{2} + \frac{e}{2}\right)^3}{2(c-d)(c^2 + 2cd + d^2)} \right)}{(ac-bd)^3 \sqrt{(a-b)(a+b)}}$
default	$\frac{2a^3 \arctan\left(\frac{(a-b) \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{\sqrt{(a-b)(a+b)}}\right)}{(ac-bd)^3 \sqrt{(a-b)(a+b)}} + \frac{2d \left(-\frac{(6a^2 c^3 + a^2 c^2 d - 2a^2 c d^2 - 10ab c^2 d - 2abc d^2 + 2ab d^3 + 4b^2 c d^2 + b^2 d^3) d \tan\left(\frac{fx}{2} + \frac{e}{2}\right)^3}{2(c-d)(c^2 + 2cd + d^2)} + \left(\tan\left(\frac{fx}{2} + \frac{e}{2}\right)^2 c - \tan\left(\frac{fx}{2} + \frac{e}{2}\right)^2 d\right) \frac{(6a^2 c^3 + a^2 c^2 d - 2a^2 c d^2 - 10ab c^2 d - 2abc d^2 + 2ab d^3 + 4b^2 c d^2 + b^2 d^3) d \tan\left(\frac{fx}{2} + \frac{e}{2}\right)^3}{2(c-d)(c^2 + 2cd + d^2)} \right)}{(ac-bd)^3 \sqrt{(a-b)(a+b)}}$
risch	Expression too large to display

input `int(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^3,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & 1/f*(2*a^3/(a*c-b*d)^3/((a-b)*(a+b))^(1/2)*\arctan((a-b)*\tan(1/2*f*x+1/2*e)/((a-b)*(a+b))^(1/2))+2*d/(a*c-b*d)^3*(-1/2*(6*a^2*c^3+a^2*c^2*d^2-2*a^2*c*d^2-10*a*b*c^2*d^2-2*a*b*c*d^2+2*a*b*d^3+4*b^2*c^2*d^2+b^2*c*d^2+b^2*d^3)*d/(c-d)/(c^2+2*c*d+d^2)*\tan(1/2*f*x+1/2*e)^3+1/2*d*(6*a^2*c^3-a^2*c^2*d^2-2*a^2*c*d^2-10*a*b*c^2*d^2+2*a*b*c*d^2+2*a*b*d^3+4*b^2*c^2*d^2-b^2*d^3)/(c+d)/(c-d)^2*\tan(1/2*f*x+1/2*e))/(tan(1/2*f*x+1/2*e)^2*c-\tan(1/2*f*x+1/2*e)^2*d-c*d)^2-1/2*(6*a^2*c^4-5*a^2*c^2*d^2+2*a^2*d^4-6*a*b*c^3*d^2+2*b^2*c^2*d^2+b^2*d^4)/(c^4-2*c^2*d^2+d^4)/((c+d)*(c-d))^(1/2)*\arctanh((c-d)*\tan(1/2*f*x+1/2*e)/((c+d)*(c-d))^(1/2))) \end{aligned}$$

Fricas [F(-1)]

Timed out.

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx = \text{Timed out}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^3,x, algorithm="fricas")`

output Timed out

Sympy [F]

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx \\ = \int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))**3,x)`

output Integral(1/((a + b*cos(e + f*x))*(c + d*sec(e + f*x))**3), x)

Maxima [F(-2)]

Exception generated.

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx = \text{Exception raised: ValueError}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))**3,x, algorithm="maxima")`

output Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more details)

Giac [A] (verification not implemented)

Time = 0.30 (sec) , antiderivative size = 748, normalized size of antiderivative = 1.63

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx = \text{Too large to display}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^3,x, algorithm="giac")`

output

```
(2*(pi*floor(1/2*(f*x + e)/pi + 1/2)*sgn(2*a - 2*b) + arctan((a*tan(1/2*f*x + 1/2*e) - b*tan(1/2*f*x + 1/2*e))/sqrt(a^2 - b^2)))*a^3/((a^3*c^3 - 3*a^2*b*c^2*d + 3*a*b^2*c*d^2 - b^3*d^3)*sqrt(a^2 - b^2)) + (6*a^2*c^4*d - 6*a*b*c^3*d^2 - 5*a^2*c^2*d^3 + 2*b^2*c^2*d^3 + 2*a^2*d^5 + b^2*d^5)*(pi*floor(1/2*(f*x + e)/pi + 1/2)*sgn(2*c - 2*d) + arctan((c*tan(1/2*f*x + 1/2*e) - d*tan(1/2*f*x + 1/2*e))/sqrt(-c^2 + d^2)))/((a^3*c^7 - 3*a^2*b*c^6*d - 2*a^3*c^5*d^2 + 3*a*b^2*c^5*d^2 + 6*a^2*b*c^4*d^3 - b^3*c^4*d^3 + a^3*c^3*d^4 - 6*a*b^2*c^3*d^4 - 3*a^2*b*c^2*d^5 + 2*b^3*c^2*d^5 + 3*a*b^2*c*d^6 - b^3*d^7)*sqrt(-c^2 + d^2)) - (6*a*c^3*d^2*tan(1/2*f*x + 1/2*e)^3 - 5*a*c^2*d^3*tan(1/2*f*x + 1/2*e)^3 - 4*b*c^2*d^3*tan(1/2*f*x + 1/2*e)^3 - 3*a*c*d^4*tan(1/2*f*x + 1/2*e)^3 + 3*b*c*d^4*tan(1/2*f*x + 1/2*e)^3 + 2*a*d^5*tan(1/2*f*x + 1/2*e)^3 + b*d^5*tan(1/2*f*x + 1/2*e)^3 - 6*a*c^3*d^2*tan(1/2*f*x + 1/2*e) - 5*a*c^2*d^3*tan(1/2*f*x + 1/2*e) + 4*b*c^2*d^3*tan(1/2*f*x + 1/2*e) + 3*a*c*d^4*tan(1/2*f*x + 1/2*e) + 3*b*c*d^4*tan(1/2*f*x + 1/2*e) + 2*a*d^5*tan(1/2*f*x + 1/2*e) - b*d^5*tan(1/2*f*x + 1/2*e))/((a^2*c^6 - 2*a*b*c^5*d - 2*a^2*c^4*d^2 + b^2*c^4*d^2 + 4*a*b*c^3*d^3 + a^2*c^2*d^4 - 2*b^2*c^2*d^4 - 2*a*b*c*d^5 + b^2*d^6)*(c*tan(1/2*f*x + 1/2*e)^2 - d*tan(1/2*f*x + 1/2*e)^2 - c - d)^2))/f
```

Mupad [B] (verification not implemented)

Time = 11.95 (sec) , antiderivative size = 52103, normalized size of antiderivative = 113.76

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx = \text{Too large to display}$$

input `int(1/((c + d/cos(e + f*x))^3*(a + b*cos(e + f*x))),x)`

output

$$\begin{aligned} & ((\tan(e/2 + (f*x)/2)^3 * (2*a*d^4 + b*d^4 - 6*a*c^2*d^2 - a*c*d^3 + 4*b*c*d^3)) / ((c + d)^2 * (a^2*c^3 - b^2*d^3 - a^2*c^2*d + b^2*c*d^2 + 2*a*b*c*d^2 - 2*a*b*c^2*d)) - (\tan(e/2 + (f*x)/2) * (2*a*d^4 - b*d^4 - 6*a*c^2*d^2 + a*c*d^3 + 4*b*c*d^3)) / ((c + d) * (a^2*c^4 + b^2*d^4 - 2*a^2*c^3*d - 2*b^2*c*d^3 + a^2*c^2*d^2 + b^2*c^2*d^2 - 2*a*b*c*d^3 - 2*a*b*c^3*d + 4*a*b*c^2*d^2))) / \\ & (f*(2*c*d - \tan(e/2 + (f*x)/2)^2 * (2*c^2 - 2*d^2) + \tan(e/2 + (f*x)/2)^4 * (c^2 - 2*c*d + d^2) + c^2 + d^2)) + (a^3 * \text{atan}(((a^3 * (b^2 - a^2)^{(1/2)} * (8 * \tan(e/2 + (f*x)/2) * (b^7 * d^10 - 8*a^7 * d^10 - 4*a^7 * c^10 + 4*a^6 * b*c^10 - 3*a*b^6 * d^10 + 16*a^6 * b*d^10 + 8*a^7 * c*d^9 + 8*a^7 * c^9 * d + 7*a^2 * b^5 * d^10 - 13*a^3 * b^4 * d^10 + 16*a^4 * b^3 * d^10 - 16*a^5 * b^2 * d^10 + 32*a^7 * c^2 * d^8 - 32*a^7 * c^3 * d^7 - 57*a^7 * c^4 * d^6 + 48*a^7 * c^5 * d^5 + 52*a^7 * c^6 * d^4 - 32*a^7 * c^7 * d^3 - 24*a^7 * c^8 * d^2 + 4*b^7 * c^2 * d^8 + 4*b^7 * c^4 * d^6 - 12*a*b^6 * c^2 * d^8 - 12*a*b^6 * c^3 * d^7 - 12*a*b^6 * c^4 * d^6 - 24*a*b^6 * c^5 * d^5 - 72*a^6 * b*c^2 * d^8 + 56*a^6 * b*c^3 * d^7 + 155*a^6 * b*c^4 * d^6 - 108*a^6 * b*c^5 * d^5 - 172*a^6 * b*c^6 * d^4 + 104*a^6 * b*c^7 * d^3 + 96*a^6 * b*c^8 * d^2 + 10*a^2 * b^5 * c^2 * d^8 + 36*a^2 * b^5 * c^3 * d^7 + 4*a^2 * b^5 * c^4 * d^6 + 72*a^2 * b^5 * c^5 * d^5 + 60*a^2 * b^5 * c^6 * d^4 + 2*a^3 * b^4 * c^2 * d^8 - 60*a^3 * b^4 * c^3 * d^7 + 20*a^3 * b^4 * c^4 * d^6 - 12*a^3 * b^4 * c^5 * d^5 - 180*a^3 * b^4 * c^6 * d^4 - 72*a^3 * b^4 * c^7 * d^3 - 26*a^4 * b^3 * c^2 * d^8 + 84*a^4 * b^3 * c^3 * d^7 + 25*a^4 * b^3 * c^4 * d^6 - 156*a^4 * b^3 * c^5 * d^5 + 120*a^4 * b^3 * c^6 * d^4 + 216*a^4 * b^3 * c^7 * d^3 + 36*a^4 * b^3 * c^8 * d^2 + 62*a^5 * b^2 * c^2 * \dots)) \end{aligned}$$

Reduce [B] (verification not implemented)

Time = 0.23 (sec), antiderivative size = 4916, normalized size of antiderivative = 10.73

$$\int \frac{1}{(a + b \cos(e + fx))(c + d \sec(e + fx))^3} dx = \text{Too large to display}$$

input `int(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^3,x)`

output

```
(8*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**3*c**7*d - 24*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**3*c**5*d**3 + 24*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**3*c**3*d**5 - 8*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*cos(e + f*x)*a**3*c*d**7 - 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*sin(e + f*x)**2*a**3*c**8 + 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*sin(e + f*x)**2*a**3*c**6*d**2 - 12*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*sin(e + f*x)**2*a**3*c**4*d**4 + 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*sin(e + f*x)**2*a**3*c**2*d**6 + 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*a**3*c**8 - 8*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*a**3*c**6*d**2 + 8*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*a**3*c**2*d**6 - 4*sqrt(a**2 - b**2)*atan((tan((e + f*x)/2)*a - tan((e + f*x)/2)*b)/sqrt(a**2 - b**2))*a**3*d**8 - 24*sqrt(- c**2 + d**2)*atan((tan((e + f*x)/2)*c - tan((e + f*x)/2)*d)/sqrt(- c**2 + d**2))*cos(e + f*x)*a**4*c**5*d**2 + 20*sqrt(- c**2 + ...)
```

3.16 $\int \frac{\sqrt{c+d \sec(e+fx)}}{a+b \cos(e+fx)} dx$

Optimal result	149
Mathematica [A] (verified)	150
Rubi [A] (verified)	150
Maple [A] (verified)	153
Fricas [F]	153
Sympy [F]	154
Maxima [F]	154
Giac [F]	154
Mupad [F(-1)]	155
Reduce [F]	155

Optimal result

Integrand size = 27, antiderivative size = 213

$$\begin{aligned} & \int \frac{\sqrt{c+d \sec(e+fx)}}{a+b \cos(e+fx)} dx \\ &= \frac{2\sqrt{c+d} \cot(e+fx) \operatorname{EllipticF}\left(\arcsin\left(\frac{\sqrt{c+d \sec(e+fx)}}{\sqrt{c+d}}\right), \frac{c+d}{c-d}\right) \sqrt{\frac{d(1-\sec(e+fx))}{c+d}} \sqrt{-\frac{d(1+\sec(e+fx))}{c-d}}}{af} \\ &+ \frac{2(ac-bd) \operatorname{EllipticPi}\left(\frac{2a}{a+b}, \arcsin\left(\frac{\sqrt{1-\sec(e+fx)}}{\sqrt{2}}\right), \frac{2d}{c+d}\right) \sqrt{\frac{c+d \sec(e+fx)}{c+d}} \tan(e+fx)}{a(a+b)f \sqrt{c+d \sec(e+fx)} \sqrt{-\tan^2(e+fx)}} \end{aligned}$$

```
output 2*(c+d)^(1/2)*cot(f*x+e)*EllipticF((c+d*sec(f*x+e))^(1/2)/(c+d)^(1/2), ((c+d)/(c-d))^(1/2)*(d*(1-sec(f*x+e))/(c+d))^(1/2)*(-d*(1+sec(f*x+e))/(c-d))^(1/2)/a/f+2*(a*c-b*d)*EllipticPi(1/2*(1-sec(f*x+e))^(1/2)*2^(1/2), 2*a/(a+b), 2^(1/2)*(d/(c+d))^(1/2))*((c+d*sec(f*x+e))/(c+d))^(1/2)*tan(f*x+e)/a/(a+b)/f/(c+d*sec(f*x+e))^(1/2)/(-tan(f*x+e))^2)^(1/2)
```

Mathematica [A] (verified)

Time = 10.69 (sec) , antiderivative size = 184, normalized size of antiderivative = 0.86

$$\int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx \\ = \frac{4 \cos^2\left(\frac{1}{2}(e + fx)\right) \sqrt{\frac{\cos(e+fx)}{1+\cos(e+fx)}} \sqrt{\frac{d+c \cos(e+fx)}{(c+d)(1+\cos(e+fx))}} \left(-((a+b)(c-d) \text{EllipticF}\left(\arcsin\left(\tan\left(\frac{1}{2}(e+fx)\right)\right)\right)\right.}{(a-b)(a+b)f(d+c \cos(e+fx)))}$$

input `Integrate[Sqrt[c + d*Sec[e + f*x]]/(a + b*Cos[e + f*x]), x]`

output `(4*Cos[(e + f*x)/2]^2*Sqrt[Cos[e + f*x]/(1 + Cos[e + f*x])]*Sqrt[(d + c*Cos[e + f*x])/((c + d)*(1 + Cos[e + f*x]))]*(-(a + b)*(c - d)*EllipticF[ArcSin[Tan[(e + f*x)/2]], (c - d)/(c + d)] + 2*(a*c - b*d)*EllipticPi[(-a + b)/(a + b), ArcSin[Tan[(e + f*x)/2]], (c - d)/(c + d)])*Sqrt[c + d*Sec[e + f*x]])/((a - b)*(a + b)*f*(d + c*Cos[e + f*x]))`

Rubi [A] (verified)

Time = 0.89 (sec) , antiderivative size = 213, normalized size of antiderivative = 1.00, number of steps used = 7, number of rules used = 7, $\frac{\text{number of rules}}{\text{integrand size}} = 0.259$, Rules used = {3042, 3308, 3042, 4457, 3042, 4319, 4461}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx \\ \downarrow 3042 \\ \int \frac{\sqrt{c + d \csc(e + fx + \frac{\pi}{2})}}{a + b \sin(e + fx + \frac{\pi}{2})} dx \\ \downarrow 3308 \\ \int \frac{\sec(e + fx) \sqrt{c + d \sec(e + fx)}}{a \sec(e + fx) + b} dx$$

$$\begin{aligned}
 & \downarrow \text{3042} \\
 & \int \frac{\csc(e + fx + \frac{\pi}{2}) \sqrt{c + d \csc(e + fx + \frac{\pi}{2})}}{a \csc(e + fx + \frac{\pi}{2}) + b} dx \\
 & \downarrow \text{4457} \\
 & \frac{(ac - bd) \int \frac{\sec(e+fx)}{(b+a\sec(e+fx))\sqrt{c+d\sec(e+fx)}} dx}{a} + \frac{d \int \frac{\sec(e+fx)}{\sqrt{c+d\sec(e+fx)}} dx}{a} \\
 & \downarrow \text{3042} \\
 & \frac{(ac - bd) \int \frac{\csc(e+fx+\frac{\pi}{2})}{(b+a\csc(e+fx+\frac{\pi}{2}))\sqrt{c+d\csc(e+fx+\frac{\pi}{2})}} dx}{a} + \frac{d \int \frac{\csc(e+fx+\frac{\pi}{2})}{\sqrt{c+d\csc(e+fx+\frac{\pi}{2})}} dx}{a} \\
 & \downarrow \text{4319} \\
 & \frac{(ac - bd) \int \frac{\csc(e+fx+\frac{\pi}{2})}{(b+a\csc(e+fx+\frac{\pi}{2}))\sqrt{c+d\csc(e+fx+\frac{\pi}{2})}} dx}{a} + \\
 & \frac{2\sqrt{c+d}\cot(e+fx)\sqrt{\frac{d(1-\sec(e+fx))}{c+d}}\sqrt{-\frac{d(\sec(e+fx)+1)}{c-d}}\text{EllipticF}\left(\arcsin\left(\frac{\sqrt{c+d\sec(e+fx)}}{\sqrt{c+d}}\right), \frac{c+d}{c-d}\right)}{af} \\
 & \downarrow \text{4461} \\
 & \frac{2(ac - bd)\tan(e+fx)\sqrt{\frac{c+d\sec(e+fx)}{c+d}}\text{EllipticPi}\left(\frac{2a}{a+b}, \arcsin\left(\frac{\sqrt{1-\sec(e+fx)}}{\sqrt{2}}\right), \frac{2d}{c+d}\right)}{af(a+b)\sqrt{-\tan^2(e+fx)}\sqrt{c+d\sec(e+fx)}} + \\
 & \frac{2\sqrt{c+d}\cot(e+fx)\sqrt{\frac{d(1-\sec(e+fx))}{c+d}}\sqrt{-\frac{d(\sec(e+fx)+1)}{c-d}}\text{EllipticF}\left(\arcsin\left(\frac{\sqrt{c+d\sec(e+fx)}}{\sqrt{c+d}}\right), \frac{c+d}{c-d}\right)}{af}
 \end{aligned}$$

input `Int[Sqrt[c + d*Sec[e + f*x]]/(a + b*Cos[e + f*x]), x]`

output

```
(2*.Sqrt[c + d]*Cot[e + f*x]*EllipticF[ArcSin[Sqrt[c + d*Sec[e + f*x]]/Sqrt[c + d]], (c + d)/(c - d)]*Sqrt[(d*(1 - Sec[e + f*x]))/(c + d)]*Sqrt[-((d*(1 + Sec[e + f*x]))/(c - d))]/(a*f) + (2*(a*c - b*d)*EllipticPi[(2*a)/(a + b), ArcSin[Sqrt[1 - Sec[e + f*x]]/Sqrt[2]], (2*d)/(c + d)]*Sqrt[(c + d)*Sec[e + f*x]/(c + d)]*Tan[e + f*x]/(a*(a + b)*f*Sqrt[c + d*Sec[e + f*x]]*Sqrt[-Tan[e + f*x]^2])]
```

Definitions of rubi rules used

rule 3042 $\text{Int}[u_, \ x_\text{Symbol}] \rightarrow \text{Int}[\text{DeactivateTrig}[u, \ x], \ x] \ /; \ \text{FunctionOfTrigOfLinearQ}[u, \ x]$

rule 3308 $\text{Int}[(\csc[(e_.) + (f_.)*(x_)]*(d_.) + (c_.))^{(n_.)}*((a_.) + (b_.)*\sin[(e_.) + (f_.)*(x_.)])^{(m_.)}, \ x_\text{Symbol}] \rightarrow \text{Int}[(b + a*\csc[e + f*x])^m*((c + d*\csc[e + f*x])^n/\csc[e + f*x]^m), \ x] \ /; \ \text{FreeQ}[\{a, b, c, d, e, f, n\}, \ x] \ \&& \ \text{!IntegerQ}[n] \ \&& \ \text{IntegerQ}[m]$

rule 4319 $\text{Int}[\csc[(e_.) + (f_.)*(x_)]/\sqrt{\csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.)}], \ x_\text{Symbol}] \rightarrow \text{Simp}[-2*(\text{Rt}[a + b, 2]/(b*f*\cot[e + f*x]))*\sqrt{((b*(1 - \csc[e + f*x]))/(a + b))*\sqrt{(-b)*((1 + \csc[e + f*x])/(a - b))}}]*\text{EllipticF}[\text{ArcSin}[\sqrt{[a + b*\csc[e + f*x]]/\text{Rt}[a + b, 2]}], \ (a + b)/(a - b)], \ x] \ /; \ \text{FreeQ}[\{a, b, e, f\}, \ x] \ \&& \ \text{NeQ}[a^2 - b^2, 0]$

rule 4457 $\text{Int}[(\csc[(e_.) + (f_.)*(x_)]*\sqrt{\csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.)})]/(\csc[(e_.) + (f_.)*(x_)]*(d_.) + (c_.)), \ x_\text{Symbol}] \rightarrow \text{Simp}[b/d \ \text{Int}[\csc[e + f*x]/\sqrt{a + b*\csc[e + f*x]}], \ x] - \text{Simp}[(b*c - a*d)/d \ \text{Int}[\csc[e + f*x]/(\sqrt{a + b*\csc[e + f*x]}*(c + d*\csc[e + f*x])), \ x]] \ /; \ \text{FreeQ}[\{a, b, c, d, e, f\}, \ x] \ \&& \ \text{NeQ}[b*c - a*d, 0] \ \&& \ \text{NeQ}[a^2 - b^2, 0] \ \&& \ \text{NeQ}[c^2 - d^2, 0]$

rule 4461 $\text{Int}[\csc[(e_.) + (f_.)*(x_)]/(\sqrt{\csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.)})*(\csc[(e_.) + (f_.)*(x_)]*(d_.) + (c_.))), \ x_\text{Symbol}] \rightarrow \text{Simp}[-2*(\cot[e + f*x]/(f*(c + d)*\sqrt{a + b*\csc[e + f*x]})*\sqrt{-\cot[e + f*x]^2})*\sqrt{((a + b*\csc[e + f*x])/(a + b))*\text{EllipticPi}[2*(d/(c + d)), \ \text{ArcSin}[\sqrt{1 - \csc[e + f*x]}]/\sqrt{2}], \ 2*(b/(a + b))}], \ x] \ /; \ \text{FreeQ}[\{a, b, c, d, e, f\}, \ x] \ \&& \ \text{NeQ}[b*c - a*d, 0] \ \&& \ \text{NeQ}[a^2 - b^2, 0] \ \&& \ \text{NeQ}[c^2 - d^2, 0]$

Maple [A] (verified)

Time = 7.80 (sec) , antiderivative size = 318, normalized size of antiderivative = 1.49

method	result
default	$2 \left(\text{EllipticF} \left(-\csc(fx+e)+\cot(fx+e), \sqrt{\frac{c-d}{c+d}} \right) ac - \text{EllipticF} \left(-\csc(fx+e)+\cot(fx+e), \sqrt{\frac{c-d}{c+d}} \right) ad + \text{EllipticF} \left(-\csc(fx+e)+\cot(fx+e), \sqrt{\frac{c-d}{c+d}} \right) bd \right)$

input `int((c+d*sec(f*x+e))^(1/2)/(a+b*cos(f*x+e)),x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & 2/f * (\text{EllipticF}(-\csc(f*x+e)+\cot(f*x+e), ((c-d)/(c+d))^{(1/2)}) * a*c - \text{EllipticF}(-\csc(f*x+e)+\cot(f*x+e), ((c-d)/(c+d))^{(1/2)}) * a*d + \text{EllipticF}(-\csc(f*x+e)+\cot(f*x+e), ((c-d)/(c+d))^{(1/2)}) * b*c - \text{EllipticF}(-\csc(f*x+e)+\cot(f*x+e), ((c-d)/(c+d))^{(1/2)}) * b*d - 2*\text{EllipticPi}(-\csc(f*x+e)+\cot(f*x+e), -(a-b)/(a+b), ((c-d)/(c+d))^{(1/2)}) * a*c + 2*\text{EllipticPi}(-\csc(f*x+e)+\cot(f*x+e), -(a-b)/(a+b), ((c-d)/(c+d))^{(1/2)}) * b*d) * (1+\cos(f*x+e)) * (\cos(f*x+e)/(1+\cos(f*x+e)))^{(1/2)} * ((d+c*\cos(f*x+e))/(1+\cos(f*x+e)))/(c+d))^{(1/2)} * (c+d*\sec(f*x+e))^{(1/2)} / (d+c*\cos(f*x+e)) / (a-b)/(a+b) \end{aligned}$$

Fricas [F]

$$\int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx = \int \frac{\sqrt{d \sec(fx + e) + c}}{b \cos(fx + e) + a} dx$$

input `integrate((c+d*sec(f*x+e))^(1/2)/(a+b*cos(f*x+e)),x, algorithm="fricas")`

output `integral(sqrt(d*sec(f*x + e) + c)/(b*cos(f*x + e) + a), x)`

Sympy [F]

$$\int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx = \int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx$$

input `integrate((c+d*sec(f*x+e))**(1/2)/(a+b*cos(f*x+e)),x)`

output `Integral(sqrt(c + d*sec(e + f*x))/(a + b*cos(e + f*x)), x)`

Maxima [F]

$$\int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx = \int \frac{\sqrt{d \sec(fx + e) + c}}{b \cos(fx + e) + a} dx$$

input `integrate((c+d*sec(f*x+e))^(1/2)/(a+b*cos(f*x+e)),x, algorithm="maxima")`

output `integrate(sqrt(d*sec(f*x + e) + c)/(b*cos(f*x + e) + a), x)`

Giac [F]

$$\int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx = \int \frac{\sqrt{d \sec(fx + e) + c}}{b \cos(fx + e) + a} dx$$

input `integrate((c+d*sec(f*x+e))^(1/2)/(a+b*cos(f*x+e)),x, algorithm="giac")`

output `integrate(sqrt(d*sec(f*x + e) + c)/(b*cos(f*x + e) + a), x)`

Mupad [F(-1)]

Timed out.

$$\int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx = \int \frac{\sqrt{c + \frac{d}{\cos(e+fx)}}}{a + b \cos(e + fx)} dx$$

input `int((c + d/cos(e + f*x))^(1/2)/(a + b*cos(e + f*x)),x)`

output `int((c + d/cos(e + f*x))^(1/2)/(a + b*cos(e + f*x)), x)`

Reduce [F]

$$\int \frac{\sqrt{c + d \sec(e + fx)}}{a + b \cos(e + fx)} dx = \int \frac{\sqrt{\sec(fx + e) d + c}}{\cos(fx + e) b + a} dx$$

input `int((c+d*sec(f*x+e))^(1/2)/(a+b*cos(f*x+e)),x)`

output `int(sqrt(sec(e + f*x)*d + c)/(cos(e + f*x)*b + a),x)`

3.17 $\int \frac{1}{(a+b \cos(e+fx))\sqrt{c+d \sec(e+fx)}} dx$

Optimal result	156
Mathematica [A] (warning: unable to verify)	156
Rubi [A] (verified)	157
Maple [B] (verified)	158
Fricas [F(-1)]	159
Sympy [F]	159
Maxima [F]	160
Giac [F]	160
Mupad [F(-1)]	160
Reduce [F]	161

Optimal result

Integrand size = 27, antiderivative size = 102

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx))\sqrt{c + d \sec(e + fx)}} dx \\ &= \frac{2 \operatorname{EllipticPi}\left(\frac{2a}{a+b}, \arcsin\left(\frac{\sqrt{1-\sec(e+fx)}}{\sqrt{2}}\right), \frac{2d}{c+d}\right) \sqrt{\frac{c+d \sec(e+fx)}{c+d}} \tan(e + fx)}{(a + b)f \sqrt{c + d \sec(e + fx)} \sqrt{-\tan^2(e + fx)}} \end{aligned}$$

output $2*\operatorname{EllipticPi}(1/2*(1-\sec(f*x+e))^(1/2)*2^(1/2), 2*a/(a+b), 2^(1/2)*(d/(c+d))^(1/2))*((c+d*\sec(f*x+e))/(c+d))^(1/2)*\tan(f*x+e)/(a+b)/f/(c+d*\sec(f*x+e))^(1/2)/(-\tan(f*x+e)^2)^(1/2)$

Mathematica [A] (warning: unable to verify)

Time = 12.05 (sec), antiderivative size = 187, normalized size of antiderivative = 1.83

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx))\sqrt{c + d \sec(e + fx)}} dx = \\ & -\frac{2\sqrt{\frac{d+c \cos(e+fx)}{(c+d)(1+\cos(e+fx))}} ((a + b) \operatorname{EllipticF}\left(\arcsin\left(\tan\left(\frac{1}{2}(e + fx)\right)\right), \frac{c-d}{c+d}\right) - 2a \operatorname{EllipticPi}\left(\frac{-a+b}{a+b}, \arcsin\left(\tan\left(\frac{1}{2}(e + fx)\right)\right), \frac{c-d}{c+d}\right))}{(a - b)(a + b)f \sqrt{\sec^2\left(\frac{1}{2}(e + fx)\right)}} \end{aligned}$$

input $\text{Integrate}[1/((a + b \cos[e + f x]) \sqrt{c + d \sec[e + f x]}), x]$

output
$$\begin{aligned} & (-2 \sqrt{(d + c \cos[e + f x]) / ((c + d)(1 + \cos[e + f x])}) * ((a + b) * \text{EllipticF}[\text{ArcSin}[\tan[(e + f x)/2]], (c - d)/(c + d)] - 2a * \text{EllipticPi}[-(a + b)/(a + b), \text{ArcSin}[\tan[(e + f x)/2]], (c - d)/(c + d)]) * \sqrt{\cos[e + f x] * \sec[(e + f x)/2]^2} * \sqrt{\sec[e + f x]} * \sqrt{1 + \sec[e + f x]}) / ((a - b) * (a + b) * f * \sqrt{\sec[(e + f x)/2]^2} * \sqrt{c + d \sec[e + f x]}) \end{aligned}$$

Rubi [A] (verified)

Time = 0.45 (sec), antiderivative size = 102, normalized size of antiderivative = 1.00, number of steps used = 4, number of rules used = 4, $\frac{\text{number of rules}}{\text{integrand size}} = 0.148$, Rules used = {3042, 3308, 3042, 4461}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx)) \sqrt{c + d \sec(e + fx)}} dx \\ & \quad \downarrow 3042 \\ & \int \frac{1}{(a + b \sin(e + fx + \frac{\pi}{2})) \sqrt{c + d \csc(e + fx + \frac{\pi}{2})}} dx \\ & \quad \downarrow 3308 \\ & \int \frac{\sec(e + fx)}{(a \sec(e + fx) + b) \sqrt{c + d \sec(e + fx)}} dx \\ & \quad \downarrow 3042 \\ & \int \frac{\csc(e + fx + \frac{\pi}{2})}{(a \csc(e + fx + \frac{\pi}{2}) + b) \sqrt{c + d \csc(e + fx + \frac{\pi}{2})}} dx \\ & \quad \downarrow 4461 \\ & \frac{2 \tan(e + fx) \sqrt{\frac{c + d \sec(e + fx)}{c + d}} \text{EllipticPi}\left(\frac{2a}{a+b}, \arcsin\left(\frac{\sqrt{1-\sec(e+fx)}}{\sqrt{2}}\right), \frac{2d}{c+d}\right)}{f(a + b) \sqrt{-\tan^2(e + fx)} \sqrt{c + d \sec(e + fx)}} \end{aligned}$$

input $\text{Int}[1/((a + b \cos[e + f x]) * \sqrt{c + d \sec[e + f x]}), x]$

output $(2 \text{EllipticPi}[(2 a)/(a + b), \text{ArcSin}[\sqrt{1 - \sec[e + f x]}/\sqrt{2}], (2 d)/(c + d)] * \sqrt{[(c + d \sec[e + f x])/(c + d)] * \tan[e + f x]}) / ((a + b) * f * \sqrt{[c + d \sec[e + f x]] * \sqrt{-\tan[e + f x]^2}})$

Definitions of rubi rules used

rule 3042 $\text{Int}[u_, x_\text{Symbol}] \rightarrow \text{Int}[\text{DeactivateTrig}[u, x], x] /; \text{FunctionOfTrigOfLinearQ}[u, x]$

rule 3308 $\text{Int}[(\csc[e_] + (f_*)*(x_)) * (d_)^n * ((a_) + (b_*) * \sin[e_] + (f_*) * (x_))^m, x_\text{Symbol}] \rightarrow \text{Int}[(b + a * \csc[e + f x])^m * ((c + d * \csc[e + f x])^n / \csc[e + f x]^m), x] /; \text{FreeQ}[\{a, b, c, d, e, f, n\}, x] \& \text{!IntegerQ}[n] \& \text{IntegerQ}[m]$

rule 4461 $\text{Int}[\csc[e_] + (f_*) * (x_)] / (\sqrt{\csc[e_] + (f_*) * (x_)} * (b_*) + (a_)) * (\csc[e_] + (f_*) * (x_)) * (d_) * ((c + d) * \sqrt{a + b * \csc[e + f x]} * \sqrt{-\cot[e + f x]^2}) * \sqrt{((a + b * \csc[e + f x]) / (a + b)) * \text{EllipticPi}[2 * (d / (c + d)), \text{ArcSin}[\sqrt{1 - \csc[e + f x]}] / \sqrt{2}], 2 * (b / (a + b))}, x] /; \text{FreeQ}[\{a, b, c, d, e, f\}, x] \& \text{NeQ}[b * c - a * d, 0] \& \text{NeQ}[a^2 - b^2, 0] \& \text{NeQ}[c^2 - d^2, 0]$

Maple [B] (verified)

Leaf count of result is larger than twice the leaf count of optimal. 205 vs. $2(97) = 194$.

Time = 4.85 (sec), antiderivative size = 206, normalized size of antiderivative = 2.02

method	result
default	$-\frac{2 \left(2 a \text{EllipticPi}\left(-\csc(f x+e)+\cot(f x+e),-\frac{a-b}{a+b},\sqrt{\frac{c-d}{c+d}}\right)-a \text{EllipticF}\left(-\csc(f x+e)+\cot(f x+e),\sqrt{\frac{c-d}{c+d}}\right)-b \text{EllipticF}\left(-\csc(f x+e)+\cot(f x+e),\sqrt{\frac{c-d}{c+d}}\right)\right)}{f(d+c \cos(f x+e))(a-b)(a+b)}$

input $\text{int}(1/(a+b*\cos(f*x+e))/(c+d*\sec(f*x+e))^{1/2}, x, \text{method}=\text{RETURNVERBOSE})$

output

```
-2/f*(2*a*EllipticPi(-csc(f*x+e)+cot(f*x+e),-(a-b)/(a+b),((c-d)/(c+d))^(1/2))-a*EllipticF(-csc(f*x+e)+cot(f*x+e),((c-d)/(c+d))^(1/2))-b*EllipticF(-csc(f*x+e)+cot(f*x+e),((c-d)/(c+d))^(1/2)))*(1+cos(f*x+e))*(c+d*sec(f*x+e))^(1/2)*(cos(f*x+e)/(1+cos(f*x+e)))^(1/2)*((d+c*cos(f*x+e))/(1+cos(f*x+e))/(c+d))^(1/2)/(d+c*cos(f*x+e))/(a-b)/(a+b)
```

Fricas [F(-1)]

Timed out.

$$\int \frac{1}{(a + b \cos(e + fx)) \sqrt{c + d \sec(e + fx)}} dx = \text{Timed out}$$

input

```
integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^(1/2),x, algorithm="fricas")
```

output

Sympy [F]

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx)) \sqrt{c + d \sec(e + fx)}} dx \\ &= \int \frac{1}{(a + b \cos(e + fx)) \sqrt{c + d \sec(e + fx)}} dx \end{aligned}$$

input

```
integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))**(1/2),x)
```

output

```
Integral(1/((a + b*cos(e + fx))*sqrt(c + d*sec(e + fx))), x)
```

Maxima [F]

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx)) \sqrt{c + d \sec(e + fx)}} dx \\ &= \int \frac{1}{(b \cos(fx + e) + a) \sqrt{d \sec(fx + e) + c}} dx \end{aligned}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^(1/2),x, algorithm="maxima")`

output `integrate(1/((b*cos(f*x + e) + a)*sqrt(d*sec(f*x + e) + c)), x)`

Giac [F]

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx)) \sqrt{c + d \sec(e + fx)}} dx \\ &= \int \frac{1}{(b \cos(fx + e) + a) \sqrt{d \sec(fx + e) + c}} dx \end{aligned}$$

input `integrate(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^(1/2),x, algorithm="giac")`

output `integrate(1/((b*cos(f*x + e) + a)*sqrt(d*sec(f*x + e) + c)), x)`

Mupad [F(-1)]

Timed out.

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx)) \sqrt{c + d \sec(e + fx)}} dx \\ &= \int \frac{1}{\sqrt{c + \frac{d}{\cos(e+fx)}} (a + b \cos(e + fx))} dx \end{aligned}$$

input `int(1/((c + d/cos(e + f*x))^(1/2)*(a + b*cos(e + f*x))),x)`

output `int(1/((c + d/cos(e + f*x))^(1/2)*(a + b*cos(e + f*x))), x)`

Reduce [F]

$$\begin{aligned} & \int \frac{1}{(a + b \cos(e + fx)) \sqrt{c + d \sec(e + fx)}} dx \\ &= \int \frac{\sqrt{\sec(fx + e) d + c}}{\cos(fx + e) \sec(fx + e) bd + \cos(fx + e) bc + \sec(fx + e) ad + ac} dx \end{aligned}$$

input `int(1/(a+b*cos(f*x+e))/(c+d*sec(f*x+e))^(1/2),x)`

output `int(sqrt(sec(e + fx)*d + c)/(cos(e + fx)*sec(e + fx)*b*d + cos(e + fx)*b*c + sec(e + fx)*a*d + a*c),x)`

3.18 $\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{a+b \cos(d+ex)} dx$

Optimal result	162
Mathematica [A] (verified)	162
Rubi [A] (verified)	163
Maple [A] (verified)	165
Fricas [A] (verification not implemented)	166
Sympy [B] (verification not implemented)	166
Maxima [F(-2)]	167
Giac [B] (verification not implemented)	168
Mupad [B] (verification not implemented)	168
Reduce [B] (verification not implemented)	169

Optimal result

Integrand size = 31, antiderivative size = 87

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx = \frac{Bx}{b} + \frac{2(Ab - aB) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(d+ex))}{\sqrt{a+b}}\right)}{\sqrt{a-b}b\sqrt{a+b}} - \frac{C \log(a + b \cos(d + ex))}{be}$$

output $B*x/b+2*(A*b-B*a)*\operatorname{arctan}((a-b)^(1/2)*\tan(1/2*e*x+1/2*d)/(a+b)^(1/2))/(a-b)^(1/2)/b/(a+b)^(1/2)/e-C*\ln(a+b*\cos(e*x+d))/b/e$

Mathematica [A] (verified)

Time = 0.47 (sec) , antiderivative size = 82, normalized size of antiderivative = 0.94

$$\begin{aligned} & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx \\ &= \frac{B(d + ex) + \frac{2(-Ab+aB)\operatorname{arctanh}\left(\frac{(a-b)\tan(\frac{1}{2}(d+ex))}{\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}} - C \log(a + b \cos(d + ex))}{be} \end{aligned}$$

input `Integrate[(A + B*Cos[d + e*x] + C*Sin[d + e*x])/ (a + b*Cos[d + e*x]), x]`

output
$$\frac{(B*(d + e*x) + (2*(-(A*b) + a*B)*ArcTanh[((a - b)*Tan[(d + e*x)/2])/Sqrt[-a^2 + b^2]])/Sqrt[-a^2 + b^2] - C*Log[a + b*Cos[d + e*x]])/(b*e)}$$

Rubi [A] (verified)

Time = 0.49 (sec), antiderivative size = 87, normalized size of antiderivative = 1.00, number of steps used = 10, number of rules used = 9, $\frac{\text{number of rules}}{\text{integrand size}} = 0.290$, Rules used = {3042, 4877, 3042, 3147, 16, 3214, 3042, 3138, 218}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx \\
 & \quad \downarrow \text{3042} \\
 & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx \\
 & \quad \downarrow \text{4877} \\
 & \int \frac{A + B \cos(d + ex)}{a + b \cos(d + ex)} dx + C \int \frac{\sin(d + ex)}{a + b \cos(d + ex)} dx \\
 & \quad \downarrow \text{3042} \\
 & \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{a + b \sin(d + ex + \frac{\pi}{2})} dx + C \int \frac{\cos(d + ex - \frac{\pi}{2})}{a - b \sin(d + ex - \frac{\pi}{2})} dx \\
 & \quad \downarrow \text{3147} \\
 & \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{a + b \sin(d + ex + \frac{\pi}{2})} dx - \frac{C \int \frac{1}{a+b\cos(d+ex)} d(b \cos(d + ex))}{be} \\
 & \quad \downarrow \text{16} \\
 & \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{a + b \sin(d + ex + \frac{\pi}{2})} dx - \frac{C \log(a + b \cos(d + ex))}{be} \\
 & \quad \downarrow \text{3214} \\
 & \frac{(Ab - aB) \int \frac{1}{a+b\cos(d+ex)} dx}{b} - \frac{C \log(a + b \cos(d + ex))}{be} + \frac{Bx}{b} \\
 & \quad \downarrow \text{3042}
 \end{aligned}$$

$$\begin{aligned}
 & \frac{(Ab - aB) \int \frac{1}{a+b \sin(d+ex+\frac{\pi}{2})} dx}{b} - \frac{C \log(a + b \cos(d + ex))}{be} + \frac{Bx}{b} \\
 & \quad \downarrow \text{3138} \\
 & \frac{2(Ab - aB) \int \frac{1}{(a-b) \tan^2(\frac{1}{2}(d+ex)) + a+b} d \tan\left(\frac{1}{2}(d+ex)\right)}{be} - \frac{C \log(a + b \cos(d + ex))}{be} + \frac{Bx}{b} \\
 & \quad \downarrow \text{218} \\
 & \frac{2(Ab - aB) \arctan\left(\frac{\sqrt{a-b} \tan(\frac{1}{2}(d+ex))}{\sqrt{a+b}}\right)}{be \sqrt{a-b} \sqrt{a+b}} - \frac{C \log(a + b \cos(d + ex))}{be} + \frac{Bx}{b}
 \end{aligned}$$

input `Int[(A + B*Cos[d + e*x] + C*Sin[d + e*x])/ (a + b*Cos[d + e*x]), x]`

output `(B*x)/b + (2*(A*b - a*B)*ArcTan[(Sqrt[a - b]*Tan[(d + e*x)/2])/Sqrt[a + b]])/(Sqrt[a - b]*b*Sqrt[a + b]*e) - (C*Log[a + b*Cos[d + e*x]])/(b*e)`

Definitions of rubi rules used

rule 16 `Int[((a_.) + (b_.)*(x_)), x_Symbol] :> Simp[c*(Log[RemoveContent[a + b*x, x]]/b), x] /; FreeQ[{a, b, c}, x]`

rule 218 `Int[((a_.) + (b_.)*(x_)^2)^(-1), x_Symbol] :> Simp[(Rt[a/b, 2]/a)*ArcTan[x/Rt[a/b, 2]], x] /; FreeQ[{a, b}, x] && PosQ[a/b]`

rule 3042 `Int[u_, x_Symbol] :> Int[DeactivateTrig[u, x], x] /; FunctionOfTrigOfLinearQ[u, x]`

rule 3138 `Int[((a_.) + (b_.)*sin[Pi/2 + (c_.) + (d_.)*(x_)])^(-1), x_Symbol] :> With[{e = FreeFactors[Tan[(c + d*x)/2], x]}, Simp[2*(e/d) Subst[Int[1/(a + b + (a - b)*e^2*x^2), x], x, Tan[(c + d*x)/2]/e], x] /; FreeQ[{a, b, c, d}, x] && NeQ[a^2 - b^2, 0]]`

rule 3147 $\text{Int}[\cos[(e_.) + (f_.)*(x_.)]^{(p_.)}*((a_.) + (b_.)*\sin[(e_.) + (f_.)*(x_.)])^{(m_.)}, x_{\text{Symbol}}] \rightarrow \text{Simp}[1/(b^{p*f}) \text{Subst}[\text{Int}[(a + x)^m * (b^2 - x^2)^{(p-1)/2}], x, x, b*\text{Sin}[e + f*x]], x] /; \text{FreeQ}[\{a, b, e, f, m\}, x] \&& \text{IntegerQ}[(p-1)/2] \&& \text{NeQ}[a^2 - b^2, 0]$

rule 3214 $\text{Int}[((a_.) + (b_.)*\sin[(e_.) + (f_.)*(x_.)]) / ((c_.) + (d_.)*\sin[(e_.) + (f_.)*(x_.)]), x_{\text{Symbol}}] \rightarrow \text{Simp}[b*(x/d), x] - \text{Simp}[(b*c - a*d)/d \text{Int}[1/(c + d*\text{Sin}[e + f*x]), x], x] /; \text{FreeQ}[\{a, b, c, d, e, f\}, x] \&& \text{NeQ}[b*c - a*d, 0]$

rule 4877 $\text{Int}[(u_)*(v_.) + (d_.)*(F_)[(c_.)*((a_.) + (b_.)*\sin[(n_.))], x_{\text{Symbol}}] :> \text{With}[\{e = \text{FreeFactors}[\text{Cos}[c*(a + b*x)], x]\}, \text{Int}[\text{ActivateTrig}[u*v], x] + \text{Simp}[d \text{Int}[\text{ActivateTrig}[u]*\text{Sin}[c*(a + b*x)]^n, x], x] /; \text{FunctionOfQ}[\text{Cos}[c*(a + b*x)]/e, u, x] /; \text{FreeQ}[\{a, b, c, d\}, x] \&& \text{!FreeQ}[v, x] \&& \text{IntegerQ}[(n - 1)/2] \&& \text{NonsumQ}[u] \&& (\text{EqQ}[F, \text{Sin}] \text{||} \text{EqQ}[F, \text{sin}])]$

Maple [A] (verified)

Time = 0.34 (sec) , antiderivative size = 142, normalized size of antiderivative = 1.63

method	result
derivativedivides	$\frac{C \ln \left(\tan \left(\frac{ex}{2} + \frac{d}{2} \right)^2 + 1 \right) + 2B \arctan \left(\tan \left(\frac{ex}{2} + \frac{d}{2} \right) \right)}{b} + \frac{\frac{2(-Ca + Cb) \ln \left(a \tan \left(\frac{ex}{2} + \frac{d}{2} \right)^2 - b \tan \left(\frac{ex}{2} + \frac{d}{2} \right)^2 + a + b \right)}{2a - 2b} + \frac{2(Ab - Ba) \arctan}{\sqrt{a}}}{e}$
default	$\frac{C \ln \left(\tan \left(\frac{ex}{2} + \frac{d}{2} \right)^2 + 1 \right) + 2B \arctan \left(\tan \left(\frac{ex}{2} + \frac{d}{2} \right) \right)}{b} + \frac{\frac{2(-Ca + Cb) \ln \left(a \tan \left(\frac{ex}{2} + \frac{d}{2} \right)^2 - b \tan \left(\frac{ex}{2} + \frac{d}{2} \right)^2 + a + b \right)}{2a - 2b} + \frac{2(Ab - Ba) \arctan}{\sqrt{a}}}{e}$
risch	$-\frac{ixC}{b} + \frac{Bx}{b} + \frac{2iC a^2 b e^2 x}{a^2 b^2 e^2 - b^4 e^2} - \frac{2iC b^3 e^2 x}{a^2 b^2 e^2 - b^4 e^2} + \frac{2iC a^2 b d e}{a^2 b^2 e^2 - b^4 e^2} - \frac{2iC b^3 d e}{a^2 b^2 e^2 - b^4 e^2} - \frac{\ln \left(e^{i(ex+d)} + \frac{Aab - B a^2 - i}{a^2 b^2 e^2 - b^4 e^2} \right)}{a^2 b^2 e^2 - b^4 e^2}$

input $\text{int}((A+B*\cos(e*x+d)+C*\sin(e*x+d))/(a+b*\cos(e*x+d)), x, \text{method}=\text{_RETURNVERBOSE})$

output
$$\frac{1/e*(2/b*(1/2*C*ln(tan(1/2*e*x+1/2*d)^2+1)+B*arctan(tan(1/2*e*x+1/2*d))))+2/b*(1/2*(-C*a+C*b)/(a-b)*ln(a*tan(1/2*e*x+1/2*d)^2-b*tan(1/2*e*x+1/2*d)^2+a+b)+(A*b-B*a)/((a-b)*(a+b))^{(1/2)}*arctan((a-b)*tan(1/2*e*x+1/2*d)/((a-b)*(a+b))^{(1/2)})))}{}$$

Fricas [A] (verification not implemented)

Time = 0.12 (sec) , antiderivative size = 326, normalized size of antiderivative = 3.75

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx \\ = \left[\frac{2(Ba^2 - Bb^2)ex + (Ba - Ab)\sqrt{-a^2 + b^2} \log\left(\frac{2ab \cos(ex+d) + (2a^2 - b^2) \cos(ex+d)^2 + 2\sqrt{-a^2 + b^2}(a \cos(ex+d) + b) \sin(ex+d)}{b^2 \cos(ex+d)^2 + 2ab \cos(ex+d) + a^2}\right)}{2(a^2b - b^3)e} \right]$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d)),x, algorithm="fricas")`

output
$$[1/2*(2*(B*a^2 - B*b^2)*e*x + (B*a - A*b)*sqrt(-a^2 + b^2)*log((2*a*b*cos(e*x + d) + (2*a^2 - b^2)*cos(e*x + d)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(e*x + d) + b)*sin(e*x + d) - a^2 + 2*b^2)/(b^2*cos(e*x + d)^2 + 2*a*b*cos(e*x + d) + a^2)) - (C*a^2 - C*b^2)*log(b^2*cos(e*x + d)^2 + 2*a*b*cos(e*x + d) + a^2))/((a^2*b - b^3)*e), 1/2*(2*(B*a^2 - B*b^2)*e*x - 2*(B*a - A*b)*sqrt(a^2 - b^2)*arctan(-(a*cos(e*x + d) + b)/(sqrt(a^2 - b^2)*sin(e*x + d))) - (C*a^2 - C*b^2)*log(b^2*cos(e*x + d)^2 + 2*a*b*cos(e*x + d) + a^2))/((a^2*b - b^3)*e)]$$

Sympy [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 672 vs. $2(73) = 146$.

Time = 13.95 (sec) , antiderivative size = 672, normalized size of antiderivative = 7.72

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx = \text{Too large to display}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d)),x)`

output

```
Piecewise((zoo*x*(A + B*cos(d) + C*sin(d))/cos(d), Eq(a, 0) & Eq(b, 0) & Eq(e, 0)), (A*tan(d/2 + e*x/2)/(b*e) + B*x/b - B*tan(d/2 + e*x/2)/(b*e) + C*log(tan(d/2 + e*x/2)**2 + 1)/(b*e), Eq(a, b)), (A/(b*e*tan(d/2 + e*x/2)) + B*x/b + B/(b*e*tan(d/2 + e*x/2)) + C*log(tan(d/2 + e*x/2)**2 + 1)/(b*e) - 2*C*log(tan(d/2 + e*x/2))/(b*e), Eq(a, -b)), ((A*x + B*sin(d + e*x))/e - C*cos(d + e*x)/e)/a, Eq(b, 0)), (x*(A + B*cos(d) + C*sin(d))/(a + b*cos(d)), Eq(e, 0)), (-A*b*sqrt(-a/(a - b) - b/(a - b)))*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(d/2 + e*x/2))/(a*b*e + b**2*e) + A*b*sqrt(-a/(a - b) - b/(a - b))*log(sqrt(-a/(a - b) - b/(a - b)) + tan(d/2 + e*x/2))/(a*b*e + b**2*e) + B*a*e*x/(a*b*e + b**2*e) + B*a*sqrt(-a/(a - b) - b/(a - b))*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(d/2 + e*x/2))/(a*b*e + b**2*e) - B*a*sqrt(-a/(a - b) - b/(a - b))*log(sqrt(-a/(a - b) - b/(a - b)) + tan(d/2 + e*x/2))/(a*b*e + b**2*e) + B*b*e*x/(a*b*e + b**2*e) - C*a*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(d/2 + e*x/2))/(a*b*e + b**2*e) - C*a*log(sqrt(-a/(a - b) - b/(a - b)) + tan(d/2 + e*x/2))/(a*b*e + b**2*e) + C*a*log(tan(d/2 + e*x/2)**2 + 1)/(a*b*e + b**2*e) - C*b*log(-sqrt(-a/(a - b) - b/(a - b)) + tan(d/2 + e*x/2))/(a*b*e + b**2*e) - C*b*log(sqrt(-a/(a - b) - b/(a - b)) + tan(d/2 + e*x/2))/(a*b*e + b**2*e) + C*b*log(tan(d/2 + e*x/2)**2 + 1)/(a*b*e + b**2*e), True))
```

Maxima [F(-2)]

Exception generated.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx = \text{Exception raised: ValueError}$$

input

```
integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d)),x, algorithm="maxima")
```

output

```
Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more details)
```

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 454 vs. $2(78) = 156$.

Time = 0.15 (sec) , antiderivative size = 454, normalized size of antiderivative = 5.22

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx =$$

$$-\frac{C(a+b)(a-b)^2 \log \left(\tan \left(\frac{1}{2} ex + \frac{1}{2} d \right)^2 + \frac{2 a + \sqrt{-4(a+b)(a-b)+4 a^2}}{2(a-b)} \right)}{(a^2 - 2 ab + b^2)b^2 + (a^3 - 2 a^2 b + ab^2)|b|} + \frac{\left(\sqrt{a^2 - b^2} B(2 a - b)|a - b| - \sqrt{a^2 - b^2} A b |a - b| - \sqrt{a^2 - b^2} A |a - b| |b| + \sqrt{a^2 - b^2} A b^2 |a - b| \right)}{(a^2 - 2 ab + b^2)b^2}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d)),x, algorithm="giac")`

output
$$-(C*(a + b)*(a - b)^2*\log(\tan(1/2*e*x + 1/2*d)^2 + 1/2*(2*a + \sqrt{-4*(a + b)*(a - b) + 4*a^2}))/((a^2 - 2*a*b + b^2)*b^2 + (a^3 - 2*a^2*b + a*b^2)*abs(b)) + (\sqrt{a^2 - b^2}*B*(2*a - b)*abs(a - b) - \sqrt{a^2 - b^2})*A*b*abs(a - b) - \sqrt{a^2 - b^2})*A*abs(a - b)*abs(b) + \sqrt{a^2 - b^2})*B*abs(a - b)*abs(b)*(\pi*floor(1/2*(e*x + d)/\pi + 1/2) + \arctan(2*\sqrt(1/2)*tan(1/2*e*x + 1/2*d)/\sqrt((2*a + \sqrt{-4*(a + b)*(a - b) + 4*a^2}))/((a - b)))))/((a^2 - 2*a*b + b^2)*b^2 + (a^3 - 2*a^2*b + a*b^2)*abs(b)) + (2*B*a - A*b - B*b + A*abs(b) - B*abs(b))*(\pi*floor(1/2*(e*x + d)/\pi + 1/2) + \arctan(2*\sqrt(1/2)*tan(1/2*e*x + 1/2*d)/\sqrt((2*a - \sqrt{-4*(a + b)*(a - b) + 4*a^2}))/((a - b))))/(b^2 - a*abs(b)) + (C*a - C*b)*log(\tan(1/2*e*x + 1/2*d)^2 + 1/2*(2*a - \sqrt{-4*(a + b)*(a - b) + 4*a^2}))/((a - b))/(b^2 - a*abs(b)))/e$$

Mupad [B] (verification not implemented)

Time = 2.19 (sec) , antiderivative size = 886, normalized size of antiderivative = 10.18

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx = \text{Too large to display}$$

input `int((A + B*cos(d + e*x) + C*sin(d + e*x))/(a + b*cos(d + e*x)),x)`

output

```
(log(tan(d/2 + (e*x)/2) + 1i)*(B*1i + C))/(b*e) - (log(tan(d/2 + (e*x)/2) - 1i)*(B*1i - C))/(b*e) - (log(A^2*b^3 + B^2*b^3 - 4*C^2*a^3 + 4*C^2*b^3 + A^2*a*b^2 + B^2*a*b^2 + 4*C^2*a*b^2 - 4*C^2*a^2*b - 2*A*B*a*b^2 - 2*A*B*a^2*b + A^2*b^2*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2) + B^2*b^2*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2) - 4*C^2*a^2*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2) + 4*C^2*b^2*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2) - 4*A*C*b^2*(b^2 - a^2)^(1/2) + 4*B*C*a^2*(b^2 - a^2)^(1/2) - 4*A*C*a*b*(b^2 - a^2)^(1/2) + 4*B*C*a*b*(b^2 - a^2)^(1/2) + 4*A*C*a^2*b*tan(d/2 + (e*x)/2) + 4*B*C*a*b^2*tan(d/2 + (e*x)/2) - 2*A*B*a*b*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2))*(C*a^2 - C*b^2 + A*b*(b^2 - a^2)^(1/2) - B*a*(b^2 - a^2)^(1/2)))/(b*e*(a^2 - b^2)) - (log(A^2*b^3 + B^2*b^3 - 4*C^2*a^3 + 4*C^2*b^3 + A^2*a*b^2 + B^2*a*b^2 + 4*C^2*a*b^2 - 4*C^2*a^2*b - 2*A*B*a*b^2 - 2*A*B*a^2*b - A^2*b^2*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2) - B^2*b^2*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2) + 4*C^2*a^2*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2) - 4*C^2*b^2*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2) + 4*A*C*b^2*(b^2 - a^2)^(1/2) - 4*B*C*a^2*(b^2 - a^2)^(1/2) - 4*A*C*a*b*(b^2 - a^2)^(1/2) - 4*B*C*a*b*(b^2 - a^2)^(1/2) + 4*A*C*a^2*b*tan(d/2 + (e*x)/2) + 4*B*C*a*b^2*tan(d/2 + (e*x)/2) + 2*A*B*a*b*tan(d/2 + (e*x)/2)*(b^2 - a^2)^(1/2))*(C*a^2 - C*b^2 - A*b*(b^2 - a^2)^(1/2) + B*a*(b^2 - a^2)^(1/2) + B*a*(b^2 - a^2)^(1/2) + ...)
```

Reduce [B] (verification not implemented)

Time = 0.15 (sec) , antiderivative size = 26, normalized size of antiderivative = 0.30

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{a + b \cos(d + ex)} dx = \frac{-\log(\cos(ex + d)b + a)c + bex}{be}$$

input

```
int((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d)),x)
```

output

```
( - log(cos(d + e*x)*b + a)*c + b*e*x)/(b*e)
```

3.19 $\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^2} dx$

Optimal result	170
Mathematica [A] (verified)	170
Rubi [A] (verified)	171
Maple [A] (verified)	174
Fricas [A] (verification not implemented)	174
Sympy [F(-1)]	175
Maxima [F(-2)]	175
Giac [A] (verification not implemented)	176
Mupad [B] (verification not implemented)	176
Reduce [B] (verification not implemented)	177

Optimal result

Integrand size = 31, antiderivative size = 120

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx = \frac{2(aA - bB) \arctan\left(\frac{\sqrt{a-b} \tan\left(\frac{1}{2}(d+ex)\right)}{\sqrt{a+b}}\right)}{(a-b)^{3/2}(a+b)^{3/2}e} \\ + \frac{C}{be(a + b \cos(d + ex))} \\ - \frac{(Ab - aB) \sin(d + ex)}{(a^2 - b^2)e(a + b \cos(d + ex))}$$

output $2*(A*a-B*b)*\arctan((a-b)^(1/2)*\tan(1/2*e*x+1/2*d)/(a+b)^(1/2))/(a-b)^(3/2) / (a+b)^(3/2)/e+C/b/e/(a+b*\cos(e*x+d))-(A*b-B*a)*\sin(e*x+d)/(a^2-b^2)/e/(a+b*\cos(e*x+d))$

Mathematica [A] (verified)

Time = 0.60 (sec) , antiderivative size = 115, normalized size of antiderivative = 0.96

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx \\ = \frac{\frac{2(aA - bB) \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(d+ex)\right)}{\sqrt{-a^2+b^2}}\right)}{(-a^2+b^2)^{3/2}} + \frac{(a^2-b^2)C - b(Ab - aB) \sin(d + ex)}{(a-b)b(a+b)(a+b \cos(d + ex))}}{e}$$

input $\text{Integrate}[(A + B \cos[d + e*x] + C \sin[d + e*x])/(a + b \cos[d + e*x])^2, x]$

output $((2*(a*A - b*B)*\text{ArcTanh}[((a - b)*\text{Tan}[(d + e*x)/2])/Sqrt[-a^2 + b^2]])/(-a^2 + b^2)^{(3/2)} + ((a^2 - b^2)*C - b*(A*b - a*B)*\text{Sin}[d + e*x])/((a - b)*b*(a + b)*(a + b \cos[d + e*x])))}/e$

Rubi [A] (verified)

Time = 0.56 (sec), antiderivative size = 131, normalized size of antiderivative = 1.09, number of steps used = 12, number of rules used = 11, $\frac{\text{number of rules}}{\text{integrand size}} = 0.355$, Rules used = {3042, 4877, 3042, 3147, 17, 3233, 25, 27, 3042, 3138, 218}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\begin{aligned}
 & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx \\
 & \quad \downarrow \textcolor{blue}{4877} \\
 & \int \frac{A + B \cos(d + ex)}{(a + b \cos(d + ex))^2} dx + C \int \frac{\sin(d + ex)}{(a + b \cos(d + ex))^2} dx \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^2} dx + C \int \frac{\cos(d + ex - \frac{\pi}{2})}{(a - b \sin(d + ex - \frac{\pi}{2}))^2} dx \\
 & \quad \downarrow \textcolor{blue}{3147} \\
 & \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^2} dx - \frac{C \int \frac{1}{(a + b \cos(d + ex))^2} d(b \cos(d + ex))}{be} \\
 & \quad \downarrow \textcolor{blue}{17} \\
 & \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^2} dx + \frac{C}{be(a + b \cos(d + ex))}
 \end{aligned}$$

$$\begin{aligned}
 & \downarrow \text{3233} \\
 -\frac{\int -\frac{aA-bB}{a+b\cos(d+ex)} dx}{a^2-b^2} - \frac{(Ab-aB)\sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))} + \frac{C}{be(a+b\cos(d+ex))} \\
 & \quad \downarrow \text{25} \\
 \frac{\int \frac{aA-bB}{a+b\cos(d+ex)} dx}{a^2-b^2} - \frac{(Ab-aB)\sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))} + \frac{C}{be(a+b\cos(d+ex))} \\
 & \quad \downarrow \text{27} \\
 \frac{(aA-bB) \int \frac{1}{a+b\cos(d+ex)} dx}{a^2-b^2} - \frac{(Ab-aB)\sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))} + \frac{C}{be(a+b\cos(d+ex))} \\
 & \quad \downarrow \text{3042} \\
 \frac{(aA-bB) \int \frac{1}{a+b\sin(d+ex+\frac{\pi}{2})} dx}{a^2-b^2} - \frac{(Ab-aB)\sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))} + \frac{C}{be(a+b\cos(d+ex))} \\
 & \quad \downarrow \text{3138} \\
 \frac{2(aA-bB) \int \frac{1}{(a-b)\tan^2(\frac{1}{2}(d+ex))+a+b} d \tan(\frac{1}{2}(d+ex))}{e(a^2-b^2)} - \frac{(Ab-aB)\sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))} + \\
 & \quad \frac{C}{be(a+b\cos(d+ex))} \\
 & \quad \downarrow \text{218} \\
 \frac{2(aA-bB) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(d+ex))}{\sqrt{a+b}}\right)}{e\sqrt{a-b}\sqrt{a+b}(a^2-b^2)} - \frac{(Ab-aB)\sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))} + \frac{C}{be(a+b\cos(d+ex))}
 \end{aligned}$$

input `Int[(A + B*Cos[d + e*x] + C*Sin[d + e*x])/((a + b*Cos[d + e*x])^2, x)]`

output `(2*(a*A - b*B)*ArcTan[((Sqrt[a - b]*Tan[(d + e*x)/2])/Sqrt[a + b]])/(Sqrt[a - b]*Sqrt[a + b]*(a^2 - b^2)*e) + C/(b*e*(a + b*Cos[d + e*x])) - ((A*b - a*B)*Sin[d + e*x])/((a^2 - b^2)*e*(a + b*Cos[d + e*x]))`

Definitions of rubi rules used

rule 17 $\text{Int}[(c_*)*((a_*) + (b_*)*(x_*))^m, x_{\text{Symbol}}] \rightarrow \text{Simp}[c*((a + b*x)^{m+1})/(b*(m+1)), x] /; \text{FreeQ}[\{a, b, c, m\}, x] \& \text{NeQ}[m, -1]$

rule 25 $\text{Int}[-(F_x), x_{\text{Symbol}}] \rightarrow \text{Simp}[\text{Identity}[-1] \text{Int}[F_x, x], x]$

rule 27 $\text{Int}[(a_)*(F_x), x_{\text{Symbol}}] \rightarrow \text{Simp}[a \text{Int}[F_x, x], x] /; \text{FreeQ}[a, x] \& \text{!MatchQ}[F_x, (b_)*(G_x)] /; \text{FreeQ}[b, x]]$

rule 218 $\text{Int}[(a_*) + (b_*)*(x_*)^2, x_{\text{Symbol}}] \rightarrow \text{Simp}[(\text{Rt}[a/b, 2]/a)*\text{ArcTan}[x/\text{Rt}[a/b, 2]], x] /; \text{FreeQ}[\{a, b\}, x] \& \text{PosQ}[a/b]$

rule 3042 $\text{Int}[u, x_{\text{Symbol}}] \rightarrow \text{Int}[\text{DeactivateTrig}[u, x], x] /; \text{FunctionOfTrigOfLinearQ}[u, x]$

rule 3138 $\text{Int}[(a_*) + (b_*)*\sin[\text{Pi}/2 + (c_*) + (d_*)*(x_*)], x_{\text{Symbol}}] \rightarrow \text{With}[\{e = \text{FreeFactors}[\tan[(c + d*x)/2], x]\}, \text{Simp}[2*(e/d) \text{Subst}[\text{Int}[1/(a + b + (a - b)*e^2*x^2), x], x, \tan[(c + d*x)/2]/e], x]] /; \text{FreeQ}[\{a, b, c, d\}, x] \& \text{NeQ}[a^2 - b^2, 0]$

rule 3147 $\text{Int}[\cos[(e_*) + (f_*)*(x_*)]^p * ((a_*) + (b_*)*\sin[(e_*) + (f_*)*(x_*)])^m, x_{\text{Symbol}}] \rightarrow \text{Simp}[1/(b^p*f) \text{Subst}[\text{Int}[(a + x)^m * (b^2 - x^2)^{(p-1)/2}, x], x, b*\sin[e + f*x]], x] /; \text{FreeQ}[\{a, b, e, f, m\}, x] \& \text{IntegerQ}[(p-1)/2] \& \text{NeQ}[a^2 - b^2, 0]$

rule 3233 $\text{Int}[(a_*) + (b_*)*\sin[(e_*) + (f_*)*(x_*)]^m * ((c_*) + (d_*)*\sin[(e_*) + (f_*)*(x_*)]), x_{\text{Symbol}}] \rightarrow \text{Simp}[(-(b*c - a*d))*\cos[e + f*x]*((a + b*\sin[e + f*x])^{m+1})/(f*(m+1)*(a^2 - b^2)), x] + \text{Simp}[1/((m+1)*(a^2 - b^2)) \text{Int}[(a + b*\sin[e + f*x])^{m+1} * \text{Simp}[(a*c - b*d)*(m+1) - (b*c - a*d)*(m+2)*\sin[e + f*x], x], x] /; \text{FreeQ}[\{a, b, c, d, e, f\}, x] \& \text{NeQ}[b*c - a*d, 0] \& \text{NeQ}[a^2 - b^2, 0] \& \text{LtQ}[m, -1] \& \text{IntegerQ}[2*m]$

rule 4877

```
Int[(u_)*((v_) + (d_.)*(F_)[(c_.)*(a_.) + (b_.)*(x_)])^(n_.)), x_Symbol] :
> With[{e = FreeFactors[Cos[c*(a + b*x)], x]}, Int[ActivateTrig[u*v], x] +
Simp[d Int[ActivateTrig[u]*Sin[c*(a + b*x)]^n, x], x] /; FunctionOfQ[Cos[
c*(a + b*x)]/e, u, x]] /; FreeQ[{a, b, c, d}, x] && !FreeQ[v, x] && Intege-
rQ[(n - 1)/2] && NonsumQ[u] && (EqQ[F, Sin] || EqQ[F, sin])
```

Maple [A] (verified)

Time = 0.32 (sec), antiderivative size = 141, normalized size of antiderivative = 1.18

method	result
derivativedivides	$\frac{-\frac{2(Ab-Ba)\tan(\frac{ex}{2}+\frac{d}{2})}{a^2-b^2}-\frac{2C}{a-b}}{a\tan(\frac{ex}{2}+\frac{d}{2})^2-b\tan(\frac{ex}{2}+\frac{d}{2})^2+a+b} + \frac{\frac{2(Aa-Bb)\arctan\left(\frac{(a-b)\tan(\frac{ex}{2}+\frac{d}{2})}{\sqrt{(a-b)(a+b)}}\right)}{(a-b)(a+b)\sqrt{(a-b)(a+b)}}}{e}$
default	$\frac{-\frac{2(Ab-Ba)\tan(\frac{ex}{2}+\frac{d}{2})}{a^2-b^2}-\frac{2C}{a-b}}{a\tan(\frac{ex}{2}+\frac{d}{2})^2-b\tan(\frac{ex}{2}+\frac{d}{2})^2+a+b} + \frac{\frac{2(Aa-Bb)\arctan\left(\frac{(a-b)\tan(\frac{ex}{2}+\frac{d}{2})}{\sqrt{(a-b)(a+b)}}\right)}{(a-b)(a+b)\sqrt{(a-b)(a+b)}}}{e}$
risch	$\frac{\frac{2iAab e^{i(ex+d)}-2iB a^2 e^{i(ex+d)}+2iA b^2-2iBab-2C a^2 e^{i(ex+d)}+2C b^2 e^{i(ex+d)}}{be(-a^2+b^2)(b e^{2i(ex+d)}+2a e^{i(ex+d)}+b)}-\frac{\ln\left(e^{i(ex+d)}+\frac{ia^2-ib^2+a\sqrt{-a^2+b^2}}{b\sqrt{-a^2+b^2}}\right)}{\sqrt{-a^2+b^2}(a+b)(a-b)e}}$

input

```
int((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^2,x,method=_RETURNVERBO
SE)
```

output

```
1/e*(2*(-(A*b-B*a)/(a^2-b^2)*tan(1/2*e*x+1/2*d)-C/(a-b))/(a*tan(1/2*e*x+1/
2*d)^2-b*tan(1/2*e*x+1/2*d)^2+a+b)+2*(A*a-B*b)/(a-b)/(a+b)/((a-b)*(a+b))^(1/
2)*arctan((a-b)*tan(1/2*e*x+1/2*d)/((a-b)*(a+b))^(1/2)))
```

Fricas [A] (verification not implemented)

Time = 0.12 (sec), antiderivative size = 444, normalized size of antiderivative = 3.70

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx$$

$$= \frac{2 Ca^4 - 4 Ca^2 b^2 + 2 C b^4 - (A a^2 b - B a b^2 + (A a b^2 - B b^3) \cos(ex + d)) \sqrt{-a^2 + b^2} \log\left(\frac{2 a b \cos(ex + d) + (2 a^2 - b^2) \sin(ex + d)}{2 ((a^4 b^2 - 2 a^2 b^4 + b^6) e \cos(ex + d) + (a^3 b^2 - a b^4) \sin(ex + d))}\right)}{2 ((a^4 b^2 - 2 a^2 b^4 + b^6) e \cos(ex + d) + (a^3 b^2 - a b^4) \sin(ex + d))}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^2,x, algorithm="fricas")`

output
$$\begin{aligned} & [1/2*(2*C*a^4 - 4*C*a^2*b^2 + 2*C*b^4 - (A*a^2*b - B*a*b^2 + (A*a*b^2 - B*b^3)*cos(e*x + d))*sqrt(-a^2 + b^2)*log((2*a*b*cos(e*x + d) + (2*a^2 - b^2)*cos(e*x + d)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(e*x + d) + b)*sin(e*x + d) - a^2 + 2*b^2)/(b^2*cos(e*x + d)^2 + 2*a*b*cos(e*x + d) + a^2)) + 2*(B*a^3*b - A*a^2*b^2 - B*a*b^3 + A*b^4)*sin(e*x + d))/((a^4*b^2 - 2*a^2*b^4 + b^6)*e*cos(e*x + d) + (a^5*b - 2*a^3*b^3 + a*b^5)*e), (C*a^4 - 2*C*a^2*b^2 + C*b^4 + (A*a^2*b - B*a*b^2 + (A*a*b^2 - B*b^3)*cos(e*x + d))*sqrt(a^2 - b^2)*arctan(-(a*cos(e*x + d) + b)/(sqrt(a^2 - b^2)*sin(e*x + d))) + (B*a^3*b - A*a^2*b^2 - B*a*b^3 + A*b^4)*sin(e*x + d))/((a^4*b^2 - 2*a^2*b^4 + b^6)*e*cos(e*x + d) + (a^5*b - 2*a^3*b^3 + a*b^5)*e)] \end{aligned}$$

Sympy [F(-1)]

Timed out.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx = \text{Timed out}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))**2,x)`

output `Timed out`

Maxima [F(-2)]

Exception generated.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx = \text{Exception raised: ValueError}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^2,x, algorithm="maxima")`

output

```
Exception raised: ValueError >> Computation failed since Maxima requested
additional constraints; using the 'assume' command before evaluation *may*
help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` f
or more de
```

Giac [A] (verification not implemented)

Time = 0.14 (sec) , antiderivative size = 167, normalized size of antiderivative = 1.39

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx =$$

$$-\frac{2 \left(\frac{\left(\pi \left\lfloor \frac{ex+d}{2\pi} + \frac{1}{2}\right\rfloor \operatorname{sgn}(-2a+2b) + \arctan\left(-\frac{a \tan\left(\frac{1}{2}ex+\frac{1}{2}d\right) - b \tan\left(\frac{1}{2}ex+\frac{1}{2}d\right)}{\sqrt{a^2-b^2}}\right)\right)(Aa-Bb)}{(a^2-b^2)^{\frac{3}{2}}} - \frac{Ba \tan\left(\frac{1}{2}ex+\frac{1}{2}d\right) - Ab \tan\left(\frac{1}{2}ex+\frac{1}{2}d\right)}{\left(a \tan\left(\frac{1}{2}ex+\frac{1}{2}d\right)\right)^2 - b \tan\left(\frac{1}{2}ex+\frac{1}{2}d\right)^2 + a^2 - b^2} \right)}{e}$$

input

```
integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^2,x, algorithm="giac")
```

output

```
-2*((pi*floor(1/2*(e*x + d)/pi + 1/2)*sgn(-2*a + 2*b) + arctan(-(a*tan(1/2
*e*x + 1/2*d) - b*tan(1/2*e*x + 1/2*d))/sqrt(a^2 - b^2)))*(A*a - B*b)/(a^2
- b^2)^(3/2) - (B*a*tan(1/2*e*x + 1/2*d) - A*b*tan(1/2*e*x + 1/2*d) - C*a
- C*b)/((a*tan(1/2*e*x + 1/2*d))^2 - b*tan(1/2*e*x + 1/2*d)^2 + a + b)*(a^
2 - b^2)))/e
```

Mupad [B] (verification not implemented)

Time = 1.26 (sec) , antiderivative size = 126, normalized size of antiderivative = 1.05

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx = \frac{2 \operatorname{atan}\left(\frac{\tan\left(\frac{d}{2} + \frac{e x}{2}\right) (2 a - 2 b)}{2 \sqrt{a+b} \sqrt{a-b}}\right) (A a - B b)}{e (a + b)^{3/2} (a - b)^{3/2}}$$

$$- \frac{\frac{2 C}{a - b} + \frac{2 \tan\left(\frac{d}{2} + \frac{e x}{2}\right) (A b - B a)}{(a+b) (a-b)}}{e \left((a - b) \tan\left(\frac{d}{2} + \frac{e x}{2}\right)^2 + a + b\right)}$$

input $\int \frac{(A + B\cos(d + ex) + C\sin(d + ex))}{(a + b\cos(d + ex))^2} dx$

output
$$\begin{aligned} & \frac{(2*\tan((d/2 + (e*x)/2)*(2*a - 2*b))/(2*(a + b)^(1/2)*(a - b)^(1/2)))* \\ & (A*a - B*b))/(e*(a + b)^(3/2)*(a - b)^(3/2)) - ((2*C)/(a - b) + (2*tan(d/2 \\ & + (e*x)/2)*(A*b - B*a))/((a + b)*(a - b)))/(e*(a + b + tan(d/2 + (e*x)/2) \\ & ^2*(a - b))) \end{aligned}$$

Reduce [B] (verification not implemented)

Time = 0.16 (sec), antiderivative size = 173, normalized size of antiderivative = 1.44

$$\begin{aligned} & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^2} dx \\ & = \frac{2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan\left(\frac{ex}{2} + \frac{d}{2}\right)a - \tan\left(\frac{ex}{2} + \frac{d}{2}\right)b}{\sqrt{a^2 - b^2}}\right) \cos(ex + d)b + 2\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan\left(\frac{ex}{2} + \frac{d}{2}\right)a - \tan\left(\frac{ex}{2} + \frac{d}{2}\right)b}{\sqrt{a^2 - b^2}}\right) a - c}{e(\cos(ex + d)a^2b - \cos(ex + d)b^3 + a^3 - ab^2)} \end{aligned}$$

input $\int \frac{(A+B\cos(e*x+d)+C\sin(e*x+d))}{(a+b\cos(e*x+d))^2} dx$

output
$$\begin{aligned} & (2*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a \\ & **2 - b**2))*cos(d + e*x)*b + 2*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a \\ & - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*a - cos(d + e*x)*a*c + cos(d + e \\ & *x)*b*c + a*c - b*c)/(e*(cos(d + e*x)*a**2*b - cos(d + e*x)*b**3 + a**3 - \\ & a*b**2)) \end{aligned}$$

3.20 $\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^3} dx$

Optimal result	178
Mathematica [A] (verified)	179
Rubi [A] (verified)	179
Maple [A] (verified)	183
Fricas [B] (verification not implemented)	184
Sympy [F(-1)]	184
Maxima [F(-2)]	185
Giac [B] (verification not implemented)	185
Mupad [B] (verification not implemented)	186
Reduce [B] (verification not implemented)	187

Optimal result

Integrand size = 31, antiderivative size = 187

$$\begin{aligned} & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx \\ &= \frac{(2a^2 A + Ab^2 - 3abB) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(d+ex))}{\sqrt{a+b}}\right)}{(a-b)^{5/2}(a+b)^{5/2}e} + \frac{C}{2be(a+b \cos(d+ex))^2} \\ &\quad - \frac{(Ab - aB) \sin(d + ex)}{2(a^2 - b^2)e(a+b \cos(d+ex))^2} - \frac{(3aAb - a^2B - 2b^2B) \sin(d + ex)}{2(a^2 - b^2)^2e(a+b \cos(d+ex))} \end{aligned}$$

output

```
(2*A*a^2+A*b^2-3*B*a*b)*arctan((a-b)^(1/2)*tan(1/2*e*x+1/2*d)/(a+b)^(1/2))
/(a-b)^(5/2)/(a+b)^(5/2)/e+1/2*C/b/e/(a+b*cos(e*x+d))^2-1/2*(A*b-B*a)*sin(
e*x+d)/(a^2-b^2)/e/(a+b*cos(e*x+d))^2-1/2*(3*A*a*b-B*a^2-2*B*b^2)*sin(e*x+
d)/(a^2-b^2)^2/e/(a+b*cos(e*x+d))
```

Mathematica [A] (verified)

Time = 0.91 (sec) , antiderivative size = 175, normalized size of antiderivative = 0.94

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx$$

$$= \frac{-\frac{2(2a^2A+Ab^2-3abB)\operatorname{arctanh}\left(\frac{(a-b)\tan\left(\frac{1}{2}(d+ex)\right)}{\sqrt{-a^2+b^2}}\right)}{(-a^2+b^2)^{5/2}} + \frac{(-3aAb+a^2B+2b^2B)\sin(d+ex)}{(a-b)^2(a+b)^2(a+b\cos(d+ex))} + \frac{(a^2-b^2)C-b(Ab-aB)\sin(d+ex)}{(a-b)b(a+b)(a+b\cos(d+ex))^2}}{2e}$$

input `Integrate[(A + B*Cos[d + e*x] + C*Sin[d + e*x])/((a + b*Cos[d + e*x])^3, x]`

output $\frac{((-2*(2*a^2*A + A*b^2 - 3*a*b*B)*\operatorname{ArcTanh}[(a - b)*\operatorname{Tan}[(d + e*x)/2]])/\operatorname{Sqrt}[-a^2 + b^2])}{(-a^2 + b^2)^{5/2}} + \frac{((-3*a*A*b + a^2*B + 2*b^2*B)*\operatorname{Sin}[d + e*x])/((a - b)^2*(a + b)^2*(a + b*\operatorname{Cos}[d + e*x])) + ((a^2 - b^2)*C - b*(A*b - a*B)*\operatorname{Sin}[d + e*x])/((a - b)*b*(a + b)*(a + b*\operatorname{Cos}[d + e*x])^2)}{(2*e)}$

Rubi [A] (verified)

Time = 0.79 (sec) , antiderivative size = 213, normalized size of antiderivative = 1.14, number of steps used = 15, number of rules used = 14, $\frac{\text{number of rules}}{\text{integrand size}} = 0.452$, Rules used = {3042, 4877, 3042, 3147, 17, 3233, 25, 3042, 3233, 25, 27, 3042, 3138, 218}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx$$

$$\downarrow \text{3042}$$

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx$$

$$\downarrow \text{4877}$$

$$\int \frac{A + B \cos(d + ex)}{(a + b \cos(d + ex))^3} dx + C \int \frac{\sin(d + ex)}{(a + b \cos(d + ex))^3} dx$$

$$\downarrow \text{3042}$$

$$\begin{aligned}
& \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^3} dx + C \int \frac{\cos(d + ex - \frac{\pi}{2})}{(a - b \sin(d + ex - \frac{\pi}{2}))^3} dx \\
& \quad \downarrow \textcolor{blue}{3147} \\
& \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^3} dx - \frac{C \int \frac{1}{(a+b \cos(d+ex))^3} d(b \cos(d+ex))}{be} \\
& \quad \downarrow \textcolor{blue}{17} \\
& \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^3} dx + \frac{C}{2be(a + b \cos(d + ex))^2} \\
& \quad \downarrow \textcolor{blue}{3233} \\
& - \frac{\int \frac{2(aA - bB) - (Ab - aB) \cos(d + ex)}{(a+b \cos(d+ex))^2} dx}{2(a^2 - b^2)} - \frac{(Ab - aB) \sin(d + ex)}{2e(a^2 - b^2)(a + b \cos(d + ex))^2} + \frac{C}{2be(a + b \cos(d + ex))^2} \\
& \quad \downarrow \textcolor{blue}{25} \\
& \frac{\int \frac{2(aA - bB) - (Ab - aB) \cos(d + ex)}{(a+b \cos(d+ex))^2} dx}{2(a^2 - b^2)} - \frac{(Ab - aB) \sin(d + ex)}{2e(a^2 - b^2)(a + b \cos(d + ex))^2} + \frac{C}{2be(a + b \cos(d + ex))^2} \\
& \quad \downarrow \textcolor{blue}{3042} \\
& \frac{\int \frac{2(aA - bB) + (aB - Ab) \sin(d + ex + \frac{\pi}{2})}{(a+b \sin(d+ex+\frac{\pi}{2}))^2} dx}{2(a^2 - b^2)} - \frac{(Ab - aB) \sin(d + ex)}{2e(a^2 - b^2)(a + b \cos(d + ex))^2} + \frac{C}{2be(a + b \cos(d + ex))^2} \\
& \quad \downarrow \textcolor{blue}{3233} \\
& - \frac{\int \frac{2Aa^2 - 3bBa + Ab^2}{a+b \cos(d+ex)} dx}{a^2 - b^2} - \frac{(a^2(-B) + 3aAb - 2b^2B) \sin(d + ex)}{e(a^2 - b^2)(a + b \cos(d + ex))} - \frac{(Ab - aB) \sin(d + ex)}{2e(a^2 - b^2)(a + b \cos(d + ex))^2} + \\
& \quad \frac{C}{2be(a + b \cos(d + ex))^2} \\
& \quad \downarrow \textcolor{blue}{25} \\
& \frac{\int \frac{2Aa^2 - 3bBa + Ab^2}{a+b \cos(d+ex)} dx}{a^2 - b^2} - \frac{(a^2(-B) + 3aAb - 2b^2B) \sin(d + ex)}{e(a^2 - b^2)(a + b \cos(d + ex))} - \frac{(Ab - aB) \sin(d + ex)}{2e(a^2 - b^2)(a + b \cos(d + ex))^2} + \\
& \quad \frac{C}{2be(a + b \cos(d + ex))^2} \\
& \quad \downarrow \textcolor{blue}{27}
\end{aligned}$$

$$\begin{aligned}
 & \frac{\frac{(2a^2A - 3abB + Ab^2) \int \frac{1}{a+b\cos(d+ex)} dx}{a^2-b^2} - \frac{(a^2(-B) + 3aAb - 2b^2B) \sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))}}{2(a^2-b^2)} - \\
 & \frac{(Ab - aB) \sin(d+ex)}{2e(a^2-b^2)(a+b\cos(d+ex))^2} + \frac{C}{2be(a+b\cos(d+ex))^2} \\
 & \quad \downarrow \textcolor{blue}{3042} \\
 & \frac{\frac{(2a^2A - 3abB + Ab^2) \int \frac{1}{a+b\sin(d+ex+\frac{\pi}{2})} dx}{a^2-b^2} - \frac{(a^2(-B) + 3aAb - 2b^2B) \sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))}}{2(a^2-b^2)} - \\
 & \frac{(Ab - aB) \sin(d+ex)}{2e(a^2-b^2)(a+b\cos(d+ex))^2} + \frac{C}{2be(a+b\cos(d+ex))^2} \\
 & \quad \downarrow \textcolor{blue}{3138} \\
 & \frac{\frac{2(2a^2A - 3abB + Ab^2) \int \frac{d\tan(\frac{1}{2}(d+ex))}{(a-b)\tan^2(\frac{1}{2}(d+ex))+a+b} dx - \frac{(a^2(-B) + 3aAb - 2b^2B) \sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))}}{e(a^2-b^2)} - \\
 & \frac{2(a^2-b^2)}{2e(a^2-b^2)(a+b\cos(d+ex))^2} + \frac{C}{2be(a+b\cos(d+ex))^2} \\
 & \quad \downarrow \textcolor{blue}{218} \\
 & \frac{\frac{2(2a^2A - 3abB + Ab^2) \arctan\left(\frac{\sqrt{a-b}\tan(\frac{1}{2}(d+ex))}{\sqrt{a+b}}\right)}{e\sqrt{a-b}\sqrt{a+b}(a^2-b^2)} - \frac{(a^2(-B) + 3aAb - 2b^2B) \sin(d+ex)}{e(a^2-b^2)(a+b\cos(d+ex))}}{2(a^2-b^2)} - \\
 & \frac{2(a^2-b^2)}{2e(a^2-b^2)(a+b\cos(d+ex))^2} + \frac{C}{2be(a+b\cos(d+ex))^2}
 \end{aligned}$$

input `Int[(A + B*Cos[d + e*x] + C*Sin[d + e*x])/((a + b*Cos[d + e*x])^3, x)]`

output `C/(2*b*e*(a + b*Cos[d + e*x])^2) - ((A*b - a*B)*Sin[d + e*x])/((2*(a^2 - b^2)*e*(a + b*Cos[d + e*x])^2) + ((2*(2*a^2*A + A*b^2 - 3*a*b*B)*ArcTan[(Sqr[t[a - b]]*Tan[(d + e*x)/2])/Sqrt[a + b]])/(Sqrt[a - b]*Sqrt[a + b]*(a^2 - b^2)*e) - ((3*a*A*b - a^2*B - 2*b^2*B)*Sin[d + e*x])/((a^2 - b^2)*e*(a + b*Cos[d + e*x])))/(2*(a^2 - b^2))`

Definitions of rubi rules used

rule 17 $\text{Int}[(c_*)*((a_*) + (b_*)*(x_*))^m, x_{\text{Symbol}}] \rightarrow \text{Simp}[c*((a + b*x)^{m+1})/(b*(m+1)), x] /; \text{FreeQ}[\{a, b, c, m\}, x] \& \text{NeQ}[m, -1]$

rule 25 $\text{Int}[-(F_x), x_{\text{Symbol}}] \rightarrow \text{Simp}[\text{Identity}[-1] \text{Int}[F_x, x], x]$

rule 27 $\text{Int}[(a_)*(F_x), x_{\text{Symbol}}] \rightarrow \text{Simp}[a \text{Int}[F_x, x], x] /; \text{FreeQ}[a, x] \& \text{!MatchQ}[F_x, (b_)*(G_x)] /; \text{FreeQ}[b, x]]$

rule 218 $\text{Int}[(a_*) + (b_*)^2(x_*)^2, x_{\text{Symbol}}] \rightarrow \text{Simp}[(\text{Rt}[a/b, 2]/a) \text{ArcTan}[x/\text{Rt}[a/b, 2]], x] /; \text{FreeQ}[\{a, b\}, x] \& \text{PosQ}[a/b]$

rule 3042 $\text{Int}[u, x_{\text{Symbol}}] \rightarrow \text{Int}[\text{DeactivateTrig}[u, x], x] /; \text{FunctionOfTrigOfLinearQ}[u, x]$

rule 3138 $\text{Int}[(a_*) + (b_*) \sin[\text{Pi}/2 + (c_*) + (d_*)*(x_*)], x_{\text{Symbol}}] \rightarrow \text{With}[\{e = \text{FreeFactors}[\tan[(c + d*x)/2], x]\}, \text{Simp}[2*(e/d) \text{Subst}[\text{Int}[1/(a + b + (a - b)*e^2*x^2), x], x, \tan[(c + d*x)/2]/e], x]] /; \text{FreeQ}[\{a, b, c, d\}, x] \& \text{NeQ}[a^2 - b^2, 0]$

rule 3147 $\text{Int}[\cos[(e_*) + (f_*)*(x_*)]^p * ((a_*) + (b_*) \sin[(e_*) + (f_*)*(x_*)])^m, x_{\text{Symbol}}] \rightarrow \text{Simp}[1/(b^p*f) \text{Subst}[\text{Int}[(a + x)^m * (b^2 - x^2)^{(p-1)/2}], x, x, b*\sin[e + f*x]], x] /; \text{FreeQ}[\{a, b, e, f, m\}, x] \& \text{IntegerQ}[(p-1)/2] \& \text{NeQ}[a^2 - b^2, 0]$

rule 3233 $\text{Int}[(a_*) + (b_*) \sin[(e_*) + (f_*)*(x_*)]^m * ((c_*) + (d_*) \sin[(e_*) + (f_*)*(x_*)]), x_{\text{Symbol}}] \rightarrow \text{Simp}[(-(b*c - a*d)) * \cos[e + f*x] * ((a + b*\sin[e + f*x])^{m+1}) / (f*(m+1)*(a^2 - b^2)), x] + \text{Simp}[1/((m+1)*(a^2 - b^2)) \text{Int}[(a + b*\sin[e + f*x])^{m+1}] * \text{Simp}[(a*c - b*d)*(m+1) - (b*c - a*d)*(m+2)*\sin[e + f*x], x], x] /; \text{FreeQ}[\{a, b, c, d, e, f\}, x] \& \text{NeQ}[b*c - a*d, 0] \& \text{NeQ}[a^2 - b^2, 0] \& \text{LtQ}[m, -1] \& \text{IntegerQ}[2*m]$

rule 4877

```
Int[((u_)*((v_) + (d_.)*(F_))[(c_.)*(a_.) + (b_.)*(x_)])^(n_.)), x_Symbol] :
> With[{e = FreeFactors[Cos[c*(a + b*x)], x]}, Int[ActivateTrig[u*v], x] +
Simp[d Int[ActivateTrig[u]*Sin[c*(a + b*x)]^n, x], x] /; FunctionOfQ[Cos[
c*(a + b*x)]/e, u, x]] /; FreeQ[{a, b, c, d}, x] && !FreeQ[v, x] && Intege-
rQ[(n - 1)/2] && NonsumQ[u] && (EqQ[F, Sin] || EqQ[F, sin])
```

Maple [A] (verified)

Time = 0.53 (sec), antiderivative size = 270, normalized size of antiderivative = 1.44

method	result
derivativedivides	$\frac{-\frac{(4Aab+A b^2-2B a^2-Bab-2B b^2) \tan\left(\frac{ex}{2}+\frac{d}{2}\right)^3}{(a-b)(a^2+2ab+b^2)}-\frac{2C \tan\left(\frac{ex}{2}+\frac{d}{2}\right)^2}{a-b}-\frac{(4Aab-A b^2-2B a^2+Bab-2B b^2) \tan\left(\frac{ex}{2}+\frac{d}{2}\right)}{(a+b)(a^2-2ab+b^2)}-\frac{2C}{a^2-2ab+b^2}}{\left(a \tan\left(\frac{ex}{2}+\frac{d}{2}\right)^2-b \tan\left(\frac{ex}{2}+\frac{d}{2}\right)^2+a+b\right)^2} e$
default	$\frac{-\frac{(4Aab+A b^2-2B a^2-Bab-2B b^2) \tan\left(\frac{ex}{2}+\frac{d}{2}\right)^3}{(a-b)(a^2+2ab+b^2)}-\frac{2C \tan\left(\frac{ex}{2}+\frac{d}{2}\right)^2}{a-b}-\frac{(4Aab-A b^2-2B a^2+Bab-2B b^2) \tan\left(\frac{ex}{2}+\frac{d}{2}\right)}{(a+b)(a^2-2ab+b^2)}-\frac{2C}{a^2-2ab+b^2}}{\left(a \tan\left(\frac{ex}{2}+\frac{d}{2}\right)^2-b \tan\left(\frac{ex}{2}+\frac{d}{2}\right)^2+a+b\right)^2} e$
risch	$2iB a^4 e^{2i(ex+d)} - iA b^4 e^{3i(ex+d)} + 2iB b^4 + iA b^4 e^{i(ex+d)} + 2iB b^4 e^{2i(ex+d)} + 5iBa b^3 e^{i(ex+d)} - 10iA a^2 b^2 e^{i(ex+d)} + 4iB$

input

```
int((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^3,x,method=_RETURNVERBO
SE)
```

output

```
1/e*(2*(-1/2*(4*A*a*b+A*b^2-2*B*a^2-B*a*b-2*B*b^2)/(a-b)/(a^2+2*a*b+b^2)*t
an(1/2*e*x+1/2*d)^3-C/(a-b)*tan(1/2*e*x+1/2*d)^2-1/2*(4*A*a*b-A*b^2-2*B*a^
2+B*a*b-2*B*b^2)/(a+b)/(a^2-2*a*b+b^2)*tan(1/2*e*x+1/2*d)-C*a/(a^2-2*a*b+b^
2))/(a*tan(1/2*e*x+1/2*d)^2-b*tan(1/2*e*x+1/2*d)^2+a+b)^2+(2*A*a^2+A*b^2-
3*B*a*b)/(a^4-2*a^2*b^2+b^4)/((a-b)*(a+b))^(1/2)*arctan((a-b)*tan(1/2*e*x+
1/2*d)/((a-b)*(a+b))^(1/2)))
```

Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 379 vs. $2(171) = 342$.

Time = 0.19 (sec), antiderivative size = 830, normalized size of antiderivative = 4.44

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx = \text{Too large to display}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^3,x, algorithm="fricas")`

output $[1/4*(2*C*a^6 - 6*C*a^4*b^2 + 6*C*a^2*b^4 - 2*C*b^6 - (2*A*a^4*b - 3*B*a^3*b^2 + A*a^2*b^3 + (2*A*a^2*b^3 - 3*B*a*b^4 + A*b^5)*cos(e*x + d)^2 + 2*(2*A*a^3*b^2 - 3*B*a^2*b^3 + A*a*b^4)*cos(e*x + d))*sqrt(-a^2 + b^2)*log((2*A*b*cos(e*x + d) + (2*a^2 - b^2)*cos(e*x + d)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(e*x + d) + b)*sin(e*x + d) - a^2 + 2*b^2)/(b^2*cos(e*x + d)^2 + 2*a*b*cos(e*x + d) + a^2)) + 2*(2*B*a^5*b - 4*A*a^4*b^2 - B*a^3*b^3 + 5*A*a^2*b^4 - B*a*b^5 - A*b^6 + (B*a^4*b^2 - 3*A*a^3*b^3 + B*a^2*b^4 + 3*A*a*b^5 - 2*B*b^6)*cos(e*x + d))*sin(e*x + d))/((a^6*b^3 - 3*a^4*b^5 + 3*a^2*b^7 - b^9)*e*cos(e*x + d)^2 + 2*(a^7*b^2 - 3*a^5*b^4 + 3*a^3*b^6 - a*b^8)*e*cos(e*x + d) + (a^8*b - 3*a^6*b^3 + 3*a^4*b^5 - a^2*b^7)*e), 1/2*(C*a^6 - 3*C*a^4*b^2 + 3*C*a^2*b^4 - C*b^6 + (2*A*a^4*b - 3*B*a^3*b^2 + A*a^2*b^3 + (2*A*a^2*b^3 - 3*B*a*b^4 + A*b^5)*cos(e*x + d)^2 + 2*(2*A*a^3*b^2 - 3*B*a^2*b^3 + A*a*b^4)*cos(e*x + d))*sqrt(a^2 - b^2)*arctan(-(a*cos(e*x + d) + b)/(sqrt(a^2 - b^2)*sin(e*x + d))) + (2*B*a^5*b - 4*A*a^4*b^2 - B*a^3*b^3 + 5*A*a^2*b^4 - B*a*b^5 - A*b^6 + (B*a^4*b^2 - 3*A*a^3*b^3 + B*a^2*b^4 + 3*A*a*b^5 - 2*B*b^6)*cos(e*x + d))*sin(e*x + d))/((a^6*b^3 - 3*a^4*b^5 + 3*a^2*b^7 - b^9)*e*cos(e*x + d)^2 + 2*(a^7*b^2 - 3*a^5*b^4 + 3*a^3*b^6 - a*b^8)*e*cos(e*x + d) + (a^8*b - 3*a^6*b^3 + 3*a^4*b^5 - a^2*b^7)*e)]$

Sympy [F(-1)]

Timed out.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx = \text{Timed out}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))**3,x)`

output Timed out

Maxima [F(-2)]

Exception generated.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx = \text{Exception raised: ValueError}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^3,x, algorithm="maxima")`

output `Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more de`

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 480 vs. $2(171) = 342$.

Time = 0.18 (sec) , antiderivative size = 480, normalized size of antiderivative = 2.57

$$\begin{aligned} & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx \\ &= \frac{(2 A a^2 - 3 B a b + A b^2) \left(\pi \left\lfloor \frac{e x + d}{2 \pi} + \frac{1}{2} \right\rfloor \operatorname{sgn}(2 a - 2 b) + \arctan \left(\frac{a \tan \left(\frac{1}{2} e x + \frac{1}{2} d \right) - b \tan \left(\frac{1}{2} e x + \frac{1}{2} d \right)}{\sqrt{a^2 - b^2}} \right) \right)}{(a^4 - 2 a^2 b^2 + b^4) \sqrt{a^2 - b^2}} + \frac{2 B a^3 \tan \left(\frac{1}{2} e x + \frac{1}{2} d \right)^3 - 4 A a^2 b \tan \left(\frac{1}{2} e x + \frac{1}{2} d \right)}{a^4 - 2 a^2 b^2 + b^4} \end{aligned}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^3,x, algorithm="giac")`

output

$$\begin{aligned}
 & ((2*A*a^2 - 3*B*a*b + A*b^2)*(pi*floor(1/2*(e*x + d)/pi + 1/2)*sgn(2*a - 2*b) + arctan((a*tan(1/2*e*x + 1/2*d) - b*tan(1/2*e*x + 1/2*d))/sqrt(a^2 - b^2)))/((a^4 - 2*a^2*b^2 + b^4)*sqrt(a^2 - b^2)) + (2*B*a^3*tan(1/2*e*x + 1/2*d)^3 - 4*A*a^2*b*tan(1/2*e*x + 1/2*d)^3 - B*a^2*b*tan(1/2*e*x + 1/2*d)^3 + 3*A*a*b^2*tan(1/2*e*x + 1/2*d)^3 + B*a*b^2*tan(1/2*e*x + 1/2*d)^3 + A*b^3*tan(1/2*e*x + 1/2*d)^3 - 2*B*b^3*tan(1/2*e*x + 1/2*d)^3 - 2*C*a^3*tan(1/2*e*x + 1/2*d)^2 - 2*C*a^2*b*tan(1/2*e*x + 1/2*d)^2 + 2*C*a*b^2*tan(1/2*e*x + 1/2*d)^2 + 2*C*b^3*tan(1/2*e*x + 1/2*d)^2 + 2*B*a^3*tan(1/2*e*x + 1/2*d) - 4*A*a^2*b*tan(1/2*e*x + 1/2*d) + B*a^2*b*tan(1/2*e*x + 1/2*d) - 3*A*a*b^2*tan(1/2*e*x + 1/2*d) + B*a*b^2*tan(1/2*e*x + 1/2*d) + A*b^3*tan(1/2*e*x + 1/2*d) + 2*B*b^3*tan(1/2*e*x + 1/2*d) - 2*C*a^3 - 4*C*a^2*b - 2*C*a*b^2)/((a^4 - 2*a^2*b^2 + b^4)*(a*tan(1/2*e*x + 1/2*d)^2 - b*tan(1/2*e*x + 1/2*d)^2 + a + b)^2)/e
 \end{aligned}$$

Mupad [B] (verification not implemented)

Time = 3.11 (sec), antiderivative size = 283, normalized size of antiderivative = 1.51

$$\begin{aligned}
 & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx \\
 &= \frac{\operatorname{atan}\left(\frac{\tan\left(\frac{d}{2} + \frac{ex}{2}\right)(2a - 2b)(a^2 - 2ab + b^2)}{2\sqrt{a+b}(a-b)^{5/2}}\right)(2Aa^2 - 3Bab + Ab^2)}{e(a+b)^{5/2}(a-b)^{5/2}} \\
 &\quad - \frac{\frac{2C\tan\left(\frac{d}{2} + \frac{ex}{2}\right)^2}{a-b} + \frac{2Ca}{(a-b)^2} - \frac{\tan\left(\frac{d}{2} + \frac{ex}{2}\right)^3(2Ba^2 - Ab^2 + 2Bb^2 - 4Ab + Bb)}{(a+b)^2(a-b)} - \frac{\tan\left(\frac{d}{2} + \frac{ex}{2}\right)(Ab^2 + 2Ba^2 + 2Bb^2 - 4Ab - Ba)}{(a+b)(a^2 - 2ab + b^2)}}{e\left(2ab + \tan\left(\frac{d}{2} + \frac{ex}{2}\right)^2(2a^2 - 2b^2) + \tan\left(\frac{d}{2} + \frac{ex}{2}\right)^4(a^2 - 2ab + b^2) + a^2 + b^2\right)}
 \end{aligned}$$

input

$$\operatorname{int}((A + B*\cos(d + e*x) + C*\sin(d + e*x))/(a + b*\cos(d + e*x))^3, x)$$

output

$$\begin{aligned}
 & (\operatorname{atan}((\tan(d/2 + (e*x)/2)*(2*a - 2*b)*(a^2 - 2*a*b + b^2)))/(2*(a + b)^(1/2)*(a - b)^(5/2)))*(2*A*a^2 + A*b^2 - 3*B*a*b)/(e*(a + b)^(5/2)*(a - b)^5) \\
 & - ((2*C*tan(d/2 + (e*x)/2)^2)/(a - b) + (2*C*a)/(a - b)^2 - (\tan(d/2 + (e*x)/2)^3*(2*B*a^2 - A*b^2 + 2*B*b^2 - 4*A*a*b + B*a*b)))/((a + b)^2*(a - b)) \\
 & - (\tan(d/2 + (e*x)/2)*(A*b^2 + 2*B*a^2 + 2*B*b^2 - 4*A*a*b - B*a*b)) \\
 & /((a + b)*(a^2 - 2*a*b + b^2)))/(e*(2*a*b + \tan(d/2 + (e*x)/2)^2*(2*a^2 - 2*b^2) + \tan(d/2 + (e*x)/2)^4*(a^2 - 2*a*b + b^2) + a^2 + b^2))
 \end{aligned}$$

Reduce [B] (verification not implemented)

Time = 0.16 (sec) , antiderivative size = 504, normalized size of antiderivative = 2.70

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^3} dx \\ = \frac{8\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan\left(\frac{ex}{2} + \frac{d}{2}\right)a - \tan\left(\frac{ex}{2} + \frac{d}{2}\right)b}{\sqrt{a^2 - b^2}}\right) \cos(ex + d) a^2 b - 4\sqrt{a^2 - b^2} \operatorname{atan}\left(\frac{\tan\left(\frac{ex}{2} + \frac{d}{2}\right)a - \tan\left(\frac{ex}{2} + \frac{d}{2}\right)b}{\sqrt{a^2 - b^2}}\right) \sin(ex + d) a^2 b^2}{(a + b \cos(d + ex))^3}$$

input `int((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^3,x)`

output

```
(8*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*cos(d + e*x)*a**2*b - 4*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*sin(d + e*x)**2*a*b**2 + 4*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*a**3 + 4*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))/sqrt(a**2 - b**2)*a*b**2 - 2*cos(d + e*x)*sin(d + e*x)*a**2*b**2 + 2*cos(d + e*x)*sin(d + e*x)*b**4 - 2*cos(d + e*x)*a**3*c + 4*cos(d + e*x)*a**2*b*c - 2*cos(d + e*x)*a*b**2*c + sin(d + e*x)**2*a**2*b*c - 2*sin(d + e*x)*a**2*a*b**2*c + sin(d + e*x)*a*b**3*c - 2*sin(d + e*x)*a**3*b + 2*sin(d + e*x)*a*b**3 + 2*a**3*c - 4*a**2*b*c + 2*a*b**2*c)/(2*e*(2*cos(d + e*x)*a**5*b - 4*cos(d + e*x)*a**3*b**3 + 2*cos(d + e*x)*a*b**5 - sin(d + e*x)**2*a**4*b**2 + 2*sin(d + e*x)**2*a**2*b**4 - sin(d + e*x)**2*b**6 + a**6 - a**4*b**2 - a**2*b**4 + b**6))
```

3.21 $\int \frac{A+B \cos(d+ex)+C \sin(d+ex)}{(a+b \cos(d+ex))^4} dx$

Optimal result	188
Mathematica [A] (verified)	189
Rubi [A] (verified)	189
Maple [A] (verified)	194
Fricas [B] (verification not implemented)	194
Sympy [F(-1)]	195
Maxima [F(-2)]	196
Giac [B] (verification not implemented)	196
Mupad [B] (verification not implemented)	197
Reduce [B] (verification not implemented)	198

Optimal result

Integrand size = 31, antiderivative size = 260

$$\begin{aligned} & \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx \\ &= \frac{(2a^3 A + 3a A b^2 - 4a^2 b B - b^3 B) \arctan\left(\frac{\sqrt{a-b} \tan\left(\frac{1}{2}(d+ex)\right)}{\sqrt{a+b}}\right)}{(a-b)^{7/2}(a+b)^{7/2}e} + \frac{C}{3be(a+b \cos(d+ex))^3} \\ &\quad - \frac{(Ab - aB) \sin(d + ex)}{3(a^2 - b^2)e(a+b \cos(d+ex))^3} - \frac{(5aAb - 2a^2B - 3b^2B) \sin(d + ex)}{6(a^2 - b^2)^2e(a+b \cos(d+ex))^2} \\ &\quad - \frac{(11a^2Ab + 4Ab^3 - 2a^3B - 13ab^2B) \sin(d + ex)}{6(a^2 - b^2)^3e(a+b \cos(d+ex))} \end{aligned}$$

output

```
(2*A*a^3+3*A*a*b^2-4*B*a^2*b-B*b^3)*arctan((a-b)^(1/2)*tan(1/2*e*x+1/2*d)/(a+b)^(1/2))/(a-b)^(7/2)/(a+b)^(7/2)/e+1/3*C/b/e/(a+b*cos(e*x+d))^(3-1/3*(A*b-B*a)*sin(e*x+d)/(a^2-b^2)/e/(a+b*cos(e*x+d))^(3-1/6*(5*A*a*b-2*B*a^2-3*B*b^2)*sin(e*x+d)/(a^2-b^2)^(2/e/(a+b*cos(e*x+d))^(2-1/6*(11*A*a^2*b+4*A*b^3-2*B*a^3-13*B*a*b^2)*sin(e*x+d)/(a^2-b^2)^(3/e/(a+b*cos(e*x+d)))
```

Mathematica [A] (verified)

Time = 1.27 (sec) , antiderivative size = 302, normalized size of antiderivative = 1.16

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx$$

$$= \frac{24(2a^3 A + 3a A b^2 - 4a^2 b B - b^3 B) \operatorname{arctanh}\left(\frac{(a-b) \tan\left(\frac{1}{2}(d+ex)\right)}{\sqrt{-a^2+b^2}}\right)}{(-a^2+b^2)^{7/2}} + \frac{-8a^6 C + 24a^4 b^2 C - 24a^2 b^4 C + 8b^6 C - 3b(-24a^4 A b + 3a^2 A b^3 - 4A b^5 + 8a^5)}{(-a^2+b^2)^{7/2}}$$

input `Integrate[(A + B*Cos[d + e*x] + C*Sin[d + e*x])/((a + b*Cos[d + e*x])^4, x]`

output $((24*(2*a^3*A + 3*a*A*b^2 - 4*a^2*b*B - b^3*B)*ArcTanh[((a - b)*Tan[(d + e*x)/2])/Sqrt[-a^2 + b^2]])/(-a^2 + b^2)^{7/2} + (-8*a^6*C + 24*a^4*b^2*C - 24*a^2*b^4*C + 8*b^6*C - 3*b*(-24*a^4*A*b + 3*a^2*A*b^3 - 4*A*b^5 + 8*a^5*B + 14*a^3*b^2*B + 3*a*b^4*B)*Sin[d + e*x] + 6*b^2*(9*a^3*A*b + a*A*b^3 - 2*a^4*B - 9*a^2*b^2*B + b^4*B)*Sin[2*(d + e*x)] + 11*a^2*A*b^4*Sin[3*(d + e*x)] + 4*A*b^6*Sin[3*(d + e*x)] - 2*a^3*b^3*B*Sin[3*(d + e*x)] - 13*a*b^5*B*Sin[3*(d + e*x)])/(b*(-a^2 + b^2)^3*(a + b*Cos[d + e*x])^3)/(24*e)$

Rubi [A] (verified)

Time = 1.10 (sec) , antiderivative size = 302, normalized size of antiderivative = 1.16, number of steps used = 17, number of rules used = 16, $\frac{\text{number of rules}}{\text{integrand size}} = 0.516$, Rules used = {3042, 4877, 3042, 3147, 17, 3233, 25, 3042, 3233, 25, 3042, 3233, 27, 3042, 3138, 218}

Below are the steps used by Rubi to obtain the solution. The rule number used for the transformation is given above next to the arrow. The rules definitions used are listed below.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx$$

↓ 3042

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx$$

↓ 4877

$$\begin{aligned}
& \int \frac{A + B \cos(d + ex)}{(a + b \cos(d + ex))^4} dx + C \int \frac{\sin(d + ex)}{(a + b \cos(d + ex))^4} dx \\
& \quad \downarrow \textcolor{blue}{3042} \\
& \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^4} dx + C \int \frac{\cos(d + ex - \frac{\pi}{2})}{(a - b \sin(d + ex - \frac{\pi}{2}))^4} dx \\
& \quad \downarrow \textcolor{blue}{3147} \\
& \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^4} dx - \frac{C \int \frac{1}{(a + b \cos(d + ex))^4} d(b \cos(d + ex))}{be} \\
& \quad \downarrow \textcolor{blue}{17} \\
& \int \frac{A + B \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^4} dx + \frac{C}{3be(a + b \cos(d + ex))^3} \\
& \quad \downarrow \textcolor{blue}{3233} \\
& - \frac{\int \frac{3(aA - bB) - 2(Ab - aB) \cos(d + ex)}{(a + b \cos(d + ex))^3} dx}{3(a^2 - b^2)} - \frac{(Ab - aB) \sin(d + ex)}{3e(a^2 - b^2)(a + b \cos(d + ex))^3} + \\
& \quad \frac{C}{3be(a + b \cos(d + ex))^3} \\
& \quad \downarrow \textcolor{blue}{25} \\
& \frac{\int \frac{3(aA - bB) - 2(Ab - aB) \cos(d + ex)}{(a + b \cos(d + ex))^3} dx}{3(a^2 - b^2)} - \frac{(Ab - aB) \sin(d + ex)}{3e(a^2 - b^2)(a + b \cos(d + ex))^3} + \frac{C}{3be(a + b \cos(d + ex))^3} \\
& \quad \downarrow \textcolor{blue}{3042} \\
& \frac{\int \frac{3(aA - bB) - 2(Ab - aB) \sin(d + ex + \frac{\pi}{2})}{(a + b \sin(d + ex + \frac{\pi}{2}))^3} dx}{3(a^2 - b^2)} - \frac{(Ab - aB) \sin(d + ex)}{3e(a^2 - b^2)(a + b \cos(d + ex))^3} + \\
& \quad \frac{C}{3be(a + b \cos(d + ex))^3} \\
& \quad \downarrow \textcolor{blue}{3233} \\
& - \frac{\int \frac{2(3Ad^2 - 5bBa + 2Ab^2) - (-2Ba^2 + 5Aba - 3b^2B) \cos(d + ex)}{(a + b \cos(d + ex))^2} dx}{2(a^2 - b^2)} - \frac{(-2a^2B + 5aAb - 3b^2B) \sin(d + ex)}{2e(a^2 - b^2)(a + b \cos(d + ex))^2} - \\
& \quad \frac{3(a^2 - b^2)}{(Ab - aB) \sin(d + ex)} + \frac{C}{3be(a + b \cos(d + ex))^3} \\
& \quad \downarrow \textcolor{blue}{25}
\end{aligned}$$

$$\begin{aligned}
& \frac{\int \frac{2(3Aa^2 - 5bBa + 2Ab^2) - (-2Ba^2 + 5Ab - 3b^2B) \cos(d+ex)}{(a+b \cos(d+ex))^2} dx}{2(a^2 - b^2)} - \frac{(-2a^2B + 5aAb - 3b^2B) \sin(d+ex)}{2e(a^2 - b^2)(a+b \cos(d+ex))^2} - \\
& \frac{3(a^2 - b^2)}{3e(a^2 - b^2)(a+b \cos(d+ex))^3} + \frac{C}{3be(a+b \cos(d+ex))^3} \\
& \quad \downarrow \textcolor{blue}{3042} \\
& \frac{\int \frac{2(3Aa^2 - 5bBa + 2Ab^2) + (2Ba^2 - 5Ab + 3b^2B) \sin(d+ex + \frac{\pi}{2})}{(a+b \sin(d+ex + \frac{\pi}{2}))^2} dx}{2(a^2 - b^2)} - \frac{(-2a^2B + 5aAb - 3b^2B) \sin(d+ex)}{2e(a^2 - b^2)(a+b \cos(d+ex))^2} - \\
& \frac{3(a^2 - b^2)}{3e(a^2 - b^2)(a+b \cos(d+ex))^3} + \frac{C}{3be(a+b \cos(d+ex))^3} \\
& \quad \downarrow \textcolor{blue}{3233} \\
& - \frac{\int \frac{-3(2Aa^3 - 4bBa^2 + 3Ab^2a - b^3B)}{a+b \cos(d+ex)} dx}{a^2 - b^2} - \frac{(-2a^3B + 11a^2Ab - 13ab^2B + 4Ab^3) \sin(d+ex)}{e(a^2 - b^2)(a+b \cos(d+ex))} - \frac{(-2a^2B + 5aAb - 3b^2B) \sin(d+ex)}{2e(a^2 - b^2)(a+b \cos(d+ex))^2} - \\
& \frac{3(a^2 - b^2)}{3e(a^2 - b^2)(a+b \cos(d+ex))^3} + \frac{C}{3be(a+b \cos(d+ex))^3} \\
& \quad \downarrow \textcolor{blue}{27} \\
& \frac{3(2a^3A - 4a^2bB + 3aAb^2 - b^3B) \int \frac{1}{a+b \cos(d+ex)} dx}{a^2 - b^2} - \frac{(-2a^3B + 11a^2Ab - 13ab^2B + 4Ab^3) \sin(d+ex)}{e(a^2 - b^2)(a+b \cos(d+ex))} - \frac{(-2a^2B + 5aAb - 3b^2B) \sin(d+ex)}{2e(a^2 - b^2)(a+b \cos(d+ex))^2} - \\
& \frac{3(a^2 - b^2)}{3e(a^2 - b^2)(a+b \cos(d+ex))^3} + \frac{C}{3be(a+b \cos(d+ex))^3} \\
& \quad \downarrow \textcolor{blue}{3042} \\
& \frac{3(2a^3A - 4a^2bB + 3aAb^2 - b^3B) \int \frac{1}{a+b \sin(d+ex + \frac{\pi}{2})} dx}{a^2 - b^2} - \frac{(-2a^3B + 11a^2Ab - 13ab^2B + 4Ab^3) \sin(d+ex)}{e(a^2 - b^2)(a+b \cos(d+ex))} - \frac{(-2a^2B + 5aAb - 3b^2B) \sin(d+ex)}{2e(a^2 - b^2)(a+b \cos(d+ex))^2} - \\
& \frac{3(a^2 - b^2)}{3e(a^2 - b^2)(a+b \cos(d+ex))^3} + \frac{C}{3be(a+b \cos(d+ex))^3} \\
& \quad \downarrow \textcolor{blue}{3138}
\end{aligned}$$

$$\begin{aligned}
 & \frac{6(2a^3A - 4a^2bB + 3aAb^2 - b^3B) \int \frac{1}{(a-b)\tan^2(\frac{1}{2}(d+ex)) + a+b} d \tan\left(\frac{1}{2}(d+ex)\right)}{e(a^2-b^2)} - \frac{(-2a^3B + 11a^2Ab - 13ab^2B + 4Ab^3) \sin(d+ex)}{e(a^2-b^2)(a+b \cos(d+ex))} - \frac{(-2a^2B + 5aAb - 3b^2B) \sin(d+ex)}{2e(a^2-b^2)(a+b \cos(d+ex))} \\
 & + \frac{(Ab - aB) \sin(d+ex)}{3e(a^2-b^2)(a+b \cos(d+ex))^3} + \frac{C}{3be(a+b \cos(d+ex))^3} \\
 & \quad \downarrow 218 \\
 & - \frac{(Ab - aB) \sin(d+ex)}{3e(a^2-b^2)(a+b \cos(d+ex))^3} + \\
 & \frac{6(2a^3A - 4a^2bB + 3aAb^2 - b^3B) \arctan\left(\frac{\sqrt{a-b}\tan\left(\frac{1}{2}(d+ex)\right)}{\sqrt{a+b}}\right)}{e\sqrt{a-b}\sqrt{a+b}(a^2-b^2)} - \frac{(-2a^3B + 11a^2Ab - 13ab^2B + 4Ab^3) \sin(d+ex)}{e(a^2-b^2)(a+b \cos(d+ex))} - \frac{(-2a^2B + 5aAb - 3b^2B) \sin(d+ex)}{2e(a^2-b^2)(a+b \cos(d+ex))^2} + \\
 & \frac{C}{3be(a+b \cos(d+ex))^3}
 \end{aligned}$$

input $\text{Int}[(A + B*\text{Cos}[d + e*x] + C*\text{Sin}[d + e*x])/((a + b*\text{Cos}[d + e*x])^4, x)]$

output $C/(3*b*e*(a + b*\text{Cos}[d + e*x])^3) - ((A*b - a*B)*\text{Sin}[d + e*x])/(3*(a^2 - b^2)*e*(a + b*\text{Cos}[d + e*x])^3) + (-1/2*((5*a*A*b - 2*a^2*B - 3*b^2*B)*\text{Sin}[d + e*x])/((a^2 - b^2)*e*(a + b*\text{Cos}[d + e*x])^2) + ((6*(2*a^3*A + 3*a*A*b^2 - 4*a^2*b*B - b^3*B)*\text{ArcTan}[(\text{Sqrt}[a - b]*\text{Tan}[(d + e*x)/2])/\text{Sqrt}[a + b]])/(\text{Sqrt}[a - b]*\text{Sqrt}[a + b]*(a^2 - b^2)*e) - ((11*a^2*A*b + 4*A*b^3 - 2*a^3*B - 13*a*b^2*B)*\text{Sin}[d + e*x])/((a^2 - b^2)*e*(a + b*\text{Cos}[d + e*x])))/(2*(a^2 - b^2))/(3*(a^2 - b^2))$

Definitions of rubi rules used

rule 17 $\text{Int}[(c_*)*((a_*) + (b_*)*(x_*)^{(m_)})^{(m_)}, x_Symbol] :> \text{Simp}[c*((a + b*x)^{(m + 1)})/(b*(m + 1))), x] /; \text{FreeQ}[\{a, b, c, m\}, x] \&& \text{NeQ}[m, -1]$

rule 25 $\text{Int}[-(F x_), x_Symbol] :> \text{Simp}[\text{Identity}[-1] \text{Int}[F x, x], x]$

rule 27 $\text{Int}[(a_)*(F_x_), x_Symbol] \rightarrow \text{Simp}[a \text{ Int}[F_x, x], x] /; \text{FreeQ}[a, x] \&& \text{!Ma} \\ \text{tchQ}[F_x, (b_)*(G_x_)] /; \text{FreeQ}[b, x]]$

rule 218 $\text{Int}[((a_) + (b_.)*(x_.)^2)^{-1}, x_Symbol] \rightarrow \text{Simp}[(\text{Rt}[a/b, 2]/a)*\text{ArcTan}[x/\text{R} \\ t[a/b, 2]], x] /; \text{FreeQ}[\{a, b\}, x] \&& \text{PosQ}[a/b]$

rule 3042 $\text{Int}[u_, x_Symbol] \rightarrow \text{Int}[\text{DeactivateTrig}[u, x], x] /; \text{FunctionOfTrigOfLinear} \\ Q[u, x]$

rule 3138 $\text{Int}[((a_) + (b_.)*\sin[\text{Pi}/2 + (c_.) + (d_.)*(x_.)])^{-1}, x_Symbol] \rightarrow \text{With}[\{ \\ e = \text{FreeFactors}[\tan[(c + d*x)/2], x]\}, \text{Simp}[2*(e/d) \text{ Subst}[\text{Int}[1/(a + b + \\ (a - b)*e^2*x^2), x], x, \tan[(c + d*x)/2]/e], x]] /; \text{FreeQ}[\{a, b, c, d\}, x] \\ \&& \text{NeQ}[a^2 - b^2, 0]$

rule 3147 $\text{Int}[\cos[(e_.) + (f_.)*(x_.)]^{(p_.)}*((a_) + (b_.)*\sin[(e_.) + (f_.)*(x_.)])^{(m \\ _.)}, x_Symbol] \rightarrow \text{Simp}[1/(b^p*f) \text{ Subst}[\text{Int}[(a + x)^m*(b^2 - x^2)^{(p - 1) \\ /2}], x, x, b*\sin[e + f*x]], x] /; \text{FreeQ}[\{a, b, e, f, m\}, x] \&& \text{IntegerQ}[(p \\ - 1)/2] \&& \text{NeQ}[a^2 - b^2, 0]$

rule 3233 $\text{Int}[((a_) + (b_.)*\sin[(e_.) + (f_.)*(x_.)])^{(m_.)}*((c_.) + (d_.)*\sin[(e_.) + \\ (f_.)*(x_.)]), x_Symbol] \rightarrow \text{Simp}[(-(b*c - a*d))*\cos[e + f*x]*((a + b*\sin[e + \\ f*x])^{(m + 1)}/(f*(m + 1)*(a^2 - b^2))), x] + \text{Simp}[1/((m + 1)*(a^2 - b^2)) \\ \text{Int}[(a + b*\sin[e + f*x])^{(m + 1)}*\text{Simp}[(a*c - b*d)*(m + 1) - (b*c - a*d)* \\ (m + 2)*\sin[e + f*x], x], x], x] /; \text{FreeQ}[\{a, b, c, d, e, f\}, x] \&& \text{NeQ}[b*c \\ - a*d, 0] \&& \text{NeQ}[a^2 - b^2, 0] \&& \text{LtQ}[m, -1] \&& \text{IntegerQ}[2*m]$

rule 4877 $\text{Int}[(u_)*((v_) + (d_.)*(F_)[(c_.)*((a_.) + (b_.)*(x_.))]^{(n_.)}), x_Symbol] : \\ > \text{With}[\{e = \text{FreeFactors}[\cos[c*(a + b*x)], x]\}, \text{Int}[\text{ActivateTrig}[u*v], x] + \\ \text{Simp}[d \text{ Int}[\text{ActivateTrig}[u]*\sin[c*(a + b*x)]^n, x], x] /; \text{FunctionOfQ}[\cos[\\ c*(a + b*x)]/e, u, x]] /; \text{FreeQ}[\{a, b, c, d\}, x] \&& \text{!FreeQ}[v, x] \&& \text{Integ} \\ rQ[(n - 1)/2] \&& \text{NonsumQ}[u] \&& (\text{EqQ}[F, \sin] \text{ || } \text{EqQ}[F, \cos])]$

Maple [A] (verified)

Time = 0.92 (sec) , antiderivative size = 456, normalized size of antiderivative = 1.75

method	result
derivativedivides	$\frac{(6A a^2 b+3 A a b^2+2 A b^3-2 B a^3-2 B a^2 b-6 B a b^2-B b^3) \tan\left(\frac{e x}{2}+\frac{d}{2}\right)^5}{(a-b)(a^3+3 a^2 b+3 a b^2+b^3)}-\frac{2 C \tan\left(\frac{e x}{2}+\frac{d}{2}\right)^4}{a-b}-\frac{4(9 A a^2 b+A b^3-3 B a^3-7 B a b^2) \tan\left(\frac{e x}{2}+\frac{d}{2}\right)^3}{3(a^2-2 a b+b^2)(a^2+2 a b+b^2)}\left(a \tan\left(\frac{e x}{2}+\frac{d}{2}\right)^2-b\right)$
default	$\frac{(6A a^2 b+3 A a b^2+2 A b^3-2 B a^3-2 B a^2 b-6 B a b^2-B b^3) \tan\left(\frac{e x}{2}+\frac{d}{2}\right)^5}{(a-b)(a^3+3 a^2 b+3 a b^2+b^3)}-\frac{2 C \tan\left(\frac{e x}{2}+\frac{d}{2}\right)^4}{a-b}-\frac{4(9 A a^2 b+A b^3-3 B a^3-7 B a b^2) \tan\left(\frac{e x}{2}+\frac{d}{2}\right)^3}{3(a^2-2 a b+b^2)(a^2+2 a b+b^2)}\left(a \tan\left(\frac{e x}{2}+\frac{d}{2}\right)^2-b\right)$
risch	Expression too large to display

input `int((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^4,x,method=_RETURNVERBOSE)`

output
$$\begin{aligned} & 1/e*(2*(-1/2*(6*A*a^2*b+3*A*a*b^2+2*A*b^3-2*B*a^3-2*B*a^2*b-6*B*a*b^2-B*b^3)/(a-b)/(a^3+3*a^2*b+3*a*b^2+b^3)*\tan(1/2*e*x+1/2*d)^5-C/(a-b)*\tan(1/2*e*x+1/2*d)^4-2/3*(9*A*a^2*b+A*b^3-3*B*a^3-7*B*a*b^2)/(a^2-2*a*b+b^2)/(a^2+2*a*b+b^2)*\tan(1/2*e*x+1/2*d)^3-2*C*a/(a^2-2*a*b+b^2)*\tan(1/2*e*x+1/2*d)^2-1/2*(6*A*a^2*b-3*A*a*b^2+2*A*b^3-2*B*a^3+2*B*a^2*b-6*B*a*b^2+B*b^3)/(a+b)/(a^3-3*a^2*b+3*a*b^2-b^3)*\tan(1/2*e*x+1/2*d)-1/3*C*(3*a^2+b^2)/(a^3-3*a^2*b+3*a*b^2-b^3)/(a*\tan(1/2*e*x+1/2*d)^2-b*\tan(1/2*e*x+1/2*d)^2+a+b)^3+(2*A*a^3+3*A*a*b^2-4*B*a^2*b-B*b^3)/(a^6-3*a^4*b^2+3*a^2*b^4-b^6)/((a-b)*(a+b))^{(1/2)}*\arctan((a-b)*\tan(1/2*e*x+1/2*d)/((a-b)*(a+b))^{(1/2)})) \end{aligned}$$

Fricas [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 632 vs. $2(243) = 486$.

Time = 0.22 (sec) , antiderivative size = 1334, normalized size of antiderivative = 5.13

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx = \text{Too large to display}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^4,x, algorithm="fricas")`

output

```
[1/12*(4*C*a^8 - 16*C*a^6*b^2 + 24*C*a^4*b^4 - 16*C*a^2*b^6 + 4*C*b^8 - 3*(2*A*a^6*b - 4*B*a^5*b^2 + 3*A*a^4*b^3 - B*a^3*b^4 + (2*A*a^3*b^4 - 4*B*a^2*b^5 + 3*A*a*b^6 - B*b^7)*cos(e*x + d)^3 + 3*(2*A*a^4*b^3 - 4*B*a^3*b^4 + 3*A*a^2*b^5 - B*a*b^6)*cos(e*x + d)^2 + 3*(2*A*a^5*b^2 - 4*B*a^4*b^3 + 3*A*a^3*b^4 - B*a^2*b^5)*cos(e*x + d))*sqrt(-a^2 + b^2)*log((2*a*b*cos(e*x + d) + (2*a^2 - b^2)*cos(e*x + d)^2 + 2*sqrt(-a^2 + b^2)*(a*cos(e*x + d) + b)*sin(e*x + d) - a^2 + 2*b^2)/(b^2*cos(e*x + d)^2 + 2*a*b*cos(e*x + d) + a^2)) + 2*(6*B*a^7*b - 18*A*a^6*b^2 + 4*B*a^5*b^3 + 23*A*a^4*b^4 - 11*B*a^3*b^5 - 7*A*a^2*b^6 + B*a*b^7 + 2*A*b^8 + (2*B*a^5*b^3 - 11*A*a^4*b^4 + 11*B*a^3*b^5 + 7*A*a^2*b^6 - 13*B*a*b^7 + 4*A*b^8)*cos(e*x + d)^2 + 3*(2*B*a^6*b^2 - 9*A*a^5*b^3 + 7*B*a^4*b^4 + 8*A*a^3*b^5 - 10*B*a^2*b^6 + A*a*b^7 + B*b^8)*cos(e*x + d))*sin(e*x + d))/((a^8*b^4 - 4*a^6*b^6 + 6*a^4*b^8 - 4*a^2*b^10 + b^12)*e*cos(e*x + d)^3 + 3*(a^9*b^3 - 4*a^7*b^5 + 6*a^5*b^7 - 4*a^3*b^9 + a*b^11)*e*cos(e*x + d)^2 + 3*(a^10*b^2 - 4*a^8*b^4 + 6*a^6*b^6 - 4*a^4*b^8 + a^2*b^10)*e*cos(e*x + d) + (a^11*b - 4*a^9*b^3 + 6*a^7*b^5 - 4*a^5*b^7 + a^3*b^9)*e), 1/6*(2*C*a^8 - 8*C*a^6*b^2 + 12*C*a^4*b^4 - 8*C*a^2*b^6 + 2*C*b^8 + 3*(2*A*a^6*b - 4*B*a^5*b^2 + 3*A*a^4*b^3 - B*a^3*b^4 + (2*A*a^3*b^4 - 4*B*a^2*b^5 + 3*A*a*b^6 - B*b^7)*cos(e*x + d)^3 + 3*(2*A*a^4*b^3 - 4*B*a^3*b^4 + 3*A*a^2*b^5 - B*a*b^6)*cos(e*x + d)^2 + 3*(2*A*a^5*b^2 - 4*B*a^4*b^3 + 3*A*a^3*b^4 - B*a^2*b^5)*cos(e*x + d))*sqrt(a^2 - ...)
```

Sympy [F(-1)]

Timed out.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx = \text{Timed out}$$

input

```
integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))**4,x)
```

output

Timed out

Maxima [F(-2)]

Exception generated.

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx = \text{Exception raised: ValueError}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^4,x, algorithm="maxima")`

output `Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*b^2-4*a^2>0)', see `assume?` for more details)`

Giac [B] (verification not implemented)

Leaf count of result is larger than twice the leaf count of optimal. 918 vs. $2(243) = 486$.

Time = 0.19 (sec) , antiderivative size = 918, normalized size of antiderivative = 3.53

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx = \text{Too large to display}$$

input `integrate((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^4,x, algorithm="giac")`

output

```

-1/3*(3*(2*A*a^3 - 4*B*a^2*b + 3*A*a*b^2 - B*b^3)*(pi*floor(1/2*(e*x + d)/
pi + 1/2)*sgn(-2*a + 2*b) + arctan(-(a*tan(1/2*e*x + 1/2*d) - b*tan(1/2*e*
x + 1/2*d))/sqrt(a^2 - b^2)))/((a^6 - 3*a^4*b^2 + 3*a^2*b^4 - b^6)*sqrt(a^
2 - b^2)) - (6*B*a^5*tan(1/2*e*x + 1/2*d)^5 - 18*A*a^4*b*tan(1/2*e*x + 1/2
*d)^5 - 6*B*a^4*b*tan(1/2*e*x + 1/2*d)^5 + 27*A*a^3*b^2*tan(1/2*e*x + 1/2*
d)^5 + 12*B*a^3*b^2*tan(1/2*e*x + 1/2*d)^5 - 6*A*a^2*b^3*tan(1/2*e*x + 1/2
*d)^5 - 27*B*a^2*b^3*tan(1/2*e*x + 1/2*d)^5 + 3*A*a*b^4*tan(1/2*e*x + 1/2*
d)^5 + 12*B*a*b^4*tan(1/2*e*x + 1/2*d)^5 - 6*A*b^5*tan(1/2*e*x + 1/2*d)^5
+ 3*B*b^5*tan(1/2*e*x + 1/2*d)^5 - 6*C*a^5*tan(1/2*e*x + 1/2*d)^4 - 6*C*a^
4*b*tan(1/2*e*x + 1/2*d)^4 + 12*C*a^3*b^2*tan(1/2*e*x + 1/2*d)^4 + 12*C*a^
2*b^3*tan(1/2*e*x + 1/2*d)^4 - 6*C*a*b^4*tan(1/2*e*x + 1/2*d)^4 - 6*C*b^5*
tan(1/2*e*x + 1/2*d)^4 + 12*B*a^5*tan(1/2*e*x + 1/2*d)^3 - 36*A*a^4*b*tan(
1/2*e*x + 1/2*d)^3 + 16*B*a^3*b^2*tan(1/2*e*x + 1/2*d)^3 + 32*A*a^2*b^3*ta
n(1/2*e*x + 1/2*d)^3 - 28*B*a*b^4*tan(1/2*e*x + 1/2*d)^3 + 4*A*b^5*tan(1/2
*e*x + 1/2*d)^3 - 12*C*a^5*tan(1/2*e*x + 1/2*d)^2 - 24*C*a^4*b*tan(1/2*e*x
+ 1/2*d)^2 + 24*C*a^2*b^3*tan(1/2*e*x + 1/2*d)^2 + 12*C*a*b^4*tan(1/2*e*x
+ 1/2*d)^2 + 6*B*a^5*tan(1/2*e*x + 1/2*d) - 18*A*a^4*b*tan(1/2*e*x + 1/2*
d) + 6*B*a^4*b*tan(1/2*e*x + 1/2*d) - 27*A*a^3*b^2*tan(1/2*e*x + 1/2*d) +
12*B*a^3*b^2*tan(1/2*e*x + 1/2*d) - 6*A*a^2*b^3*tan(1/2*e*x + 1/2*d) + 27*
B*a^2*b^3*tan(1/2*e*x + 1/2*d) - 3*A*a*b^4*tan(1/2*e*x + 1/2*d) + 12*B*...

```

Mupad [B] (verification not implemented)

Time = 2.88 (sec) , antiderivative size = 502, normalized size of antiderivative = 1.93

$$\begin{aligned}
& \int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx \\
&= \frac{\operatorname{atan}\left(\frac{\tan\left(\frac{d}{2} + \frac{ex}{2}\right)(2a - 2b)(a^3 - 3a^2b + 3ab^2 - b^3)}{2\sqrt{a+b}(a-b)^{7/2}}\right)(2Aa^3 - 4Ba^2b + 3Aab^2 - Bb^3)}{e(a+b)^{7/2}(a-b)^{7/2}} \\
&\quad - \frac{\frac{2C \tan\left(\frac{d}{2} + \frac{ex}{2}\right)^4}{a-b} + \frac{2C(3a^2+b^2)}{3(a-b)^3} + \frac{4Ca \tan\left(\frac{d}{2} + \frac{ex}{2}\right)^2}{(a-b)^2} + \frac{4\tan\left(\frac{d}{2} + \frac{ex}{2}\right)^3(-3Ba^3 + 9Aa^2b - 7Bab^2 + Ab^3)}{3(a+b)^2(a^2 - 2ab + b^2)} - \frac{\tan\left(\frac{d}{2} + \frac{ex}{2}\right)^5(2B^2a^3 - 6Ba^4 + 12Aa^3b - 12Aa^2b^2 + 3Ab^4)}{3(a+b)^3(a^2 - 2ab + b^2)^2}}{e\left(3ab^2 - \tan\left(\frac{d}{2} + \frac{ex}{2}\right)^4(-3a^3 + 3a^2b + 3ab^2 - 3b^3) - \tan\left(\frac{d}{2} + \frac{ex}{2}\right)^2(-3a^3 - 3a^2b - 3ab^2 + b^3)\right)}
\end{aligned}$$

input

```
int((A + B*cos(d + e*x) + C*sin(d + e*x))/(a + b*cos(d + e*x))^4,x)
```

output

$$\begin{aligned} & \left(\frac{\operatorname{atan}\left(\left(\tan\left(d/2 + (e*x)/2\right) * (2*a - 2*b) * (3*a^2*b^2 - 3*a^2*b + a^3 - b^3)\right) / (2*(a + b)^{1/2} * (a - b)^{7/2})\right) * (2*A*a^3 - B*b^3 + 3*A*a*b^2 - 4*B*a^2*b))}{e*(a + b)^{7/2} * (a - b)^{7/2}} \right. \\ & \quad \left. - \frac{((2*C*\tan(d/2 + (e*x)/2)^4) / (a - b) + (2*C*(3*a^2 + b^2)) / (3*(a - b)^3) + (4*C*a*\tan(d/2 + (e*x)/2)^2) / (a - b)^2 + (4*\tan(d/2 + (e*x)/2)^3 * (A*b^3 - 3*B*a^3 + 9*A*a^2*b - 7*B*a^2*b^2)) / (3*(a + b)^2 * (a^2 - 2*a*b + b^2))) - (\tan(d/2 + (e*x)/2)^5 * (2*B*a^3 - 2*A*b^3 + B*b^3 - 3*A*a*b^2 - 6*A*a^2*b + 6*B*a*b^2 + 2*B*a^2*b)) / ((a + b)^3 * (a - b))}{+ (\tan(d/2 + (e*x)/2) * (2*A*b^3 - 2*B*a^3 + B*b^3 - 3*A*a*b^2 + 6*A*a^2*b - 6*B*a*b^2 + 2*B*a^2*b)) / ((a + b) * (3*a^2*b^2 - 3*a^2*b + a^3 - b^3))) / (e * (3*a^2*b^2 - \tan(d/2 + (e*x)/2)^4 * (3*a^2*b^2 + 3*a^2*b - 3*a^3 - 3*b^3) - \tan(d/2 + (e*x)/2)^2 * (3*a^2*b^2 - 3*a^2*b - 3*a^3 + 3*b^3) + 3*a^2*b + a^3 + b^3 + \tan(d/2 + (e*x)/2)^6 * (3*a^2*b^2 - 3*a^2*b + a^3 - b^3)))} \right) \end{aligned}$$

Reduce [B] (verification not implemented)

Time = 0.16 (sec), antiderivative size = 1239, normalized size of antiderivative = 4.77

$$\int \frac{A + B \cos(d + ex) + C \sin(d + ex)}{(a + b \cos(d + ex))^4} dx = \text{Too large to display}$$

input

```
int((A+B*cos(e*x+d)+C*sin(e*x+d))/(a+b*cos(e*x+d))^4,x)
```

```

output (12*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(
a**2 - b**2))*cos(d + e*x)*sin(d + e*x)**2*a**2*b**3 + 6*sqrt(a**2 - b**2)
*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*cos(d +
e*x)*sin(d + e*x)**2*b**5 - 36*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a -
tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*cos(d + e*x)*a**4*b - 30*sqrt(a*
2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2
))*cos(d + e*x)*a**2*b**3 - 6*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a -
tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*cos(d + e*x)*b**5 + 36*sqrt(a**2 -
b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*s
in(d + e*x)**2*a**3*b**2 + 18*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a -
tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*sin(d + e*x)**2*a*b**4 - 12*sqrt(a
**2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**
2))*a**5 - 42*sqrt(a**2 - b**2)*atan((tan((d + e*x)/2)*a - tan((d + e*x)/2
)*b)/sqrt(a**2 - b**2))*a**3*b**2 - 18*sqrt(a**2 - b**2)*atan((tan((d + e*
x)/2)*a - tan((d + e*x)/2)*b)/sqrt(a**2 - b**2))*a*b**4 - 2*cos(d + e*x)*s
in(d + e*x)**2*a**3*b**2*c + 6*cos(d + e*x)*sin(d + e*x)**2*a**2*b**3*c - 6*cos(d + e*x)*sin(d + e*x)**2*a*b**4*c + 2*cos(d + e*x)*sin(d + e*x)**2*b
**5*c + 21*cos(d + e*x)*sin(d + e*x)*a**4*b**2 - 24*cos(d + e*x)*sin(d + e
*x)*a**2*b**4 + 3*cos(d + e*x)*sin(d + e*x)*b**6 + 6*cos(d + e*x)*a**5*c -
18*cos(d + e*x)*a**4*b*c + 20*cos(d + e*x)*a**3*b**2*c - 12*cos(d + e*...

```

CHAPTER 4

APPENDIX

4.1 Listing of Grading functions	200
4.2 Links to plain text integration problems used in this report for each CAS .	218

4.1 Listing of Grading functions

The following are the current version of the grading functions used for grading the quality of the antiderivative with reference to the optimal antiderivative included in the test suite.

There is a version for Maple and for Mathematica/Rubi. There is a version for grading Sympy and version for use with Sagemath.

The following are links to the current source code.

The following are the listings of source code of the grading functions.

Mathematica and Rubi grading function

```
(* Original version thanks to Albert Rich emailed on 03/21/2017 *)
(* ::Package:: *)

(* Nasser: April 7,2022. add second output which gives reason for the grade *)
(*                               Small rewrite of logic in main function to make it*)
(*                               match Maple's logic. No change in functionality otherwise*)

(* ::Subsection:: *)
(*GradeAntiderivative[result,optimal]*)
```

```
(* ::Text:: *)
(*If result and optimal are mathematical expressions, *)
(*      GradeAntiderivative[result,optimal] returns*)
(* "F" if the result fails to integrate an expression that*)
(*      is integrable*)
(* "C" if result involves higher level functions than necessary*)
(* "B" if result is more than twice the size of the optimal*)
(*      antiderivative*)
(* "A" if result can be considered optimal*)

GradeAntiderivative[result_,optimal_] := Module[{expnResult,expnOptimal,leafCountResult,leaf
expnResult = ExpnType[result];
expnOptimal = ExpnType[optimal];
leafCountResult = LeafCount[result];
leafCountOptimal = LeafCount[optimal];

(*Print["expnResult=",expnResult," expnOptimal=",expnOptimal];*)
If[expnResult<=expnOptimal,
  If[Not[FreeQ[result,Complex]], (*result contains complex*)
    If[Not[FreeQ[optimal,Complex]], (*optimal contains complex*)
      If[leafCountResult<=2*leafCountOptimal,
        finalresult={"A","");
        ,(*ELSE*)
        finalresult={"B","Both result and optimal contain complex but leaf count
      ]
      ,(*ELSE*)
      finalresult={"C","Result contains complex when optimal does not."}
    ]
    ,(*ELSE*) (*result does not contains complex*)
    If[leafCountResult<=2*leafCountOptimal,
      finalresult={"A","");
      ,(*ELSE*)
      finalresult={"B","Leaf count is larger than twice the leaf count of optimal.
    ]
    ,(*ELSE*) (*expnResult>expnOptimal*)
    If[FreeQ[result,Integrate] && FreeQ[result,Int],
      finalresult={"C","Result contains higher order function than in optimal. Order "}
      ,
      finalresult={"C","Result contains higher order function than in optimal. Order "}
    ]
  ]
]
]
```

```

        finalresult={"F","Contains unresolved integral."}
    ]
];

finalresult
]

(* ::Text:: *)
(*The following summarizes the type number assigned an *)
(*expression based on the functions it involves*)
(*1 = rational function*)
(*2 = algebraic function*)
(*3 = elementary function*)
(*4 = special function*)
(*5 = hypergeometric function*)
(*6 = appell function*)
(*7 = rootsum function*)
(*8 = integrate function*)
(*9 = unknown function*)

```



```

ExpnType[expn_] :=
If[AtomQ[expn],
  1,
  If[ListQ[expn],
    Max[Map[ExpnType, expn]],
    If[Head[expn] === Power,
      If[IntegerQ[expn[[2]]],
        ExpnType[expn[[1]]],
        If[Head[expn[[2]]] === Rational,
          If[IntegerQ[expn[[1]]] || Head[expn[[1]]] === Rational,
            1,
            Max[ExpnType[expn[[1]]], 2]],
          Max[ExpnType[expn[[1]]], ExpnType[expn[[2]]], 3]]],
      If[Head[expn] === Plus || Head[expn] === Times,
        Max[ExpnType[First[expn]], ExpnType[Rest[expn]]],
        If[ElementaryFunctionQ[Head[expn]],
          Max[3, ExpnType[expn[[1]]]],
          If[SpecialFunctionQ[Head[expn]],
            Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 4]],
            If[HypergeometricFunctionQ[Head[expn]],
              Max[ExpnType[expn[[1]]], ExpnType[expn[[2]]], 3],
              Max[ExpnType[expn[[1]]], ExpnType[expn[[2]]], ExpnType[expn[[3]]]]]]]]]]]

```

```
Apply[Max,Append[Map[ExpnType,Apply[List,expn]],5]],  
If[AppellFunctionQ[Head[expn]],  
    Apply[Max,Append[Map[ExpnType,Apply[List,expn]],6]],  
If[Head[expn]==RootSum,  
    Apply[Max,Append[Map[ExpnType,Apply[List,expn]],7]],  
If[Head[expn]==Integrate || Head[expn]==Int,  
    Apply[Max,Append[Map[ExpnType,Apply[List,expn]],8]],  
9]]]]]]]]]]]
```

```
ElementaryFunctionQ[func_] :=  
MemberQ[{  
Exp, Log,  
Sin, Cos, Tan, Cot, Sec, Csc,  
ArcSin, ArcCos, ArcTan, ArcCot, ArcSec, ArcCsc,  
Sinh, Cosh, Tanh, Coth, Sech, Csch,  
ArcSinh, ArcCosh, ArcTanh, ArcCoth, ArcSech, ArcCsch  
} , func]
```

```
SpecialFunctionQ[func_] :=  
MemberQ[{  
Erf, Erfc, Erfi,  
FresnelS, FresnelC,  
ExpIntegralE, ExpIntegralEi, LogIntegral,  

```

```
HypergeometricFunctionQ[func_] :=  
MemberQ[{Hypergeometric1F1, Hypergeometric2F1, HypergeometricPFQ}, func]
```

```
AppellFunctionQ[func_] :=  
MemberQ[{AppellF1}, func]
```

Maple grading function

```
# File: GradeAntiderivative.mpl
# Original version thanks to Albert Rich emailed on 03/21/2017

#Nasser 03/22/2017 Use Maple leaf count instead since buildin
#Nasser 03/23/2017 missing 'ln' for ElementaryFunctionQ added
#Nasser 03/24/2017 corrected the check for complex result
#Nasser 10/27/2017 check for leafsize and do not call ExpnType()
#           if leaf size is "too large". Set at 500,000
#Nasser 12/22/2019 Added debug flag, added 'dilog' to special functions
#           see problem 156, file Apostol_Problems
#Nasser 4/07/2022 add second output which gives reason for the grade

GradeAntiderivative := proc(result,optimal)
local leaf_count_result,
      leaf_count_optimal,
      ExpnType_result,
      ExpnType_optimal,
      debug:=false;

leaf_count_result:=leafcount(result);
#do NOT call ExpnType() if leaf size is too large. Recursion problem
if leaf_count_result > 500000 then
    return "B","result has leaf size over 500,000. Avoiding possible recursion issue
fi;

leaf_count_optimal := leafcount(optimal);
ExpnType_result := ExpnType(result);
ExpnType_optimal := ExpnType(optimal);

if debug then
    print("ExpnType_result",ExpnType_result," ExpnType_optimal=",ExpnType_optimal);
fi;

# If result and optimal are mathematical expressions,
# GradeAntiderivative[result,optimal] returns
#   "F" if the result fails to integrate an expression that
#       is integrable
#   "C" if result involves higher level functions than necessary
#   "B" if result is more than twice the size of the optimal
```

```
#      antiderivative
# "A" if result can be considered optimal

#This check below actually is not needed, since I only
#call this grading only for passed integrals. i.e. I check
#for "F" before calling this. But no harm of keeping it here.
#just in case.

if not type(result,freeof('int')) then
    return "F","Result contains unresolved integral";
fi;

if ExpnType_result<=ExpnType_optimal then
    if debug then
        print("ExpnType_result<=ExpnType_optimal");
    fi;
    if is_contains_complex(result) then
        if is_contains_complex(optimal) then
            if debug then
                print("both result and optimal complex");
            fi;
            if leaf_count_result<=2*leaf_count_optimal then
                return "A"," ";
            else
                return "B",cat("Both result and optimal contain complex but leaf count of
                                convert(leaf_count_result,string)," vs. $2 (
                                convert(leaf_count_optimal,string)," ) = ",convert(2*leaf
                end if
            else #result contains complex but optimal is not
                if debug then
                    print("result contains complex but optimal is not");
                fi;
                return "C","Result contains complex when optimal does not.";
            fi;
        else # result do not contain complex
            # this assumes optimal do not as well. No check is needed here.
            if debug then
                print("result do not contain complex, this assumes optimal do not as well");
            fi;
```

```

        if leaf_count_result<=2*leaf_count_optimal then
            if debug then
                print("leaf_count_result<=2*leaf_count_optimal");
            fi;
            return "A"," ";
        else
            if debug then
                print("leaf_count_result>2*leaf_count_optimal");
            fi;
            return "B",cat("Leaf count of result is larger than twice the leaf count of
                           convert(leaf_count_result,string),\"$ vs. \$2(", 
                           convert(leaf_count_optimal,string),")=",convert(2*leaf_co
                           fi;
            fi;
        else #ExpnType(result) > ExpnType(optimal)
            if debug then
                print("ExpnType(result) > ExpnType(optimal)");
            fi;
            return "C",cat("Result contains higher order function than in optimal. Order ",
                           convert(ExpnType_result,string)," vs. order ",
                           convert(ExpnType_optimal,string),"."));
        fi;

    end proc:

    #

    # is_contains_complex(result)
    # takes expressions and returns true if it contains "I" else false
    #
    #Nasser 032417
    is_contains_complex:= proc(expression)
        return (has(expression,I));
    end proc:

    # The following summarizes the type number assigned an expression
    # based on the functions it involves
    # 1 = rational function
    # 2 = algebraic function
    # 3 = elementary function
    # 4 = special function
    # 5 = hypergeometric function

```

```
# 6 = appell function
# 7 = rootsum function
# 8 = integrate function
# 9 = unknown function

ExpnType := proc(expn)
    if type(expn,'atomic') then
        1
    elif type(expn,'list') then
        apply(max,map(ExpnType,expn))
    elif type(expn,'sqrt') then
        if type(op(1,expn),'rational') then
            1
        else
            max(2,ExpnType(op(1,expn)))
        end if
    elif type(expn,'`^`') then
        if type(op(2,expn),'integer') then
            ExpnType(op(1,expn))
        elif type(op(2,expn),'rational') then
            if type(op(1,expn),'rational') then
                1
            else
                max(2,ExpnType(op(1,expn)))
            end if
        else
            max(3,ExpnType(op(1,expn)),ExpnType(op(2,expn)))
        end if
    elif type(expn,'`+`') or type(expn,'`*`') then
        max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
    elif ElementaryFunctionQ(op(0,expn)) then
        max(3,ExpnType(op(1,expn)))
    elif SpecialFunctionQ(op(0,expn)) then
        max(4,apply(max,map(ExpnType,[op(expn)])))
    elif HypergeometricFunctionQ(op(0,expn)) then
        max(5,apply(max,map(ExpnType,[op(expn)])))
    elif AppellFunctionQ(op(0,expn)) then
        max(6,apply(max,map(ExpnType,[op(expn)])))
    elif op(0,expn)='int' then
        max(8,apply(max,map(ExpnType,[op(expn)]))) else
9
```

```
end if
end proc:

ElementaryFunctionQ := proc(func)
member(func,[
    exp,log,ln,
    sin,cos,tan,cot,sec,csc,
    arcsin,arccos,arctan,arccot,arcsec,arccsc,
    sinh,cosh,tanh,coth,sech,csch,
    arccsinh,arccosh,arctanh,arccoth,arcsech,arccsch])
end proc:

SpecialFunctionQ := proc(func)
member(func,[
    erf,erfc,erfi,
    FresnelS,FresnelC,
    Ei,Ei,Li,Si,Ci,Shi,Chi,
    GAMMA,lnGAMMA,Psi,Zeta,polylog,dilog,LambertW,
    EllipticF,EllipticE,EllipticPi])
end proc:

HypergeometricFunctionQ := proc(func)
member(func,[Hypergeometric1F1,hypergeom,HypergeometricPFQ])
end proc:

AppellFunctionQ := proc(func)
member(func,[AppellF1])
end proc:

# u is a sum or product.  rest(u) returns all but the
# first term or factor of u.
rest := proc(u) local v;
if nops(u)=2 then
    op(2,u)
else
    apply(op(0,u),op(2..nops(u),u))
end if
end proc:

#leafcount(u) returns the number of nodes in u.
```

```
#Nasser 3/23/17 Replaced by build-in leafCount from package in Maple
leafcount := proc(u)
    MmaTranslator[Mma][LeafCount](u);
end proc:
```

Sympy grading function

```
#Dec 24, 2019. Nasser M. Abbasi:
#          Port of original Maple grading function by
#          Albert Rich to use with Sympy/Python
#Dec 27, 2019 Nasser. Added `RootSum`. See problem 177, Timofeev file
#          added 'exp_polar'
from sympy import *

def leaf_count(expr):
    #sympy do not have leaf count function. This is approximation
    return round(1.7*count_ops(expr))

def is_sqrt(expr):
    if isinstance(expr,Pow):
        if expr.args[1] == Rational(1,2):
            return True
        else:
            return False
    else:
        return False

def is_elementary_function(func):
    return func in [exp,log,ln,sin,cos,tan,cot,sec,csc,
        asin,acos,atan,acot,asec,acsc,sinh,cosh,tanh,coth,sech,csch,
        asinh,acosh,atanh,acoth,asech,acsch
    ]

def is_special_function(func):
    return func in [ erf,erfc,erfi,
        fresnels,fresnelc,Ei,Ei,Li,Si,Ci,Shi,Chi,
        gamma,loggamma,digamma,zeta,polylog,LambertW,
        elliptic_f,elliptic_e,elliptic_pi,exp_polar
    ]
```

```
def is_hypergeometric_function(func):
    return func in [hyper]

def is_appell_function(func):
    return func in [appellf1]

def is_atom(expn):
    try:
        if expn.isAtom or isinstance(expn,int) or isinstance(expn,float):
            return True
        else:
            return False
    except AttributeError as error:
        return False

def expnType(expn):
    debug=False
    if debug:
        print("expn=",expn,"type(expn)=",type(expn))

    if is_atom(expn):
        return 1
    elif isinstance(expn,list):
        return max(map(expnType, expn)) #apply(max,map(ExpnType,expn))
    elif is_sqrt(expn):
        if isinstance(expn.args[0],Rational): #type(op(1,expn),'rational')
            return 1
        else:
            return max(2,expnType(expn.args[0])) #max(2,ExpnType(op(1,expn)))
    elif isinstance(expn,Pow): #type(expn,'`^`)
        if isinstance(expn.args[1],Integer): #type(op(2,expn),'integer')
            return expnType(expn.args[0]) #ExpnType(op(1,expn))
        elif isinstance(expn.args[1],Rational): #type(op(2,expn),'rational')
            if isinstance(expn.args[0],Rational): #type(op(1,expn),'rational')
                return 1
            else:
                return max(2,expnType(expn.args[0])) #max(2,ExpnType(op(1,expn)))
        else:
            return max(3,expnType(expn.args[0]),expnType(expn.args[1])) #max(3,ExpnType(op(1,expn)),ExpnType(op(2,expn)))
    elif isinstance(expn,Add) or isinstance(expn,Mul): #type(expn,'`+') or type(expn,'`*')
```

```

m1 = expnType(expn.args[0])
m2 = expnType(list(expn.args[1:]))
return max(m1,m2) #max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
elif is_elementary_function(expn.func): #ElementaryFunctionQ(op(0,expn))
    return max(3,expnType(expn.args[0])) #max(3,ExpnType(op(1,expn)))
elif is_special_function(expn.func): #SpecialFunctionQ(op(0,expn))
    m1 = max(map(expnType, list(expn.args)))
    return max(4,m1) #max(4,apply(max,map(ExpnType,[op(expn)])))
elif is_hypergeometric_function(expn.func): #HypergeometricFunctionQ(op(0,expn))
    m1 = max(map(expnType, list(expn.args)))
    return max(5,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
elif is_appell_function(expn.func):
    m1 = max(map(expnType, list(expn.args)))
    return max(6,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
elif isinstance(expn,RootSum):
    m1 = max(map(expnType, list(expn.args))) #Apply[Max,Append[Map[ExpnType,Apply[List,expn]],7]]
    return max(7,m1)
elif str(expn).find("Integral") != -1:
    m1 = max(map(expnType, list(expn.args)))
    return max(8,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
else:
    return 9

#main function
def grade_antiderivative(result,optimal):

#print ("Enter grade_antiderivative for sagemath")
#print("Enter grade_antiderivative, result=",result, " optimal=",optimal)

leaf_count_result = leaf_count(result)
leaf_count_optimal = leaf_count(optimal)

#print("leaf_count_result=",leaf_count_result)
#print("leaf_count_optimal=",leaf_count_optimal)

expnType_result = expnType(result)
expnType_optimal = expnType(optimal)

if str(result).find("Integral") != -1:
    grade = "F"
    grade_annotation = ""

```

```

else:
    if expnType_result <= expnType_optimal:
        if result.has(I):
            if optimal.has(I): #both result and optimal complex
                if leaf_count_result <= 2*leaf_count_optimal:
                    grade = "A"
                    grade_annotation = ""
                else:
                    grade = "B"
                    grade_annotation = "Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. "+str(grade)
                else: #result contains complex but optimal is not
                    grade = "C"
                    grade_annotation = "Result contains complex when optimal does not."
            else: # result do not contain complex, this assumes optimal do not as well
                if leaf_count_result <= 2*leaf_count_optimal:
                    grade = "A"
                    grade_annotation = ""
                else:
                    grade = "B"
                    grade_annotation = "Leaf count of result is larger than twice the leaf count of optimal. "+str(grade)
            else:
                grade = "C"
                grade_annotation = "Result contains higher order function than in optimal. Order "+str(grade)

#print("Before returning. grade=",grade, " grade_annotation=",grade_annotation)

return grade, grade_annotation

```

SageMath grading function

```

#Dec 24, 2019. Nasser: Ported original Maple grading function by
# Albert Rich to use with Sagemath. This is used to
# grade Fricas, Giac and Maxima results.
#Dec 24, 2019. Nasser: Added 'exp_integral_e' and 'sng', 'sin_integral'
# 'arctan2','floor','abs','log_integral'
#June 4, 2022 Made default grade_annotation "none" instead of "" due
# issue later when reading the file.
#July 14, 2022. Added ellipticF. This is until they fix sagemath, then remove it.

```

```
from sage.all import *
from sage.symbolic.operators import add_vararg, mul_vararg

debug=False;

def tree_size(expr):
    """
    Return the tree size of this expression.
    """
    #print("Enter tree_size, expr is ",expr)

    if expr not in SR:
        # deal with lists, tuples, vectors
        return 1 + sum(tree_size(a) for a in expr)
    expr = SR(expr)
    x, aa = expr.operator(), expr.operands()
    if x is None:
        return 1
    else:
        return 1 + sum(tree_size(a) for a in aa)

def is_sqrt(expr):
    if expr.operator() == operator.pow: #isinstance(expr,Pow):
        if expr.operands()[1]==1/2: #expr.args[1] == Rational(1,2):
            if debug: print ("expr is sqrt")
            return True
        else:
            return False
    else:
        return False

def is_elementary_function(func):
    #debug=False
    m = func.name() in ['exp','log','ln',
                        'sin','cos','tan','cot','sec','csc',
                        'arcsin','arccos','arctan','arccot','arcsec','arccsc',
                        'sinh','cosh','tanh','coth','sech','csch',
                        'arcsinh','arccosh','arctanh','arccoth','arcsech','arccsch','sgn',
                        'arctan2','floor','abs'
                       ]
    if debug:
```

```

if m:
    print ("func ", func , " is elementary_function")
else:
    print ("func ", func , " is NOT elementary_function")

return m

def is_special_function(func):
    #debug=False
    if debug:
        print ("type(func)=", type(func))

m= func.name() in ['erf','erfc','erfi','fresnel_sin','fresnel_cos','Ei',
'Ei','Li','Si','sin_integral','Ci','cos_integral','Shi','sinh_integral'
'Chi','cosh_integral','gamma','log_gamma','psi','zeta',
'polylog','lambert_w','elliptic_f','elliptic_e','ellipticF',
'elliptic_pi','exp_integral_e','log_integral',
'veierstrassPInverse','weierstrass','weierstrassP','weierstrassZeta',
'veierstrassPPrime','weierstrassSigma']

if debug:
    print ("m=",m)
    if m:
        print ("func ", func , " is special_function")
    else:
        print ("func ", func , " is NOT special_function")

return m

def is_hypergeometric_function(func):
    return func.name() in ['hypergeometric','hypergeometric_M','hypergeometric_U']

def is_appell_function(func):
    return func.name() in ['hypergeometric']  #[appellf1] can't find this in sagemath

def is_atom(expn):
    #debug=False

```

```

if debug:
    print ("Enter is_atom, expn=",expn)

if not hasattr(expn, 'parent'):
    return False

#thanks to answer at https://ask.sagemath.org/question/49179/what-is-sagemath-equivalent-to-atomic
try:
    if expn.parent() is SR:
        return expn.operator() is None
    if expn.parent() in (ZZ, QQ, AA, QQbar):
        return expn in expn.parent() # Should always return True
    if hasattr(expn.parent(), "base_ring") and hasattr(expn.parent(), "gens"):
        return expn in expn.parent().base_ring() or expn in expn.parent().gens()

    return False

except AttributeError as error:
    print("Exception,AttributeError in is_atom")
    print ("caught exception" , type(error).__name__)
    return False


def expnType(expn):

    if debug:
        print (">>>>Enter expnType, expn=", expn)
        print (">>>>is_atom(expn)=", is_atom(expn))

    if is_atom(expn):
        return 1
    elif type(expn)==list: #isinstance(expn,list):
        return max(map(expnType, expn)) #apply(max,map(ExpnType,expn))
    elif is_sqrt(expn):
        if type(expn.operands()[0])==Rational: #type(isinstance(expn.args[0], Rational)):
            return 1
        else:
            return max(2,expnType(expn.operands()[0])) #max(2,expnType(expn.args[0]))
    elif expn.operator() == operator.pow: #isinstance(expn,Pow)
        if type(expn.operands()[1])==Integer: #isinstance(expn.args[1], Integer)

```

```

    return expnType(expn.operands()[0])  #expnType(expn.args[0])
elif type(expn.operands()[1]) == Rational: #isinstance(expn.args[1],Rational)
    if type(expn.operands()[0]) == Rational: #isinstance(expn.args[0],Rational)
        return 1
    else:
        return max(2,expnType(expn.operands()[0]))  #max(2,expnType(expn.args[0]))
else:
    return max(3,expnType(expn.operands()[0]),expnType(expn.operands()[1]))  #max(3,expnType(expn.args[0]),expnType(expn.args[1]))
elif expn.operator() == add_vararg or expn.operator() == mul_vararg: #isinstance(expn,Add) or isinstance(expn,Mul)
    m1 = expnType(expn.operands()[0]) #expnType(expn.args[0])
    m2 = expnType(expn.operands()[1:]) #expnType(list(expn.args[1:]))
    return max(m1,m2)  #max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
elif is_elementary_function(expn.operator()): #is_elementary_function(expn.func)
    return max(3,expnType(expn.operands()[0]))
elif is_special_function(expn.operator()): #is_special_function(expn.func)
    m1 = max(map(expnType, expn.operands()))  #max(map(expnType, list(expn.args)))
    return max(4,m1)  #max(4,m1)
elif is_hypergeometric_function(expn.operator()): #is_hypergeometric_function(expn.func)
    m1 = max(map(expnType, expn.operands()))  #max(map(expnType, list(expn.args)))
    return max(5,m1)  #max(5,m1)
elif is_appell_function(expn.operator()):
    m1 = max(map(expnType, expn.operands()))  #max(map(expnType, list(expn.args)))
    return max(6,m1)
elif str(expn).find("Integral") != -1: #this will never happen, since it
    #is checked before calling the grading function that is passed.
    #but kept it here.
    m1 = max(map(expnType, expn.operands()))  #max(map(expnType, list(expn.args)))
    return max(8,m1)  #max(5,apply(max,map(ExpnType,[op(expn)])))
else:
    return 9

#main function
def grade_antiderivative(result,optimal):

    if debug:
        print ("Enter grade_antiderivative for sageMath")
        print("Enter grade_antiderivative, result=",result)
        print("Enter grade_antiderivative, optimal=",optimal)
        print("type(anti)=",type(result))
        print("type(optimal)=",type(optimal))

```

```

leaf_count_result = tree_size(result) #leaf_count(result)
leaf_count_optimal = tree_size(optimal) #leaf_count(optimal)

#if debug: print ("leaf_count_result=", leaf_count_result, "leaf_count_optimal=",leaf_count_optimal)

expnType_result = expnType(result)
expnType_optimal = expnType(optimal)

if debug: print ("expnType_result=", expnType_result, "expnType_optimal=",expnType_optimal)

if expnType_result <= expnType_optimal:
    if result.has(I):
        if optimal.has(I): #both result and optimal complex
            if leaf_count_result <= 2*leaf_count_optimal:
                grade = "A"
                grade_annotation ="none"
            else:
                grade = "B"
                grade_annotation ="Both result and optimal contain complex but leaf count of result is larger"
        else: #result contains complex but optimal is not
            grade = "C"
            grade_annotation ="Result contains complex when optimal does not."
    else: # result do not contain complex, this assumes optimal do not as well
        if leaf_count_result <= 2*leaf_count_optimal:
            grade = "A"
            grade_annotation ="none"
        else:
            grade = "B"
            grade_annotation ="Leaf count of result is larger than twice the leaf count of optimal. "+str(leaf_count_result)+"/"+str(leaf_count_optimal)
    else:
        grade = "C"
        grade_annotation ="Result contains higher order function than in optimal. Order "+str(expnType_result)+"/"+str(expnType_optimal)

print("Before returning. grade=",grade, " grade_annotation=",grade_annotation)

return grade, grade_annotation

```

4.2 Links to plain text integration problems used in this report for each CAS

1. Mathematica integration problems as .m file
2. Maple integration problems as .txt file
3. Sagemath integration problems as .sage file
4. Reduce integration problems as .txt file
5. Mupad integration problems as .txt file
6. Sympy integration problems as .py file